

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331542-940

Luminaire Tested: **S122DIW-S675D970U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331542-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S675D970U940-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 970 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5405.5 lumens
Efficiency: N/A
Efficacy: 102.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 52.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331542-940

CATALOG NUMBER: S122DIW-S675D970U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

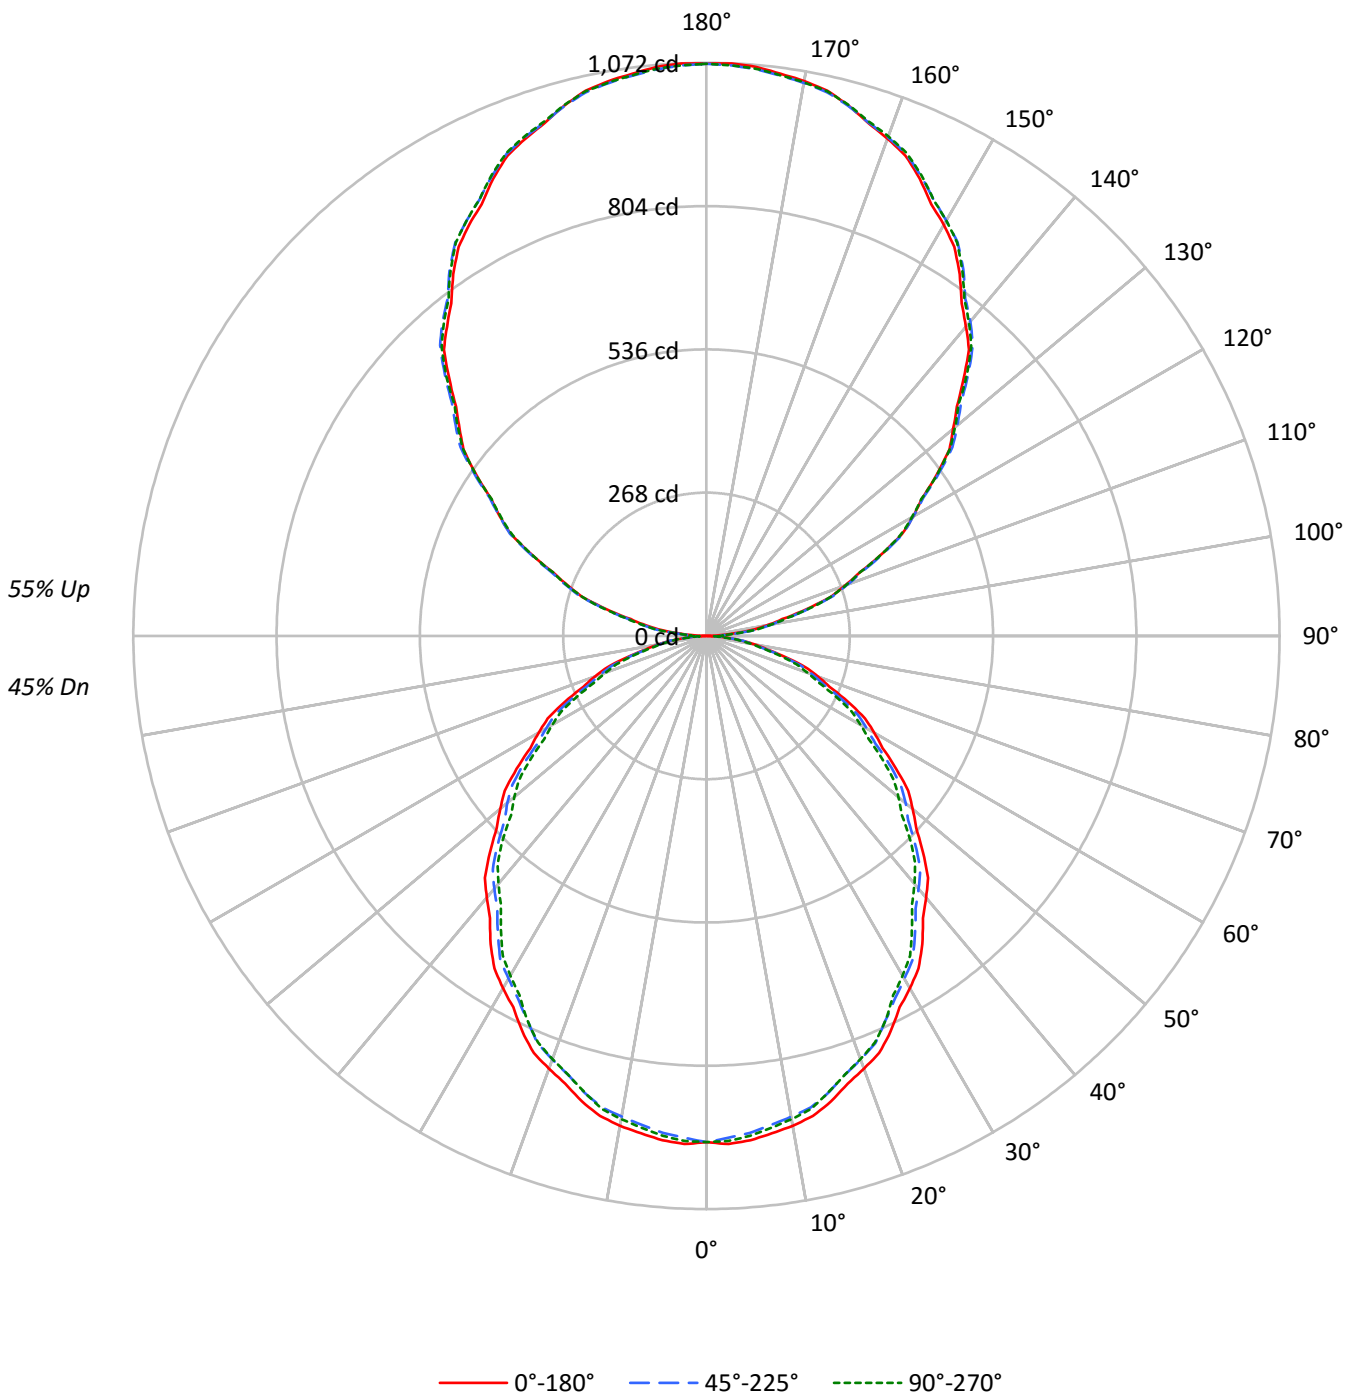



TEST NUMBER: P331542-940

CATALOG NUMBER: S122DIW-S675D970U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	45
1	97	92	88	85	88	85	81	78	70	68	66	57	56	54	45	44	43	38
2	88	81	74	69	80	74	69	64	62	58	55	50	48	45	40	38	36	31
3	80	71	64	58	73	65	59	54	54	50	46	44	41	38	35	33	31	27
4	73	63	55	49	67	58	51	45	48	43	39	40	36	33	32	29	27	23
5	67	56	48	42	61	51	44	39	43	38	34	36	32	28	28	26	23	20
6	62	50	42	36	57	46	39	34	39	33	29	32	28	25	26	23	20	17
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	24	20	18	15
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	16	14
9	49	37	30	25	45	35	28	23	29	24	20	25	20	18	20	17	15	13
10	46	34	27	22	42	32	25	21	27	22	18	23	19	16	18	16	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	15285	15285	15285
5°	15344	15123	15211
10°	15252	14969	15044
15°	15064	14775	14760
20°	14795	14483	14467
25°	14530	14125	14125
30°	14188	13798	13679
35°	13868	13403	13204
40°	13468	13009	12760
45°	13075	12618	12305
50°	12645	12210	11776
55°	12197	11738	11299
60°	11699	11170	10756
65°	11163	10609	10120
70°	10485	9928	9456
75°	9538	9145	8914
80°	8461	8210	7782
85°	6928	6576	5891



TEST NUMBER: P331542-940

CATALOG NUMBER: S122DIW-S675D970U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	89.0	1.6
10°-20°	250.5	4.6
20°-30°	368.2	6.8
30°-40°	427.7	7.9
40°-50°	427.2	7.9
50°-60°	372.6	6.9
60°-70°	275.5	5.1
70°-80°	156.0	2.9
80°-90°	46.2	0.9
90°-100°	67.8	1.3
100°-110°	210.6	3.9
110°-120°	360.0	6.7
120°-130°	473.5	8.8
130°-140°	531.4	9.8
140°-150°	521.1	9.6
150°-160°	437.0	8.1
160°-170°	289.9	5.4
170°-180°	101.3	1.9
0°-30°	707.7	13.1
0°-40°	1135.4	21.0
0°-60°	1935.1	35.8
0°-90°	2412.9	44.6
90°-120°	638.5	11.8
90°-150°	2164.4	40.0
90°-180°	2993.0	55.4
0°-180°	5405.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	947	947	947	947	947	
5°	947	943	933	940	938	90
15°	901	895	884	887	883	254
25°	816	808	793	794	793	375
35°	704	694	680	675	670	439
45°	573	566	553	543	539	442
55°	433	428	417	406	401	387
65°	292	286	278	270	265	289
75°	153	151	147	142	143	163
85°	37	36	36	33	32	43
90°	1	12	32	30	31	4
95°	47	56	58	58	56	54
105°	194	197	199	200	200	205
115°	361	366	365	364	361	357
125°	526	533	531	528	527	470
135°	680	690	692	691	688	525
145°	826	832	837	838	835	515
155°	944	946	949	953	951	434
165°	1027	1026	1026	1032	1028	289
175°	1068	1066	1064	1070	1065	101
180°	1070	1070	1070	1070	1070	



TEST NUMBER: P331542-940

CATALOG NUMBER: S122DIW-S675D970U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	946.7	946.7	946.7	946.7	946.7	946.7	946.7	946.7	946.7	946.7	946.7
2.5°	951.1	950.3	949.5	948.7	947.9	946.6	944.8	943.0	941.2	939.4	941.0
5°	946.7	945.9	945.1	944.3	943.5	942.0	939.8	937.5	935.3	933.1	934.7
7.5°	938.3	937.1	935.9	934.6	933.4	931.6	929.3	927.0	924.8	922.5	924.1
10°	930.3	928.9	927.5	926.0	924.7	922.7	920.3	917.9	915.4	913.0	914.6
12.5°	919.4	918.2	916.9	915.6	914.4	912.6	910.1	907.7	905.3	902.9	904.0
15°	901.2	900.0	898.8	897.6	896.3	894.4	891.8	889.1	886.5	883.9	884.8
17.5°	877.9	876.6	875.5	874.2	873.1	871.1	868.4	865.8	863.1	860.4	861.4
20°	861.1	860.0	858.7	857.5	856.3	854.3	851.4	848.6	845.8	842.9	843.6
22.5°	844.4	842.7	841.0	839.3	837.6	835.4	832.8	830.1	827.4	824.7	824.8
25°	815.6	814.0	812.4	810.7	809.1	806.6	803.2	799.8	796.3	792.9	793.3
27.5°	782.8	781.4	780.0	778.5	777.0	775.0	772.2	769.5	766.8	764.1	763.5
30°	761.0	759.4	757.8	756.2	754.6	752.2	749.2	746.2	743.2	740.1	739.5
32.5°	737.7	736.4	735.1	733.8	732.5	730.3	727.1	723.9	720.7	717.5	716.4
35°	703.6	701.7	699.6	697.6	695.5	692.9	689.7	686.4	683.2	680.0	678.8
37.5°	665.2	663.4	661.6	659.9	658.2	655.6	652.4	649.2	646.0	642.7	641.1
40°	639.0	637.4	635.8	634.2	632.6	630.2	626.9	623.7	620.5	617.2	615.4
42.5°	613.6	611.9	610.3	608.7	607.1	604.7	601.4	598.2	594.9	591.7	589.7
45°	572.6	571.1	569.7	568.4	566.9	564.7	561.7	558.7	555.6	552.6	550.4
47.5°	531.8	530.5	529.1	527.8	526.5	524.2	521.0	517.9	514.8	511.6	509.3
50°	503.4	502.4	501.4	500.3	499.4	497.4	494.6	491.8	488.9	486.1	483.3
52.5°	475.7	474.4	473.1	471.7	470.4	468.4	465.7	463.1	460.4	457.7	455.4
55°	433.3	432.1	430.9	429.6	428.5	426.6	424.2	421.8	419.4	417.0	414.5
57.5°	390.7	389.8	388.8	387.8	386.8	385.0	382.4	379.7	377.0	374.3	371.9
60°	362.3	361.5	360.7	359.9	359.1	357.2	354.5	351.6	348.7	345.9	343.7
62.5°	334.7	333.3	332.1	330.7	329.5	327.7	325.6	323.3	321.2	319.0	316.9
65°	292.2	291.0	289.8	288.6	287.3	285.7	283.7	281.7	279.6	277.7	275.8
67.5°	249.1	248.1	247.1	246.1	245.1	243.8	241.9	240.1	238.4	236.5	235.1
70°	222.1	221.3	220.5	219.7	218.9	217.6	215.7	213.9	212.1	210.3	208.8
72.5°	194.5	193.6	192.8	192.0	191.2	190.2	189.0	187.9	186.7	185.5	184.1
75°	152.9	152.5	152.1	151.7	151.3	150.6	149.6	148.6	147.6	146.6	145.3
77.5°	115.8	115.1	114.4	113.7	113.1	112.5	112.1	111.6	111.3	110.8	110.3
80°	91.0	90.9	90.6	90.4	90.2	89.9	89.5	89.1	88.7	88.3	87.7
82.5°	67.8	67.7	67.7	67.6	67.6	67.4	67.1	67.0	66.7	66.4	65.7
85°	37.4	37.1	36.9	36.7	36.5	36.3	36.1	35.9	35.7	35.5	34.9
87.5°	13.3	13.5	13.6	13.7	13.9	14.3	14.8	15.4	16.0	16.5	16.0
90°	0.9	3.3	5.7	8.1	10.5	13.9	18.4	22.7	27.2	31.6	31.2
92.5°	16.1	17.8	19.6	21.4	23.2	24.5	25.6	26.7	27.6	28.7	28.8
95°	47.0	49.0	51.0	53.0	55.0	56.2	56.6	57.0	57.4	57.8	57.8
97.5°	85.8	87.6	89.3	91.1	92.8	94.2	94.9	95.7	96.4	97.2	97.2
100°	114.7	116.3	117.9	119.5	121.1	122.3	122.8	123.4	124.0	124.7	124.7
102.5°	145.1	146.3	147.6	148.9	150.2	151.2	151.9	152.8	153.5	154.3	154.4
105°	194.2	194.7	195.4	196.0	196.6	197.1	197.5	197.9	198.3	198.7	199.1
107.5°	243.7	244.6	245.4	246.3	247.2	247.6	247.6	247.6	247.6	247.6	247.8
110°	275.4	276.7	277.9	279.1	280.3	280.9	280.9	280.9	280.9	280.9	280.9



TEST NUMBER: P331542-940

CATALOG NUMBER: S122DIW-S675D970U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	310.1	311.4	312.5	313.8	315.0	315.5	315.3	315.1	315.0	314.9	314.3
115°	361.2	362.5	363.6	364.9	366.0	366.5	366.0	365.7	365.2	364.9	364.7
117.5°	412.2	413.8	415.4	417.1	418.7	418.8	417.8	416.6	415.5	414.4	413.9
120°	446.2	447.8	449.4	451.0	452.6	452.6	451.0	449.4	447.8	446.2	446.2
122.5°	477.2	479.2	481.1	483.0	484.9	485.4	484.2	483.1	482.0	480.8	480.4
125°	525.7	527.4	529.2	531.1	532.9	533.5	532.9	532.3	531.6	531.1	530.5
127.5°	572.8	575.1	577.4	579.7	581.9	582.7	582.0	581.3	580.6	579.9	579.1
130°	602.4	605.0	607.6	610.3	612.9	613.9	613.6	613.1	612.8	612.3	612.0
132.5°	635.6	637.8	639.9	642.0	644.2	645.2	645.3	645.4	645.5	645.6	644.7
135°	680.1	682.3	684.5	686.7	688.9	690.2	690.6	691.0	691.4	691.8	691.6
137.5°	726.8	728.7	730.5	732.3	734.1	735.3	735.8	736.3	736.8	737.4	737.2
140°	755.0	756.9	758.7	760.5	762.2	763.7	764.7	765.7	766.7	767.7	767.7
142.5°	784.0	785.8	787.6	789.3	791.2	792.5	793.1	793.8	794.5	795.1	795.3
145°	825.5	826.9	828.3	829.7	831.2	832.4	833.7	834.8	836.1	837.2	837.4
147.5°	862.6	864.2	865.9	867.5	869.2	870.5	871.3	872.1	872.9	873.7	874.1
150°	887.8	889.0	890.2	891.4	892.6	893.7	894.5	895.3	896.1	896.9	897.4
152.5°	910.3	911.4	912.7	913.8	915.1	916.1	917.1	918.0	919.0	920.0	920.7
155°	943.8	944.4	945.0	945.7	946.2	946.8	947.4	948.1	948.6	949.2	950.2
157.5°	972.5	972.9	973.3	973.7	974.1	974.6	974.9	975.3	975.6	976.0	977.3
160°	989.9	990.2	990.7	991.0	991.5	991.8	992.0	992.2	992.4	992.6	993.8
162.5°	1005.8	1005.8	1005.9	1006.0	1006.1	1006.2	1006.5	1006.7	1006.8	1007.0	1008.4
165°	1026.9	1026.7	1026.5	1026.3	1026.1	1026.0	1026.0	1026.0	1026.0	1026.0	1027.4
167.5°	1044.6	1044.0	1043.4	1042.8	1042.2	1041.9	1041.9	1041.8	1041.8	1041.7	1043.1
170°	1054.0	1053.4	1052.8	1052.2	1051.6	1051.2	1051.0	1050.8	1050.6	1050.4	1051.8
172.5°	1060.5	1059.9	1059.3	1058.7	1058.1	1057.7	1057.5	1057.3	1057.1	1056.9	1058.3
175°	1068.4	1067.8	1067.3	1066.7	1066.0	1065.5	1065.1	1064.7	1064.3	1063.9	1065.3
177.5°	1071.7	1071.2	1070.8	1070.2	1069.8	1069.3	1069.1	1068.7	1068.4	1068.1	1069.1
180°	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2



TEST NUMBER: P331542-940

CATALOG NUMBER: S122DIW-S675D970U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	946.7	946.7	946.7	946.7	946.7	946.7	946.7	946.7
2.5°	942.6	944.3	945.9	946.6	946.2	945.9	945.6	945.3
5°	936.3	937.9	939.5	940.1	939.8	939.3	939.0	938.5
7.5°	925.8	927.4	929.0	929.5	929.1	928.7	928.3	927.8
10°	916.2	917.9	919.5	920.0	919.4	918.8	918.2	917.6
12.5°	905.1	906.2	907.4	907.7	907.2	906.9	906.4	906.0
15°	885.6	886.4	887.2	887.1	886.0	885.0	884.0	883.0
17.5°	862.3	863.2	864.2	864.2	863.2	862.2	861.2	860.2
20°	844.2	844.8	845.3	845.3	844.5	843.6	842.8	842.0
22.5°	825.0	825.1	825.2	825.0	824.6	824.0	823.6	823.1
25°	793.7	794.1	794.5	794.5	794.1	793.7	793.3	792.9
27.5°	762.9	762.3	761.7	760.9	759.9	758.9	758.0	757.0
30°	738.9	738.2	737.6	736.9	736.1	735.3	734.5	733.7
32.5°	715.3	714.3	713.1	712.2	711.4	710.6	709.7	708.9
35°	677.6	676.4	675.1	674.0	673.1	672.0	671.0	669.9
37.5°	639.7	638.2	636.7	635.4	634.5	633.5	632.6	631.6
40°	613.6	611.7	609.9	608.6	607.8	607.0	606.2	605.4
42.5°	587.7	585.8	583.8	582.2	581.0	580.0	578.8	577.7
45°	548.1	545.9	543.7	542.2	541.4	540.6	539.8	538.9
47.5°	506.9	504.5	502.2	500.4	499.3	498.1	497.0	495.8
50°	480.5	477.6	474.7	472.9	471.8	470.8	469.8	468.8
52.5°	453.0	450.7	448.4	446.5	445.1	443.8	442.5	441.1
55°	412.1	409.7	407.2	405.5	404.5	403.5	402.4	401.4
57.5°	369.5	367.1	364.8	363.2	362.4	361.7	360.9	360.1
60°	341.4	339.2	337.0	335.6	335.0	334.4	333.8	333.1
62.5°	314.9	312.8	310.8	309.3	308.5	307.7	307.0	306.2
65°	274.0	272.2	270.4	268.9	268.0	266.9	265.9	264.9
67.5°	233.6	232.3	230.9	229.7	228.9	228.1	227.3	226.5
70°	207.4	206.1	204.6	203.5	202.7	201.9	201.1	200.3
72.5°	182.7	181.3	179.9	178.8	178.2	177.5	176.9	176.2
75°	144.1	142.9	141.7	141.3	141.7	142.1	142.5	142.9
77.5°	109.7	109.1	108.4	107.9	107.3	106.7	106.2	105.6
80°	87.1	86.5	85.9	85.3	85.0	84.5	84.2	83.7
82.5°	64.9	64.1	63.4	63.0	62.9	62.8	62.7	62.6
85°	34.3	33.7	33.1	32.6	32.5	32.3	32.1	31.8
87.5°	15.4	14.8	14.3	13.9	13.8	13.6	13.6	13.5
90°	30.8	30.4	30.0	29.9	30.1	30.3	30.5	30.7
92.5°	28.9	29.0	29.1	29.1	29.2	29.2	29.2	29.2
95°	57.8	57.8	57.8	57.6	57.2	56.8	56.4	56.0
97.5°	97.2	97.2	97.2	97.2	97.1	97.1	97.0	97.0
100°	124.7	124.7	124.7	124.6	124.3	124.1	123.9	123.8
102.5°	154.6	154.7	154.9	154.9	154.7	154.4	154.3	154.1
105°	199.5	199.9	200.3	200.5	200.5	200.5	200.5	200.5
107.5°	248.0	248.2	248.3	247.9	247.0	246.0	245.1	244.2
110°	280.9	280.9	280.9	280.6	280.0	279.4	278.7	278.2



TEST NUMBER: P331542-940

CATALOG NUMBER: S122DIW-S675D970U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	313.9	313.4	312.9	312.5	312.0	311.6	311.1	310.7
115°	364.4	364.3	364.1	363.6	363.1	362.5	361.9	361.2
117.5°	413.4	413.0	412.4	411.9	411.3	410.7	410.1	409.5
120°	446.2	446.2	446.2	445.9	445.2	444.7	444.1	443.4
122.5°	479.9	479.4	478.9	478.5	478.0	477.6	477.2	476.7
125°	529.9	529.2	528.7	528.2	528.1	527.9	527.6	527.4
127.5°	578.4	577.7	576.9	576.2	575.6	575.0	574.4	573.7
130°	611.5	611.2	610.7	610.1	609.3	608.5	607.7	606.9
132.5°	643.8	642.9	642.0	641.3	640.7	640.0	639.4	638.7
135°	691.4	691.3	691.0	690.6	690.0	689.4	688.8	688.2
137.5°	737.0	736.9	736.7	736.2	735.4	734.6	733.8	733.0
140°	767.7	767.7	767.7	767.3	766.5	765.7	764.9	764.1
142.5°	795.5	795.7	795.8	795.5	794.7	793.9	793.1	792.3
145°	837.7	837.9	838.0	837.8	837.0	836.2	835.4	834.6
147.5°	874.6	875.0	875.5	875.3	874.6	873.8	873.1	872.3
150°	898.0	898.7	899.3	899.3	898.7	898.0	897.4	896.9
152.5°	921.5	922.3	923.0	923.0	922.3	921.5	920.7	920.0
155°	951.3	952.3	953.2	953.4	952.9	952.3	951.6	951.0
157.5°	978.7	980.1	981.4	981.6	980.7	979.7	978.7	977.8
160°	995.0	996.2	997.4	997.6	996.8	996.0	995.2	994.4
162.5°	1009.8	1011.1	1012.5	1012.7	1011.7	1010.8	1009.8	1008.9
165°	1028.9	1030.2	1031.6	1031.8	1030.8	1029.8	1028.9	1027.8
167.5°	1044.6	1046.0	1047.3	1047.5	1046.5	1045.4	1044.4	1043.4
170°	1053.2	1054.6	1056.1	1056.1	1054.9	1053.7	1052.5	1051.3
172.5°	1059.7	1061.1	1062.5	1062.7	1061.4	1060.2	1059.0	1057.8
175°	1066.8	1068.2	1069.5	1069.7	1068.4	1067.3	1066.0	1064.9
177.5°	1070.1	1070.9	1071.9	1071.9	1070.9	1070.1	1069.1	1068.1
180°	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2

(END OF REPORT)