

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331576-940

Luminaire Tested: **S122DIW-S865D1240U940-4F0-1E-UDD-D1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331576-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S865D1240U940-4F0-1E-UDD-D1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, DROP SATIN WHITE DIFFUSER
UPLIGHT 1240 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6951.4 lumens
Efficiency: N/A
Efficacy: 99.6 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.32 / 1.42
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.08')
CIE Type: Semi-Indirect


Input Watts (W): 69.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331576-940

CATALOG NUMBER: S122DIW-S865D1240U940-4F0-1E-UDD-D1

Luminous Intensity Polar Plot

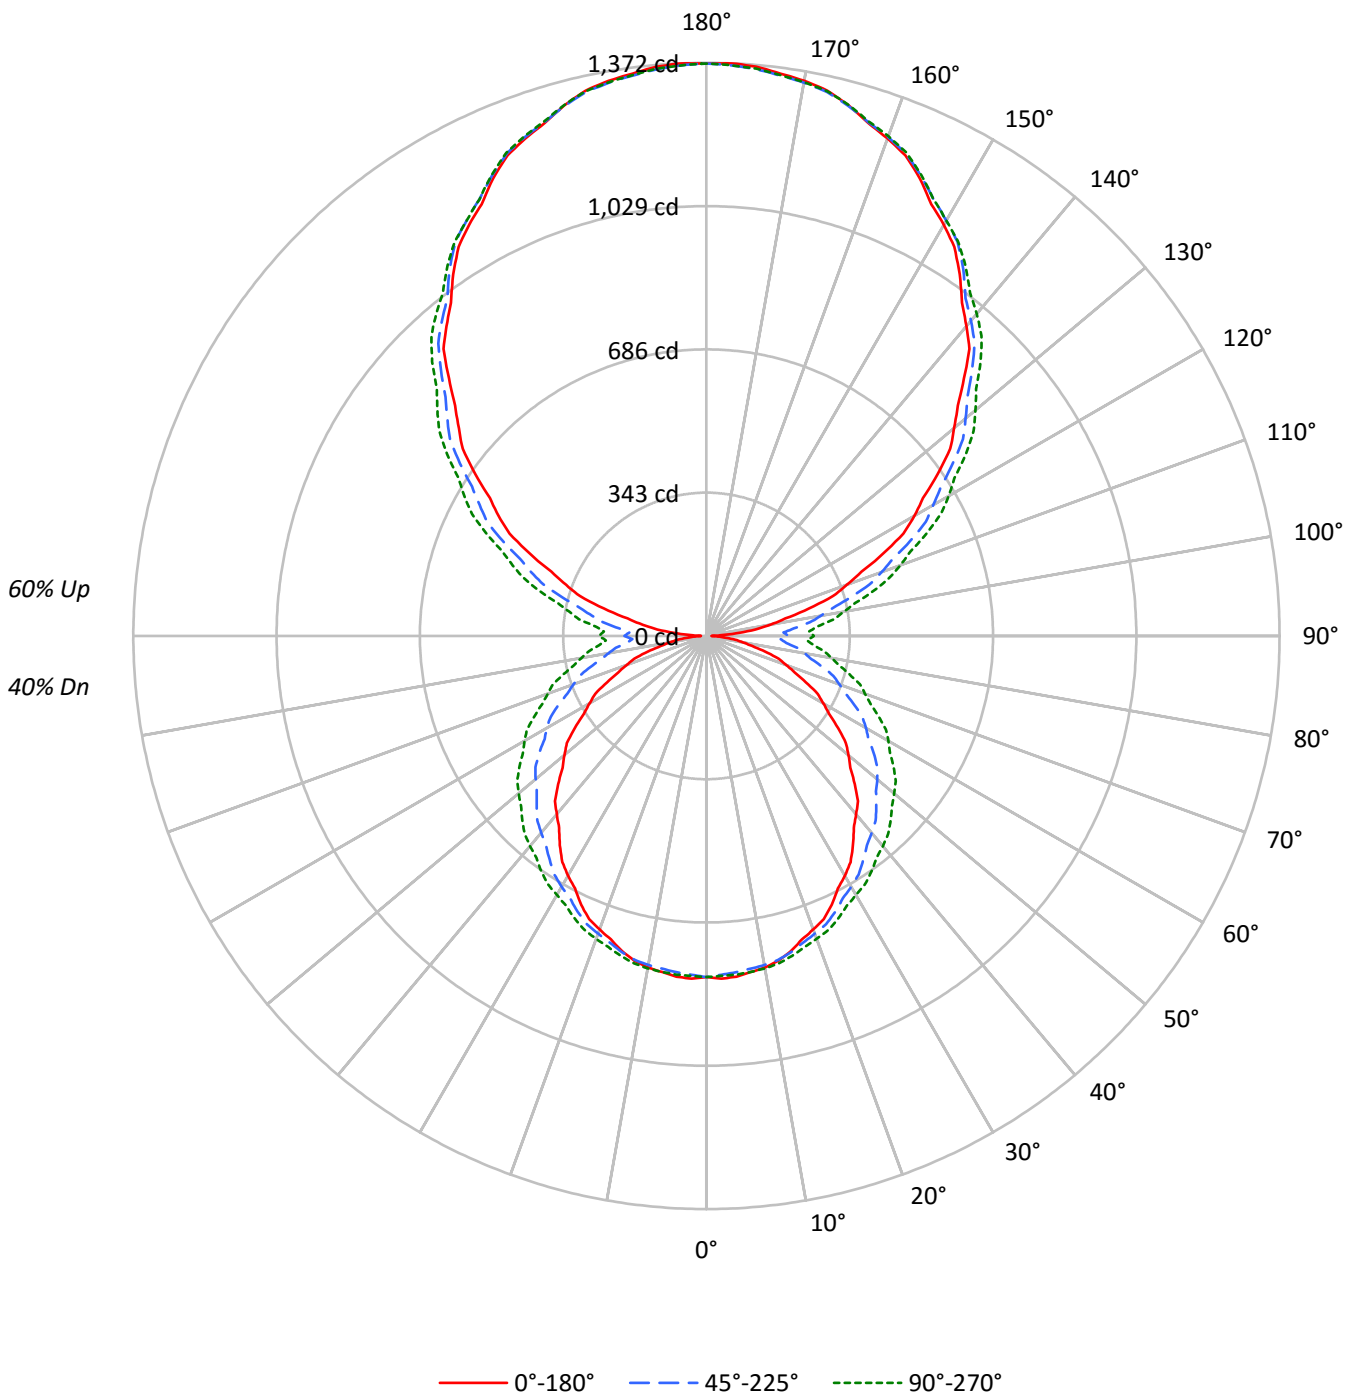



TEST NUMBER: P331576-940

CATALOG NUMBER: S122DIW-S865D1240U940-4F0-1E-UDD-D1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	95	95	95	95	78	78	78	62	62	62	47	47	47
1	94	90	85	81	85	81	78	74	66	64	61	52	50	49	39	38	37
2	85	77	71	65	77	70	65	60	57	53	50	45	42	40	34	32	30
3	78	68	60	54	70	62	55	50	50	45	41	40	36	33	30	27	25
4	71	60	51	45	64	54	47	42	44	39	35	35	31	28	26	24	21
5	65	53	45	38	58	48	41	35	39	34	30	31	27	24	24	21	18
6	59	47	39	33	54	43	36	31	35	30	26	28	24	21	21	18	16
7	55	42	34	29	50	39	32	27	32	26	22	25	21	18	19	16	14
8	51	38	31	25	46	35	28	23	29	24	20	23	19	16	18	15	13
9	47	35	27	22	43	32	25	21	26	21	18	21	17	14	16	13	11
10	44	32	25	20	40	29	23	18	24	19	16	20	16	13	15	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13183	13183	13183
5°	13247	12690	12640
10°	13163	12315	12177
15°	12982	11917	11686
20°	12752	11492	11215
25°	12527	11082	10786
30°	12206	10661	10357
35°	11884	10253	10054
40°	11544	9907	9750
45°	11222	9597	9493
50°	10875	9317	9238
55°	10513	9015	8977
60°	10070	8702	8703
65°	9607	8336	8376
70°	9087	7940	8025
75°	8422	7553	7701
80°	7376	7159	7372
85°	6374	6817	7118



TEST NUMBER: P331576-940

CATALOG NUMBER: S122DIW-S865D1240U940-4F0-1E-UDD-D1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	77.4	1.1
10°-20°	221.8	3.2
20°-30°	336.2	4.8
30°-40°	409.5	5.9
40°-50°	440.5	6.3
50°-60°	427.8	6.2
60°-70°	373.5	5.4
70°-80°	287.6	4.1
80°-90°	198.5	2.9
90°-100°	219.8	3.2
100°-110°	366.7	5.3
110°-120°	525.0	7.6
120°-130°	641.9	9.2
130°-140°	695.3	10.0
140°-150°	669.7	9.6
150°-160°	559.5	8.0
160°-170°	371.1	5.3
170°-180°	129.7	1.9
0°-30°	635.4	9.1
0°-40°	1044.8	15.0
0°-60°	1913.1	27.5
0°-90°	2772.7	39.9
90°-120°	1111.5	16.0
90°-150°	3118.4	44.9
90°-180°	4179.0	60.1
0°-180°	6951.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	816	816	816	816	816	
5°	819	815	808	815	814	78
15°	781	783	783	793	793	220
25°	710	718	729	742	747	326
35°	612	632	654	679	689	382
45°	502	534	575	610	624	387
55°	385	428	489	530	547	344
65°	263	321	390	437	454	261
75°	146	212	288	336	354	154
85°	43	116	192	240	258	46
90°	13	96	197	240	257	11
95°	70	137	210	253	267	76
105°	254	294	356	398	413	269
115°	467	489	538	571	582	462
125°	675	687	720	748	758	604
135°	872	885	899	921	928	674
145°	1057	1065	1072	1080	1081	660
155°	1208	1212	1215	1220	1218	556
165°	1315	1314	1314	1321	1316	371
175°	1368	1364	1362	1369	1363	130
180°	1370	1370	1370	1370	1370	



TEST NUMBER: P331576-940

CATALOG NUMBER: S122DIW-S865D1240U940-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	816.5	816.5	816.5	816.5	816.5	816.5	816.5	816.5	816.5	816.5	816.5
2.5°	821.2	820.6	819.9	819.3	818.7	817.6	816.1	814.7	813.2	811.7	812.8
5°	818.8	818.1	817.3	816.5	815.6	814.5	812.9	811.3	809.8	808.2	809.8
7.5°	811.5	810.9	810.4	809.9	809.4	808.5	807.3	806.1	804.9	803.7	805.6
10°	805.8	805.3	804.8	804.2	803.7	803.1	802.3	801.5	800.7	799.9	802.0
12.5°	796.3	796.5	796.6	796.7	796.7	796.5	795.9	795.3	794.8	794.2	796.3
15°	781.0	781.5	782.0	782.6	783.0	783.3	783.3	783.3	783.3	783.3	785.7
17.5°	761.1	762.1	763.3	764.4	765.4	766.4	767.3	768.1	769.0	769.8	772.3
20°	747.8	749.1	750.5	751.8	753.0	754.3	755.3	756.3	757.4	758.5	761.3
22.5°	733.6	735.1	736.6	738.2	739.7	741.2	742.7	744.1	745.6	747.1	750.0
25°	710.0	711.8	713.6	715.5	717.3	719.4	721.8	724.2	726.5	728.9	732.0
27.5°	681.5	684.6	687.5	690.5	693.6	696.4	699.2	702.0	704.8	707.6	711.6
30°	662.6	666.0	669.5	672.9	676.3	679.8	683.1	686.5	690.0	693.4	697.6
32.5°	641.8	645.6	649.4	653.4	657.2	661.1	665.1	669.2	673.2	677.3	682.2
35°	611.7	616.2	620.7	625.2	629.6	634.4	639.4	644.4	649.3	654.3	660.1
37.5°	579.1	584.2	589.4	594.5	599.7	605.5	612.0	618.5	624.9	631.4	637.8
40°	557.3	563.1	568.9	574.7	580.4	586.9	594.0	601.1	608.2	615.3	622.1
42.5°	536.5	542.2	548.0	553.8	559.6	566.6	574.7	582.9	591.0	599.2	606.6
45°	501.7	508.8	515.9	523.0	530.1	538.2	547.4	556.7	565.9	575.1	583.2
47.5°	467.3	475.1	482.9	490.6	498.3	507.6	518.4	529.1	539.9	550.7	559.2
50°	443.7	451.8	460.0	468.1	476.4	486.3	498.1	510.0	521.8	533.7	542.6
52.5°	421.0	429.5	438.2	446.7	455.3	465.8	478.3	490.7	503.2	515.7	524.8
55°	384.6	394.0	403.5	413.0	422.4	434.0	447.6	461.4	475.0	488.7	498.1
57.5°	348.6	359.3	370.0	380.6	391.3	403.6	417.5	431.5	445.4	459.3	469.6
60°	323.1	334.3	345.6	357.0	368.3	381.4	396.4	411.3	426.3	441.4	451.4
62.5°	300.3	312.0	323.8	335.5	347.2	360.6	375.6	390.6	405.6	420.5	431.1
65°	262.7	275.5	288.5	301.3	314.2	328.4	343.9	359.4	375.0	390.5	401.3
67.5°	228.1	241.6	255.0	268.5	282.0	296.7	312.5	328.4	344.3	360.2	371.0
70°	203.5	217.2	230.9	244.5	258.2	273.2	289.5	305.8	322.1	338.4	349.7
72.5°	180.8	194.9	209.0	223.1	237.2	252.4	269.0	285.5	302.0	318.5	329.7
75°	145.5	160.2	175.0	189.8	204.5	220.3	237.0	253.9	270.7	287.5	298.8
77.5°	111.5	126.9	142.3	157.7	173.1	189.3	206.4	223.6	240.6	257.7	268.9
80°	88.7	104.8	120.8	136.9	152.9	169.4	186.5	203.7	220.7	237.8	248.9
82.5°	69.8	85.6	101.5	117.3	133.1	149.7	167.0	184.3	201.6	218.9	230.0
85°	42.6	58.9	75.2	91.5	107.8	124.4	141.2	158.0	174.9	191.7	202.8
87.5°	23.5	39.7	56.0	72.3	88.5	105.7	123.7	141.6	159.6	177.5	188.2
90°	13.0	31.3	49.7	67.9	86.3	106.7	129.2	151.7	174.2	196.6	206.7
92.5°	31.5	47.9	64.4	80.9	97.3	114.3	131.8	149.4	166.9	184.4	194.8
95°	69.6	84.5	99.4	114.4	129.3	144.9	161.2	177.5	193.8	210.1	220.1
97.5°	118.2	131.3	144.6	157.9	171.1	185.8	202.0	218.0	234.2	250.3	260.0
100°	155.2	166.9	178.7	190.5	202.2	215.9	231.4	246.9	262.4	277.9	287.6
102.5°	193.1	203.6	214.1	224.6	235.1	248.1	263.3	278.7	293.9	309.2	318.9
105°	254.5	262.9	271.3	279.7	288.1	299.3	313.5	327.8	342.0	356.1	365.9
107.5°	317.6	324.9	332.1	339.3	346.5	356.7	369.8	382.9	396.0	409.1	418.1
110°	357.4	364.2	371.0	377.8	384.6	394.4	407.3	420.2	433.1	445.9	454.4



TEST NUMBER: P331576-940

CATALOG NUMBER: S122DIW-S865D1240U940-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	401.8	407.8	413.7	419.6	425.6	434.6	446.7	458.7	470.7	482.8	490.6
115°	467.3	471.6	476.1	480.5	485.0	492.8	504.2	515.5	526.8	538.1	545.7
117.5°	531.3	535.2	539.1	543.1	547.1	553.8	563.3	572.7	582.3	591.7	599.0
120°	574.7	577.8	580.9	584.1	587.2	592.9	601.4	609.8	618.3	626.8	634.2
122.5°	614.5	617.4	620.3	623.1	626.1	631.7	640.2	648.6	657.1	665.5	672.1
125°	675.3	677.6	679.9	682.2	684.6	689.6	697.1	704.8	712.5	720.1	726.4
127.5°	735.7	738.3	741.0	743.7	746.3	750.6	756.4	762.3	768.1	774.0	779.6
130°	773.6	776.7	779.7	782.8	785.9	790.0	795.0	800.0	804.9	809.9	815.7
132.5°	816.1	818.6	821.1	823.5	826.0	829.4	833.7	838.1	842.5	846.9	851.8
135°	871.8	874.7	877.4	880.3	883.2	886.1	889.3	892.4	895.5	898.7	903.9
137.5°	931.7	934.0	936.2	938.5	940.8	942.8	944.6	946.5	948.2	950.1	954.8
140°	967.8	969.8	971.9	973.9	976.0	977.9	979.7	981.5	983.4	985.2	989.4
142.5°	1004.8	1006.8	1008.9	1010.9	1013.0	1014.5	1015.5	1016.5	1017.4	1018.4	1022.0
145°	1056.8	1058.6	1060.4	1062.2	1064.0	1065.7	1067.2	1068.7	1070.3	1071.8	1073.6
147.5°	1104.2	1106.3	1108.5	1110.7	1112.9	1114.5	1115.4	1116.5	1117.5	1118.6	1119.3
150°	1136.6	1138.1	1139.7	1141.2	1142.7	1144.1	1145.0	1146.1	1147.1	1148.2	1148.9
152.5°	1165.3	1166.8	1168.3	1169.8	1171.4	1172.8	1174.0	1175.3	1176.5	1177.8	1178.8
155°	1208.3	1209.1	1209.8	1210.6	1211.4	1212.1	1212.9	1213.6	1214.4	1215.2	1216.5
157.5°	1245.0	1245.5	1246.1	1246.6	1247.1	1247.6	1248.0	1248.5	1248.9	1249.5	1251.2
160°	1267.2	1267.7	1268.3	1268.8	1269.3	1269.7	1269.9	1270.2	1270.4	1270.7	1272.2
162.5°	1287.5	1287.7	1287.8	1287.9	1288.0	1288.2	1288.4	1288.7	1289.0	1289.2	1290.9
165°	1314.6	1314.4	1314.1	1313.8	1313.6	1313.5	1313.5	1313.5	1313.5	1313.5	1315.3
167.5°	1337.3	1336.5	1335.8	1335.0	1334.2	1333.8	1333.7	1333.7	1333.6	1333.6	1335.4
170°	1349.3	1348.5	1347.8	1347.0	1346.2	1345.8	1345.5	1345.2	1345.0	1344.7	1346.5
172.5°	1357.6	1356.9	1356.1	1355.3	1354.6	1354.1	1353.8	1353.5	1353.3	1353.0	1354.9
175°	1367.8	1367.1	1366.3	1365.5	1364.8	1364.1	1363.6	1363.1	1362.5	1362.0	1363.9
177.5°	1372.0	1371.4	1370.7	1370.1	1369.5	1369.0	1368.6	1368.2	1367.8	1367.3	1368.6
180°	1370.1	1370.1	1370.1	1370.1	1370.1	1370.1	1370.1	1370.1	1370.1	1370.1	1370.1



TEST NUMBER: P331576-940

CATALOG NUMBER: S122DIW-S865D1240U940-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	816.5	816.5	816.5	816.5	816.5	816.5	816.5	816.5
2.5°	813.8	814.8	815.9	816.3	815.8	815.4	814.9	814.6
5°	811.3	812.9	814.5	815.1	814.8	814.6	814.3	814.0
7.5°	807.4	809.3	811.3	812.1	811.8	811.5	811.3	811.0
10°	804.1	806.2	808.3	809.2	809.0	808.7	808.4	808.2
12.5°	798.4	800.5	802.6	803.5	803.3	803.0	802.7	802.5
15°	788.0	790.4	792.8	793.8	793.5	793.3	793.0	792.8
17.5°	774.8	777.2	779.7	781.0	781.0	781.0	781.0	781.0
20°	764.3	767.1	770.0	771.5	771.5	771.5	771.5	771.5
22.5°	752.9	755.8	758.7	760.4	760.7	761.2	761.6	762.1
25°	735.2	738.3	741.5	743.5	744.2	745.0	745.8	746.6
27.5°	715.6	719.6	723.5	725.9	726.5	727.0	727.6	728.2
30°	701.8	706.0	710.2	712.7	713.5	714.3	715.1	715.9
32.5°	687.0	691.8	696.6	699.8	701.2	702.6	704.0	705.4
35°	665.9	671.7	677.5	681.3	683.1	685.0	686.8	688.7
37.5°	644.2	650.6	657.0	661.2	663.2	665.1	667.1	669.1
40°	628.9	635.8	642.7	647.2	649.6	651.9	654.3	656.7
42.5°	614.1	621.6	629.1	634.0	636.3	638.7	641.1	643.5
45°	591.4	599.5	607.7	613.1	615.7	618.3	621.0	623.6
47.5°	567.8	576.2	584.8	590.5	593.3	596.3	599.1	602.1
50°	551.5	560.4	569.4	575.3	578.2	581.1	584.0	586.9
52.5°	534.0	543.1	552.2	558.4	561.5	564.6	567.7	570.8
55°	507.7	517.1	526.6	533.0	536.4	539.8	543.2	546.6
57.5°	479.7	489.9	500.2	507.0	510.4	513.9	517.4	520.8
60°	461.4	471.4	481.3	488.1	491.9	495.5	499.2	502.9
62.5°	441.8	452.4	463.0	470.1	473.5	477.0	480.5	483.9
65°	412.1	422.8	433.6	440.7	444.1	447.5	450.9	454.3
67.5°	381.9	392.8	403.8	411.0	414.6	418.1	421.7	425.3
70°	361.1	372.3	383.6	390.8	394.0	397.2	400.4	403.5
72.5°	340.7	351.8	362.9	370.3	374.2	377.9	381.7	385.5
75°	310.1	321.5	332.8	340.1	343.6	347.0	350.4	353.8
77.5°	280.3	291.5	302.7	310.2	313.9	317.5	321.3	324.9
80°	259.9	271.0	282.0	289.4	293.0	296.8	300.4	304.1
82.5°	241.0	252.0	263.1	270.4	273.8	277.2	280.7	284.2
85°	213.7	224.8	235.9	243.3	246.9	250.6	254.2	258.0
87.5°	198.8	209.4	220.1	227.0	230.5	233.9	237.3	240.8
90°	216.7	226.7	236.7	243.3	246.8	250.2	253.6	257.0
92.5°	205.3	215.7	226.0	232.9	236.1	239.3	242.5	245.8
95°	230.1	240.0	250.0	256.4	259.0	261.6	264.3	266.9
97.5°	269.7	279.5	289.2	295.6	298.6	301.8	304.8	307.8
100°	297.4	307.1	316.8	323.0	325.7	328.2	330.9	333.5
102.5°	328.6	338.3	348.1	354.3	356.9	359.5	362.1	364.8
105°	375.6	385.3	395.0	401.3	404.2	407.1	410.0	412.9
107.5°	427.2	436.2	445.2	450.7	452.4	454.1	455.8	457.4
110°	462.8	471.2	479.7	484.9	487.1	489.1	491.2	493.4



TEST NUMBER: P331576-940

CATALOG NUMBER: S122DIW-S865D1240U940-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	498.4	506.2	514.0	519.1	521.4	523.7	526.0	528.3
115°	553.4	561.0	568.6	573.5	575.6	577.7	579.9	582.0
117.5°	606.1	613.2	620.5	625.0	626.9	628.8	630.7	632.6
120°	641.5	648.9	656.2	661.0	663.1	665.2	667.4	669.5
122.5°	678.6	685.1	691.6	695.9	697.8	699.7	701.6	703.5
125°	732.7	739.0	745.4	749.7	751.7	753.9	756.0	758.0
127.5°	785.2	790.8	796.4	800.0	801.5	802.9	804.4	805.9
130°	821.5	827.3	833.1	836.6	837.7	838.7	839.8	840.9
132.5°	856.8	861.7	866.7	869.9	871.1	872.4	873.7	874.9
135°	909.2	914.4	919.7	923.0	924.3	925.7	927.0	928.4
137.5°	959.4	964.0	968.7	971.3	972.1	972.9	973.6	974.4
140°	993.5	997.8	1002.0	1004.3	1005.0	1005.5	1006.0	1006.6
142.5°	1025.6	1029.1	1032.7	1034.7	1035.0	1035.4	1035.7	1036.0
145°	1075.5	1077.4	1079.1	1080.2	1080.5	1080.8	1081.1	1081.4
147.5°	1120.1	1120.9	1121.7	1121.9	1121.5	1121.1	1120.8	1120.4
150°	1149.7	1150.5	1151.2	1151.2	1150.5	1149.7	1148.9	1148.2
152.5°	1179.7	1180.6	1181.6	1181.6	1180.6	1179.7	1178.8	1177.8
155°	1217.8	1219.1	1220.3	1220.6	1219.9	1219.1	1218.3	1217.5
157.5°	1252.9	1254.6	1256.4	1256.7	1255.4	1254.2	1252.9	1251.7
160°	1273.8	1275.3	1276.8	1277.1	1276.1	1275.1	1274.1	1273.0
162.5°	1292.7	1294.4	1296.2	1296.5	1295.2	1294.0	1292.7	1291.6
165°	1317.1	1318.8	1320.7	1320.9	1319.6	1318.4	1317.1	1315.8
167.5°	1337.2	1339.0	1340.8	1341.0	1339.7	1338.4	1337.0	1335.7
170°	1348.3	1350.1	1351.9	1352.0	1350.5	1349.0	1347.4	1345.9
172.5°	1356.6	1358.4	1360.2	1360.3	1358.8	1357.3	1355.8	1354.2
175°	1365.7	1367.4	1369.2	1369.4	1367.8	1366.3	1364.8	1363.2
177.5°	1369.8	1371.1	1372.3	1372.3	1371.1	1369.8	1368.6	1367.3
180°	1370.1	1370.1	1370.1	1370.1	1370.1	1370.1	1370.1	1370.1

(END OF REPORT)