

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331562-940

Luminaire Tested: **S122DIW-S865D710U940-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331562-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S865D710U940-4F0-1E-UDD-A1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 710 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5592.3 lumens
Efficiency: N/A
Efficacy: 104.3 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.16 / 1.23
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 53.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331562-940

CATALOG NUMBER: S122DIW-S865D710U940-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

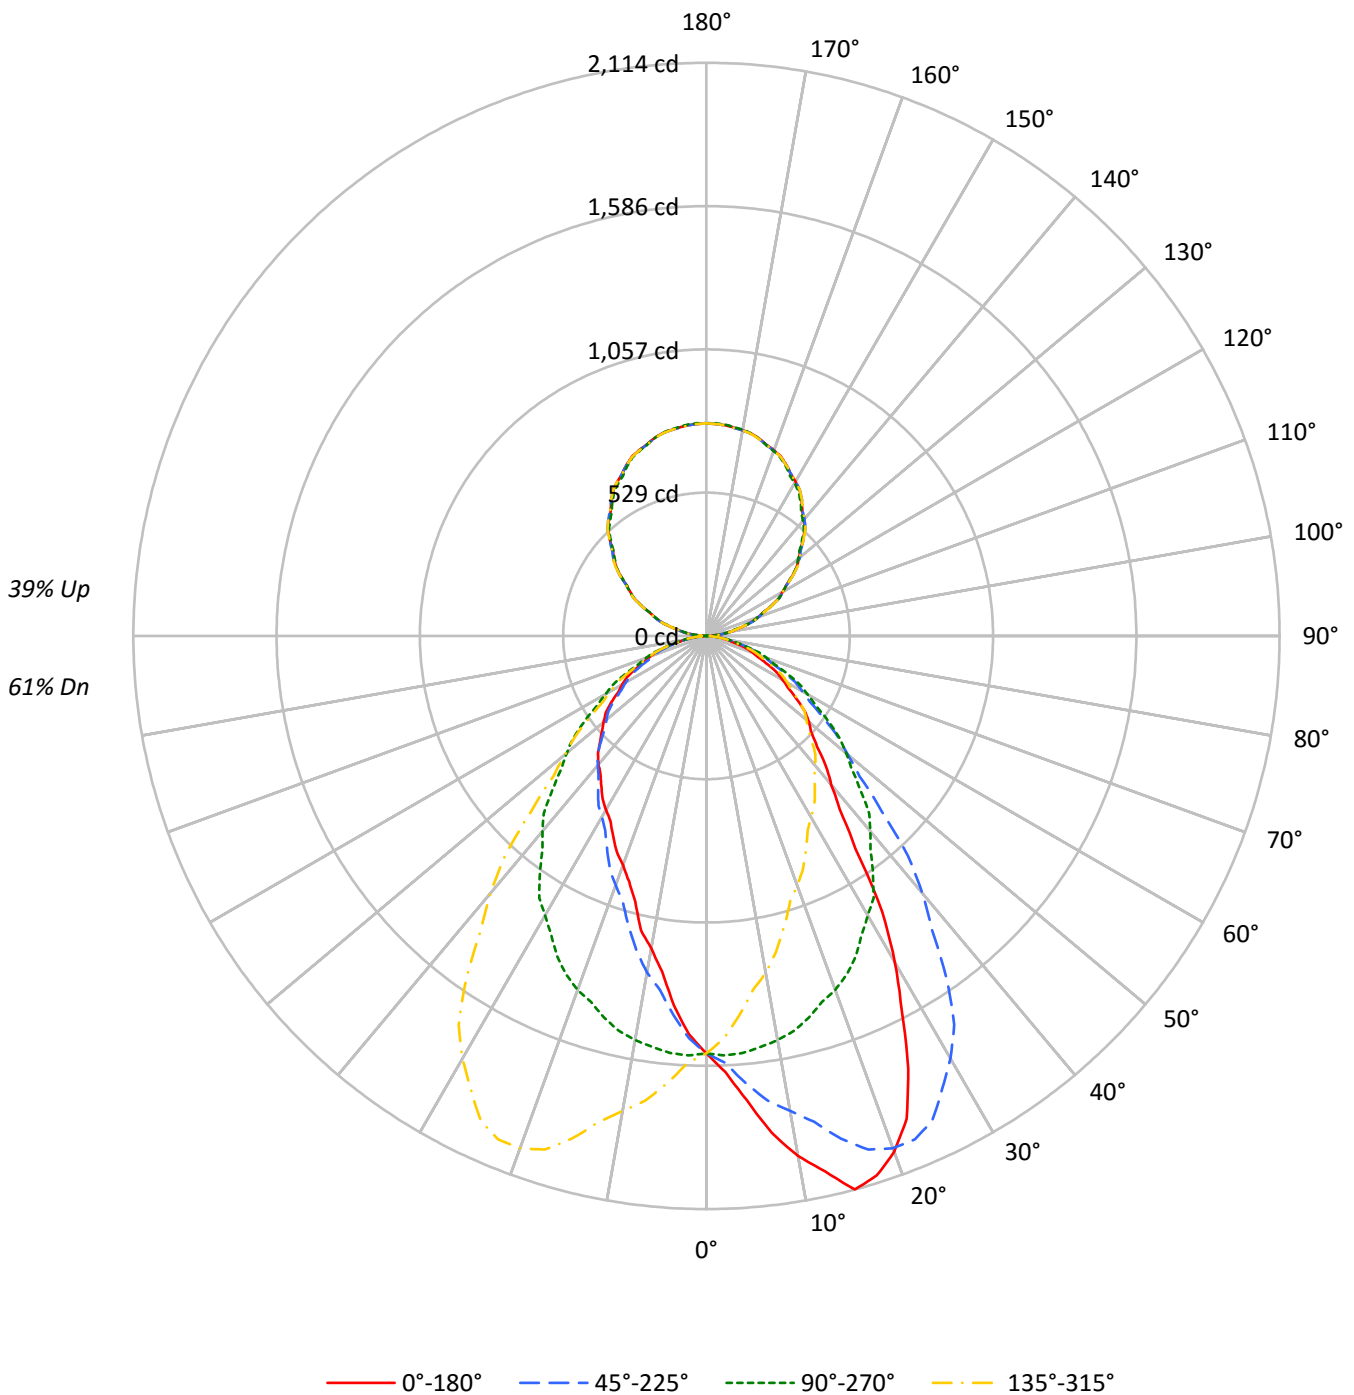



TEST NUMBER: P331562-940

CATALOG NUMBER: S122DIW-S865D710U940-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66	61
1	101	97	93	89	94	91	87	84	79	77	75	69	67	66	59	58	57	52
2	92	85	79	74	86	80	75	70	70	66	63	61	58	56	53	51	49	45
3	85	75	68	62	79	71	65	59	62	58	53	55	51	48	47	45	42	39
4	78	67	59	53	73	63	56	51	56	50	46	49	45	41	43	40	37	34
5	72	60	52	46	67	57	50	44	50	45	40	44	40	36	39	35	33	30
6	66	54	46	41	62	51	44	39	46	40	36	40	36	32	35	32	29	26
7	61	49	41	36	57	47	40	34	42	36	32	37	32	29	33	29	26	24
8	57	45	37	32	54	43	36	31	38	32	28	34	29	26	30	26	24	21
9	53	41	34	29	50	39	32	28	35	30	26	31	27	23	28	24	21	19
10	50	38	31	26	47	36	30	25	33	27	23	29	25	21	26	22	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	24857	24857	24857	24857
5°	27869	25020	22172	25020
10°	31936	24815	19189	24815
15°	35328	24359	16951	24359
20°	34790	23871	15454	23871
25°	31370	23222	14503	23222
30°	25922	22184	13811	22184
35°	18892	21098	13318	21098
40°	15091	19816	13044	19816
45°	13186	18333	12673	18333
50°	12396	16900	12424	16900
55°	11426	15440	12090	15440
60°	10469	13892	11580	13892
65°	9540	12500	11075	12500
70°	8658	11146	10334	11146
75°	7679	9632	9158	9632
80°	6602	7978	7373	7978
85°	5910	5910	4372	5910



TEST NUMBER: P331562-940

CATALOG NUMBER: S122DIW-S865D710U940-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	146.6	2.6
10°-20°	426.3	7.6
20°-30°	618.6	11.1
30°-40°	652.8	11.7
40°-50°	578.0	10.3
50°-60°	461.3	8.2
60°-70°	313.5	5.6
70°-80°	160.7	2.9
80°-90°	41.9	0.7
90°-100°	49.7	0.9
100°-110°	154.3	2.8
110°-120°	263.8	4.7
120°-130°	346.9	6.2
130°-140°	389.3	7.0
140°-150°	381.7	6.8
150°-160°	320.2	5.7
160°-170°	212.4	3.8
170°-180°	74.2	1.3
0°-30°	1191.5	21.3
0°-40°	1844.3	33.0
0°-60°	2883.6	51.6
0°-90°	3399.7	60.8
90°-120°	467.8	8.4
90°-150°	1585.7	28.4
90°-180°	2193.0	39.2
0°-180°	5592.3	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1540	1540	1540	1540	1540	
5°	1720	1544	1368	1544	1720	172
15°	2114	1457	1014	1457	2114	583
25°	1761	1304	814	1304	1761	796
35°	958	1070	676	1070	958	623
45°	578	803	555	803	578	454
55°	406	548	430	548	406	364
65°	250	327	290	327	250	248
75°	123	154	147	154	123	132
85°	32	32	24	32	32	36
90°	22	1	22	1	22	11
95°	41	34	41	34	41	46
105°	147	142	147	142	147	155
115°	265	265	265	265	265	261
125°	386	385	386	385	386	345
135°	504	498	504	498	504	388
145°	611	605	611	605	611	382
155°	697	691	697	691	697	321
165°	753	752	753	752	753	212
175°	780	783	780	783	780	74
180°	784	784	784	784	784	



TEST NUMBER: P331562-940

CATALOG NUMBER: S122DIW-S865D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5
2.5°	1610.6	1611.1	1612.0	1604.5	1603.5	1603.5	1596.9	1591.2	1584.6	1575.6	1576.5
5°	1719.5	1726.0	1728.3	1721.3	1710.6	1709.4	1699.3	1682.7	1667.4	1654.9	1646.1
7.5°	1849.4	1852.0	1846.2	1836.8	1828.9	1814.7	1796.0	1777.7	1752.0	1728.5	1710.9
10°	1947.9	1951.4	1941.3	1927.7	1916.5	1899.9	1872.7	1844.9	1811.2	1778.6	1752.6
12.5°	2022.7	2031.4	2018.5	2016.7	1997.4	1974.7	1942.3	1928.2	1880.8	1835.4	1807.5
15°	2113.5	2112.9	2114.2	2102.8	2088.7	2085.1	2050.8	2013.6	1946.7	1920.0	1873.9
17.5°	2087.2	2096.2	2100.4	2100.2	2099.9	2097.7	2086.7	2063.2	2029.6	1986.5	1933.1
20°	2024.8	2036.6	2038.4	2052.0	2059.7	2069.7	2073.9	2067.3	2046.7	2010.5	1964.4
22.5°	1928.2	1931.5	1937.1	1958.3	1975.0	2000.2	2013.3	2035.2	2027.2	2009.6	1971.0
25°	1760.9	1755.0	1775.7	1786.3	1824.8	1865.0	1894.0	1925.9	1954.4	1971.5	1960.2
27.5°	1560.0	1551.0	1582.1	1610.3	1641.6	1685.2	1730.4	1783.7	1828.1	1883.6	1902.6
30°	1390.4	1395.8	1425.4	1455.5	1502.9	1564.4	1615.3	1673.9	1737.2	1799.3	1842.5
32.5°	1207.7	1228.2	1247.0	1293.2	1334.9	1403.5	1478.0	1551.3	1630.2	1700.8	1767.7
35°	958.5	982.2	1008.3	1042.0	1100.5	1168.6	1241.4	1340.2	1447.9	1544.4	1623.6
37.5°	806.8	803.1	818.0	842.3	889.7	944.7	1028.5	1126.1	1252.9	1366.2	1478.0
40°	716.0	713.5	724.2	746.7	782.8	823.0	896.4	982.2	1099.9	1238.4	1371.5
42.5°	653.4	654.9	660.8	676.6	701.4	734.5	789.4	862.5	970.3	1100.6	1243.8
45°	577.5	581.7	588.2	595.8	610.0	637.2	668.0	720.1	805.3	914.2	1055.0
47.5°	522.8	522.9	529.6	536.3	544.7	560.1	585.1	617.9	678.0	766.6	887.7
50°	493.5	489.4	494.1	499.4	508.3	518.9	535.5	566.2	606.5	678.1	779.3
52.5°	457.5	457.6	461.9	463.9	471.8	482.5	497.6	518.9	555.4	611.4	694.6
55°	405.9	408.8	411.3	414.7	421.9	429.5	441.4	455.6	484.0	526.0	587.5
57.5°	357.4	358.3	360.7	367.5	371.9	379.1	390.3	403.1	421.6	452.7	499.0
60°	324.2	324.2	329.0	331.9	337.9	344.9	353.8	366.2	382.8	408.2	445.6
62.5°	294.0	293.5	295.3	300.2	304.7	311.4	320.2	330.7	346.3	369.0	399.7
65°	249.7	248.5	252.1	253.2	258.0	264.5	271.6	282.9	295.2	311.8	339.0
67.5°	207.1	208.5	210.4	212.7	215.3	222.1	226.9	234.8	245.3	259.0	277.5
70°	183.4	183.4	183.4	185.2	188.8	192.3	197.1	203.6	213.6	225.4	242.0
72.5°	156.9	158.8	160.7	159.6	164.2	166.3	171.9	175.6	185.2	192.8	207.4
75°	123.1	123.1	123.1	126.0	127.8	129.6	133.1	136.7	141.4	150.9	158.5
77.5°	91.8	91.6	92.2	92.9	94.8	96.9	98.0	101.2	105.6	109.9	116.5
80°	71.0	72.2	72.8	73.9	73.9	75.2	75.7	79.9	82.8	85.8	90.0
82.5°	54.9	55.1	55.3	55.5	56.0	56.7	58.2	59.6	60.5	63.0	66.3
85°	31.9	31.4	31.4	32.5	31.9	31.9	33.2	34.3	34.3	34.9	36.6
87.5°	16.8	16.8	17.2	16.7	16.7	17.2	17.2	16.9	17.4	17.9	17.7
90°	22.5	22.4	22.2	22.0	21.9	22.0	22.3	22.6	22.8	23.2	19.9
92.5°	21.4	21.4	21.4	21.3	21.3	21.3	21.2	21.1	21.1	21.0	20.2
95°	41.0	41.3	41.6	41.9	42.2	42.4	42.4	42.4	42.4	42.4	42.1
97.5°	71.1	71.1	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	70.6
100°	90.7	90.8	91.0	91.1	91.2	91.3	91.3	91.3	91.3	91.3	90.9
102.5°	112.9	113.1	113.2	113.3	113.5	113.5	113.3	113.2	113.2	113.0	112.4
105°	146.9	146.9	146.9	146.9	146.9	146.8	146.4	146.2	145.9	145.6	145.3
107.5°	179.0	179.6	180.3	180.9	181.6	181.9	181.8	181.6	181.6	181.5	181.5
110°	203.8	204.2	204.6	205.1	205.5	205.8	205.8	205.8	205.8	205.8	205.8



TEST NUMBER: P331562-940

CATALOG NUMBER: S122DIW-S865D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	227.7	227.9	228.3	228.6	228.9	229.3	229.6	230.0	230.3	230.7	230.8
115°	264.7	265.1	265.6	266.0	266.4	266.7	266.9	267.1	267.2	267.3	267.6
117.5°	300.0	300.4	300.9	301.3	301.8	302.2	302.6	302.9	303.3	303.6	304.4
120°	324.9	325.3	325.7	326.2	326.6	326.9	326.9	326.9	326.9	326.9	328.1
122.5°	349.3	349.6	349.9	350.2	350.5	350.9	351.2	351.6	352.0	352.3	353.1
125°	386.5	386.6	386.7	386.9	387.0	387.3	387.7	388.2	388.6	389.1	389.5
127.5°	420.4	420.8	421.2	421.7	422.2	422.7	423.2	423.7	424.3	424.8	425.3
130°	444.7	445.2	445.9	446.4	447.0	447.5	447.7	448.1	448.4	448.6	448.9
132.5°	468.0	468.4	468.9	469.4	469.8	470.4	471.0	471.7	472.3	473.0	473.0
135°	504.2	504.6	505.1	505.5	506.0	506.3	506.4	506.6	506.7	506.8	506.6
137.5°	537.0	537.6	538.2	538.8	539.4	539.8	539.8	539.9	540.1	540.2	539.8
140°	559.8	560.4	561.0	561.6	562.1	562.4	562.4	562.4	562.4	562.4	561.7
142.5°	580.4	581.0	581.6	582.2	582.8	583.0	582.9	582.8	582.6	582.6	582.0
145°	611.4	612.0	612.6	613.1	613.8	613.9	613.9	613.7	613.5	613.4	612.5
147.5°	639.1	639.6	640.2	640.8	641.3	641.4	641.1	640.8	640.4	640.2	639.5
150°	657.1	657.5	657.9	658.4	658.8	658.8	658.4	657.9	657.5	657.1	656.5
152.5°	674.0	674.6	675.1	675.6	676.3	676.3	675.6	675.1	674.6	674.0	673.3
155°	696.8	697.2	697.7	698.1	698.6	698.4	697.7	696.9	696.2	695.4	695.0
157.5°	716.3	717.0	717.7	718.5	719.2	719.0	718.0	717.0	716.0	715.1	714.8
160°	728.5	729.2	729.7	730.3	730.8	730.8	729.9	729.0	728.1	727.2	727.0
162.5°	739.1	739.9	740.6	741.2	741.9	741.8	740.8	739.8	738.8	737.8	737.6
165°	753.0	753.8	754.5	755.2	756.0	755.8	754.7	753.8	752.7	751.7	751.7
167.5°	764.4	765.2	765.9	766.7	767.4	767.3	766.2	765.3	764.2	763.2	763.2
170°	770.2	771.1	772.0	772.8	773.7	773.6	772.7	771.6	770.6	769.5	769.7
172.5°	775.0	775.9	776.8	777.7	778.5	778.5	777.4	776.4	775.3	774.3	774.5
175°	780.2	781.0	781.9	782.7	783.6	783.6	782.6	781.5	780.5	779.4	779.8
177.5°	782.5	783.2	783.9	784.6	785.3	785.3	784.6	783.9	783.2	782.5	782.7
180°	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1



TEST NUMBER: P331562-940

CATALOG NUMBER: S122DIW-S865D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5
2.5°	1579.8	1576.0	1573.7	1565.1	1557.6	1550.0	1547.7	1548.5	1538.2	1528.2	1523.9
5°	1641.4	1629.5	1618.3	1602.3	1583.4	1562.6	1552.0	1543.7	1523.0	1500.6	1487.6
7.5°	1696.5	1679.5	1658.0	1627.9	1600.3	1567.7	1547.0	1528.7	1498.4	1466.7	1447.2
10°	1730.1	1707.0	1679.2	1642.5	1608.8	1569.1	1541.3	1513.6	1478.0	1440.2	1416.5
12.5°	1759.0	1727.9	1700.5	1653.4	1613.6	1564.0	1531.0	1491.7	1454.4	1409.4	1386.3
15°	1827.7	1770.3	1718.2	1665.0	1615.9	1546.7	1510.0	1457.3	1408.2	1352.6	1326.0
17.5°	1880.9	1816.4	1734.4	1666.7	1609.4	1532.8	1478.9	1415.8	1357.7	1294.1	1257.9
20°	1911.2	1837.2	1749.0	1668.6	1599.9	1512.3	1453.8	1389.3	1321.2	1249.6	1210.6
22.5°	1929.1	1851.4	1764.2	1661.4	1581.0	1495.8	1422.1	1351.4	1282.5	1205.1	1164.2
25°	1934.8	1863.9	1771.6	1655.6	1557.4	1460.9	1372.2	1303.5	1220.0	1147.9	1088.2
27.5°	1906.7	1855.7	1767.0	1644.4	1530.0	1417.2	1318.3	1240.5	1152.5	1074.2	1014.1
30°	1872.1	1842.5	1756.1	1633.1	1508.2	1387.0	1278.1	1189.9	1102.3	1023.1	961.5
32.5°	1818.6	1812.2	1736.3	1616.9	1485.1	1348.6	1235.9	1146.8	1049.8	971.9	913.2
35°	1713.5	1742.0	1694.0	1581.0	1441.4	1294.1	1172.2	1070.4	969.8	895.2	840.2
37.5°	1572.7	1643.2	1630.7	1528.3	1382.4	1234.7	1100.1	993.7	897.9	822.6	768.6
40°	1475.7	1565.6	1578.6	1488.1	1340.8	1188.7	1046.2	940.2	846.7	778.1	723.6
42.5°	1371.5	1476.6	1512.3	1439.8	1295.3	1140.4	997.8	888.1	795.6	728.9	680.6
45°	1197.0	1336.1	1400.5	1359.1	1219.5	1060.9	914.2	802.9	718.9	656.2	618.9
47.5°	1033.8	1185.7	1272.5	1257.8	1135.1	978.0	832.9	726.2	644.4	594.4	561.1
50°	918.3	1074.5	1179.2	1184.0	1074.5	918.9	773.4	672.8	597.6	550.9	523.6
52.5°	818.0	967.1	1081.3	1106.3	1006.8	857.4	719.9	619.7	553.6	510.6	486.2
55°	687.0	813.0	939.6	985.8	905.9	763.8	636.7	548.5	486.3	456.8	435.5
57.5°	571.1	676.2	793.1	844.1	794.9	673.3	554.0	477.5	427.0	401.2	384.9
60°	510.1	592.9	697.1	758.0	715.3	607.1	502.9	430.2	388.8	365.7	350.3
62.5°	453.3	526.6	614.7	670.4	647.2	545.1	451.8	387.5	351.8	330.2	319.1
65°	374.0	431.9	500.0	551.4	536.1	458.5	382.3	327.2	298.8	281.6	272.8
67.5°	307.9	349.8	397.0	442.1	429.7	374.8	313.4	270.6	249.5	234.7	229.3
70°	266.3	298.2	340.2	376.3	366.2	321.3	272.8	236.1	217.8	205.4	200.0
72.5°	226.5	252.8	284.8	314.3	307.6	270.2	229.7	202.0	187.9	176.5	172.1
75°	171.0	191.1	210.6	230.2	228.4	199.4	175.8	154.4	143.2	134.3	132.5
77.5°	126.3	137.5	150.8	162.4	159.2	142.6	124.0	111.8	103.5	97.6	96.7
80°	96.5	103.0	112.4	120.7	116.5	109.5	94.7	85.8	79.9	73.9	71.6
82.5°	69.9	76.4	82.1	86.6	83.5	76.8	67.7	61.6	58.1	54.0	53.1
85°	36.6	40.2	42.6	43.8	42.6	38.4	34.3	31.9	29.0	27.2	26.7
87.5°	17.6	16.9	16.2	16.7	14.9	14.5	12.3	10.5	10.4	10.3	9.7
90°	16.7	13.5	10.3	7.8	6.0	4.2	2.4	0.6	2.4	4.2	6.0
92.5°	19.5	18.7	18.0	16.9	15.7	14.4	13.1	11.8	13.1	14.4	15.7
95°	41.7	41.5	41.2	40.3	38.8	37.4	35.8	34.4	35.8	37.4	38.8
97.5°	70.1	69.6	68.9	68.0	66.7	65.5	64.1	62.9	64.1	65.5	66.7
100°	90.4	90.0	89.5	88.7	87.6	86.4	85.2	84.0	85.2	86.4	87.6
102.5°	111.9	111.4	110.8	110.0	109.1	108.2	107.2	106.3	107.2	108.2	109.1
105°	145.0	144.7	144.4	144.0	143.6	143.1	142.7	142.2	142.7	143.1	143.6
107.5°	181.5	181.5	181.5	181.1	180.5	179.9	179.1	178.5	179.1	179.9	180.5
110°	205.8	205.8	205.8	205.4	204.5	203.6	202.7	201.8	202.7	203.6	204.5



TEST NUMBER: P331562-940

CATALOG NUMBER: S122DIW-S865D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	230.9	231.0	231.1	230.8	229.9	229.0	228.1	227.2	228.1	229.0	229.9
115°	267.9	268.2	268.5	268.2	267.3	266.4	265.6	264.7	265.6	266.4	267.3
117.5°	305.2	306.0	306.8	306.7	305.5	304.3	303.2	302.0	303.2	304.3	305.5
120°	329.2	330.4	331.5	331.5	330.4	329.2	328.1	326.9	328.1	329.2	330.4
122.5°	353.9	354.7	355.6	355.3	353.8	352.5	351.1	349.6	351.1	352.5	353.8
125°	389.9	390.4	390.8	390.4	389.1	387.7	386.5	385.1	386.5	387.7	389.1
127.5°	425.9	426.4	427.0	426.3	424.6	423.0	421.3	419.6	421.3	423.0	424.6
130°	449.2	449.5	449.8	449.0	447.1	445.1	443.3	441.3	443.3	445.1	447.1
132.5°	472.9	472.8	472.8	471.9	470.4	468.9	467.3	465.7	467.3	468.9	470.4
135°	506.3	506.0	505.7	504.7	503.1	501.5	499.9	498.3	499.9	501.5	503.1
137.5°	539.5	539.0	538.7	537.8	536.5	535.2	533.9	532.5	533.9	535.2	536.5
140°	561.0	560.3	559.5	558.5	557.1	555.8	554.5	553.2	554.5	555.8	557.1
142.5°	581.6	581.0	580.6	579.6	578.4	577.0	575.7	574.4	575.7	577.0	578.4
145°	611.6	610.7	609.8	608.9	607.9	606.8	605.8	604.8	605.8	606.8	607.9
147.5°	638.9	638.4	637.8	636.9	635.6	634.4	633.1	632.0	633.1	634.4	635.6
150°	655.9	655.3	654.7	654.0	653.1	652.2	651.3	650.4	651.3	652.2	653.1
152.5°	672.6	671.9	671.2	670.4	669.5	668.6	667.7	666.8	667.7	668.6	669.5
155°	694.6	694.1	693.7	693.2	692.8	692.3	691.9	691.4	691.9	692.3	692.8
157.5°	714.5	714.3	714.0	713.7	713.4	713.1	712.8	712.5	712.8	713.1	713.4
160°	726.9	726.7	726.7	726.4	726.1	725.8	725.5	725.2	725.5	725.8	726.1
162.5°	737.5	737.4	737.2	737.1	737.0	737.0	736.9	736.8	736.9	737.0	737.0
165°	751.7	751.7	751.7	751.8	751.9	752.1	752.2	752.3	752.2	752.1	751.9
167.5°	763.2	763.3	763.3	763.6	764.0	764.5	764.9	765.4	764.9	764.5	764.0
170°	769.8	770.0	770.2	770.4	770.9	771.3	771.8	772.2	771.8	771.3	770.9
172.5°	774.6	774.7	774.9	775.2	775.6	776.1	776.5	776.9	776.5	776.1	775.6
175°	780.1	780.3	780.7	781.0	781.5	781.9	782.4	782.7	782.4	781.9	781.5
177.5°	783.0	783.2	783.5	783.7	784.1	784.4	784.8	785.2	784.8	784.4	784.1
180°	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1



TEST NUMBER: P331562-940

CATALOG NUMBER: S122DIW-S865D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5
2.5°	1519.2	1516.4	1506.5	1501.3	1492.7	1484.7	1479.4	1481.8	1483.7	1482.7	1481.4
5°	1475.7	1464.5	1447.2	1432.4	1421.8	1402.3	1394.0	1389.9	1386.3	1382.2	1378.0
7.5°	1423.9	1406.1	1381.4	1360.4	1340.5	1316.3	1302.4	1294.1	1285.7	1276.3	1268.0
10°	1387.0	1362.1	1336.1	1306.4	1282.8	1260.9	1241.4	1228.3	1216.6	1205.2	1197.0
12.5°	1348.1	1319.5	1287.3	1246.8	1220.8	1189.5	1186.4	1163.5	1145.0	1138.1	1128.4
15°	1286.4	1246.1	1205.2	1157.4	1136.7	1108.2	1090.5	1072.7	1056.8	1045.5	1042.6
17.5°	1216.2	1164.1	1123.5	1089.0	1055.1	1026.0	1009.7	995.5	982.3	967.3	965.3
20°	1162.7	1117.7	1073.4	1043.1	1008.3	978.7	958.5	944.3	933.1	924.3	916.5
22.5°	1112.1	1062.8	1022.2	989.2	954.8	930.9	915.0	901.3	891.9	882.1	874.9
25°	1030.7	992.3	947.9	910.6	882.2	866.8	853.8	842.0	836.1	829.6	821.3
27.5°	959.6	916.9	875.4	846.5	821.5	807.9	798.7	790.6	785.1	781.2	776.5
30°	909.5	866.2	833.7	805.3	784.6	771.0	765.1	760.4	753.9	751.4	749.1
32.5°	861.1	822.2	794.4	769.8	750.0	741.2	735.8	731.5	726.4	724.0	719.3
35°	792.9	760.4	733.1	719.5	703.6	695.8	691.7	685.8	681.0	678.7	678.1
37.5°	728.6	700.3	682.4	664.9	658.2	653.4	647.8	643.7	642.3	641.9	641.4
40°	687.0	663.9	647.9	633.7	630.7	623.7	618.9	615.4	615.4	616.0	615.4
42.5°	649.1	628.4	614.3	602.0	598.5	594.3	589.6	589.3	590.3	592.3	590.3
45°	591.7	576.9	566.9	560.9	554.4	550.3	549.7	551.4	552.1	552.7	554.4
47.5°	539.0	529.1	520.0	513.4	510.6	509.9	509.2	512.3	515.1	516.2	518.9
50°	507.7	496.4	488.7	484.6	482.2	481.1	482.2	485.8	488.1	491.1	492.8
52.5°	472.6	464.7	459.4	456.2	455.2	455.9	456.2	460.2	464.0	465.0	465.9
55°	424.3	418.3	417.1	411.8	414.2	413.6	416.5	418.9	422.5	426.1	426.6
57.5°	375.9	371.2	368.0	368.5	369.3	371.8	374.3	378.4	382.3	386.0	386.4
60°	343.8	341.4	339.7	339.7	340.8	344.4	347.3	351.4	353.8	356.2	357.9
62.5°	314.4	312.1	310.3	311.2	314.3	316.5	319.9	322.1	324.5	326.8	327.7
65°	268.0	266.9	268.7	269.8	270.4	273.4	277.5	279.3	281.6	282.9	287.0
67.5°	225.3	225.5	225.3	226.9	230.4	231.1	235.1	239.2	239.6	241.9	244.6
70°	196.4	197.6	198.9	200.0	203.0	204.1	207.1	208.8	211.2	213.0	214.8
72.5°	170.0	170.1	171.4	171.1	173.6	176.2	178.7	180.5	182.8	185.1	186.8
75°	130.7	130.7	132.0	132.5	135.5	138.5	137.9	139.0	141.4	143.7	145.0
77.5°	95.5	94.2	95.5	96.1	97.0	99.5	100.0	101.7	104.3	103.5	104.9
80°	72.8	71.0	72.8	73.4	73.4	76.3	76.3	77.5	79.3	77.5	79.3
82.5°	52.0	51.1	52.4	52.5	53.5	53.6	54.6	54.8	56.5	55.7	56.5
85°	26.0	25.4	26.0	25.4	26.0	26.7	26.7	26.0	26.0	27.2	25.4
87.5°	9.6	9.6	9.8	10.4	10.6	10.8	10.3	10.2	10.2	9.1	9.1
90°	7.8	10.3	13.5	16.7	19.9	23.2	22.8	22.6	22.3	22.0	21.9
92.5°	16.9	18.0	18.7	19.5	20.2	21.0	21.1	21.1	21.2	21.3	21.3
95°	40.3	41.2	41.5	41.7	42.1	42.4	42.4	42.4	42.4	42.4	42.2
97.5°	68.0	68.9	69.6	70.1	70.6	71.2	71.2	71.2	71.2	71.2	71.2
100°	88.7	89.5	90.0	90.4	90.9	91.3	91.3	91.3	91.3	91.3	91.2
102.5°	110.0	110.8	111.4	111.9	112.4	113.0	113.2	113.2	113.3	113.5	113.5
105°	144.0	144.4	144.7	145.0	145.3	145.6	145.9	146.2	146.4	146.8	146.9
107.5°	181.1	181.5	181.5	181.5	181.5	181.5	181.6	181.6	181.8	181.9	181.6
110°	205.4	205.8	205.8	205.8	205.8	205.8	205.8	205.8	205.8	205.8	205.5



TEST NUMBER: P331562-940

CATALOG NUMBER: S122DIW-S865D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	230.8	231.1	231.0	230.9	230.8	230.7	230.3	230.0	229.6	229.3	228.9
115°	268.2	268.5	268.2	267.9	267.6	267.3	267.2	267.1	266.9	266.7	266.4
117.5°	306.7	306.8	306.0	305.2	304.4	303.6	303.3	302.9	302.6	302.2	301.8
120°	331.5	331.5	330.4	329.2	328.1	326.9	326.9	326.9	326.9	326.9	326.6
122.5°	355.3	355.6	354.7	353.9	353.1	352.3	352.0	351.6	351.2	350.9	350.5
125°	390.4	390.8	390.4	389.9	389.5	389.1	388.6	388.2	387.7	387.3	387.0
127.5°	426.3	427.0	426.4	425.9	425.3	424.8	424.3	423.7	423.2	422.7	422.2
130°	449.0	449.8	449.5	449.2	448.9	448.6	448.4	448.1	447.7	447.5	447.0
132.5°	471.9	472.8	472.8	472.9	473.0	473.0	472.3	471.7	471.0	470.4	469.8
135°	504.7	505.7	506.0	506.3	506.6	506.8	506.7	506.6	506.4	506.3	506.0
137.5°	537.8	538.7	539.0	539.5	539.8	540.2	540.1	539.9	539.8	539.8	539.4
140°	558.5	559.5	560.3	561.0	561.7	562.4	562.4	562.4	562.4	562.4	562.1
142.5°	579.6	580.6	581.0	581.6	582.0	582.6	582.6	582.8	582.9	583.0	582.8
145°	608.9	609.8	610.7	611.6	612.5	613.4	613.5	613.7	613.9	613.9	613.8
147.5°	636.9	637.8	638.4	638.9	639.5	640.2	640.4	640.8	641.1	641.4	641.3
150°	654.0	654.7	655.3	655.9	656.5	657.1	657.5	657.9	658.4	658.8	658.8
152.5°	670.4	671.2	671.9	672.6	673.3	674.0	674.6	675.1	675.6	676.3	676.3
155°	693.2	693.7	694.1	694.6	695.0	695.4	696.2	696.9	697.7	698.4	698.6
157.5°	713.7	714.0	714.3	714.5	714.8	715.1	716.0	717.0	718.0	719.0	719.2
160°	726.4	726.7	726.7	726.9	727.0	727.2	728.1	729.0	729.9	730.8	730.8
162.5°	737.1	737.2	737.4	737.5	737.6	737.8	738.8	739.8	740.8	741.8	741.9
165°	751.8	751.7	751.7	751.7	751.7	751.7	752.7	753.8	754.7	755.8	756.0
167.5°	763.6	763.3	763.3	763.2	763.2	763.2	764.2	765.3	766.2	767.3	767.4
170°	770.4	770.2	770.0	769.8	769.7	769.5	770.6	771.6	772.7	773.6	773.7
172.5°	775.2	774.9	774.7	774.6	774.5	774.3	775.3	776.4	777.4	778.5	778.5
175°	781.0	780.7	780.3	780.1	779.8	779.4	780.5	781.5	782.6	783.6	783.6
177.5°	783.7	783.5	783.2	783.0	782.7	782.5	783.2	783.9	784.6	785.3	785.3
180°	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1



TEST NUMBER: P331562-940

CATALOG NUMBER: S122DIW-S865D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5
2.5°	1476.6	1475.7	1475.7	1471.4	1475.7	1475.7	1476.6	1481.4	1482.7	1483.7	1481.8
5°	1369.8	1368.0	1365.0	1368.0	1365.0	1368.0	1369.8	1378.0	1382.2	1386.3	1389.9
7.5°	1264.1	1257.0	1255.9	1248.9	1255.9	1257.0	1264.1	1268.0	1276.3	1285.7	1294.1
10°	1187.0	1182.2	1181.6	1170.4	1181.6	1182.2	1187.0	1197.0	1205.2	1216.6	1228.3
12.5°	1128.3	1116.9	1119.1	1112.6	1119.1	1116.9	1128.3	1128.4	1138.1	1145.0	1163.5
15°	1026.6	1026.6	1024.2	1014.1	1024.2	1026.6	1026.6	1042.6	1045.5	1056.8	1072.7
17.5°	953.6	952.3	946.7	949.6	946.7	952.3	953.6	965.3	967.3	982.3	995.5
20°	910.0	906.5	899.4	899.4	899.4	906.5	910.0	916.5	924.3	933.1	944.3
22.5°	868.9	868.6	861.0	863.4	861.0	868.6	868.9	874.9	882.1	891.9	901.3
25°	820.6	815.9	812.4	814.1	812.4	815.9	820.6	821.3	829.6	836.1	842.0
27.5°	775.0	772.4	772.1	767.3	772.1	772.4	775.0	776.5	781.2	785.1	790.6
30°	748.5	742.6	743.8	740.8	743.8	742.6	748.5	749.1	751.4	753.9	760.4
32.5°	718.2	716.0	714.9	712.4	714.9	716.0	718.2	719.3	724.0	726.4	731.5
35°	676.9	677.5	674.5	675.7	674.5	677.5	676.9	678.1	678.7	681.0	685.8
37.5°	640.8	642.7	641.3	641.7	641.3	642.7	640.8	641.4	641.9	642.3	643.7
40°	617.2	617.2	617.2	618.9	617.2	617.2	617.2	615.4	616.0	615.4	615.4
42.5°	594.4	593.4	592.5	592.4	592.5	593.4	594.4	590.3	592.3	590.3	589.3
45°	555.6	557.4	557.9	555.0	557.9	557.4	555.6	554.4	552.7	552.1	551.4
47.5°	520.5	520.7	520.5	523.1	520.5	520.7	520.5	518.9	516.2	515.1	512.3
50°	495.9	494.6	495.9	494.6	495.9	494.6	495.9	492.8	491.1	488.1	485.8
52.5°	469.8	470.0	469.3	469.1	469.3	470.0	469.8	465.9	465.0	464.0	460.2
55°	429.0	430.2	429.5	429.5	429.5	430.2	429.0	426.6	426.1	422.5	418.9
57.5°	386.7	387.8	388.6	386.0	388.6	387.8	386.7	386.4	386.0	382.3	378.4
60°	357.4	360.3	359.7	358.6	359.7	360.3	357.4	357.9	356.2	353.8	351.4
62.5°	330.4	331.4	331.4	331.1	331.4	331.4	330.4	327.7	326.8	324.5	322.1
65°	288.7	289.9	288.1	289.9	288.1	289.9	288.7	287.0	282.9	281.6	279.3
67.5°	243.9	244.2	245.6	246.4	245.6	244.2	243.9	244.6	241.9	239.6	239.2
70°	216.0	215.3	217.1	218.9	217.1	215.3	216.0	214.8	213.0	211.2	208.8
72.5°	186.6	187.9	187.3	188.6	187.3	187.9	186.6	186.8	185.1	182.8	180.5
75°	143.7	145.5	145.0	146.8	145.0	145.5	143.7	145.0	143.7	141.4	139.0
77.5°	103.9	104.2	103.9	104.9	103.9	104.2	103.9	104.9	103.5	104.3	101.7
80°	79.3	78.1	77.0	79.3	77.0	78.1	79.3	79.3	77.5	79.3	77.5
82.5°	55.1	55.8	54.7	54.7	54.7	55.8	55.1	56.5	55.7	56.5	54.8
85°	25.4	24.9	23.6	23.6	23.6	24.9	25.4	25.4	27.2	26.0	26.0
87.5°	9.2	8.7	8.7	8.3	8.7	8.7	9.2	9.1	9.1	10.2	10.2
90°	22.0	22.2	22.4	22.5	22.4	22.2	22.0	21.9	22.0	22.3	22.6
92.5°	21.3	21.4	21.4	21.4	21.4	21.4	21.3	21.3	21.3	21.2	21.1
95°	41.9	41.6	41.3	41.0	41.3	41.6	41.9	42.2	42.4	42.4	42.4
97.5°	71.2	71.2	71.1	71.1	71.1	71.2	71.2	71.2	71.2	71.2	71.2
100°	91.1	91.0	90.8	90.7	90.8	91.0	91.1	91.2	91.3	91.3	91.3
102.5°	113.3	113.2	113.1	112.9	113.1	113.2	113.3	113.5	113.5	113.3	113.2
105°	146.9	146.9	146.9	146.9	146.9	146.9	146.9	146.9	146.8	146.4	146.2
107.5°	180.9	180.3	179.6	179.0	179.6	180.3	180.9	181.6	181.9	181.8	181.6
110°	205.1	204.6	204.2	203.8	204.2	204.6	205.1	205.5	205.8	205.8	205.8



TEST NUMBER: P331562-940

CATALOG NUMBER: S122DIW-S865D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	228.6	228.3	227.9	227.7	227.9	228.3	228.6	228.9	229.3	229.6	230.0
115°	266.0	265.6	265.1	264.7	265.1	265.6	266.0	266.4	266.7	266.9	267.1
117.5°	301.3	300.9	300.4	300.0	300.4	300.9	301.3	301.8	302.2	302.6	302.9
120°	326.2	325.7	325.3	324.9	325.3	325.7	326.2	326.6	326.9	326.9	326.9
122.5°	350.2	349.9	349.6	349.3	349.6	349.9	350.2	350.5	350.9	351.2	351.6
125°	386.9	386.7	386.6	386.5	386.6	386.7	386.9	387.0	387.3	387.7	388.2
127.5°	421.7	421.2	420.8	420.4	420.8	421.2	421.7	422.2	422.7	423.2	423.7
130°	446.4	445.9	445.2	444.7	445.2	445.9	446.4	447.0	447.5	447.7	448.1
132.5°	469.4	468.9	468.4	468.0	468.4	468.9	469.4	469.8	470.4	471.0	471.7
135°	505.5	505.1	504.6	504.2	504.6	505.1	505.5	506.0	506.3	506.4	506.6
137.5°	538.8	538.2	537.6	537.0	537.6	538.2	538.8	539.4	539.8	539.8	539.9
140°	561.6	561.0	560.4	559.8	560.4	561.0	561.6	562.1	562.4	562.4	562.4
142.5°	582.2	581.6	581.0	580.4	581.0	581.6	582.2	582.8	583.0	582.9	582.8
145°	613.1	612.6	612.0	611.4	612.0	612.6	613.1	613.8	613.9	613.9	613.7
147.5°	640.8	640.2	639.6	639.1	639.6	640.2	640.8	641.3	641.4	641.1	640.8
150°	658.4	657.9	657.5	657.1	657.5	657.9	658.4	658.8	658.8	658.4	657.9
152.5°	675.6	675.1	674.6	674.0	674.6	675.1	675.6	676.3	676.3	675.6	675.1
155°	698.1	697.7	697.2	696.8	697.2	697.7	698.1	698.6	698.4	697.7	696.9
157.5°	718.5	717.7	717.0	716.3	717.0	717.7	718.5	719.2	719.0	718.0	717.0
160°	730.3	729.7	729.2	728.5	729.2	729.7	730.3	730.8	730.8	729.9	729.0
162.5°	741.2	740.6	739.9	739.1	739.9	740.6	741.2	741.9	741.8	740.8	739.8
165°	755.2	754.5	753.8	753.0	753.8	754.5	755.2	756.0	755.8	754.7	753.8
167.5°	766.7	765.9	765.2	764.4	765.2	765.9	766.7	767.4	767.3	766.2	765.3
170°	772.8	772.0	771.1	770.2	771.1	772.0	772.8	773.7	773.6	772.7	771.6
172.5°	777.7	776.8	775.9	775.0	775.9	776.8	777.7	778.5	778.5	777.4	776.4
175°	782.7	781.9	781.0	780.2	781.0	781.9	782.7	783.6	783.6	782.6	781.5
177.5°	784.6	783.9	783.2	782.5	783.2	783.9	784.6	785.3	785.3	784.6	783.9
180°	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1



TEST NUMBER: P331562-940

CATALOG NUMBER: S122DIW-S865D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5
2.5°	1479.4	1484.7	1492.7	1501.3	1506.5	1516.4	1519.2	1523.9	1528.2	1538.2	1548.5
5°	1394.0	1402.3	1421.8	1432.4	1447.2	1464.5	1475.7	1487.6	1500.6	1523.0	1543.7
7.5°	1302.4	1316.3	1340.5	1360.4	1381.4	1406.1	1423.9	1447.2	1466.7	1498.4	1528.7
10°	1241.4	1260.9	1282.8	1306.4	1336.1	1362.1	1387.0	1416.5	1440.2	1478.0	1513.6
12.5°	1186.4	1189.5	1220.8	1246.8	1287.3	1319.5	1348.1	1386.3	1409.4	1454.4	1491.7
15°	1090.5	1108.2	1136.7	1157.4	1205.2	1246.1	1286.4	1326.0	1352.6	1408.2	1457.3
17.5°	1009.7	1026.0	1055.1	1089.0	1123.5	1164.1	1216.2	1257.9	1294.1	1357.7	1415.8
20°	958.5	978.7	1008.3	1043.1	1073.4	1117.7	1162.7	1210.6	1249.6	1321.2	1389.3
22.5°	915.0	930.9	954.8	989.2	1022.2	1062.8	1112.1	1164.2	1205.1	1282.5	1351.4
25°	853.8	866.8	882.2	910.6	947.9	992.3	1030.7	1088.2	1147.9	1220.0	1303.5
27.5°	798.7	807.9	821.5	846.5	875.4	916.9	959.6	1014.1	1074.2	1152.5	1240.5
30°	765.1	771.0	784.6	805.3	833.7	866.2	909.5	961.5	1023.1	1102.3	1189.9
32.5°	735.8	741.2	750.0	769.8	794.4	822.2	861.1	913.2	971.9	1049.8	1146.8
35°	691.7	695.8	703.6	719.5	733.1	760.4	792.9	840.2	895.2	969.8	1070.4
37.5°	647.8	653.4	658.2	664.9	682.4	700.3	728.6	768.6	822.6	897.9	993.7
40°	618.9	623.7	630.7	633.7	647.9	663.9	687.0	723.6	778.1	846.7	940.2
42.5°	589.6	594.3	598.5	602.0	614.3	628.4	649.1	680.6	728.9	795.6	888.1
45°	549.7	550.3	554.4	560.9	566.9	576.9	591.7	618.9	656.2	718.9	802.9
47.5°	509.2	509.9	510.6	513.4	520.0	529.1	539.0	561.1	594.4	644.4	726.2
50°	482.2	481.1	482.2	484.6	488.7	496.4	507.7	523.6	550.9	597.6	672.8
52.5°	456.2	455.9	455.2	456.2	459.4	464.7	472.6	486.2	510.6	553.6	619.7
55°	416.5	413.6	414.2	411.8	417.1	418.3	424.3	435.5	456.8	486.3	548.5
57.5°	374.3	371.8	369.3	368.5	368.0	371.2	375.9	384.9	401.2	427.0	477.5
60°	347.3	344.4	340.8	339.7	339.7	341.4	343.8	350.3	365.7	388.8	430.2
62.5°	319.9	316.5	314.3	311.2	310.3	312.1	314.4	319.1	330.2	351.8	387.5
65°	277.5	273.4	270.4	269.8	268.7	266.9	268.0	272.8	281.6	298.8	327.2
67.5°	235.1	231.1	230.4	226.9	225.3	225.5	225.3	229.3	234.7	249.5	270.6
70°	207.1	204.1	203.0	200.0	198.9	197.6	196.4	200.0	205.4	217.8	236.1
72.5°	178.7	176.2	173.6	171.1	171.4	170.1	170.0	172.1	176.5	187.9	202.0
75°	137.9	138.5	135.5	132.5	132.0	130.7	130.7	132.5	134.3	143.2	154.4
77.5°	100.0	99.5	97.0	96.1	95.5	94.2	95.5	96.7	97.6	103.5	111.8
80°	76.3	76.3	73.4	73.4	72.8	71.0	72.8	71.6	73.9	79.9	85.8
82.5°	54.6	53.6	53.5	52.5	52.4	51.1	52.0	53.1	54.0	58.1	61.6
85°	26.7	26.7	26.0	25.4	26.0	25.4	26.0	26.7	27.2	29.0	31.9
87.5°	10.3	10.8	10.6	10.4	9.8	9.6	9.6	9.7	10.3	10.4	10.5
90°	22.8	23.2	19.9	16.7	13.5	10.3	7.8	6.0	4.2	2.4	0.6
92.5°	21.1	21.0	20.2	19.5	18.7	18.0	16.9	15.7	14.4	13.1	11.8
95°	42.4	42.4	42.1	41.7	41.5	41.2	40.3	38.8	37.4	35.8	34.4
97.5°	71.2	71.2	70.6	70.1	69.6	68.9	68.0	66.7	65.5	64.1	62.9
100°	91.3	91.3	90.9	90.4	90.0	89.5	88.7	87.6	86.4	85.2	84.0
102.5°	113.2	113.0	112.4	111.9	111.4	110.8	110.0	109.1	108.2	107.2	106.3
105°	145.9	145.6	145.3	145.0	144.7	144.4	144.0	143.6	143.1	142.7	142.2
107.5°	181.6	181.5	181.5	181.5	181.5	181.5	181.1	180.5	179.9	179.1	178.5
110°	205.8	205.8	205.8	205.8	205.8	205.8	205.4	204.5	203.6	202.7	201.8



TEST NUMBER: P331562-940

CATALOG NUMBER: S122DIW-S865D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	230.3	230.7	230.8	230.9	231.0	231.1	230.8	229.9	229.0	228.1	227.2
115°	267.2	267.3	267.6	267.9	268.2	268.5	268.2	267.3	266.4	265.6	264.7
117.5°	303.3	303.6	304.4	305.2	306.0	306.8	306.7	305.5	304.3	303.2	302.0
120°	326.9	326.9	328.1	329.2	330.4	331.5	331.5	330.4	329.2	328.1	326.9
122.5°	352.0	352.3	353.1	353.9	354.7	355.6	355.3	353.8	352.5	351.1	349.6
125°	388.6	389.1	389.5	389.9	390.4	390.8	390.4	389.1	387.7	386.5	385.1
127.5°	424.3	424.8	425.3	425.9	426.4	427.0	426.3	424.6	423.0	421.3	419.6
130°	448.4	448.6	448.9	449.2	449.5	449.8	449.0	447.1	445.1	443.3	441.3
132.5°	472.3	473.0	473.0	472.9	472.8	472.8	471.9	470.4	468.9	467.3	465.7
135°	506.7	506.8	506.6	506.3	506.0	505.7	504.7	503.1	501.5	499.9	498.3
137.5°	540.1	540.2	539.8	539.5	539.0	538.7	537.8	536.5	535.2	533.9	532.5
140°	562.4	562.4	561.7	561.0	560.3	559.5	558.5	557.1	555.8	554.5	553.2
142.5°	582.6	582.6	582.0	581.6	581.0	580.6	579.6	578.4	577.0	575.7	574.4
145°	613.5	613.4	612.5	611.6	610.7	609.8	608.9	607.9	606.8	605.8	604.8
147.5°	640.4	640.2	639.5	638.9	638.4	637.8	636.9	635.6	634.4	633.1	632.0
150°	657.5	657.1	656.5	655.9	655.3	654.7	654.0	653.1	652.2	651.3	650.4
152.5°	674.6	674.0	673.3	672.6	671.9	671.2	670.4	669.5	668.6	667.7	666.8
155°	696.2	695.4	695.0	694.6	694.1	693.7	693.2	692.8	692.3	691.9	691.4
157.5°	716.0	715.1	714.8	714.5	714.3	714.0	713.7	713.4	713.1	712.8	712.5
160°	728.1	727.2	727.0	726.9	726.7	726.7	726.4	726.1	725.8	725.5	725.2
162.5°	738.8	737.8	737.6	737.5	737.4	737.2	737.1	737.0	737.0	736.9	736.8
165°	752.7	751.7	751.7	751.7	751.7	751.7	751.8	751.9	752.1	752.2	752.3
167.5°	764.2	763.2	763.2	763.2	763.3	763.3	763.6	764.0	764.5	764.9	765.4
170°	770.6	769.5	769.7	769.8	770.0	770.2	770.4	770.9	771.3	771.8	772.2
172.5°	775.3	774.3	774.5	774.6	774.7	774.9	775.2	775.6	776.1	776.5	776.9
175°	780.5	779.4	779.8	780.1	780.3	780.7	781.0	781.5	781.9	782.4	782.7
177.5°	783.2	782.5	782.7	783.0	783.2	783.5	783.7	784.1	784.4	784.8	785.2
180°	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1



TEST NUMBER: P331562-940

CATALOG NUMBER: S122DIW-S865D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5
2.5°	1547.7	1550.0	1557.6	1565.1	1573.7	1576.0	1579.8	1576.5	1575.6	1584.6	1591.2
5°	1552.0	1562.6	1583.4	1602.3	1618.3	1629.5	1641.4	1646.1	1654.9	1667.4	1682.7
7.5°	1547.0	1567.7	1600.3	1627.9	1658.0	1679.5	1696.5	1710.9	1728.5	1752.0	1777.7
10°	1541.3	1569.1	1608.8	1642.5	1679.2	1707.0	1730.1	1752.6	1778.6	1811.2	1844.9
12.5°	1531.0	1564.0	1613.6	1653.4	1700.5	1727.9	1759.0	1807.5	1835.4	1880.8	1928.2
15°	1510.0	1546.7	1615.9	1665.0	1718.2	1770.3	1827.7	1873.9	1920.0	1946.7	2013.6
17.5°	1478.9	1532.8	1609.4	1666.7	1734.4	1816.4	1880.9	1933.1	1986.5	2029.6	2063.2
20°	1453.8	1512.3	1599.9	1668.6	1749.0	1837.2	1911.2	1964.4	2010.5	2046.7	2067.3
22.5°	1422.1	1495.8	1581.0	1661.4	1764.2	1851.4	1929.1	1971.0	2009.6	2027.2	2035.2
25°	1372.2	1460.9	1557.4	1655.6	1771.6	1863.9	1934.8	1960.2	1971.5	1954.4	1925.9
27.5°	1318.3	1417.2	1530.0	1644.4	1767.0	1855.7	1906.7	1902.6	1883.6	1828.1	1783.7
30°	1278.1	1387.0	1508.2	1633.1	1756.1	1842.5	1872.1	1842.5	1799.3	1737.2	1673.9
32.5°	1235.9	1348.6	1485.1	1616.9	1736.3	1812.2	1818.6	1767.7	1700.8	1630.2	1551.3
35°	1172.2	1294.1	1441.4	1581.0	1694.0	1742.0	1713.5	1623.6	1544.4	1447.9	1340.2
37.5°	1100.1	1234.7	1382.4	1528.3	1630.7	1643.2	1572.7	1478.0	1366.2	1252.9	1126.1
40°	1046.2	1188.7	1340.8	1488.1	1578.6	1565.6	1475.7	1371.5	1238.4	1099.9	982.2
42.5°	997.8	1140.4	1295.3	1439.8	1512.3	1476.6	1371.5	1243.8	1100.6	970.3	862.5
45°	914.2	1060.9	1219.5	1359.1	1400.5	1336.1	1197.0	1055.0	914.2	805.3	720.1
47.5°	832.9	978.0	1135.1	1257.8	1272.5	1185.7	1033.8	887.7	766.6	678.0	617.9
50°	773.4	918.9	1074.5	1184.0	1179.2	1074.5	918.3	779.3	678.1	606.5	566.2
52.5°	719.9	857.4	1006.8	1106.3	1081.3	967.1	818.0	694.6	611.4	555.4	518.9
55°	636.7	763.8	905.9	985.8	939.6	813.0	687.0	587.5	526.0	484.0	455.6
57.5°	554.0	673.3	794.9	844.1	793.1	676.2	571.1	499.0	452.7	421.6	403.1
60°	502.9	607.1	715.3	758.0	697.1	592.9	510.1	445.6	408.2	382.8	366.2
62.5°	451.8	545.1	647.2	670.4	614.7	526.6	453.3	399.7	369.0	346.3	330.7
65°	382.3	458.5	536.1	551.4	500.0	431.9	374.0	339.0	311.8	295.2	282.9
67.5°	313.4	374.8	429.7	442.1	397.0	349.8	307.9	277.5	259.0	245.3	234.8
70°	272.8	321.3	366.2	376.3	340.2	298.2	266.3	242.0	225.4	213.6	203.6
72.5°	229.7	270.2	307.6	314.3	284.8	252.8	226.5	207.4	192.8	185.2	175.6
75°	175.8	199.4	228.4	230.2	210.6	191.1	171.0	158.5	150.9	141.4	136.7
77.5°	124.0	142.6	159.2	162.4	150.8	137.5	126.3	116.5	109.9	105.6	101.2
80°	94.7	109.5	116.5	120.7	112.4	103.0	96.5	90.0	85.8	82.8	79.9
82.5°	67.7	76.8	83.5	86.6	82.1	76.4	69.9	66.3	63.0	60.5	59.6
85°	34.3	38.4	42.6	43.8	42.6	40.2	36.6	36.6	34.9	34.3	34.3
87.5°	12.3	14.5	14.9	16.7	16.2	16.9	17.6	17.7	17.9	17.4	16.9
90°	2.4	4.2	6.0	7.8	10.3	13.5	16.7	19.9	23.2	22.8	22.6
92.5°	13.1	14.4	15.7	16.9	18.0	18.7	19.5	20.2	21.0	21.1	21.1
95°	35.8	37.4	38.8	40.3	41.2	41.5	41.7	42.1	42.4	42.4	42.4
97.5°	64.1	65.5	66.7	68.0	68.9	69.6	70.1	70.6	71.2	71.2	71.2
100°	85.2	86.4	87.6	88.7	89.5	90.0	90.4	90.9	91.3	91.3	91.3
102.5°	107.2	108.2	109.1	110.0	110.8	111.4	111.9	112.4	113.0	113.2	113.2
105°	142.7	143.1	143.6	144.0	144.4	144.7	145.0	145.3	145.6	145.9	146.2
107.5°	179.1	179.9	180.5	181.1	181.5	181.5	181.5	181.5	181.5	181.6	181.6
110°	202.7	203.6	204.5	205.4	205.8	205.8	205.8	205.8	205.8	205.8	205.8



TEST NUMBER: P331562-940

CATALOG NUMBER: S122DIW-S865D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	228.1	229.0	229.9	230.8	231.1	231.0	230.9	230.8	230.7	230.3	230.0
115°	265.6	266.4	267.3	268.2	268.5	268.2	267.9	267.6	267.3	267.2	267.1
117.5°	303.2	304.3	305.5	306.7	306.8	306.0	305.2	304.4	303.6	303.3	302.9
120°	328.1	329.2	330.4	331.5	331.5	330.4	329.2	328.1	326.9	326.9	326.9
122.5°	351.1	352.5	353.8	355.3	355.6	354.7	353.9	353.1	352.3	352.0	351.6
125°	386.5	387.7	389.1	390.4	390.8	390.4	389.9	389.5	389.1	388.6	388.2
127.5°	421.3	423.0	424.6	426.3	427.0	426.4	425.9	425.3	424.8	424.3	423.7
130°	443.3	445.1	447.1	449.0	449.8	449.5	449.2	448.9	448.6	448.4	448.1
132.5°	467.3	468.9	470.4	471.9	472.8	472.8	472.9	473.0	473.0	472.3	471.7
135°	499.9	501.5	503.1	504.7	505.7	506.0	506.3	506.6	506.8	506.7	506.6
137.5°	533.9	535.2	536.5	537.8	538.7	539.0	539.5	539.8	540.2	540.1	539.9
140°	554.5	555.8	557.1	558.5	559.5	560.3	561.0	561.7	562.4	562.4	562.4
142.5°	575.7	577.0	578.4	579.6	580.6	581.0	581.6	582.0	582.6	582.6	582.8
145°	605.8	606.8	607.9	608.9	609.8	610.7	611.6	612.5	613.4	613.5	613.7
147.5°	633.1	634.4	635.6	636.9	637.8	638.4	638.9	639.5	640.2	640.4	640.8
150°	651.3	652.2	653.1	654.0	654.7	655.3	655.9	656.5	657.1	657.5	657.9
152.5°	667.7	668.6	669.5	670.4	671.2	671.9	672.6	673.3	674.0	674.6	675.1
155°	691.9	692.3	692.8	693.2	693.7	694.1	694.6	695.0	695.4	696.2	696.9
157.5°	712.8	713.1	713.4	713.7	714.0	714.3	714.5	714.8	715.1	716.0	717.0
160°	725.5	725.8	726.1	726.4	726.7	726.7	726.9	727.0	727.2	728.1	729.0
162.5°	736.9	737.0	737.0	737.1	737.2	737.4	737.5	737.6	737.8	738.8	739.8
165°	752.2	752.1	751.9	751.8	751.7	751.7	751.7	751.7	751.7	752.7	753.8
167.5°	764.9	764.5	764.0	763.6	763.3	763.3	763.2	763.2	763.2	764.2	765.3
170°	771.8	771.3	770.9	770.4	770.2	770.0	769.8	769.7	769.5	770.6	771.6
172.5°	776.5	776.1	775.6	775.2	774.9	774.7	774.6	774.5	774.3	775.3	776.4
175°	782.4	781.9	781.5	781.0	780.7	780.3	780.1	779.8	779.4	780.5	781.5
177.5°	784.8	784.4	784.1	783.7	783.5	783.2	783.0	782.7	782.5	783.2	783.9
180°	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1



TEST NUMBER: P331562-940

CATALOG NUMBER: S122DIW-S865D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5
2.5°	1596.9	1603.5	1603.5	1604.5	1612.0	1611.1	1610.6
5°	1699.3	1709.4	1710.6	1721.3	1728.3	1726.0	1719.5
7.5°	1796.0	1814.7	1828.9	1836.8	1846.2	1852.0	1849.4
10°	1872.7	1899.9	1916.5	1927.7	1941.3	1951.4	1947.9
12.5°	1942.3	1974.7	1997.4	2016.7	2018.5	2031.4	2022.7
15°	2050.8	2085.1	2088.7	2102.8	2114.2	2112.9	2113.5
17.5°	2086.7	2097.7	2099.9	2100.2	2100.4	2096.2	2087.2
20°	2073.9	2069.7	2059.7	2052.0	2038.4	2036.6	2024.8
22.5°	2013.3	2000.2	1975.0	1958.3	1937.1	1931.5	1928.2
25°	1894.0	1865.0	1824.8	1786.3	1775.7	1755.0	1760.9
27.5°	1730.4	1685.2	1641.6	1610.3	1582.1	1551.0	1560.0
30°	1615.3	1564.4	1502.9	1455.5	1425.4	1395.8	1390.4
32.5°	1478.0	1403.5	1334.9	1293.2	1247.0	1228.2	1207.7
35°	1241.4	1168.6	1100.5	1042.0	1008.3	982.2	958.5
37.5°	1028.5	944.7	889.7	842.3	818.0	803.1	806.8
40°	896.4	823.0	782.8	746.7	724.2	713.5	716.0
42.5°	789.4	734.5	701.4	676.6	660.8	654.9	653.4
45°	668.0	637.2	610.0	595.8	588.2	581.7	577.5
47.5°	585.1	560.1	544.7	536.3	529.6	522.9	522.8
50°	535.5	518.9	508.3	499.4	494.1	489.4	493.5
52.5°	497.6	482.5	471.8	463.9	461.9	457.6	457.5
55°	441.4	429.5	421.9	414.7	411.3	408.8	405.9
57.5°	390.3	379.1	371.9	367.5	360.7	358.3	357.4
60°	353.8	344.9	337.9	331.9	329.0	324.2	324.2
62.5°	320.2	311.4	304.7	300.2	295.3	293.5	294.0
65°	271.6	264.5	258.0	253.2	252.1	248.5	249.7
67.5°	226.9	222.1	215.3	212.7	210.4	208.5	207.1
70°	197.1	192.3	188.8	185.2	183.4	183.4	183.4
72.5°	171.9	166.3	164.2	159.6	160.7	158.8	156.9
75°	133.1	129.6	127.8	126.0	123.1	123.1	123.1
77.5°	98.0	96.9	94.8	92.9	92.2	91.6	91.8
80°	75.7	75.2	73.9	73.9	72.8	72.2	71.0
82.5°	58.2	56.7	56.0	55.5	55.3	55.1	54.9
85°	33.2	31.9	31.9	32.5	31.4	31.4	31.9
87.5°	17.2	17.2	16.7	16.7	17.2	16.8	16.8
90°	22.3	22.0	21.9	22.0	22.2	22.4	22.5
92.5°	21.2	21.3	21.3	21.3	21.4	21.4	21.4
95°	42.4	42.4	42.2	41.9	41.6	41.3	41.0
97.5°	71.2	71.2	71.2	71.2	71.2	71.1	71.1
100°	91.3	91.3	91.2	91.1	91.0	90.8	90.7
102.5°	113.3	113.5	113.5	113.3	113.2	113.1	112.9
105°	146.4	146.8	146.9	146.9	146.9	146.9	146.9
107.5°	181.8	181.9	181.6	180.9	180.3	179.6	179.0
110°	205.8	205.8	205.5	205.1	204.6	204.2	203.8



TEST NUMBER: P331562-940

CATALOG NUMBER: S122DIW-S865D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	229.6	229.3	228.9	228.6	228.3	227.9	227.7
115°	266.9	266.7	266.4	266.0	265.6	265.1	264.7
117.5°	302.6	302.2	301.8	301.3	300.9	300.4	300.0
120°	326.9	326.9	326.6	326.2	325.7	325.3	324.9
122.5°	351.2	350.9	350.5	350.2	349.9	349.6	349.3
125°	387.7	387.3	387.0	386.9	386.7	386.6	386.5
127.5°	423.2	422.7	422.2	421.7	421.2	420.8	420.4
130°	447.7	447.5	447.0	446.4	445.9	445.2	444.7
132.5°	471.0	470.4	469.8	469.4	468.9	468.4	468.0
135°	506.4	506.3	506.0	505.5	505.1	504.6	504.2
137.5°	539.8	539.8	539.4	538.8	538.2	537.6	537.0
140°	562.4	562.4	562.1	561.6	561.0	560.4	559.8
142.5°	582.9	583.0	582.8	582.2	581.6	581.0	580.4
145°	613.9	613.9	613.8	613.1	612.6	612.0	611.4
147.5°	641.1	641.4	641.3	640.8	640.2	639.6	639.1
150°	658.4	658.8	658.8	658.4	657.9	657.5	657.1
152.5°	675.6	676.3	676.3	675.6	675.1	674.6	674.0
155°	697.7	698.4	698.6	698.1	697.7	697.2	696.8
157.5°	718.0	719.0	719.2	718.5	717.7	717.0	716.3
160°	729.9	730.8	730.8	730.3	729.7	729.2	728.5
162.5°	740.8	741.8	741.9	741.2	740.6	739.9	739.1
165°	754.7	755.8	756.0	755.2	754.5	753.8	753.0
167.5°	766.2	767.3	767.4	766.7	765.9	765.2	764.4
170°	772.7	773.6	773.7	772.8	772.0	771.1	770.2
172.5°	777.4	778.5	778.5	777.7	776.8	775.9	775.0
175°	782.6	783.6	783.6	782.7	781.9	781.0	780.2
177.5°	784.6	785.3	785.3	784.6	783.9	783.2	782.5
180°	784.1	784.1	784.1	784.1	784.1	784.1	784.1

(END OF REPORT)