

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331571-940

Luminaire Tested: **S122DIW-S865D970U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331571-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S865D970U940-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 970 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6584.5 lumens
Efficiency: N/A
Efficacy: 107.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 61.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331571-940

CATALOG NUMBER: S122DIW-S865D970U940-4F0-1E-UDD-F

Luminous Intensity Polar Plot

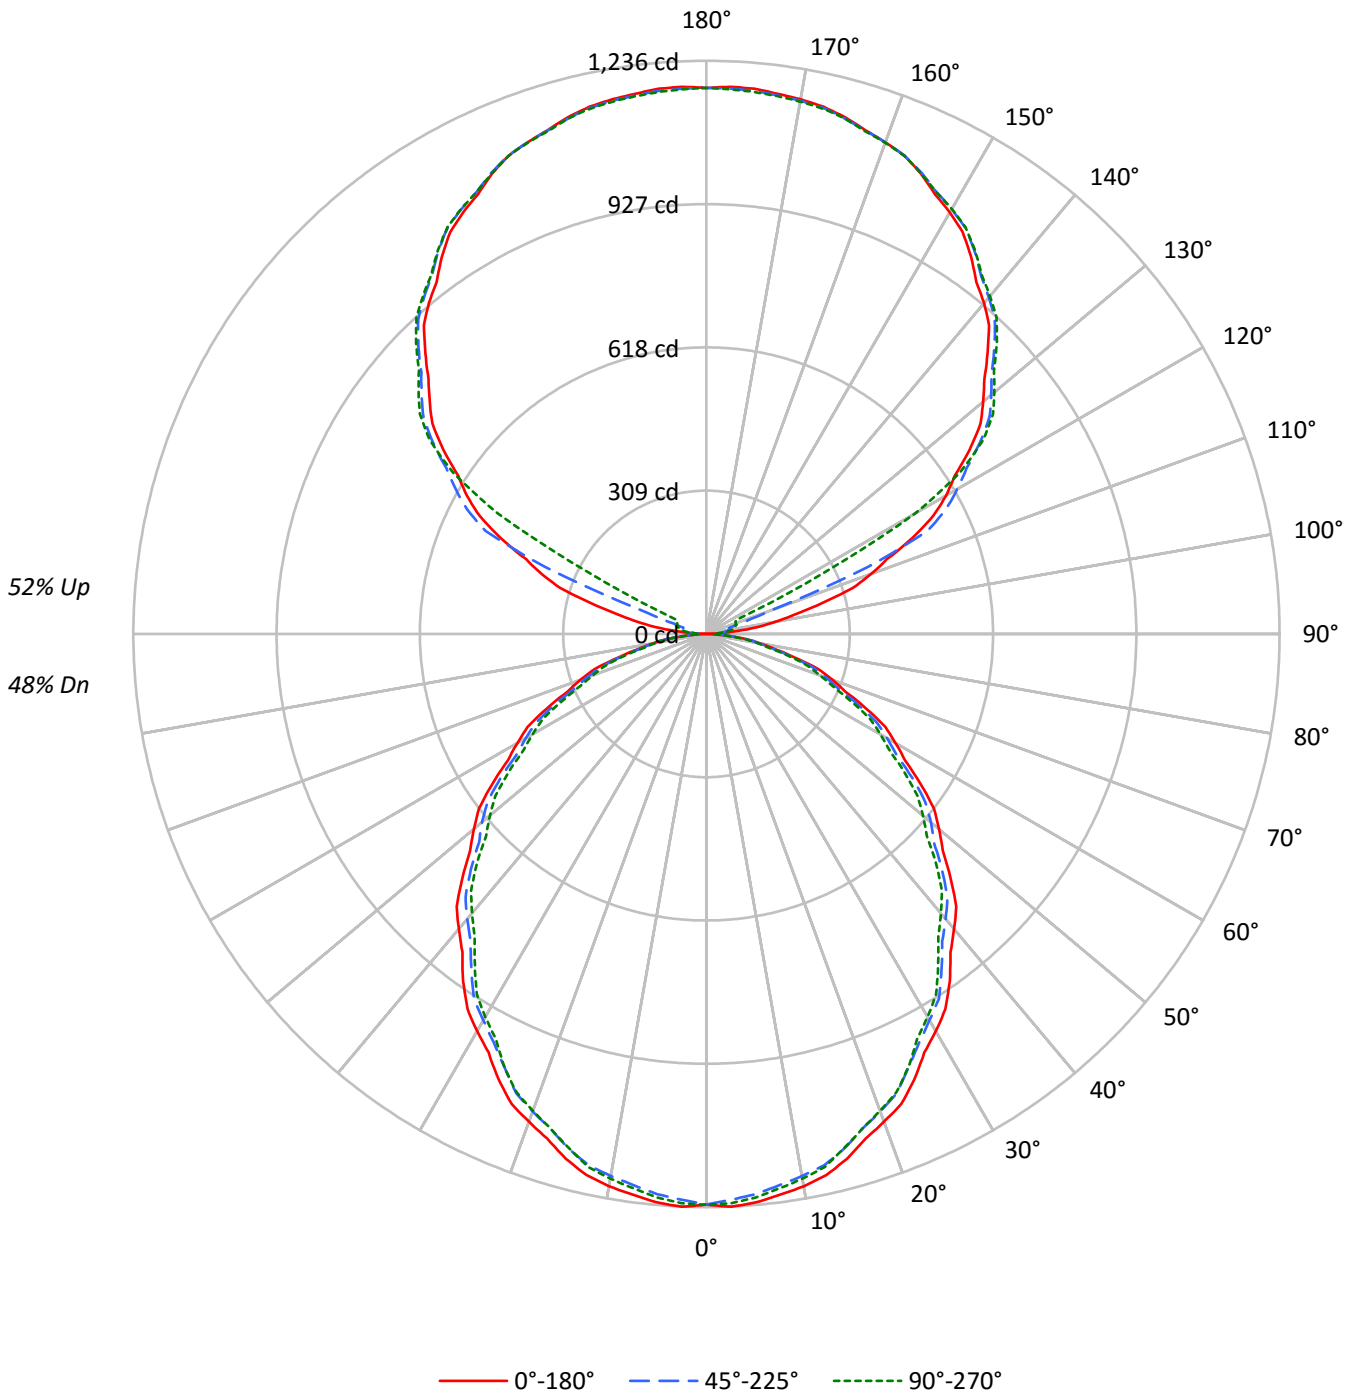



TEST NUMBER: P331571-940

CATALOG NUMBER: S122DIW-S865D970U940-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	98	98	98	98	82	82	82	67	67	67	54	54	54	48
1	97	93	89	86	89	86	82	79	72	69	67	59	58	56	48	47	46	40
2	89	81	75	70	81	75	70	65	63	59	56	52	49	47	42	40	38	34
3	81	71	64	58	74	66	59	54	56	51	47	46	43	40	37	35	33	28
4	74	63	55	49	68	58	51	46	49	44	40	41	37	34	33	30	28	24
5	68	56	48	42	62	52	45	40	44	39	34	37	33	29	30	27	24	21
6	62	50	42	37	57	47	40	34	40	34	30	33	29	26	27	24	22	19
7	58	45	38	32	53	42	35	30	36	30	26	30	26	23	25	22	19	17
8	54	41	34	28	49	38	31	27	33	27	23	28	23	20	23	20	17	15
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	16	13
10	47	35	27	23	43	32	26	21	28	23	19	23	19	16	20	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	19869	19869	19869
5°	19945	19656	19772
10°	19825	19457	19556
15°	19580	19206	19184
20°	19234	18826	18806
25°	18887	18360	18360
30°	18442	17935	17780
35°	18027	17422	17164
40°	17506	16910	16583
45°	16993	16401	15995
50°	16435	15872	15307
55°	15854	15254	14688
60°	15206	14518	13986
65°	14514	13788	13154
70°	13629	12902	12288
75°	12402	11884	11584
80°	11000	10674	10126
85°	8985	8559	7669



TEST NUMBER: P331571-940

CATALOG NUMBER: S122DIW-S865D970U940-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	115.7	1.8
10°-20°	325.6	4.9
20°-30°	478.6	7.3
30°-40°	555.9	8.4
40°-50°	555.3	8.4
50°-60°	484.3	7.4
60°-70°	358.1	5.4
70°-80°	202.8	3.1
80°-90°	57.4	0.9
90°-100°	39.3	0.6
100°-110°	144.0	2.2
110°-120°	385.0	5.8
120°-130°	635.6	9.7
130°-140°	675.9	10.3
140°-150°	628.3	9.5
150°-160°	505.1	7.7
160°-170°	325.5	4.9
170°-180°	112.0	1.7
0°-30°	919.9	14.0
0°-40°	1475.8	22.4
0°-60°	2515.4	38.2
0°-90°	3133.7	47.6
90°-120°	568.4	8.6
90°-150°	2508.2	38.1
90°-180°	3451.0	52.4
0°-180°	6584.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1231	1231	1231	1231	1231	
5°	1231	1225	1213	1222	1220	117
15°	1171	1164	1149	1153	1148	330
25°	1060	1050	1031	1033	1031	488
35°	915	902	884	877	871	571
45°	744	735	718	706	700	574
55°	563	556	542	528	522	503
65°	380	372	361	350	344	376
75°	199	196	190	184	186	212
85°	48	47	46	43	41	56
90°	1	10	17	21	23	5
95°	55	29	33	37	37	68
105°	259	270	52	61	65	277
115°	490	505	526	150	70	482
125°	693	704	720	726	728	617
135°	857	870	878	886	885	662
145°	994	994	1008	1013	1010	622
155°	1095	1088	1097	1102	1096	504
165°	1154	1149	1151	1156	1151	326
175°	1180	1175	1176	1181	1173	112
180°	1178	1178	1178	1178	1178	



TEST NUMBER: P331571-940

CATALOG NUMBER: S122DIW-S865D970U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6
2.5°	1236.3	1235.2	1234.1	1233.1	1232.1	1230.4	1228.1	1225.7	1223.4	1221.1	1223.2
5°	1230.6	1229.5	1228.5	1227.4	1226.4	1224.4	1221.6	1218.6	1215.8	1212.8	1215.0
7.5°	1219.7	1218.1	1216.5	1214.8	1213.2	1210.9	1207.9	1205.0	1202.0	1199.1	1201.2
10°	1209.2	1207.5	1205.6	1203.7	1201.9	1199.4	1196.2	1193.1	1190.0	1186.8	1188.9
12.5°	1195.1	1193.5	1191.9	1190.2	1188.6	1186.2	1183.0	1179.8	1176.7	1173.6	1175.0
15°	1171.4	1169.8	1168.2	1166.7	1165.1	1162.6	1159.2	1155.7	1152.4	1149.0	1150.0
17.5°	1141.1	1139.5	1138.0	1136.4	1134.8	1132.3	1128.8	1125.3	1121.9	1118.4	1119.6
20°	1119.4	1117.8	1116.2	1114.6	1113.0	1110.4	1106.7	1103.0	1099.4	1095.7	1096.4
22.5°	1097.6	1095.4	1093.1	1090.9	1088.8	1085.9	1082.4	1079.0	1075.5	1072.0	1072.2
25°	1060.2	1058.1	1056.0	1053.9	1051.8	1048.5	1044.0	1039.6	1035.1	1030.6	1031.2
27.5°	1017.6	1015.7	1013.8	1011.9	1010.0	1007.3	1003.8	1000.2	996.8	993.2	992.5
30°	989.2	987.1	985.0	982.9	980.8	977.8	973.8	969.9	965.9	962.0	961.2
32.5°	958.9	957.3	955.6	953.9	952.2	949.2	945.1	940.9	936.8	932.6	931.2
35°	914.6	912.0	909.4	906.8	904.1	900.7	896.5	892.3	888.1	883.9	882.3
37.5°	864.7	862.4	860.1	857.7	855.5	852.2	848.0	843.8	839.5	835.4	833.4
40°	830.6	828.6	826.4	824.3	822.2	819.0	814.8	810.7	806.5	802.3	799.9
42.5°	797.5	795.4	793.3	791.2	789.1	786.0	781.8	777.6	773.3	769.1	766.5
45°	744.2	742.4	740.6	738.8	736.9	734.0	730.0	726.1	722.2	718.3	715.3
47.5°	691.3	689.6	687.8	686.1	684.3	681.4	677.3	673.2	669.1	664.9	661.9
50°	654.3	653.0	651.8	650.4	649.1	646.6	642.9	639.2	635.5	631.9	628.2
52.5°	618.4	616.6	614.9	613.1	611.4	608.9	605.4	601.9	598.4	594.9	591.9
55°	563.2	561.7	560.1	558.5	556.9	554.6	551.4	548.2	545.1	541.9	538.8
57.5°	507.8	506.6	505.3	504.1	502.8	500.4	497.0	493.5	490.0	486.5	483.5
60°	470.9	469.8	468.9	467.8	466.7	464.4	460.7	457.0	453.3	449.6	446.7
62.5°	435.0	433.3	431.6	429.9	428.2	426.0	423.1	420.3	417.4	414.6	412.0
65°	379.9	378.3	376.7	375.1	373.5	371.4	368.8	366.1	363.6	360.9	358.6
67.5°	323.8	322.4	321.2	319.9	318.7	316.9	314.5	312.1	309.8	307.4	305.6
70°	288.7	287.7	286.6	285.5	284.5	282.8	280.4	278.0	275.7	273.3	271.5
72.5°	252.7	251.7	250.7	249.6	248.5	247.3	245.8	244.2	242.6	241.1	239.3
75°	198.8	198.2	197.7	197.2	196.7	195.7	194.5	193.1	191.8	190.5	189.0
77.5°	150.5	149.6	148.7	147.8	147.0	146.2	145.7	145.2	144.6	144.1	143.3
80°	118.3	118.1	117.8	117.5	117.3	116.9	116.4	115.8	115.3	114.8	114.0
82.5°	88.0	88.0	87.9	87.8	87.8	87.7	87.3	87.0	86.7	86.4	85.3
85°	48.5	48.2	48.0	47.7	47.4	47.2	46.9	46.6	46.4	46.2	45.4
87.5°	17.2	17.2	17.2	17.2	17.2	17.1	17.0	16.9	16.8	16.7	16.2
90°	0.9	2.9	5.0	7.1	9.2	11.0	12.5	14.0	15.5	17.0	18.0
92.5°	17.2	17.0	16.9	16.7	16.5	16.8	17.5	18.3	19.0	19.8	20.2
95°	55.4	49.1	42.9	36.6	30.4	27.9	29.2	30.6	31.9	33.3	34.2
97.5°	109.9	92.3	74.7	57.1	39.5	32.2	35.3	38.3	41.4	44.5	45.2
100°	150.8	124.8	98.9	73.0	47.1	35.7	38.9	42.1	45.4	48.6	50.1
102.5°	195.8	190.3	184.9	179.3	173.8	157.7	130.7	103.8	76.9	49.9	51.9
105°	259.0	264.7	270.4	276.1	281.8	258.8	207.1	155.3	103.7	52.0	54.0
107.5°	331.1	335.7	340.3	344.8	349.5	320.7	258.8	196.7	134.7	72.8	70.6
110°	377.5	381.5	385.4	389.4	393.3	368.0	313.3	258.6	203.8	149.1	130.2



TEST NUMBER: P331571-940

CATALOG NUMBER: S122DIW-S865D970U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	421.1	424.6	428.1	431.7	435.2	430.2	416.7	403.1	389.6	376.1	307.0
115°	489.9	493.1	496.4	499.6	502.8	506.8	511.5	516.2	521.0	525.8	438.0
117.5°	551.4	555.1	558.7	562.2	565.9	569.3	572.6	575.8	579.1	582.3	561.1
120°	596.5	599.3	602.1	604.9	607.8	610.9	614.3	617.8	621.2	624.6	626.9
122.5°	634.6	637.6	640.6	643.5	646.6	650.0	653.6	657.4	661.0	664.8	666.1
125°	692.7	695.2	697.7	700.1	702.6	705.6	709.2	712.8	716.4	720.0	721.3
127.5°	745.4	748.1	750.8	753.6	756.3	759.0	761.7	764.4	767.0	769.7	771.7
130°	778.8	781.9	784.9	787.8	790.9	793.4	795.5	797.6	799.7	801.8	803.9
132.5°	812.9	815.5	818.1	820.6	823.1	825.5	827.6	829.6	831.7	833.8	835.6
135°	857.2	860.2	863.3	866.3	869.3	871.6	873.3	875.0	876.7	878.5	880.4
137.5°	902.0	904.1	906.2	908.4	910.4	912.5	914.4	916.3	918.3	920.2	922.1
140°	931.3	932.8	934.3	935.9	937.4	939.1	941.2	943.3	945.4	947.5	949.2
142.5°	955.8	957.2	958.6	959.9	961.3	963.1	965.5	968.0	970.4	972.7	974.3
145°	994.3	994.2	994.0	993.8	993.6	995.1	998.4	1001.6	1004.8	1008.0	1009.3
147.5°	1028.0	1027.2	1026.4	1025.7	1025.0	1026.3	1029.5	1032.6	1035.8	1039.0	1040.0
150°	1049.7	1048.4	1047.0	1045.8	1044.5	1045.3	1048.3	1051.3	1054.4	1057.4	1058.5
152.5°	1068.2	1066.7	1065.1	1063.7	1062.2	1062.9	1065.8	1068.7	1071.6	1074.4	1075.6
155°	1094.9	1093.1	1091.5	1089.8	1088.1	1088.3	1090.7	1092.9	1095.2	1097.4	1098.6
157.5°	1115.9	1114.5	1112.9	1111.5	1110.1	1110.2	1111.8	1113.4	1114.9	1116.5	1117.8
160°	1128.1	1127.0	1125.9	1124.7	1123.6	1123.6	1124.7	1125.9	1127.0	1128.1	1129.3
162.5°	1139.1	1137.9	1136.8	1135.6	1134.5	1134.4	1135.4	1136.4	1137.4	1138.4	1139.6
165°	1153.7	1152.5	1151.4	1150.3	1149.1	1148.9	1149.4	1150.0	1150.6	1151.1	1152.4
167.5°	1164.6	1163.4	1162.3	1161.2	1160.0	1159.8	1160.3	1160.8	1161.4	1161.9	1163.1
170°	1170.7	1169.6	1168.5	1167.3	1166.2	1165.8	1166.2	1166.5	1167.0	1167.3	1168.7
172.5°	1174.8	1173.7	1172.5	1171.4	1170.3	1169.9	1170.3	1170.6	1171.0	1171.4	1172.8
175°	1180.1	1178.8	1177.4	1176.2	1174.8	1174.3	1174.7	1175.1	1175.5	1175.8	1177.1
177.5°	1181.0	1179.9	1178.8	1177.8	1176.7	1176.3	1176.4	1176.5	1176.7	1176.9	1177.9
180°	1177.5	1177.5	1177.5	1177.5	1177.5	1177.5	1177.5	1177.5	1177.5	1177.5	1177.5



TEST NUMBER: P331571-940

CATALOG NUMBER: S122DIW-S865D970U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6
2.5°	1225.3	1227.4	1229.5	1230.4	1229.9	1229.5	1229.1	1228.7
5°	1217.0	1219.1	1221.3	1222.0	1221.6	1221.0	1220.5	1219.9
7.5°	1203.3	1205.4	1207.6	1208.3	1207.7	1207.1	1206.6	1205.9
10°	1191.0	1193.1	1195.2	1195.9	1195.1	1194.3	1193.5	1192.8
12.5°	1176.5	1177.9	1179.5	1179.9	1179.3	1178.8	1178.1	1177.6
15°	1151.0	1152.1	1153.2	1153.0	1151.7	1150.4	1149.1	1147.7
17.5°	1120.8	1122.0	1123.3	1123.2	1122.0	1120.7	1119.5	1118.2
20°	1097.3	1098.1	1098.9	1098.7	1097.7	1096.6	1095.6	1094.5
22.5°	1072.4	1072.5	1072.6	1072.5	1071.7	1071.1	1070.5	1069.9
25°	1031.7	1032.2	1032.7	1032.7	1032.2	1031.7	1031.2	1030.6
27.5°	991.7	990.9	990.1	989.1	987.7	986.5	985.3	984.0
30°	960.4	959.7	958.9	957.9	956.9	955.8	954.8	953.7
32.5°	929.8	928.4	926.9	925.7	924.7	923.6	922.6	921.5
35°	880.7	879.1	877.6	876.1	874.9	873.5	872.2	870.8
37.5°	831.5	829.6	827.6	826.0	824.7	823.5	822.2	820.9
40°	797.5	795.1	792.8	791.0	790.1	789.0	787.9	786.8
42.5°	763.9	761.3	758.8	756.8	755.3	753.9	752.3	750.9
45°	712.5	709.5	706.7	704.7	703.6	702.6	701.5	700.5
47.5°	658.9	655.9	652.8	650.5	649.0	647.5	646.0	644.4
50°	624.5	620.8	617.2	614.7	613.3	612.0	610.7	609.4
52.5°	588.8	585.8	582.7	580.3	578.6	576.8	575.2	573.4
55°	535.7	532.4	529.3	527.1	525.8	524.4	523.2	521.8
57.5°	480.4	477.2	474.1	472.1	471.1	470.1	469.1	468.1
60°	443.9	441.0	438.1	436.2	435.4	434.6	433.8	433.1
62.5°	409.2	406.5	403.9	402.1	401.0	400.0	399.0	398.1
65°	356.1	353.8	351.4	349.6	348.3	347.0	345.6	344.3
67.5°	303.7	301.8	300.1	298.6	297.6	296.5	295.4	294.4
70°	269.7	267.8	266.0	264.5	263.5	262.4	261.4	260.3
72.5°	237.5	235.6	233.8	232.5	231.6	230.8	229.9	229.1
75°	187.3	185.7	184.2	183.7	184.2	184.8	185.2	185.7
77.5°	142.6	141.8	141.0	140.2	139.5	138.8	138.0	137.2
80°	113.2	112.4	111.6	110.9	110.4	109.9	109.4	108.9
82.5°	84.4	83.4	82.4	81.9	81.7	81.6	81.5	81.4
85°	44.6	43.8	43.0	42.4	42.2	41.9	41.6	41.4
87.5°	15.8	15.3	14.9	14.6	14.4	14.4	14.2	14.1
90°	18.9	19.9	20.9	21.5	21.8	22.2	22.6	23.0
92.5°	20.8	21.2	21.8	22.1	22.3	22.6	22.7	23.0
95°	35.1	36.1	37.0	37.4	37.2	37.0	36.8	36.6
97.5°	46.0	46.7	47.5	48.0	48.2	48.4	48.7	48.9
100°	51.6	53.1	54.7	55.6	55.9	56.4	56.7	57.1
102.5°	53.9	55.8	57.8	59.0	59.6	60.1	60.6	61.2
105°	56.2	58.2	60.3	61.7	62.5	63.2	64.0	64.7
107.5°	68.5	66.4	64.3	63.6	64.4	65.1	65.9	66.6
110°	111.2	92.3	73.4	64.3	65.0	65.8	66.5	67.3



TEST NUMBER: P331571-940

CATALOG NUMBER: S122DIW-S865D970U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	237.9	168.9	99.8	65.5	66.2	66.8	67.4	68.0
115°	350.4	262.7	175.0	124.4	110.8	97.1	83.5	69.9
117.5°	539.8	518.7	497.5	464.5	419.6	374.9	330.1	285.3
120°	629.1	631.3	633.6	622.0	596.5	570.9	545.3	519.8
122.5°	667.5	668.9	670.2	668.4	663.4	658.5	653.5	648.6
125°	722.6	724.0	725.3	726.2	726.8	727.4	727.9	728.5
127.5°	773.6	775.5	777.5	778.5	778.6	778.7	778.8	778.9
130°	805.9	808.1	810.1	811.1	810.8	810.7	810.5	810.3
132.5°	837.4	839.2	841.0	841.8	841.5	841.3	841.2	841.0
135°	882.3	884.1	886.0	886.8	886.4	886.0	885.6	885.3
137.5°	923.9	925.8	927.6	928.3	927.6	926.9	926.3	925.7
140°	950.9	952.6	954.3	954.7	953.8	952.8	951.8	950.9
142.5°	975.8	977.4	978.9	979.2	978.3	977.3	976.4	975.4
145°	1010.7	1012.0	1013.3	1013.5	1012.5	1011.6	1010.7	1009.7
147.5°	1041.0	1042.0	1042.9	1043.0	1042.2	1041.4	1040.6	1039.8
150°	1059.7	1060.8	1061.9	1062.0	1061.1	1060.2	1059.2	1058.3
152.5°	1076.7	1077.8	1079.0	1079.0	1077.7	1076.5	1075.2	1074.0
155°	1099.7	1100.8	1102.0	1101.8	1100.3	1098.8	1097.3	1095.7
157.5°	1119.1	1120.4	1121.7	1121.6	1120.1	1118.7	1117.1	1115.7
160°	1130.4	1131.5	1132.7	1132.6	1131.2	1129.9	1128.6	1127.3
162.5°	1140.9	1142.2	1143.5	1143.4	1141.7	1140.1	1138.4	1136.8
165°	1153.8	1155.1	1156.5	1156.5	1155.1	1153.8	1152.4	1151.1
167.5°	1164.5	1165.8	1167.2	1167.0	1165.3	1163.6	1161.9	1160.2
170°	1170.0	1171.3	1172.6	1172.4	1170.7	1169.0	1167.3	1165.6
172.5°	1174.0	1175.4	1176.7	1176.5	1174.8	1173.1	1171.4	1169.7
175°	1178.5	1179.8	1181.2	1180.9	1178.9	1177.1	1175.2	1173.3
177.5°	1179.0	1180.0	1181.1	1181.0	1179.6	1178.2	1176.9	1175.5
180°	1177.5	1177.5	1177.5	1177.5	1177.5	1177.5	1177.5	1177.5

(END OF REPORT)