

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331861-940

Luminaire Tested: **S122RDIW-S1005D1440U940-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331861-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIW-S1005D1440U940-4F0-1E-UDD-A
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 1440 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8539.4 lumens
Efficiency: N/A
Efficacy: 103.0 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 1.16 / 1.02
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 82.9
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331861-940

CATALOG NUMBER: S122RDIW-S1005D1440U940-4F0-1E-UDD-A

Luminous Intensity Polar Plot

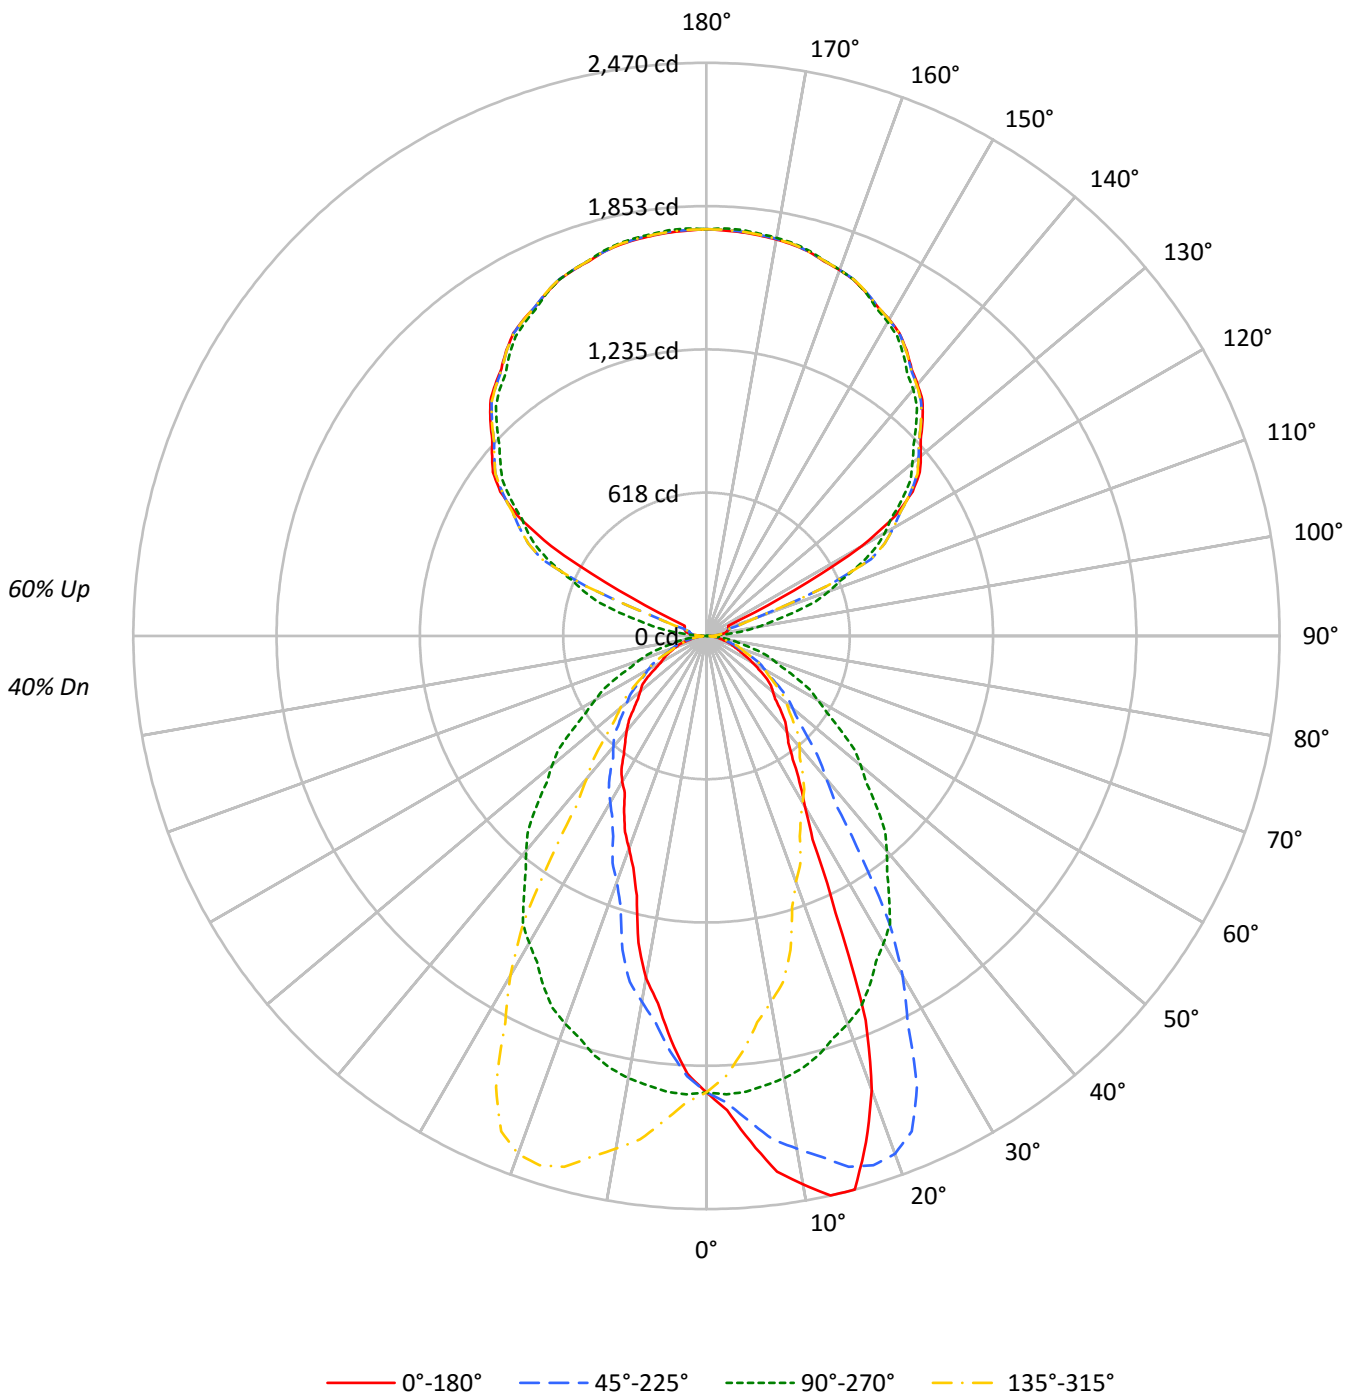



TEST NUMBER: P331861-940

CATALOG NUMBER: S122RDIW-S1005D1440U940-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	95	95	95	95	78	78	78	62	62	62	47	47	47	40
1	96	92	88	85	87	84	81	78	69	67	65	55	54	52	42	41	41	35
2	88	81	75	71	80	74	69	65	61	58	55	49	47	45	38	37	35	30
3	81	72	65	60	73	66	60	55	55	50	47	44	41	39	34	32	31	26
4	74	64	57	51	67	59	52	47	49	44	40	40	36	34	31	29	27	23
5	68	57	50	44	62	53	46	41	44	39	35	36	32	30	28	26	24	21
6	63	52	44	39	57	48	41	36	40	35	31	33	29	26	26	24	22	19
7	59	47	39	34	53	43	37	32	36	31	28	30	26	24	24	21	20	17
8	54	43	35	30	50	40	33	29	33	28	25	28	24	21	22	20	18	15
9	51	39	32	27	46	36	30	26	31	26	22	26	22	19	21	18	16	14
10	47	36	29	25	43	33	27	23	28	24	20	24	20	18	19	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	31752	31752	31752	31752
5°	35462	31951	28329	31951
10°	39346	31727	24556	31727
15°	41279	31263	19348	31263
20°	35787	30574	16744	30574
25°	23469	29630	14949	29630
30°	15797	28486	13530	28486
35°	12796	27045	12203	27045
40°	11377	25478	11291	25478
45°	10298	23640	10079	23640
50°	9372	21815	9339	21815
55°	8811	19792	8695	19792
60°	7369	17938	7282	17938
65°	6212	16290	7049	16290
70°	5740	14549	6647	14549
75°	5371	12664	6138	12664
80°	4956	10423	5467	10423
85°	4557	8225	4798	8225



TEST NUMBER: P331861-940

CATALOG NUMBER: S122RDIW-S1005D1440U940-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	186.4	2.2
10°-20°	519.5	6.1
20°-30°	669.4	7.8
30°-40°	636.1	7.4
40°-50°	544.9	6.4
50°-60°	415.0	4.9
60°-70°	262.3	3.1
70°-80°	131.0	1.5
80°-90°	38.4	0.4
90°-100°	58.5	0.7
100°-110°	214.4	2.5
110°-120°	573.1	6.7
120°-130°	946.0	11.1
130°-140°	1006.1	11.8
140°-150°	935.1	11.0
150°-160°	751.8	8.8
160°-170°	484.5	5.7
170°-180°	166.8	2.0
0°-30°	1375.3	16.1
0°-40°	2011.4	23.6
0°-60°	2971.3	34.8
0°-90°	3403.1	39.9
90°-120°	846.0	9.9
90°-150°	3733.2	43.7
90°-180°	5136.0	60.1
0°-180°	8539.4	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1967	1967	1967	1967	1967	
5°	2188	1971	1748	1971	2188	216
15°	2470	1870	1158	1870	2470	666
25°	1317	1663	839	1663	1317	625
35°	649	1372	619	1372	649	415
45°	451	1035	441	1035	451	349
55°	313	703	309	703	313	275
65°	163	426	184	426	163	166
75°	86	203	98	203	86	91
85°	25	44	26	44	25	27
90°	34	1	34	1	34	16
95°	55	82	55	82	55	51
105°	96	386	96	386	96	100
115°	104	729	104	729	104	260
125°	1084	1031	1084	1031	1084	938
135°	1318	1276	1318	1276	1318	1016
145°	1503	1480	1503	1480	1503	940
155°	1631	1630	1631	1630	1631	753
165°	1713	1717	1713	1717	1713	484
175°	1746	1756	1746	1756	1746	166
180°	1753	1753	1753	1753	1753	



TEST NUMBER: P331861-940

CATALOG NUMBER: S122RDIW-S1005D1440U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6
2.5°	2046.4	2048.1	2049.7	2045.9	2045.9	2042.6	2035.5	2030.0	2014.7	2012.5	2012.5
5°	2188.0	2186.7	2189.3	2180.5	2168.2	2165.4	2152.5	2135.4	2117.6	2097.8	2093.7
7.5°	2328.8	2326.7	2321.2	2319.8	2310.3	2289.6	2268.8	2246.5	2217.0	2188.2	2173.6
10°	2399.9	2422.4	2408.7	2384.8	2389.6	2357.5	2340.4	2311.0	2286.4	2243.4	2233.8
12.5°	2469.8	2478.7	2474.3	2460.8	2454.6	2432.3	2409.2	2383.7	2338.3	2299.6	2266.0
15°	2469.5	2482.5	2485.9	2481.8	2485.3	2483.9	2471.6	2450.4	2410.7	2368.4	2331.5
17.5°	2287.2	2296.2	2318.6	2333.8	2353.0	2393.4	2413.3	2421.2	2415.3	2391.1	2365.1
20°	2082.8	2067.7	2130.6	2162.8	2190.0	2258.3	2317.1	2339.7	2375.9	2375.3	2368.4
22.5°	1793.1	1796.6	1856.2	1894.4	1974.2	2042.5	2109.4	2194.3	2264.4	2310.7	2337.8
25°	1317.4	1343.5	1402.8	1454.8	1543.6	1670.7	1786.2	1920.1	2046.6	2146.3	2241.3
27.5°	989.4	991.4	1038.5	1086.5	1139.2	1243.4	1388.8	1548.7	1728.9	1877.7	2048.7
30°	847.3	843.2	863.0	892.4	937.5	1018.2	1127.5	1284.7	1464.4	1688.5	1888.0
32.5°	746.7	747.0	761.9	783.6	821.1	875.5	950.4	1078.0	1247.9	1468.2	1702.2
35°	649.2	648.5	659.4	675.1	690.8	725.7	776.9	843.9	960.7	1166.4	1405.6
37.5°	579.2	582.2	587.5	597.4	614.7	634.1	664.9	709.8	793.1	914.7	1115.7
40°	539.8	541.2	548.7	556.9	567.1	582.2	607.4	643.7	704.5	801.6	948.4
42.5°	503.7	505.2	510.4	518.1	526.2	541.2	562.1	593.4	642.7	718.5	839.6
45°	451.0	451.0	455.8	459.2	468.1	481.7	498.8	524.8	558.9	615.0	695.6
47.5°	401.5	401.6	404.8	410.7	416.3	427.0	443.7	464.9	489.8	533.2	602.0
50°	373.1	373.8	375.9	380.6	384.1	393.6	406.6	425.0	451.0	484.5	541.9
52.5°	350.2	349.7	352.3	354.4	356.7	363.6	373.3	389.5	412.7	441.8	489.4
55°	313.0	310.2	314.3	317.7	319.8	322.5	328.0	338.2	358.0	382.6	418.2
57.5°	266.5	265.4	268.3	271.4	277.9	285.3	289.9	296.4	306.7	324.3	359.5
60°	228.2	228.2	234.3	236.4	244.0	253.5	263.1	268.6	278.8	290.4	316.4
62.5°	194.3	194.9	197.8	199.8	204.0	215.8	229.2	241.2	250.9	262.0	279.2
65°	162.6	164.0	164.0	165.3	168.1	170.9	176.3	185.8	203.0	218.6	231.7
67.5°	138.0	138.5	138.8	140.2	140.9	143.9	146.1	150.3	154.3	169.2	185.3
70°	121.6	123.7	123.0	124.4	125.0	126.4	129.1	131.2	137.3	140.8	150.3
72.5°	106.3	107.8	107.7	108.5	110.3	110.6	112.7	114.8	118.8	121.6	126.8
75°	86.1	85.4	86.1	87.5	88.2	88.8	88.8	91.6	93.6	96.3	99.8
77.5°	66.4	67.1	67.0	67.1	67.2	68.5	68.3	69.6	71.6	72.9	74.6
80°	53.3	53.9	53.3	53.9	54.7	55.4	54.7	55.4	57.4	58.8	58.8
82.5°	41.3	41.4	41.8	42.0	42.1	42.3	43.2	43.3	44.9	44.6	45.1
85°	24.6	23.9	23.9	23.9	24.6	25.3	24.6	24.6	25.3	25.3	25.3
87.5°	15.6	16.1	15.9	15.8	15.7	15.5	15.2	15.5	14.6	14.9	13.9
90°	34.2	33.7	33.1	32.5	32.0	31.0	29.6	28.2	26.8	25.3	23.1
92.5°	34.2	33.9	33.5	33.3	32.9	32.4	31.7	30.9	30.1	29.4	28.3
95°	54.6	54.8	55.1	55.4	55.6	55.1	53.7	52.3	50.8	49.5	47.5
97.5°	72.8	72.5	72.1	71.8	71.4	70.7	69.6	68.5	67.3	66.2	61.6
100°	85.0	84.4	83.8	83.3	82.8	81.3	79.1	76.8	74.5	72.3	67.5
102.5°	91.0	90.2	89.4	88.7	87.9	86.1	83.1	80.2	77.2	74.3	114.4
105°	96.4	95.2	94.2	93.0	91.8	89.8	86.7	83.6	80.4	77.4	154.3
107.5°	99.2	98.1	96.9	95.8	94.7	95.7	98.8	102.0	105.1	108.3	200.5
110°	100.2	99.1	97.9	96.8	95.7	109.2	137.4	165.6	193.8	221.9	303.4



TEST NUMBER: P331861-940

CATALOG NUMBER: S122RDIW-S1005D1440U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	101.2	100.3	99.4	98.5	97.6	148.6	251.4	354.2	457.0	559.8	579.9
115°	104.0	124.3	144.5	164.9	185.1	260.6	391.0	521.6	652.0	782.5	775.4
117.5°	424.6	491.2	557.9	624.6	691.3	740.5	772.0	803.6	835.2	866.7	861.8
120°	773.6	811.6	849.7	887.8	925.8	943.2	939.8	936.4	933.0	929.6	924.5
122.5°	965.4	972.8	980.2	987.5	994.9	997.6	995.6	993.5	991.5	989.4	983.9
125°	1084.3	1083.5	1082.6	1081.8	1080.9	1079.5	1077.5	1075.6	1073.6	1071.7	1066.3
127.5°	1159.4	1159.2	1159.0	1158.9	1158.8	1157.2	1154.3	1151.5	1148.6	1145.8	1141.7
130°	1206.0	1206.4	1206.7	1206.9	1207.2	1205.8	1202.7	1199.6	1196.5	1193.4	1190.3
132.5°	1251.7	1252.1	1252.3	1252.6	1252.9	1251.7	1249.0	1246.3	1243.8	1241.1	1238.0
135°	1317.7	1318.2	1318.8	1319.4	1319.9	1318.8	1316.0	1313.1	1310.4	1307.5	1305.0
137.5°	1377.8	1378.8	1379.7	1380.6	1381.6	1380.7	1378.0	1375.2	1372.4	1369.7	1366.8
140°	1415.3	1416.8	1418.2	1419.6	1420.9	1420.4	1417.9	1415.3	1412.8	1410.2	1407.2
142.5°	1451.9	1453.3	1454.6	1456.1	1457.5	1457.1	1454.7	1452.4	1450.1	1447.8	1444.2
145°	1502.9	1504.2	1505.7	1507.1	1508.5	1508.2	1506.2	1504.2	1502.3	1500.3	1495.5
147.5°	1547.7	1548.9	1550.2	1551.3	1552.5	1552.4	1550.9	1549.4	1547.9	1546.5	1541.8
150°	1575.1	1576.5	1578.0	1579.4	1580.7	1580.6	1579.0	1577.3	1575.6	1573.9	1569.3
152.5°	1598.5	1600.4	1602.2	1604.0	1605.9	1606.0	1604.3	1602.6	1600.9	1599.2	1594.9
155°	1630.9	1633.2	1635.5	1637.7	1639.9	1640.2	1638.5	1636.8	1635.1	1633.4	1630.1
157.5°	1660.6	1662.8	1665.0	1667.2	1669.4	1669.6	1667.6	1665.7	1663.8	1661.9	1659.5
160°	1677.8	1679.8	1681.8	1683.8	1685.8	1685.9	1684.2	1682.5	1680.8	1679.1	1677.4
162.5°	1692.1	1694.5	1696.9	1699.3	1701.7	1702.0	1700.1	1698.2	1696.3	1694.3	1692.9
165°	1713.3	1715.4	1717.3	1719.3	1721.3	1721.3	1719.3	1717.3	1715.4	1713.3	1712.5
167.5°	1726.8	1729.4	1731.9	1734.5	1737.0	1737.2	1735.3	1733.3	1731.3	1729.4	1728.6
170°	1734.9	1737.5	1740.0	1742.6	1745.1	1745.3	1743.4	1741.4	1739.5	1737.5	1736.9
172.5°	1741.0	1743.6	1746.1	1748.6	1751.1	1751.4	1749.4	1747.5	1745.5	1743.6	1743.0
175°	1746.3	1749.2	1751.9	1754.8	1757.7	1758.0	1756.0	1754.1	1752.1	1750.2	1749.6
177.5°	1749.6	1751.7	1753.7	1755.7	1757.7	1758.0	1756.4	1754.8	1753.3	1751.7	1751.4
180°	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7



TEST NUMBER: P331861-940

CATALOG NUMBER: S122RDIW-S1005D1440U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6
2.5°	2013.7	2009.2	2005.5	1995.6	1990.7	1979.7	1978.1	1977.5	1963.4	1949.6	1945.8
5°	2082.8	2071.8	2055.5	2036.3	2016.5	1996.0	1982.4	1971.4	1944.0	1918.1	1903.1
7.5°	2152.5	2129.0	2100.7	2064.5	2034.3	2000.4	1975.2	1952.7	1913.9	1876.7	1851.6
10°	2204.4	2166.1	2128.5	2078.7	2039.7	2001.4	1966.0	1935.2	1891.4	1842.3	1807.4
12.5°	2236.7	2194.6	2142.8	2094.0	2043.5	1994.9	1947.3	1907.8	1856.5	1805.6	1764.2
15°	2280.3	2235.2	2172.3	2102.6	2037.6	1974.2	1919.5	1870.3	1803.3	1742.5	1691.9
17.5°	2316.0	2253.9	2186.4	2105.8	2030.6	1949.8	1879.5	1816.6	1742.0	1668.7	1609.1
20°	2327.4	2265.9	2188.0	2107.4	2018.6	1923.6	1847.7	1779.4	1699.4	1619.4	1551.1
22.5°	2320.3	2272.4	2185.9	2089.4	1998.3	1899.0	1813.3	1734.0	1645.3	1563.7	1484.4
25°	2272.1	2255.7	2173.6	2068.4	1964.5	1849.1	1750.0	1663.2	1562.1	1474.6	1388.5
27.5°	2159.5	2194.9	2144.1	2032.0	1916.6	1792.8	1681.4	1582.6	1477.7	1379.2	1293.4
30°	2051.4	2132.6	2110.8	2006.9	1877.8	1756.1	1631.1	1527.9	1415.9	1314.7	1230.0
32.5°	1903.2	2037.6	2058.9	1971.9	1838.4	1704.8	1573.7	1471.1	1354.1	1247.5	1164.9
35°	1667.3	1868.2	1960.4	1905.1	1771.2	1627.0	1491.7	1372.1	1254.5	1149.3	1067.4
37.5°	1385.9	1659.6	1813.3	1817.2	1694.3	1544.4	1397.0	1278.3	1158.0	1054.6	966.0
40°	1203.4	1499.9	1700.1	1744.5	1640.7	1478.7	1329.7	1208.8	1091.3	990.2	888.3
42.5°	1039.4	1334.8	1580.9	1658.1	1575.7	1414.8	1265.2	1138.8	1024.6	928.9	824.9
45°	840.5	1098.8	1370.0	1508.1	1462.3	1313.3	1155.5	1035.3	927.9	845.3	745.5
47.5°	709.0	891.1	1153.6	1340.2	1339.4	1203.5	1048.2	933.0	833.5	756.0	675.3
50°	634.1	792.6	1014.8	1226.5	1244.3	1130.2	982.6	868.5	775.6	694.3	629.4
52.5°	566.9	697.5	897.2	1100.3	1150.8	1052.0	908.8	803.4	713.3	638.5	582.9
55°	479.0	580.1	731.8	921.8	998.4	928.6	801.6	703.1	630.0	567.1	519.3
57.5°	405.2	481.1	602.8	755.7	844.9	801.0	696.2	616.3	553.7	496.8	459.1
60°	358.7	420.9	524.1	651.9	750.3	719.5	630.0	555.5	502.2	453.1	417.5
62.5°	315.0	368.5	456.9	560.6	650.8	638.1	565.0	502.5	455.8	411.0	380.8
65°	253.5	292.5	361.5	442.8	515.2	521.4	468.8	426.4	384.7	349.2	322.5
67.5°	201.9	227.3	275.9	344.4	398.7	418.0	385.9	353.6	320.5	293.0	269.9
70°	170.1	190.6	226.1	281.5	331.4	351.9	333.5	308.2	279.5	256.9	237.1
72.5°	137.9	157.8	184.0	224.7	267.4	289.6	283.2	265.0	241.7	223.0	204.3
75°	103.9	110.0	127.8	155.2	188.6	207.8	212.5	203.0	184.5	170.1	159.2
77.5°	76.8	80.5	89.0	103.3	125.2	142.2	149.3	148.1	135.5	127.1	116.8
80°	61.5	63.6	67.7	73.8	90.2	107.3	112.1	112.1	103.2	99.8	89.5
82.5°	46.7	48.2	50.7	54.1	61.8	76.7	82.0	83.1	77.5	72.9	64.9
85°	26.7	25.9	27.4	29.4	30.8	34.9	43.1	44.4	43.1	37.5	35.5
87.5°	13.5	13.6	13.1	12.0	11.9	11.9	14.0	16.1	14.5	13.6	13.0
90°	20.9	18.6	16.3	13.6	10.6	7.5	4.4	1.2	4.4	7.5	10.6
92.5°	27.2	26.0	24.9	24.5	24.8	25.1	25.3	25.6	25.3	25.1	24.8
95°	45.5	43.5	41.6	45.2	54.6	63.8	73.1	82.4	73.1	63.8	54.6
97.5°	57.1	52.5	48.0	58.8	85.0	111.2	137.4	163.6	137.4	111.2	85.0
100°	62.7	57.9	53.1	70.0	108.6	147.2	185.8	224.4	185.8	147.2	108.6
102.5°	154.4	194.6	234.6	258.8	266.9	275.1	283.3	291.4	283.3	275.1	266.9
105°	231.2	308.2	385.1	419.4	410.9	402.4	394.0	385.6	394.0	402.4	410.9
107.5°	292.8	385.1	477.4	520.1	513.3	506.5	499.6	492.8	499.6	506.5	513.3
110°	384.9	466.3	547.7	585.5	579.6	573.6	567.8	561.9	567.8	573.6	579.6



TEST NUMBER: P331861-940

CATALOG NUMBER: S122RDIW-S1005D1440U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	600.0	620.2	640.2	647.7	642.5	637.2	632.0	626.8	632.0	637.2	642.5
115°	768.4	761.3	754.3	748.4	743.6	738.8	734.1	729.2	734.1	738.8	743.6
117.5°	857.0	852.1	847.3	842.2	836.9	831.5	826.2	820.8	826.2	831.5	836.9
120°	919.4	914.4	909.3	904.6	900.4	896.2	892.0	887.8	892.0	896.2	900.4
122.5°	978.4	972.9	967.4	962.4	958.0	953.5	949.0	944.6	949.0	953.5	958.0
125°	1061.0	1055.6	1050.3	1045.7	1042.1	1038.4	1034.7	1031.1	1034.7	1038.4	1042.1
127.5°	1137.7	1133.7	1129.7	1125.7	1121.6	1117.6	1113.5	1109.5	1113.5	1117.6	1121.6
130°	1187.2	1184.1	1181.0	1177.2	1172.7	1168.1	1163.7	1159.1	1163.7	1168.1	1172.7
132.5°	1234.8	1231.8	1228.7	1225.2	1221.4	1217.5	1213.7	1209.9	1213.7	1217.5	1221.4
135°	1302.4	1299.9	1297.4	1293.9	1289.3	1284.9	1280.3	1275.9	1280.3	1284.9	1289.3
137.5°	1364.0	1361.0	1358.2	1355.1	1352.0	1348.9	1345.7	1342.6	1345.7	1348.9	1352.0
140°	1404.1	1401.0	1397.8	1395.2	1392.9	1390.7	1388.4	1386.2	1388.4	1390.7	1392.9
142.5°	1440.7	1437.2	1433.6	1430.8	1428.8	1426.7	1424.7	1422.7	1424.7	1426.7	1428.8
145°	1490.8	1485.9	1481.1	1478.9	1479.2	1479.4	1479.7	1480.1	1479.7	1479.4	1479.2
147.5°	1537.0	1532.2	1527.5	1525.7	1526.8	1527.9	1528.9	1530.0	1528.9	1527.9	1526.8
150°	1564.9	1560.3	1555.9	1554.5	1556.6	1558.5	1560.5	1562.5	1560.5	1558.5	1556.6
152.5°	1590.6	1586.4	1582.1	1581.1	1583.2	1585.5	1587.7	1589.8	1587.7	1585.5	1583.2
155°	1626.7	1623.4	1620.0	1619.5	1622.0	1624.6	1627.1	1629.7	1627.1	1624.6	1622.0
157.5°	1657.2	1654.7	1652.4	1652.3	1654.5	1656.6	1658.8	1660.9	1658.8	1656.6	1654.5
160°	1675.8	1674.1	1672.4	1672.4	1674.1	1675.8	1677.4	1679.1	1677.4	1675.8	1674.1
162.5°	1691.4	1690.0	1688.5	1688.6	1690.3	1692.0	1693.7	1695.3	1693.7	1692.0	1690.3
165°	1711.6	1710.8	1710.0	1710.4	1712.1	1713.8	1715.5	1717.2	1715.5	1713.8	1712.1
167.5°	1727.8	1727.0	1726.2	1726.6	1728.3	1730.0	1731.7	1733.4	1731.7	1730.0	1728.3
170°	1736.3	1735.8	1735.2	1735.8	1737.5	1739.2	1740.9	1742.6	1740.9	1739.2	1737.5
172.5°	1742.4	1741.9	1741.3	1741.9	1743.6	1745.3	1747.0	1748.6	1747.0	1745.3	1743.6
175°	1749.0	1748.5	1747.9	1748.6	1750.6	1752.6	1754.5	1756.5	1754.5	1752.6	1750.6
177.5°	1751.2	1751.0	1750.8	1751.4	1753.0	1754.6	1756.2	1757.7	1756.2	1754.6	1753.0
180°	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7



TEST NUMBER: P331861-940

CATALOG NUMBER: S122RDIW-S1005D1440U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6
2.5°	1938.8	1934.9	1927.8	1916.8	1910.3	1898.8	1891.1	1895.5	1896.7	1895.5	1894.4
5°	1886.7	1872.3	1852.5	1833.4	1815.6	1796.4	1785.6	1780.7	1771.2	1765.7	1763.0
7.5°	1823.6	1798.9	1770.9	1737.6	1709.2	1679.6	1664.5	1656.9	1637.4	1626.7	1617.4
10°	1776.6	1737.7	1709.7	1666.0	1639.3	1600.4	1573.7	1574.4	1547.7	1532.7	1521.8
12.5°	1724.7	1681.9	1635.3	1596.0	1559.0	1527.7	1495.5	1482.6	1454.3	1439.8	1410.2
15°	1638.6	1588.8	1539.5	1486.2	1448.7	1400.2	1353.7	1297.0	1251.2	1211.6	1200.6
17.5°	1544.6	1482.8	1433.5	1370.9	1306.5	1224.9	1171.1	1138.2	1110.5	1089.7	1074.1
20°	1480.1	1417.2	1364.6	1270.3	1183.5	1128.2	1088.5	1063.3	1034.6	1012.0	999.7
22.5°	1412.3	1346.7	1275.0	1169.7	1102.1	1057.7	1022.3	993.3	973.8	956.3	945.0
25°	1316.1	1244.3	1126.1	1053.6	999.0	952.5	927.9	910.2	889.7	865.8	854.9
27.5°	1214.4	1100.3	1015.4	961.5	909.4	879.1	857.0	830.5	812.2	801.4	790.1
30°	1138.4	1024.3	958.1	899.3	862.4	828.8	802.9	787.9	770.1	751.6	744.1
32.5°	1053.6	962.5	899.0	850.1	812.6	784.1	763.6	739.2	726.4	715.1	699.3
35°	948.4	879.4	821.4	781.8	746.2	723.0	699.0	684.7	661.5	651.9	645.8
37.5°	859.3	799.5	756.2	714.3	686.2	660.5	645.9	623.0	613.0	599.7	586.7
40°	809.0	750.3	708.6	674.4	643.0	623.8	605.4	587.0	571.9	565.8	550.1
42.5°	757.7	709.8	668.2	630.7	609.7	589.4	566.1	552.5	537.0	527.0	517.3
45°	686.7	644.4	608.9	578.1	554.8	533.7	518.6	496.1	487.2	467.4	459.2
47.5°	624.5	585.1	551.2	521.9	499.3	485.4	463.4	445.8	431.6	419.5	408.9
50°	580.1	547.3	514.5	488.6	468.1	448.3	425.7	416.8	394.9	388.8	382.6
52.5°	539.7	508.5	478.5	453.1	432.6	413.3	393.4	381.8	367.1	361.0	356.4
55°	483.1	453.1	424.4	401.8	381.3	361.5	349.2	334.8	328.0	323.2	317.7
57.5°	426.2	399.2	377.2	354.4	333.8	318.0	303.8	295.2	288.1	281.8	275.3
60°	390.2	364.2	344.4	323.2	302.0	289.0	278.1	267.9	259.7	250.1	247.4
62.5°	351.9	329.2	311.0	290.4	272.0	260.1	249.7	240.0	230.2	216.2	212.4
65°	299.3	281.5	262.4	245.3	228.9	217.3	202.2	191.4	187.3	185.8	185.2
67.5°	251.7	235.0	218.6	201.0	186.1	175.3	167.7	166.0	163.2	162.4	160.4
70°	220.1	204.3	187.9	171.5	157.2	155.2	152.4	149.6	146.2	144.9	143.5
72.5°	191.6	175.3	158.9	145.8	139.6	137.1	134.4	131.6	129.3	128.0	127.1
75°	147.0	131.9	120.9	116.2	112.7	110.7	106.6	104.5	103.2	101.1	100.4
77.5°	105.8	97.3	92.3	89.3	85.7	83.5	81.1	79.1	77.7	77.2	76.2
80°	80.6	76.5	73.1	69.0	67.7	64.9	64.2	62.2	62.9	60.8	60.8
82.5°	62.6	57.4	54.6	52.6	51.3	49.0	48.4	47.4	47.5	46.0	46.0
85°	32.1	30.8	29.4	28.0	28.0	25.9	26.7	25.9	25.9	24.6	23.9
87.5°	13.1	13.1	12.5	12.9	13.4	13.3	13.6	13.3	13.6	13.8	13.5
90°	13.6	16.3	18.6	20.9	23.1	25.3	26.8	28.2	29.6	31.0	32.0
92.5°	24.5	24.9	26.0	27.2	28.3	29.4	30.1	30.9	31.7	32.4	32.9
95°	45.2	41.6	43.5	45.5	47.5	49.5	50.8	52.3	53.7	55.1	55.6
97.5°	58.8	48.0	52.5	57.1	61.6	66.2	67.3	68.5	69.6	70.7	71.4
100°	70.0	53.1	57.9	62.7	67.5	72.3	74.5	76.8	79.1	81.3	82.8
102.5°	258.8	234.6	194.6	154.4	114.4	74.3	77.2	80.2	83.1	86.1	87.9
105°	419.4	385.1	308.2	231.2	154.3	77.4	80.4	83.6	86.7	89.8	91.8
107.5°	520.1	477.4	385.1	292.8	200.5	108.3	105.1	102.0	98.8	95.7	94.7
110°	585.5	547.7	466.3	384.9	303.4	221.9	193.8	165.6	137.4	109.2	95.7



TEST NUMBER: P331861-940

CATALOG NUMBER: S122RDIW-S1005D1440U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	647.7	640.2	620.2	600.0	579.9	559.8	457.0	354.2	251.4	148.6	97.6
115°	748.4	754.3	761.3	768.4	775.4	782.5	652.0	521.6	391.0	260.6	185.1
117.5°	842.2	847.3	852.1	857.0	861.8	866.7	835.2	803.6	772.0	740.5	691.3
120°	904.6	909.3	914.4	919.4	924.5	929.6	933.0	936.4	939.8	943.2	925.8
122.5°	962.4	967.4	972.9	978.4	983.9	989.4	991.5	993.5	995.6	997.6	994.9
125°	1045.7	1050.3	1055.6	1061.0	1066.3	1071.7	1073.6	1075.6	1077.5	1079.5	1080.9
127.5°	1125.7	1129.7	1133.7	1137.7	1141.7	1145.8	1148.6	1151.5	1154.3	1157.2	1158.8
130°	1177.2	1181.0	1184.1	1187.2	1190.3	1193.4	1196.5	1199.6	1202.7	1205.8	1207.2
132.5°	1225.2	1228.7	1231.8	1234.8	1238.0	1241.1	1243.8	1246.3	1249.0	1251.7	1252.9
135°	1293.9	1297.4	1299.9	1302.4	1305.0	1307.5	1310.4	1313.1	1316.0	1318.8	1319.9
137.5°	1355.1	1358.2	1361.0	1364.0	1366.8	1369.7	1372.4	1375.2	1378.0	1380.7	1381.6
140°	1395.2	1397.8	1401.0	1404.1	1407.2	1410.2	1412.8	1415.3	1417.9	1420.4	1420.9
142.5°	1430.8	1433.6	1437.2	1440.7	1444.2	1447.8	1450.1	1452.4	1454.7	1457.1	1457.5
145°	1478.9	1481.1	1485.9	1490.8	1495.5	1500.3	1502.3	1504.2	1506.2	1508.2	1508.5
147.5°	1525.7	1527.5	1532.2	1537.0	1541.8	1546.5	1547.9	1549.4	1550.9	1552.4	1552.5
150°	1554.5	1555.9	1560.3	1564.9	1569.3	1573.9	1575.6	1577.3	1579.0	1580.6	1580.7
152.5°	1581.1	1582.1	1586.4	1590.6	1594.9	1599.2	1600.9	1602.6	1604.3	1606.0	1605.9
155°	1619.5	1620.0	1623.4	1626.7	1630.1	1633.4	1635.1	1636.8	1638.5	1640.2	1639.9
157.5°	1652.3	1652.4	1654.7	1657.2	1659.5	1661.9	1663.8	1665.7	1667.6	1669.6	1669.4
160°	1672.4	1672.4	1674.1	1675.8	1677.4	1679.1	1680.8	1682.5	1684.2	1685.9	1685.8
162.5°	1688.6	1688.5	1690.0	1691.4	1692.9	1694.3	1696.3	1698.2	1700.1	1702.0	1701.7
165°	1710.4	1710.0	1710.8	1711.6	1712.5	1713.3	1715.4	1717.3	1719.3	1721.3	1721.3
167.5°	1726.6	1726.2	1727.0	1727.8	1728.6	1729.4	1731.3	1733.3	1735.3	1737.2	1737.0
170°	1735.8	1735.2	1735.8	1736.3	1736.9	1737.5	1739.5	1741.4	1743.4	1745.3	1745.1
172.5°	1741.9	1741.3	1741.9	1742.4	1743.0	1743.6	1745.5	1747.5	1749.4	1751.4	1751.1
175°	1748.6	1747.9	1748.5	1749.0	1749.6	1750.2	1752.1	1754.1	1756.0	1758.0	1757.7
177.5°	1751.4	1750.8	1751.0	1751.2	1751.4	1751.7	1753.3	1754.8	1756.4	1758.0	1757.7
180°	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7



TEST NUMBER: P331861-940

CATALOG NUMBER: S122RDIW-S1005D1440U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6
2.5°	1888.5	1889.5	1887.9	1889.0	1887.9	1889.5	1888.5	1894.4	1895.5	1896.7	1895.5
5°	1759.5	1751.3	1750.0	1747.9	1750.0	1751.3	1759.5	1763.0	1765.7	1771.2	1780.7
7.5°	1605.7	1604.5	1601.1	1596.3	1601.1	1604.5	1605.7	1617.4	1626.7	1637.4	1656.9
10°	1506.7	1503.3	1502.6	1497.8	1502.6	1503.3	1506.7	1521.8	1532.7	1547.7	1574.4
12.5°	1390.8	1368.9	1366.5	1354.6	1366.5	1368.9	1390.8	1410.2	1439.8	1454.3	1482.6
15°	1184.2	1180.1	1166.4	1157.5	1166.4	1180.1	1184.2	1200.6	1211.6	1251.2	1297.0
17.5°	1066.1	1052.8	1048.5	1046.6	1048.5	1052.8	1066.1	1074.1	1089.7	1110.5	1138.2
20°	990.2	977.9	975.8	974.5	975.8	977.9	990.2	999.7	1012.0	1034.6	1063.3
22.5°	937.6	924.8	919.4	915.3	919.4	924.8	937.6	945.0	956.3	973.8	993.3
25°	848.0	843.2	840.5	839.1	840.5	843.2	848.0	854.9	865.8	889.7	910.2
27.5°	777.9	767.4	765.4	761.8	765.4	767.4	777.9	790.1	801.4	812.2	830.5
30°	738.0	734.6	729.8	725.7	729.8	734.6	738.0	744.1	751.6	770.1	787.9
32.5°	691.0	688.1	683.9	682.0	683.9	688.1	691.0	699.3	715.1	726.4	739.2
35°	638.9	629.4	625.3	619.1	625.3	629.4	638.9	645.8	651.9	661.5	684.7
37.5°	583.8	578.8	573.0	575.1	573.0	578.8	583.8	586.7	599.7	613.0	623.0
40°	541.2	537.8	536.5	535.7	536.5	537.8	541.2	550.1	565.8	571.9	587.0
42.5°	507.3	497.8	494.3	494.2	494.3	497.8	507.3	517.3	527.0	537.0	552.5
45°	455.8	446.9	440.8	441.4	440.8	446.9	455.8	459.2	467.4	487.2	496.1
47.5°	403.1	402.8	399.0	400.1	399.0	402.8	403.1	408.9	419.5	431.6	445.8
50°	377.9	373.8	371.0	371.8	371.0	373.8	377.9	382.6	388.8	394.9	416.8
52.5°	353.8	350.3	348.1	351.0	348.1	350.3	353.8	356.4	361.0	367.1	381.8
55°	314.3	310.2	309.5	308.9	309.5	310.2	314.3	317.7	323.2	328.0	334.8
57.5°	270.2	267.4	263.3	261.5	263.3	267.4	270.2	275.3	281.8	288.1	295.2
60°	238.4	233.0	226.1	225.5	226.1	233.0	238.4	247.4	250.1	259.7	267.9
62.5°	209.5	208.4	207.1	206.9	207.1	208.4	209.5	212.4	216.2	230.2	240.0
65°	183.8	183.2	183.8	184.5	183.8	183.2	183.8	185.2	185.8	187.3	191.4
67.5°	160.2	158.9	157.7	158.3	157.7	158.9	160.2	160.4	162.4	163.2	166.0
70°	142.1	141.4	140.8	140.8	140.8	141.4	142.1	143.5	144.9	146.2	149.6
72.5°	124.7	124.5	123.9	123.2	123.9	124.5	124.7	127.1	128.0	129.3	131.6
75°	99.8	98.4	98.4	98.4	98.4	98.4	99.8	100.4	101.1	103.2	104.5
77.5°	76.0	75.3	74.6	74.1	74.6	75.3	76.0	76.2	77.2	77.7	79.1
80°	60.1	59.5	58.8	58.8	58.8	59.5	60.1	60.8	60.8	62.9	62.2
82.5°	45.9	45.2	45.1	44.6	45.1	45.2	45.9	46.0	46.0	47.5	47.4
85°	24.6	25.3	24.6	25.9	24.6	25.3	24.6	23.9	24.6	25.9	25.9
87.5°	13.6	13.2	13.8	13.4	13.8	13.2	13.6	13.5	13.8	13.6	13.3
90°	32.5	33.1	33.7	34.2	33.7	33.1	32.5	32.0	31.0	29.6	28.2
92.5°	33.3	33.5	33.9	34.2	33.9	33.5	33.3	32.9	32.4	31.7	30.9
95°	55.4	55.1	54.8	54.6	54.8	55.1	55.4	55.6	55.1	53.7	52.3
97.5°	71.8	72.1	72.5	72.8	72.5	72.1	71.8	71.4	70.7	69.6	68.5
100°	83.3	83.8	84.4	85.0	84.4	83.8	83.3	82.8	81.3	79.1	76.8
102.5°	88.7	89.4	90.2	91.0	90.2	89.4	88.7	87.9	86.1	83.1	80.2
105°	93.0	94.2	95.2	96.4	95.2	94.2	93.0	91.8	89.8	86.7	83.6
107.5°	95.8	96.9	98.1	99.2	98.1	96.9	95.8	94.7	95.7	98.8	102.0
110°	96.8	97.9	99.1	100.2	99.1	97.9	96.8	95.7	109.2	137.4	165.6



TEST NUMBER: P331861-940

CATALOG NUMBER: S122RDIW-S1005D1440U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	98.5	99.4	100.3	101.2	100.3	99.4	98.5	97.6	148.6	251.4	354.2
115°	164.9	144.5	124.3	104.0	124.3	144.5	164.9	185.1	260.6	391.0	521.6
117.5°	624.6	557.9	491.2	424.6	491.2	557.9	624.6	691.3	740.5	772.0	803.6
120°	887.8	849.7	811.6	773.6	811.6	849.7	887.8	925.8	943.2	939.8	936.4
122.5°	987.5	980.2	972.8	965.4	972.8	980.2	987.5	994.9	997.6	995.6	993.5
125°	1081.8	1082.6	1083.5	1084.3	1083.5	1082.6	1081.8	1080.9	1079.5	1077.5	1075.6
127.5°	1158.9	1159.0	1159.2	1159.4	1159.2	1159.0	1158.9	1158.8	1157.2	1154.3	1151.5
130°	1206.9	1206.7	1206.4	1206.0	1206.4	1206.7	1206.9	1207.2	1205.8	1202.7	1199.6
132.5°	1252.6	1252.3	1252.1	1251.7	1252.1	1252.3	1252.6	1252.9	1251.7	1249.0	1246.3
135°	1319.4	1318.8	1318.2	1317.7	1318.2	1318.8	1319.4	1319.9	1318.8	1316.0	1313.1
137.5°	1380.6	1379.7	1378.8	1377.8	1378.8	1379.7	1380.6	1381.6	1380.7	1378.0	1375.2
140°	1419.6	1418.2	1416.8	1415.3	1416.8	1418.2	1419.6	1420.9	1420.4	1417.9	1415.3
142.5°	1456.1	1454.6	1453.3	1451.9	1453.3	1454.6	1456.1	1457.5	1457.1	1454.7	1452.4
145°	1507.1	1505.7	1504.2	1502.9	1504.2	1505.7	1507.1	1508.5	1508.2	1506.2	1504.2
147.5°	1551.3	1550.2	1548.9	1547.7	1548.9	1550.2	1551.3	1552.5	1552.4	1550.9	1549.4
150°	1579.4	1578.0	1576.5	1575.1	1576.5	1578.0	1579.4	1580.7	1580.6	1579.0	1577.3
152.5°	1604.0	1602.2	1600.4	1598.5	1600.4	1602.2	1604.0	1605.9	1606.0	1604.3	1602.6
155°	1637.7	1635.5	1633.2	1630.9	1633.2	1635.5	1637.7	1639.9	1640.2	1638.5	1636.8
157.5°	1667.2	1665.0	1662.8	1660.6	1662.8	1665.0	1667.2	1669.4	1669.6	1667.6	1665.7
160°	1683.8	1681.8	1679.8	1677.8	1679.8	1681.8	1683.8	1685.8	1685.9	1684.2	1682.5
162.5°	1699.3	1696.9	1694.5	1692.1	1694.5	1696.9	1699.3	1701.7	1702.0	1700.1	1698.2
165°	1719.3	1717.3	1715.4	1713.3	1715.4	1717.3	1719.3	1721.3	1721.3	1719.3	1717.3
167.5°	1734.5	1731.9	1729.4	1726.8	1729.4	1731.9	1734.5	1737.0	1737.2	1735.3	1733.3
170°	1742.6	1740.0	1737.5	1734.9	1737.5	1740.0	1742.6	1745.1	1745.3	1743.4	1741.4
172.5°	1748.6	1746.1	1743.6	1741.0	1743.6	1746.1	1748.6	1751.1	1751.4	1749.4	1747.5
175°	1754.8	1751.9	1749.2	1746.3	1749.2	1751.9	1754.8	1757.7	1758.0	1756.0	1754.1
177.5°	1755.7	1753.7	1751.7	1749.6	1751.7	1753.7	1755.7	1757.7	1758.0	1756.4	1754.8
180°	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7



TEST NUMBER: P331861-940

CATALOG NUMBER: S122RDIW-S1005D1440U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6
2.5°	1891.1	1898.8	1910.3	1916.8	1927.8	1934.9	1938.8	1945.8	1949.6	1963.4	1977.5
5°	1785.6	1796.4	1815.6	1833.4	1852.5	1872.3	1886.7	1903.1	1918.1	1944.0	1971.4
7.5°	1664.5	1679.6	1709.2	1737.6	1770.9	1798.9	1823.6	1851.6	1876.7	1913.9	1952.7
10°	1573.7	1600.4	1639.3	1666.0	1709.7	1737.7	1776.6	1807.4	1842.3	1891.4	1935.2
12.5°	1495.5	1527.7	1559.0	1596.0	1635.3	1681.9	1724.7	1764.2	1805.6	1856.5	1907.8
15°	1353.7	1400.2	1448.7	1486.2	1539.5	1588.8	1638.6	1691.9	1742.5	1803.3	1870.3
17.5°	1171.1	1224.9	1306.5	1370.9	1433.5	1482.8	1544.6	1609.1	1668.7	1742.0	1816.6
20°	1088.5	1128.2	1183.5	1270.3	1364.6	1417.2	1480.1	1551.1	1619.4	1699.4	1779.4
22.5°	1022.3	1057.7	1102.1	1169.7	1275.0	1346.7	1412.3	1484.4	1563.7	1645.3	1734.0
25°	927.9	952.5	999.0	1053.6	1126.1	1244.3	1316.1	1388.5	1474.6	1562.1	1663.2
27.5°	857.0	879.1	909.4	961.5	1015.4	1100.3	1214.4	1293.4	1379.2	1477.7	1582.6
30°	802.9	828.8	862.4	899.3	958.1	1024.3	1138.4	1230.0	1314.7	1415.9	1527.9
32.5°	763.6	784.1	812.6	850.1	899.0	962.5	1053.6	1164.9	1247.5	1354.1	1471.1
35°	699.0	723.0	746.2	781.8	821.4	879.4	948.4	1067.4	1149.3	1254.5	1372.1
37.5°	645.9	660.5	686.2	714.3	756.2	799.5	859.3	966.0	1054.6	1158.0	1278.3
40°	605.4	623.8	643.0	674.4	708.6	750.3	809.0	888.3	990.2	1091.3	1208.8
42.5°	566.1	589.4	609.7	630.7	668.2	709.8	757.7	824.9	928.9	1024.6	1138.8
45°	518.6	533.7	554.8	578.1	608.9	644.4	686.7	745.5	845.3	927.9	1035.3
47.5°	463.4	485.4	499.3	521.9	551.2	585.1	624.5	675.3	756.0	833.5	933.0
50°	425.7	448.3	468.1	488.6	514.5	547.3	580.1	629.4	694.3	775.6	868.5
52.5°	393.4	413.3	432.6	453.1	478.5	508.5	539.7	582.9	638.5	713.3	803.4
55°	349.2	361.5	381.3	401.8	424.4	453.1	483.1	519.3	567.1	630.0	703.1
57.5°	303.8	318.0	333.8	354.4	377.2	399.2	426.2	459.1	496.8	553.7	616.3
60°	278.1	289.0	302.0	323.2	344.4	364.2	390.2	417.5	453.1	502.2	555.5
62.5°	249.7	260.1	272.0	290.4	311.0	329.2	351.9	380.8	411.0	455.8	502.5
65°	202.2	217.3	228.9	245.3	262.4	281.5	299.3	322.5	349.2	384.7	426.4
67.5°	167.7	175.3	186.1	201.0	218.6	235.0	251.7	269.9	293.0	320.5	353.6
70°	152.4	155.2	157.2	171.5	187.9	204.3	220.1	237.1	256.9	279.5	308.2
72.5°	134.4	137.1	139.6	145.8	158.9	175.3	191.6	204.3	223.0	241.7	265.0
75°	106.6	110.7	112.7	116.2	120.9	131.9	147.0	159.2	170.1	184.5	203.0
77.5°	81.1	83.5	85.7	89.3	92.3	97.3	105.8	116.8	127.1	135.5	148.1
80°	64.2	64.9	67.7	69.0	73.1	76.5	80.6	89.5	99.8	103.2	112.1
82.5°	48.4	49.0	51.3	52.6	54.6	57.4	62.6	64.9	72.9	77.5	83.1
85°	26.7	25.9	28.0	28.0	29.4	30.8	32.1	35.5	37.5	43.1	44.4
87.5°	13.6	13.3	13.4	12.9	12.5	13.1	13.1	13.0	13.6	14.5	16.1
90°	26.8	25.3	23.1	20.9	18.6	16.3	13.6	10.6	7.5	4.4	1.2
92.5°	30.1	29.4	28.3	27.2	26.0	24.9	24.5	24.8	25.1	25.3	25.6
95°	50.8	49.5	47.5	45.5	43.5	41.6	45.2	54.6	63.8	73.1	82.4
97.5°	67.3	66.2	61.6	57.1	52.5	48.0	58.8	85.0	111.2	137.4	163.6
100°	74.5	72.3	67.5	62.7	57.9	53.1	70.0	108.6	147.2	185.8	224.4
102.5°	77.2	74.3	114.4	154.4	194.6	234.6	258.8	266.9	275.1	283.3	291.4
105°	80.4	77.4	154.3	231.2	308.2	385.1	419.4	410.9	402.4	394.0	385.6
107.5°	105.1	108.3	200.5	292.8	385.1	477.4	520.1	513.3	506.5	499.6	492.8
110°	193.8	221.9	303.4	384.9	466.3	547.7	585.5	579.6	573.6	567.8	561.9



TEST NUMBER: P331861-940

CATALOG NUMBER: S122RDIW-S1005D1440U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	457.0	559.8	579.9	600.0	620.2	640.2	647.7	642.5	637.2	632.0	626.8
115°	652.0	782.5	775.4	768.4	761.3	754.3	748.4	743.6	738.8	734.1	729.2
117.5°	835.2	866.7	861.8	857.0	852.1	847.3	842.2	836.9	831.5	826.2	820.8
120°	933.0	929.6	924.5	919.4	914.4	909.3	904.6	900.4	896.2	892.0	887.8
122.5°	991.5	989.4	983.9	978.4	972.9	967.4	962.4	958.0	953.5	949.0	944.6
125°	1073.6	1071.7	1066.3	1061.0	1055.6	1050.3	1045.7	1042.1	1038.4	1034.7	1031.1
127.5°	1148.6	1145.8	1141.7	1137.7	1133.7	1129.7	1125.7	1121.6	1117.6	1113.5	1109.5
130°	1196.5	1193.4	1190.3	1187.2	1184.1	1181.0	1177.2	1172.7	1168.1	1163.7	1159.1
132.5°	1243.8	1241.1	1238.0	1234.8	1231.8	1228.7	1225.2	1221.4	1217.5	1213.7	1209.9
135°	1310.4	1307.5	1305.0	1302.4	1299.9	1297.4	1293.9	1289.3	1284.9	1280.3	1275.9
137.5°	1372.4	1369.7	1366.8	1364.0	1361.0	1358.2	1355.1	1352.0	1348.9	1345.7	1342.6
140°	1412.8	1410.2	1407.2	1404.1	1401.0	1397.8	1395.2	1392.9	1390.7	1388.4	1386.2
142.5°	1450.1	1447.8	1444.2	1440.7	1437.2	1433.6	1430.8	1428.8	1426.7	1424.7	1422.7
145°	1502.3	1500.3	1495.5	1490.8	1485.9	1481.1	1478.9	1479.2	1479.4	1479.7	1480.1
147.5°	1547.9	1546.5	1541.8	1537.0	1532.2	1527.5	1525.7	1526.8	1527.9	1528.9	1530.0
150°	1575.6	1573.9	1569.3	1564.9	1560.3	1555.9	1554.5	1556.6	1558.5	1560.5	1562.5
152.5°	1600.9	1599.2	1594.9	1590.6	1586.4	1582.1	1581.1	1583.2	1585.5	1587.7	1589.8
155°	1635.1	1633.4	1630.1	1626.7	1623.4	1620.0	1619.5	1622.0	1624.6	1627.1	1629.7
157.5°	1663.8	1661.9	1659.5	1657.2	1654.7	1652.4	1652.3	1654.5	1656.6	1658.8	1660.9
160°	1680.8	1679.1	1677.4	1675.8	1674.1	1672.4	1672.4	1674.1	1675.8	1677.4	1679.1
162.5°	1696.3	1694.3	1692.9	1691.4	1690.0	1688.5	1688.6	1690.3	1692.0	1693.7	1695.3
165°	1715.4	1713.3	1712.5	1711.6	1710.8	1710.0	1710.4	1712.1	1713.8	1715.5	1717.2
167.5°	1731.3	1729.4	1728.6	1727.8	1727.0	1726.2	1726.6	1728.3	1730.0	1731.7	1733.4
170°	1739.5	1737.5	1736.9	1736.3	1735.8	1735.2	1735.8	1737.5	1739.2	1740.9	1742.6
172.5°	1745.5	1743.6	1743.0	1742.4	1741.9	1741.3	1741.9	1743.6	1745.3	1747.0	1748.6
175°	1752.1	1750.2	1749.6	1749.0	1748.5	1747.9	1748.6	1750.6	1752.6	1754.5	1756.5
177.5°	1753.3	1751.7	1751.4	1751.2	1751.0	1750.8	1751.4	1753.0	1754.6	1756.2	1757.7
180°	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7



TEST NUMBER: P331861-940

CATALOG NUMBER: S122RDIW-S1005D1440U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6
2.5°	1978.1	1979.7	1990.7	1995.6	2005.5	2009.2	2013.7	2012.5	2012.5	2014.7	2030.0
5°	1982.4	1996.0	2016.5	2036.3	2055.5	2071.8	2082.8	2093.7	2097.8	2117.6	2135.4
7.5°	1975.2	2000.4	2034.3	2064.5	2100.7	2129.0	2152.5	2173.6	2188.2	2217.0	2246.5
10°	1966.0	2001.4	2039.7	2078.7	2128.5	2166.1	2204.4	2233.8	2243.4	2286.4	2311.0
12.5°	1947.3	1994.9	2043.5	2094.0	2142.8	2194.6	2236.7	2266.0	2299.6	2338.3	2383.7
15°	1919.5	1974.2	2037.6	2102.6	2172.3	2235.2	2280.3	2331.5	2368.4	2410.7	2450.4
17.5°	1879.5	1949.8	2030.6	2105.8	2186.4	2253.9	2316.0	2365.1	2391.1	2415.3	2421.2
20°	1847.7	1923.6	2018.6	2107.4	2188.0	2265.9	2327.4	2368.4	2375.3	2375.9	2339.7
22.5°	1813.3	1899.0	1998.3	2089.4	2185.9	2272.4	2320.3	2337.8	2310.7	2264.4	2194.3
25°	1750.0	1849.1	1964.5	2068.4	2173.6	2255.7	2272.1	2241.3	2146.3	2046.6	1920.1
27.5°	1681.4	1792.8	1916.6	2032.0	2144.1	2194.9	2159.5	2048.7	1877.7	1728.9	1548.7
30°	1631.1	1756.1	1877.8	2006.9	2110.8	2132.6	2051.4	1888.0	1688.5	1464.4	1284.7
32.5°	1573.7	1704.8	1838.4	1971.9	2058.9	2037.6	1903.2	1702.2	1468.2	1247.9	1078.0
35°	1491.7	1627.0	1771.2	1905.1	1960.4	1868.2	1667.3	1405.6	1166.4	960.7	843.9
37.5°	1397.0	1544.4	1694.3	1817.2	1813.3	1659.6	1385.9	1115.7	914.7	793.1	709.8
40°	1329.7	1478.7	1640.7	1744.5	1700.1	1499.9	1203.4	948.4	801.6	704.5	643.7
42.5°	1265.2	1414.8	1575.7	1658.1	1580.9	1334.8	1039.4	839.6	718.5	642.7	593.4
45°	1155.5	1313.3	1462.3	1508.1	1370.0	1098.8	840.5	695.6	615.0	558.9	524.8
47.5°	1048.2	1203.5	1339.4	1340.2	1153.6	891.1	709.0	602.0	533.2	489.8	464.9
50°	982.6	1130.2	1244.3	1226.5	1014.8	792.6	634.1	541.9	484.5	451.0	425.0
52.5°	908.8	1052.0	1150.8	1100.3	897.2	697.5	566.9	489.4	441.8	412.7	389.5
55°	801.6	928.6	998.4	921.8	731.8	580.1	479.0	418.2	382.6	358.0	338.2
57.5°	696.2	801.0	844.9	755.7	602.8	481.1	405.2	359.5	324.3	306.7	296.4
60°	630.0	719.5	750.3	651.9	524.1	420.9	358.7	316.4	290.4	278.8	268.6
62.5°	565.0	638.1	650.8	560.6	456.9	368.5	315.0	279.2	262.0	250.9	241.2
65°	468.8	521.4	515.2	442.8	361.5	292.5	253.5	231.7	218.6	203.0	185.8
67.5°	385.9	418.0	398.7	344.4	275.9	227.3	201.9	185.3	169.2	154.3	150.3
70°	333.5	351.9	331.4	281.5	226.1	190.6	170.1	150.3	140.8	137.3	131.2
72.5°	283.2	289.6	267.4	224.7	184.0	157.8	137.9	126.8	121.6	118.8	114.8
75°	212.5	207.8	188.6	155.2	127.8	110.0	103.9	99.8	96.3	93.6	91.6
77.5°	149.3	142.2	125.2	103.3	89.0	80.5	76.8	74.6	72.9	71.6	69.6
80°	112.1	107.3	90.2	73.8	67.7	63.6	61.5	58.8	58.8	57.4	55.4
82.5°	82.0	76.7	61.8	54.1	50.7	48.2	46.7	45.1	44.6	44.9	43.3
85°	43.1	34.9	30.8	29.4	27.4	25.9	26.7	25.3	25.3	25.3	24.6
87.5°	14.0	11.9	11.9	12.0	13.1	13.6	13.5	13.9	14.9	14.6	15.5
90°	4.4	7.5	10.6	13.6	16.3	18.6	20.9	23.1	25.3	26.8	28.2
92.5°	25.3	25.1	24.8	24.5	24.9	26.0	27.2	28.3	29.4	30.1	30.9
95°	73.1	63.8	54.6	45.2	41.6	43.5	45.5	47.5	49.5	50.8	52.3
97.5°	137.4	111.2	85.0	58.8	48.0	52.5	57.1	61.6	66.2	67.3	68.5
100°	185.8	147.2	108.6	70.0	53.1	57.9	62.7	67.5	72.3	74.5	76.8
102.5°	283.3	275.1	266.9	258.8	234.6	194.6	154.4	114.4	74.3	77.2	80.2
105°	394.0	402.4	410.9	419.4	385.1	308.2	231.2	154.3	77.4	80.4	83.6
107.5°	499.6	506.5	513.3	520.1	477.4	385.1	292.8	200.5	108.3	105.1	102.0
110°	567.8	573.6	579.6	585.5	547.7	466.3	384.9	303.4	221.9	193.8	165.6



TEST NUMBER: P331861-940

CATALOG NUMBER: S122RDIW-S1005D1440U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	632.0	637.2	642.5	647.7	640.2	620.2	600.0	579.9	559.8	457.0	354.2
115°	734.1	738.8	743.6	748.4	754.3	761.3	768.4	775.4	782.5	652.0	521.6
117.5°	826.2	831.5	836.9	842.2	847.3	852.1	857.0	861.8	866.7	835.2	803.6
120°	892.0	896.2	900.4	904.6	909.3	914.4	919.4	924.5	929.6	933.0	936.4
122.5°	949.0	953.5	958.0	962.4	967.4	972.9	978.4	983.9	989.4	991.5	993.5
125°	1034.7	1038.4	1042.1	1045.7	1050.3	1055.6	1061.0	1066.3	1071.7	1073.6	1075.6
127.5°	1113.5	1117.6	1121.6	1125.7	1129.7	1133.7	1137.7	1141.7	1145.8	1148.6	1151.5
130°	1163.7	1168.1	1172.7	1177.2	1181.0	1184.1	1187.2	1190.3	1193.4	1196.5	1199.6
132.5°	1213.7	1217.5	1221.4	1225.2	1228.7	1231.8	1234.8	1238.0	1241.1	1243.8	1246.3
135°	1280.3	1284.9	1289.3	1293.9	1297.4	1299.9	1302.4	1305.0	1307.5	1310.4	1313.1
137.5°	1345.7	1348.9	1352.0	1355.1	1358.2	1361.0	1364.0	1366.8	1369.7	1372.4	1375.2
140°	1388.4	1390.7	1392.9	1395.2	1397.8	1401.0	1404.1	1407.2	1410.2	1412.8	1415.3
142.5°	1424.7	1426.7	1428.8	1430.8	1433.6	1437.2	1440.7	1444.2	1447.8	1450.1	1452.4
145°	1479.7	1479.4	1479.2	1478.9	1481.1	1485.9	1490.8	1495.5	1500.3	1502.3	1504.2
147.5°	1528.9	1527.9	1526.8	1525.7	1527.5	1532.2	1537.0	1541.8	1546.5	1547.9	1549.4
150°	1560.5	1558.5	1556.6	1554.5	1555.9	1560.3	1564.9	1569.3	1573.9	1575.6	1577.3
152.5°	1587.7	1585.5	1583.2	1581.1	1582.1	1586.4	1590.6	1594.9	1599.2	1600.9	1602.6
155°	1627.1	1624.6	1622.0	1619.5	1620.0	1623.4	1626.7	1630.1	1633.4	1635.1	1636.8
157.5°	1658.8	1656.6	1654.5	1652.3	1652.4	1654.7	1657.2	1659.5	1661.9	1663.8	1665.7
160°	1677.4	1675.8	1674.1	1672.4	1672.4	1674.1	1675.8	1677.4	1679.1	1680.8	1682.5
162.5°	1693.7	1692.0	1690.3	1688.6	1688.5	1690.0	1691.4	1692.9	1694.3	1696.3	1698.2
165°	1715.5	1713.8	1712.1	1710.4	1710.0	1710.8	1711.6	1712.5	1713.3	1715.4	1717.3
167.5°	1731.7	1730.0	1728.3	1726.6	1726.2	1727.0	1727.8	1728.6	1729.4	1731.3	1733.3
170°	1740.9	1739.2	1737.5	1735.8	1735.2	1735.8	1736.3	1736.9	1737.5	1739.5	1741.4
172.5°	1747.0	1745.3	1743.6	1741.9	1741.3	1741.9	1742.4	1743.0	1743.6	1745.5	1747.5
175°	1754.5	1752.6	1750.6	1748.6	1747.9	1748.5	1749.0	1749.6	1750.2	1752.1	1754.1
177.5°	1756.2	1754.6	1753.0	1751.4	1750.8	1751.0	1751.2	1751.4	1751.7	1753.3	1754.8
180°	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7



TEST NUMBER: P331861-940

CATALOG NUMBER: S122RDIW-S1005D1440U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6	1966.6
2.5°	2035.5	2042.6	2045.9	2045.9	2049.7	2048.1	2046.4
5°	2152.5	2165.4	2168.2	2180.5	2189.3	2186.7	2188.0
7.5°	2268.8	2289.6	2310.3	2319.8	2321.2	2326.7	2328.8
10°	2340.4	2357.5	2389.6	2384.8	2408.7	2422.4	2399.9
12.5°	2409.2	2432.3	2454.6	2460.8	2474.3	2478.7	2469.8
15°	2471.6	2483.9	2485.3	2481.8	2485.9	2482.5	2469.5
17.5°	2413.3	2393.4	2353.0	2333.8	2318.6	2296.2	2287.2
20°	2317.1	2258.3	2190.0	2162.8	2130.6	2067.7	2082.8
22.5°	2109.4	2042.5	1974.2	1894.4	1856.2	1796.6	1793.1
25°	1786.2	1670.7	1543.6	1454.8	1402.8	1343.5	1317.4
27.5°	1388.8	1243.4	1139.2	1086.5	1038.5	991.4	989.4
30°	1127.5	1018.2	937.5	892.4	863.0	843.2	847.3
32.5°	950.4	875.5	821.1	783.6	761.9	747.0	746.7
35°	776.9	725.7	690.8	675.1	659.4	648.5	649.2
37.5°	664.9	634.1	614.7	597.4	587.5	582.2	579.2
40°	607.4	582.2	567.1	556.9	548.7	541.2	539.8
42.5°	562.1	541.2	526.2	518.1	510.4	505.2	503.7
45°	498.8	481.7	468.1	459.2	455.8	451.0	451.0
47.5°	443.7	427.0	416.3	410.7	404.8	401.6	401.5
50°	406.6	393.6	384.1	380.6	375.9	373.8	373.1
52.5°	373.3	363.6	356.7	354.4	352.3	349.7	350.2
55°	328.0	322.5	319.8	317.7	314.3	310.2	313.0
57.5°	289.9	285.3	277.9	271.4	268.3	265.4	266.5
60°	263.1	253.5	244.0	236.4	234.3	228.2	228.2
62.5°	229.2	215.8	204.0	199.8	197.8	194.9	194.3
65°	176.3	170.9	168.1	165.3	164.0	164.0	162.6
67.5°	146.1	143.9	140.9	140.2	138.8	138.5	138.0
70°	129.1	126.4	125.0	124.4	123.0	123.7	121.6
72.5°	112.7	110.6	110.3	108.5	107.7	107.8	106.3
75°	88.8	88.8	88.2	87.5	86.1	85.4	86.1
77.5°	68.3	68.5	67.2	67.1	67.0	67.1	66.4
80°	54.7	55.4	54.7	53.9	53.3	53.9	53.3
82.5°	43.2	42.3	42.1	42.0	41.8	41.4	41.3
85°	24.6	25.3	24.6	23.9	23.9	23.9	24.6
87.5°	15.2	15.5	15.7	15.8	15.9	16.1	15.6
90°	29.6	31.0	32.0	32.5	33.1	33.7	34.2
92.5°	31.7	32.4	32.9	33.3	33.5	33.9	34.2
95°	53.7	55.1	55.6	55.4	55.1	54.8	54.6
97.5°	69.6	70.7	71.4	71.8	72.1	72.5	72.8
100°	79.1	81.3	82.8	83.3	83.8	84.4	85.0
102.5°	83.1	86.1	87.9	88.7	89.4	90.2	91.0
105°	86.7	89.8	91.8	93.0	94.2	95.2	96.4
107.5°	98.8	95.7	94.7	95.8	96.9	98.1	99.2
110°	137.4	109.2	95.7	96.8	97.9	99.1	100.2



TEST NUMBER: P331861-940

CATALOG NUMBER: S122RDIW-S1005D1440U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	251.4	148.6	97.6	98.5	99.4	100.3	101.2
115°	391.0	260.6	185.1	164.9	144.5	124.3	104.0
117.5°	772.0	740.5	691.3	624.6	557.9	491.2	424.6
120°	939.8	943.2	925.8	887.8	849.7	811.6	773.6
122.5°	995.6	997.6	994.9	987.5	980.2	972.8	965.4
125°	1077.5	1079.5	1080.9	1081.8	1082.6	1083.5	1084.3
127.5°	1154.3	1157.2	1158.8	1158.9	1159.0	1159.2	1159.4
130°	1202.7	1205.8	1207.2	1206.9	1206.7	1206.4	1206.0
132.5°	1249.0	1251.7	1252.9	1252.6	1252.3	1252.1	1251.7
135°	1316.0	1318.8	1319.9	1319.4	1318.8	1318.2	1317.7
137.5°	1378.0	1380.7	1381.6	1380.6	1379.7	1378.8	1377.8
140°	1417.9	1420.4	1420.9	1419.6	1418.2	1416.8	1415.3
142.5°	1454.7	1457.1	1457.5	1456.1	1454.6	1453.3	1451.9
145°	1506.2	1508.2	1508.5	1507.1	1505.7	1504.2	1502.9
147.5°	1550.9	1552.4	1552.5	1551.3	1550.2	1548.9	1547.7
150°	1579.0	1580.6	1580.7	1579.4	1578.0	1576.5	1575.1
152.5°	1604.3	1606.0	1605.9	1604.0	1602.2	1600.4	1598.5
155°	1638.5	1640.2	1639.9	1637.7	1635.5	1633.2	1630.9
157.5°	1667.6	1669.6	1669.4	1667.2	1665.0	1662.8	1660.6
160°	1684.2	1685.9	1685.8	1683.8	1681.8	1679.8	1677.8
162.5°	1700.1	1702.0	1701.7	1699.3	1696.9	1694.5	1692.1
165°	1719.3	1721.3	1721.3	1719.3	1717.3	1715.4	1713.3
167.5°	1735.3	1737.2	1737.0	1734.5	1731.9	1729.4	1726.8
170°	1743.4	1745.3	1745.1	1742.6	1740.0	1737.5	1734.9
172.5°	1749.4	1751.4	1751.1	1748.6	1746.1	1743.6	1741.0
175°	1756.0	1758.0	1757.7	1754.8	1751.9	1749.2	1746.3
177.5°	1756.4	1758.0	1757.7	1755.7	1753.7	1751.7	1749.6
180°	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7

(END OF REPORT)