

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331790-940

Luminaire Tested: **S122RDIW-S485D710U940-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331790-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIW-S485D710U940-4F0-1E-UDD-A1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 710 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3851.9 lumens
Efficiency: N/A
Efficacy: 102.4 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 1.16 / 1.02
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 37.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331790-940

CATALOG NUMBER: S122RDIW-S485D710U940-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

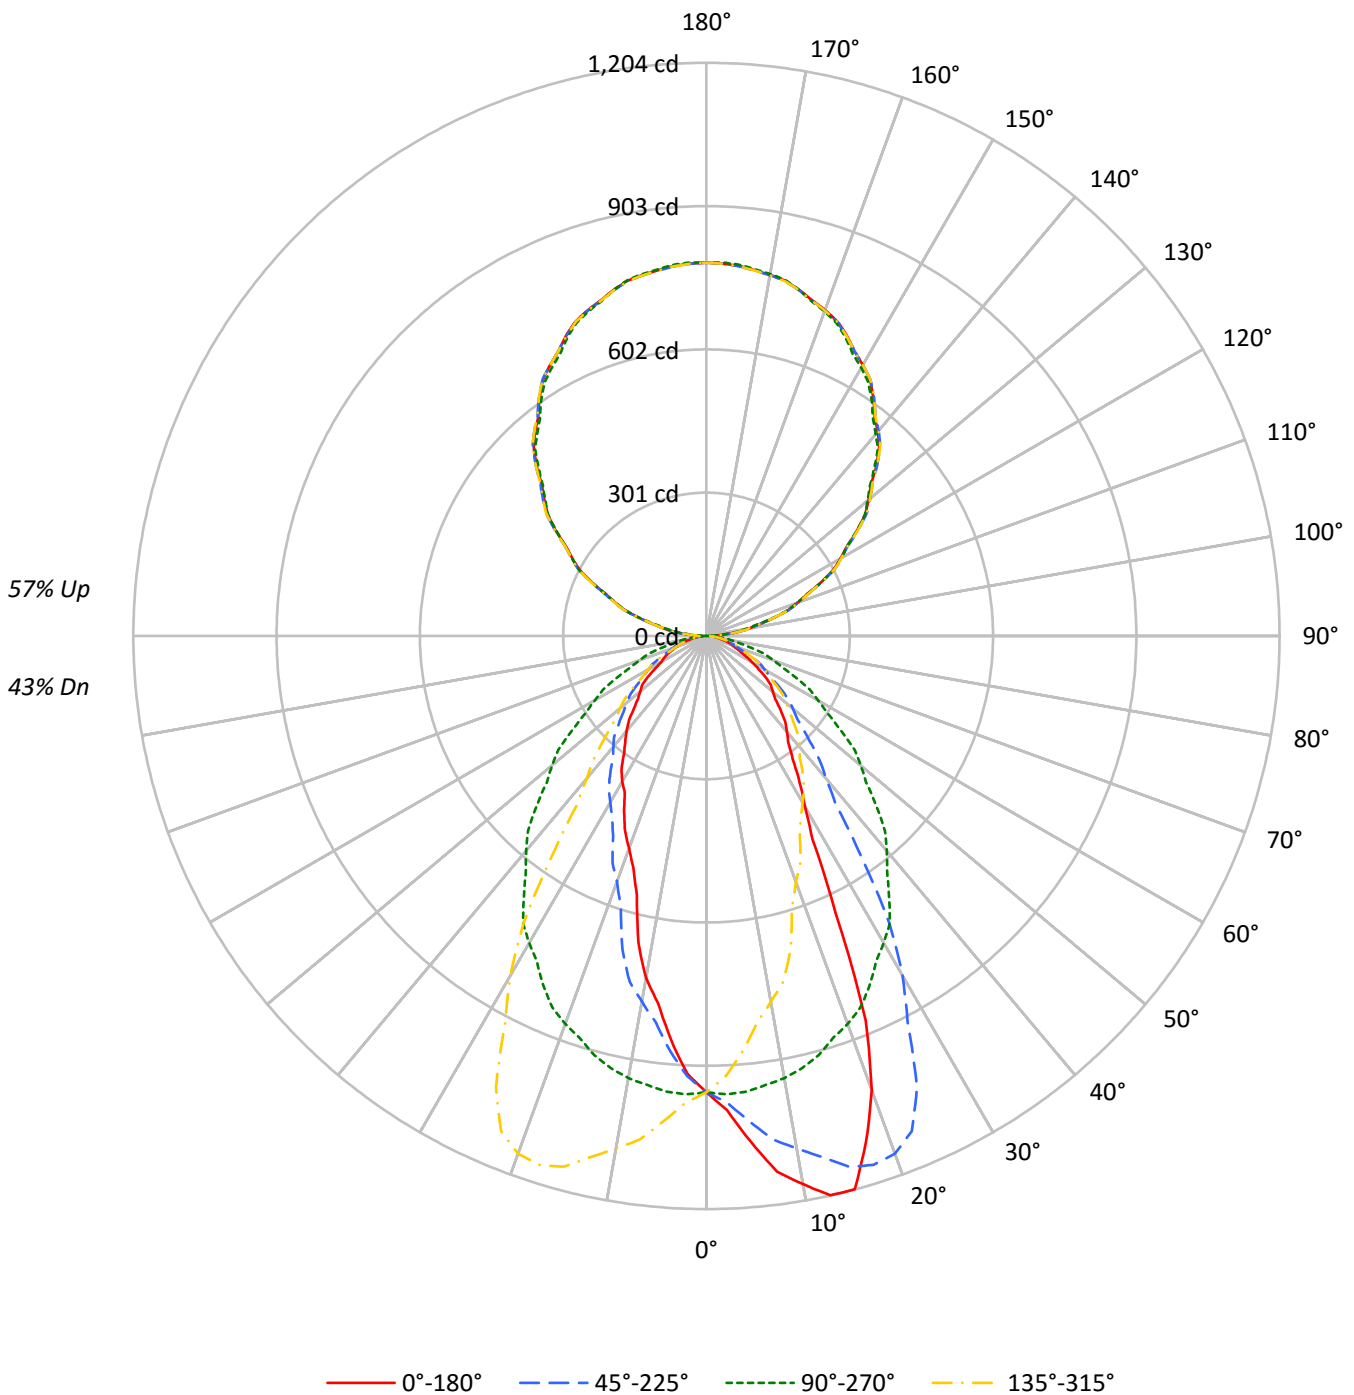



TEST NUMBER: P331790-940

CATALOG NUMBER: S122RDIW-S485D710U940-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	50	50	50	43
1	97	93	89	86	88	85	82	79	71	68	66	57	56	55	45	44	43	38
2	89	82	76	71	81	75	70	66	63	59	56	51	49	47	40	39	37	33
3	81	73	66	60	74	67	61	56	56	52	48	46	43	40	36	34	33	28
4	75	65	57	52	68	60	53	48	50	45	42	41	38	35	33	31	29	25
5	69	58	50	45	63	54	47	42	45	40	36	38	34	31	30	28	26	22
6	64	52	45	39	58	48	42	37	41	36	32	34	30	28	28	25	23	20
7	59	48	40	35	54	44	37	33	38	32	29	31	28	25	26	23	21	18
8	55	43	36	31	50	40	34	29	34	29	26	29	25	22	24	21	19	17
9	51	40	33	28	47	37	31	26	32	27	23	27	23	20	22	19	17	15
10	48	37	30	25	44	34	28	24	29	24	21	25	21	19	21	18	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	15474	15474	15474	15474
5°	17280	15571	13807	15571
10°	19174	15462	11968	15462
15°	20117	15234	9429	15234
20°	17438	14899	8158	14899
25°	11437	14439	7285	14439
30°	7700	13882	6594	13882
35°	6236	13180	5947	13180
40°	5545	12416	5503	12416
45°	5019	11520	4912	11520
50°	4567	10630	4549	10630
55°	4293	9647	4236	9647
60°	3591	8741	3549	8741
65°	3030	7939	3435	7939
70°	2799	7091	3238	7091
75°	2620	6170	2994	6170
80°	2408	5077	2659	5077
85°	2205	4020	2353	4020



TEST NUMBER: P331790-940

CATALOG NUMBER: S122RDIW-S485D710U940-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	90.8	2.4
10°-20°	253.1	6.6
20°-30°	326.2	8.5
30°-40°	310.0	8.0
40°-50°	265.6	6.9
50°-60°	202.2	5.2
60°-70°	127.8	3.3
70°-80°	63.8	1.7
80°-90°	19.7	0.5
90°-100°	49.7	1.3
100°-110°	154.3	4.0
110°-120°	263.8	6.8
120°-130°	346.9	9.0
130°-140°	389.3	10.1
140°-150°	381.7	9.9
150°-160°	320.2	8.3
160°-170°	212.4	5.5
170°-180°	74.2	1.9
0°-30°	670.2	17.4
0°-40°	980.2	25.4
0°-60°	1448.0	37.6
0°-90°	1659.4	43.1
90°-120°	467.8	12.1
90°-150°	1585.7	41.2
90°-180°	2193.0	56.9
0°-180°	3851.9	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	958	958	958	958	958	
5°	1066	961	852	961	1066	105
15°	1204	911	564	911	1204	325
25°	642	810	409	810	642	305
35°	316	669	302	669	316	202
45°	220	504	215	504	220	170
55°	152	343	150	343	152	134
65°	79	208	90	208	79	81
75°	42	99	48	99	42	45
85°	12	22	13	22	12	13
90°	22	1	22	1	22	10
95°	41	34	41	34	41	46
105°	147	142	147	142	147	155
115°	265	265	265	265	265	261
125°	386	385	386	385	386	345
135°	504	498	504	498	504	388
145°	611	605	611	605	611	382
155°	697	691	697	691	697	321
165°	753	752	753	752	753	212
175°	780	783	780	783	780	74
180°	784	784	784	784	784	



TEST NUMBER: P331790-940

CATALOG NUMBER: S122RDIW-S485D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4
2.5°	997.3	998.1	998.9	997.0	997.0	995.4	991.9	989.3	981.8	980.7	980.7
5°	1066.2	1065.6	1066.9	1062.6	1056.6	1055.3	1048.9	1040.6	1032.0	1022.3	1020.3
7.5°	1134.9	1133.9	1131.2	1130.4	1125.9	1115.8	1105.6	1094.8	1080.4	1066.3	1059.3
10°	1169.5	1180.4	1173.8	1162.2	1164.5	1148.9	1140.5	1126.2	1114.2	1093.2	1088.6
12.5°	1203.5	1207.9	1205.8	1199.2	1196.2	1185.4	1174.1	1161.6	1139.5	1120.7	1104.3
15°	1203.5	1209.8	1211.5	1209.4	1211.1	1210.4	1204.4	1194.1	1174.8	1154.1	1136.2
17.5°	1114.6	1119.0	1129.9	1137.3	1146.7	1166.4	1176.1	1179.9	1177.0	1165.2	1152.5
20°	1014.9	1007.6	1038.3	1053.9	1067.3	1100.5	1129.2	1140.1	1157.8	1157.5	1154.1
22.5°	873.8	875.5	904.6	923.1	962.1	995.3	1028.0	1069.3	1103.5	1126.1	1139.2
25°	642.0	654.7	683.7	708.9	752.2	814.2	870.5	935.8	997.3	1046.0	1092.3
27.5°	482.1	483.1	506.0	529.5	555.2	605.9	676.8	754.7	842.6	915.0	998.4
30°	413.0	410.9	420.6	434.9	456.9	496.1	549.5	626.1	713.6	822.9	920.1
32.5°	363.9	364.0	371.3	381.9	400.1	426.6	463.2	525.3	608.1	715.5	829.5
35°	316.4	316.0	321.4	329.0	336.6	353.7	378.6	411.3	468.2	568.5	685.0
37.5°	282.2	283.7	286.3	291.1	299.5	309.0	324.0	345.9	386.5	445.8	543.7
40°	263.1	263.8	267.4	271.4	276.4	283.7	296.0	313.7	343.3	390.6	462.2
42.5°	245.5	246.1	248.8	252.4	256.4	263.8	273.9	289.2	313.3	350.1	409.2
45°	219.8	219.8	222.1	223.7	228.1	234.8	243.1	255.7	272.4	299.7	339.0
47.5°	195.6	195.7	197.2	200.1	202.9	208.0	216.2	226.6	238.7	259.8	293.4
50°	181.8	182.2	183.2	185.5	187.2	191.8	198.1	207.1	219.8	236.1	264.0
52.5°	170.6	170.4	171.7	172.7	173.8	177.2	181.9	189.8	201.2	215.3	238.5
55°	152.5	151.1	153.2	154.8	155.9	157.2	159.8	164.9	174.5	186.5	203.8
57.5°	129.8	129.3	130.7	132.2	135.4	139.0	141.2	144.5	149.5	158.0	175.2
60°	111.2	111.2	114.2	115.2	118.9	123.5	128.2	130.9	135.9	141.5	154.2
62.5°	94.7	95.0	96.4	97.4	99.4	105.1	111.7	117.5	122.3	127.7	136.1
65°	79.3	79.9	79.9	80.6	81.9	83.3	85.9	90.6	98.9	106.6	112.9
67.5°	67.2	67.5	67.7	68.3	68.7	70.1	71.2	73.3	75.2	82.5	90.3
70°	59.3	60.3	59.9	60.6	60.9	61.6	63.0	63.9	67.0	68.6	73.3
72.5°	51.8	52.5	52.5	52.9	53.8	53.9	54.9	55.9	57.9	59.3	61.8
75°	42.0	41.6	42.0	42.6	43.0	43.2	43.2	44.6	45.7	47.0	48.6
77.5°	32.4	32.7	32.6	32.7	32.7	33.3	33.3	33.9	34.9	35.6	36.4
80°	25.9	26.3	25.9	26.3	26.7	26.9	26.7	26.9	28.0	28.6	28.6
82.5°	20.2	20.2	20.4	20.4	20.5	20.6	21.0	21.1	21.8	21.7	21.9
85°	11.9	11.7	11.7	11.7	11.9	12.3	11.9	11.9	12.3	12.3	12.3
87.5°	8.7	9.0	9.0	8.9	8.9	8.9	9.0	9.3	9.1	9.5	8.5
90°	22.5	22.4	22.2	22.0	21.9	22.0	22.3	22.6	22.8	23.2	19.9
92.5°	21.4	21.4	21.4	21.3	21.3	21.3	21.2	21.1	21.1	21.0	20.2
95°	41.0	41.3	41.6	41.9	42.2	42.4	42.4	42.4	42.4	42.4	42.1
97.5°	71.1	71.1	71.2	71.2	71.2	71.2	71.2	71.2	71.2	71.2	70.6
100°	90.7	90.8	91.0	91.1	91.2	91.3	91.3	91.3	91.3	91.3	90.9
102.5°	112.9	113.1	113.2	113.3	113.5	113.5	113.3	113.2	113.2	113.0	112.4
105°	146.9	146.9	146.9	146.9	146.9	146.8	146.4	146.2	145.9	145.6	145.3
107.5°	179.0	179.6	180.3	180.9	181.6	181.9	181.8	181.6	181.6	181.5	181.5
110°	203.8	204.2	204.6	205.1	205.5	205.8	205.8	205.8	205.8	205.8	205.8



TEST NUMBER: P331790-940

CATALOG NUMBER: S122RDIW-S485D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	227.7	227.9	228.3	228.6	228.9	229.3	229.6	230.0	230.3	230.7	230.8
115°	264.7	265.1	265.6	266.0	266.4	266.7	266.9	267.1	267.2	267.3	267.6
117.5°	300.0	300.4	300.9	301.3	301.8	302.2	302.6	302.9	303.3	303.6	304.4
120°	324.9	325.3	325.7	326.2	326.6	326.9	326.9	326.9	326.9	326.9	328.1
122.5°	349.3	349.6	349.9	350.2	350.5	350.9	351.2	351.6	352.0	352.3	353.1
125°	386.5	386.6	386.7	386.9	387.0	387.3	387.7	388.2	388.6	389.1	389.5
127.5°	420.4	420.8	421.2	421.7	422.2	422.7	423.2	423.7	424.3	424.8	425.3
130°	444.7	445.2	445.9	446.4	447.0	447.5	447.7	448.1	448.4	448.6	448.9
132.5°	468.0	468.4	468.9	469.4	469.8	470.4	471.0	471.7	472.3	473.0	473.0
135°	504.2	504.6	505.1	505.5	506.0	506.3	506.4	506.6	506.7	506.8	506.6
137.5°	537.0	537.6	538.2	538.8	539.4	539.8	539.8	539.9	540.1	540.2	539.8
140°	559.8	560.4	561.0	561.6	562.1	562.4	562.4	562.4	562.4	562.4	561.7
142.5°	580.4	581.0	581.6	582.2	582.8	583.0	582.9	582.8	582.6	582.6	582.0
145°	611.4	612.0	612.6	613.1	613.8	613.9	613.9	613.7	613.5	613.4	612.5
147.5°	639.1	639.6	640.2	640.8	641.3	641.4	641.1	640.8	640.4	640.2	639.5
150°	657.1	657.5	657.9	658.4	658.8	658.8	658.4	657.9	657.5	657.1	656.5
152.5°	674.0	674.6	675.1	675.6	676.3	676.3	675.6	675.1	674.6	674.0	673.3
155°	696.8	697.2	697.7	698.1	698.6	698.4	697.7	696.9	696.2	695.4	695.0
157.5°	716.3	717.0	717.7	718.5	719.2	719.0	718.0	717.0	716.0	715.1	714.8
160°	728.5	729.2	729.7	730.3	730.8	730.8	729.9	729.0	728.1	727.2	727.0
162.5°	739.1	739.9	740.6	741.2	741.9	741.8	740.8	739.8	738.8	737.8	737.6
165°	753.0	753.8	754.5	755.2	756.0	755.8	754.7	753.8	752.7	751.7	751.7
167.5°	764.4	765.2	765.9	766.7	767.4	767.3	766.2	765.3	764.2	763.2	763.2
170°	770.2	771.1	772.0	772.8	773.7	773.6	772.7	771.6	770.6	769.5	769.7
172.5°	775.0	775.9	776.8	777.7	778.5	778.5	777.4	776.4	775.3	774.3	774.5
175°	780.2	781.0	781.9	782.7	783.6	783.6	782.6	781.5	780.5	779.4	779.8
177.5°	782.5	783.2	783.9	784.6	785.3	785.3	784.6	783.9	783.2	782.5	782.7
180°	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1



TEST NUMBER: P331790-940

CATALOG NUMBER: S122RDIW-S485D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4
2.5°	981.2	979.2	977.3	972.5	970.1	964.7	963.9	963.7	956.8	950.1	948.2
5°	1014.9	1009.7	1001.7	992.3	982.7	972.7	966.0	960.7	947.4	934.7	927.4
7.5°	1048.9	1037.5	1023.7	1006.0	991.3	974.8	962.6	951.5	932.6	914.5	902.3
10°	1074.2	1055.6	1037.3	1013.0	994.0	975.4	958.1	943.1	921.8	897.8	880.7
12.5°	1089.9	1069.4	1044.2	1020.5	995.9	972.1	949.0	929.7	904.7	879.9	859.7
15°	1111.3	1089.2	1058.6	1024.7	993.0	962.1	935.4	911.4	878.8	849.2	824.5
17.5°	1128.6	1098.3	1065.4	1026.2	989.5	950.2	915.9	885.2	848.9	813.2	784.2
20°	1134.2	1104.2	1066.2	1027.0	983.6	937.4	900.4	867.1	828.1	789.2	755.9
22.5°	1130.7	1107.4	1065.1	1018.2	973.8	925.4	883.7	845.0	801.8	762.1	723.4
25°	1107.2	1099.2	1059.3	1008.0	957.3	901.1	852.8	810.5	761.3	718.6	676.6
27.5°	1052.4	1069.7	1044.9	990.2	934.0	873.6	819.4	771.2	720.1	672.1	630.3
30°	999.7	1039.3	1028.6	978.0	915.1	855.8	794.9	744.6	690.0	640.7	599.4
32.5°	927.5	992.9	1003.4	961.0	895.9	830.7	766.9	716.8	659.9	607.9	567.7
35°	812.5	910.4	955.4	928.4	863.1	792.9	726.9	668.7	611.4	560.1	520.1
37.5°	675.4	808.7	883.7	885.6	825.6	752.6	680.8	622.9	564.3	514.0	470.7
40°	586.4	730.9	828.5	850.2	799.5	720.6	648.0	589.1	531.8	482.5	432.9
42.5°	506.5	650.5	770.4	808.1	767.9	689.5	616.6	555.0	499.3	452.6	402.0
45°	409.6	535.5	667.6	734.9	712.7	640.0	563.1	504.5	452.2	411.9	363.3
47.5°	345.5	434.3	562.1	653.2	652.7	586.5	510.9	454.7	406.2	368.5	329.0
50°	309.0	386.3	494.5	597.7	606.4	550.8	478.8	423.2	378.0	338.3	306.7
52.5°	276.3	339.9	437.2	536.2	560.8	512.6	442.9	391.6	347.6	311.1	284.0
55°	233.4	282.7	356.7	449.2	486.5	452.5	390.6	342.7	307.0	276.4	253.1
57.5°	197.4	234.4	293.7	368.3	411.7	390.3	339.3	300.3	269.8	242.1	223.7
60°	174.9	205.1	255.4	317.7	365.6	350.6	307.0	270.7	244.8	220.8	203.5
62.5°	153.6	179.6	222.7	273.2	317.2	310.9	275.4	244.9	222.1	200.3	185.7
65°	123.5	142.5	176.1	215.8	251.1	254.0	228.5	207.8	187.4	170.1	157.2
67.5°	98.4	110.8	134.5	167.8	194.3	203.8	188.1	172.3	156.1	142.8	131.5
70°	82.9	92.9	110.2	137.2	161.5	171.5	162.5	150.2	136.2	125.2	115.6
72.5°	67.2	77.0	89.7	109.5	130.4	141.2	138.0	129.1	117.8	108.7	99.6
75°	50.6	53.6	62.2	75.6	91.9	101.2	103.5	98.9	89.9	82.9	77.6
77.5°	37.5	39.2	43.3	50.4	61.0	69.3	72.8	72.2	66.0	62.0	57.0
80°	30.0	30.9	33.0	35.9	44.0	52.3	54.6	54.6	50.3	48.6	43.6
82.5°	22.7	23.5	24.7	26.4	30.1	37.4	39.9	40.5	37.7	35.6	31.7
85°	13.0	12.7	13.3	14.4	15.0	16.9	21.0	21.7	21.0	18.3	17.3
87.5°	7.8	7.5	6.9	6.1	6.0	5.9	6.9	7.8	7.1	6.7	6.5
90°	16.7	13.5	10.3	7.8	6.0	4.2	2.4	0.6	2.4	4.2	6.0
92.5°	19.5	18.7	18.0	16.9	15.7	14.4	13.1	11.8	13.1	14.4	15.7
95°	41.7	41.5	41.2	40.3	38.8	37.4	35.8	34.4	35.8	37.4	38.8
97.5°	70.1	69.6	68.9	68.0	66.7	65.5	64.1	62.9	64.1	65.5	66.7
100°	90.4	90.0	89.5	88.7	87.6	86.4	85.2	84.0	85.2	86.4	87.6
102.5°	111.9	111.4	110.8	110.0	109.1	108.2	107.2	106.3	107.2	108.2	109.1
105°	145.0	144.7	144.4	144.0	143.6	143.1	142.7	142.2	142.7	143.1	143.6
107.5°	181.5	181.5	181.5	181.1	180.5	179.9	179.1	178.5	179.1	179.9	180.5
110°	205.8	205.8	205.8	205.4	204.5	203.6	202.7	201.8	202.7	203.6	204.5



TEST NUMBER: P331790-940

CATALOG NUMBER: S122RDIW-S485D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	230.9	231.0	231.1	230.8	229.9	229.0	228.1	227.2	228.1	229.0	229.9
115°	267.9	268.2	268.5	268.2	267.3	266.4	265.6	264.7	265.6	266.4	267.3
117.5°	305.2	306.0	306.8	306.7	305.5	304.3	303.2	302.0	303.2	304.3	305.5
120°	329.2	330.4	331.5	331.5	330.4	329.2	328.1	326.9	328.1	329.2	330.4
122.5°	353.9	354.7	355.6	355.3	353.8	352.5	351.1	349.6	351.1	352.5	353.8
125°	389.9	390.4	390.8	390.4	389.1	387.7	386.5	385.1	386.5	387.7	389.1
127.5°	425.9	426.4	427.0	426.3	424.6	423.0	421.3	419.6	421.3	423.0	424.6
130°	449.2	449.5	449.8	449.0	447.1	445.1	443.3	441.3	443.3	445.1	447.1
132.5°	472.9	472.8	472.8	471.9	470.4	468.9	467.3	465.7	467.3	468.9	470.4
135°	506.3	506.0	505.7	504.7	503.1	501.5	499.9	498.3	499.9	501.5	503.1
137.5°	539.5	539.0	538.7	537.8	536.5	535.2	533.9	532.5	533.9	535.2	536.5
140°	561.0	560.3	559.5	558.5	557.1	555.8	554.5	553.2	554.5	555.8	557.1
142.5°	581.6	581.0	580.6	579.6	578.4	577.0	575.7	574.4	575.7	577.0	578.4
145°	611.6	610.7	609.8	608.9	607.9	606.8	605.8	604.8	605.8	606.8	607.9
147.5°	638.9	638.4	637.8	636.9	635.6	634.4	633.1	632.0	633.1	634.4	635.6
150°	655.9	655.3	654.7	654.0	653.1	652.2	651.3	650.4	651.3	652.2	653.1
152.5°	672.6	671.9	671.2	670.4	669.5	668.6	667.7	666.8	667.7	668.6	669.5
155°	694.6	694.1	693.7	693.2	692.8	692.3	691.9	691.4	691.9	692.3	692.8
157.5°	714.5	714.3	714.0	713.7	713.4	713.1	712.8	712.5	712.8	713.1	713.4
160°	726.9	726.7	726.7	726.4	726.1	725.8	725.5	725.2	725.5	725.8	726.1
162.5°	737.5	737.4	737.2	737.1	737.0	737.0	736.9	736.8	736.9	737.0	737.0
165°	751.7	751.7	751.7	751.8	751.9	752.1	752.2	752.3	752.2	752.1	751.9
167.5°	763.2	763.3	763.3	763.6	764.0	764.5	764.9	765.4	764.9	764.5	764.0
170°	769.8	770.0	770.2	770.4	770.9	771.3	771.8	772.2	771.8	771.3	770.9
172.5°	774.6	774.7	774.9	775.2	775.6	776.1	776.5	776.9	776.5	776.1	775.6
175°	780.1	780.3	780.7	781.0	781.5	781.9	782.4	782.7	782.4	781.9	781.5
177.5°	783.0	783.2	783.5	783.7	784.1	784.4	784.8	785.2	784.8	784.4	784.1
180°	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1



TEST NUMBER: P331790-940

CATALOG NUMBER: S122RDIW-S485D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4
2.5°	944.8	942.9	939.4	934.2	930.9	925.3	921.6	923.7	924.3	923.7	923.2
5°	919.4	912.4	902.8	893.4	884.8	875.5	870.1	867.8	863.1	860.5	859.2
7.5°	888.7	876.6	863.0	846.8	832.9	818.5	811.1	807.4	797.9	792.7	788.2
10°	865.8	846.8	833.1	811.8	798.9	779.9	766.9	767.2	754.2	746.9	741.5
12.5°	840.5	819.7	796.9	777.8	759.7	744.5	728.8	722.5	708.6	701.6	687.2
15°	798.5	774.2	750.3	724.2	706.0	682.3	659.7	632.0	609.8	590.4	585.1
17.5°	752.7	722.6	698.6	668.1	636.7	596.9	570.7	554.6	541.2	531.0	523.4
20°	721.3	690.6	665.0	619.0	576.8	549.7	530.5	518.2	504.2	493.2	487.1
22.5°	688.2	656.3	621.3	570.0	537.1	515.4	498.2	484.0	474.6	466.0	460.6
25°	641.3	606.4	548.8	513.4	486.9	464.2	452.2	443.5	433.5	421.9	416.6
27.5°	591.8	536.2	494.8	468.6	443.2	428.5	417.7	404.7	395.8	390.6	385.0
30°	554.7	499.2	466.9	438.2	420.3	403.9	391.3	384.0	375.3	366.3	362.7
32.5°	513.4	469.0	438.1	414.3	396.0	382.1	372.1	360.3	354.0	348.5	340.8
35°	462.2	428.6	400.3	380.9	363.6	352.3	340.6	333.7	322.4	317.7	314.7
37.5°	418.7	389.6	368.5	348.1	334.4	321.9	314.8	303.6	298.7	292.2	285.9
40°	394.2	365.6	345.4	328.7	313.3	304.0	295.1	286.1	278.7	275.7	268.0
42.5°	369.3	345.9	325.6	307.4	297.1	287.2	275.9	269.3	261.6	256.8	252.1
45°	334.7	314.1	296.7	281.7	270.4	260.1	252.7	241.7	237.5	227.7	223.7
47.5°	304.3	285.1	268.6	254.3	243.3	236.6	225.9	217.2	210.4	204.4	199.3
50°	282.7	266.7	250.7	238.1	228.1	218.5	207.5	203.1	192.4	189.5	186.5
52.5°	263.0	247.8	233.2	220.8	210.8	201.4	191.7	186.1	178.9	175.8	173.7
55°	235.4	220.8	206.8	195.8	185.8	176.1	170.1	163.2	159.8	157.5	154.8
57.5°	207.7	194.6	183.8	172.7	162.6	155.0	148.0	143.8	140.4	137.3	134.1
60°	190.1	177.5	167.8	157.5	147.2	140.9	135.5	130.5	126.5	121.9	120.6
62.5°	171.5	160.4	151.6	141.5	132.5	126.7	121.7	117.0	112.2	105.4	103.5
65°	145.9	137.2	127.9	119.6	111.6	105.9	98.5	93.3	91.2	90.6	90.2
67.5°	122.7	114.5	106.5	98.0	90.7	85.4	81.7	80.9	79.5	79.1	78.2
70°	107.2	99.6	91.6	83.6	76.6	75.6	74.3	72.9	71.2	70.6	69.9
72.5°	93.4	85.4	77.5	71.1	68.0	66.8	65.5	64.1	63.0	62.3	62.0
75°	71.6	64.3	58.9	56.6	54.9	53.9	52.0	50.9	50.3	49.3	49.0
77.5°	51.5	47.4	44.9	43.5	41.7	40.7	39.6	38.5	37.8	37.6	37.1
80°	39.3	37.3	35.7	33.6	33.0	31.7	31.3	30.3	30.7	29.6	29.6
82.5°	30.5	28.0	26.6	25.7	25.0	23.9	23.5	23.1	23.2	22.5	22.5
85°	15.7	15.0	14.4	13.6	13.6	12.7	13.0	12.7	12.7	11.9	11.7
87.5°	6.6	6.9	7.0	7.6	8.2	8.6	8.6	8.2	8.2	8.1	7.8
90°	7.8	10.3	13.5	16.7	19.9	23.2	22.8	22.6	22.3	22.0	21.9
92.5°	16.9	18.0	18.7	19.5	20.2	21.0	21.1	21.1	21.2	21.3	21.3
95°	40.3	41.2	41.5	41.7	42.1	42.4	42.4	42.4	42.4	42.4	42.2
97.5°	68.0	68.9	69.6	70.1	70.6	71.2	71.2	71.2	71.2	71.2	71.2
100°	88.7	89.5	90.0	90.4	90.9	91.3	91.3	91.3	91.3	91.3	91.2
102.5°	110.0	110.8	111.4	111.9	112.4	113.0	113.2	113.2	113.3	113.5	113.5
105°	144.0	144.4	144.7	145.0	145.3	145.6	145.9	146.2	146.4	146.8	146.9
107.5°	181.1	181.5	181.5	181.5	181.5	181.5	181.6	181.6	181.8	181.9	181.6
110°	205.4	205.8	205.8	205.8	205.8	205.8	205.8	205.8	205.8	205.8	205.5



TEST NUMBER: P331790-940

CATALOG NUMBER: S122RDIW-S485D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	230.8	231.1	231.0	230.9	230.8	230.7	230.3	230.0	229.6	229.3	228.9
115°	268.2	268.5	268.2	267.9	267.6	267.3	267.2	267.1	266.9	266.7	266.4
117.5°	306.7	306.8	306.0	305.2	304.4	303.6	303.3	302.9	302.6	302.2	301.8
120°	331.5	331.5	330.4	329.2	328.1	326.9	326.9	326.9	326.9	326.9	326.6
122.5°	355.3	355.6	354.7	353.9	353.1	352.3	352.0	351.6	351.2	350.9	350.5
125°	390.4	390.8	390.4	389.9	389.5	389.1	388.6	388.2	387.7	387.3	387.0
127.5°	426.3	427.0	426.4	425.9	425.3	424.8	424.3	423.7	423.2	422.7	422.2
130°	449.0	449.8	449.5	449.2	448.9	448.6	448.4	448.1	447.7	447.5	447.0
132.5°	471.9	472.8	472.8	472.9	473.0	473.0	472.3	471.7	471.0	470.4	469.8
135°	504.7	505.7	506.0	506.3	506.6	506.8	506.7	506.6	506.4	506.3	506.0
137.5°	537.8	538.7	539.0	539.5	539.8	540.2	540.1	539.9	539.8	539.8	539.4
140°	558.5	559.5	560.3	561.0	561.7	562.4	562.4	562.4	562.4	562.4	562.1
142.5°	579.6	580.6	581.0	581.6	582.0	582.6	582.6	582.8	582.9	583.0	582.8
145°	608.9	609.8	610.7	611.6	612.5	613.4	613.5	613.7	613.9	613.9	613.8
147.5°	636.9	637.8	638.4	638.9	639.5	640.2	640.4	640.8	641.1	641.4	641.3
150°	654.0	654.7	655.3	655.9	656.5	657.1	657.5	657.9	658.4	658.8	658.8
152.5°	670.4	671.2	671.9	672.6	673.3	674.0	674.6	675.1	675.6	676.3	676.3
155°	693.2	693.7	694.1	694.6	695.0	695.4	696.2	696.9	697.7	698.4	698.6
157.5°	713.7	714.0	714.3	714.5	714.8	715.1	716.0	717.0	718.0	719.0	719.2
160°	726.4	726.7	726.7	726.9	727.0	727.2	728.1	729.0	729.9	730.8	730.8
162.5°	737.1	737.2	737.4	737.5	737.6	737.8	738.8	739.8	740.8	741.8	741.9
165°	751.8	751.7	751.7	751.7	751.7	751.7	752.7	753.8	754.7	755.8	756.0
167.5°	763.6	763.3	763.3	763.2	763.2	763.2	764.2	765.3	766.2	767.3	767.4
170°	770.4	770.2	770.0	769.8	769.7	769.5	770.6	771.6	772.7	773.6	773.7
172.5°	775.2	774.9	774.7	774.6	774.5	774.3	775.3	776.4	777.4	778.5	778.5
175°	781.0	780.7	780.3	780.1	779.8	779.4	780.5	781.5	782.6	783.6	783.6
177.5°	783.7	783.5	783.2	783.0	782.7	782.5	783.2	783.9	784.6	785.3	785.3
180°	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1



TEST NUMBER: P331790-940

CATALOG NUMBER: S122RDIW-S485D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4
2.5°	920.2	920.8	920.0	920.5	920.0	920.8	920.2	923.2	923.7	924.3	923.7
5°	857.5	853.5	852.8	851.9	852.8	853.5	857.5	859.2	860.5	863.1	867.8
7.5°	782.5	781.9	780.2	777.8	780.2	781.9	782.5	788.2	792.7	797.9	807.4
10°	734.2	732.6	732.3	730.0	732.3	732.6	734.2	741.5	746.9	754.2	767.2
12.5°	677.8	667.1	665.9	660.1	665.9	667.1	677.8	687.2	701.6	708.6	722.5
15°	577.1	575.1	568.5	564.1	568.5	575.1	577.1	585.1	590.4	609.8	632.0
17.5°	519.5	513.0	511.0	510.1	511.0	513.0	519.5	523.4	531.0	541.2	554.6
20°	482.5	476.5	475.5	474.8	475.5	476.5	482.5	487.1	493.2	504.2	518.2
22.5°	456.9	450.7	448.1	446.1	448.1	450.7	456.9	460.6	466.0	474.6	484.0
25°	413.2	410.9	409.6	408.9	409.6	410.9	413.2	416.6	421.9	433.5	443.5
27.5°	379.1	374.0	372.9	371.2	372.9	374.0	379.1	385.0	390.6	395.8	404.7
30°	359.6	357.9	355.6	353.7	355.6	357.9	359.6	362.7	366.3	375.3	384.0
32.5°	336.7	335.4	333.2	332.3	333.2	335.4	336.7	340.8	348.5	354.0	360.3
35°	311.4	306.7	304.7	301.7	304.7	306.7	311.4	314.7	317.7	322.4	333.7
37.5°	284.5	282.0	279.3	280.3	279.3	282.0	284.5	285.9	292.2	298.7	303.6
40°	263.8	262.1	261.4	261.1	261.4	262.1	263.8	268.0	275.7	278.7	286.1
42.5°	247.2	242.6	240.9	240.9	240.9	242.6	247.2	252.1	256.8	261.6	269.3
45°	222.1	217.8	214.8	215.1	214.8	217.8	222.1	223.7	227.7	237.5	241.7
47.5°	196.4	196.3	194.4	195.0	194.4	196.3	196.4	199.3	204.4	210.4	217.2
50°	184.1	182.2	180.8	181.1	180.8	182.2	184.1	186.5	189.5	192.4	203.1
52.5°	172.5	170.7	169.6	171.0	169.6	170.7	172.5	173.7	175.8	178.9	186.1
55°	153.2	151.1	150.9	150.5	150.9	151.1	153.2	154.8	157.5	159.8	163.2
57.5°	131.7	130.4	128.3	127.5	128.3	130.4	131.7	134.1	137.3	140.4	143.8
60°	116.2	113.5	110.2	109.9	110.2	113.5	116.2	120.6	121.9	126.5	130.5
62.5°	102.1	101.6	100.9	100.9	100.9	101.6	102.1	103.5	105.4	112.2	117.0
65°	89.6	89.3	89.6	89.9	89.6	89.3	89.6	90.2	90.6	91.2	93.3
67.5°	78.0	77.5	76.9	77.1	76.9	77.5	78.0	78.2	79.1	79.5	80.9
70°	69.3	68.9	68.6	68.6	68.6	68.9	69.3	69.9	70.6	71.2	72.9
72.5°	60.7	60.6	60.4	60.1	60.4	60.6	60.7	62.0	62.3	63.0	64.1
75°	48.6	48.0	48.0	48.0	48.0	48.0	48.6	49.0	49.3	50.3	50.9
77.5°	37.0	36.7	36.4	36.1	36.4	36.7	37.0	37.1	37.6	37.8	38.5
80°	29.3	29.0	28.6	28.6	28.6	29.0	29.3	29.6	29.6	30.7	30.3
82.5°	22.4	22.0	21.9	21.7	21.9	22.0	22.4	22.5	22.5	23.2	23.1
85°	11.9	12.3	11.9	12.7	11.9	12.3	11.9	11.7	11.9	12.7	12.7
87.5°	7.8	7.7	7.9	7.7	7.9	7.7	7.8	7.8	8.1	8.2	8.2
90°	22.0	22.2	22.4	22.5	22.4	22.2	22.0	21.9	22.0	22.3	22.6
92.5°	21.3	21.4	21.4	21.4	21.4	21.4	21.3	21.3	21.3	21.2	21.1
95°	41.9	41.6	41.3	41.0	41.3	41.6	41.9	42.2	42.4	42.4	42.4
97.5°	71.2	71.2	71.1	71.1	71.1	71.2	71.2	71.2	71.2	71.2	71.2
100°	91.1	91.0	90.8	90.7	90.8	91.0	91.1	91.2	91.3	91.3	91.3
102.5°	113.3	113.2	113.1	112.9	113.1	113.2	113.3	113.5	113.5	113.3	113.2
105°	146.9	146.9	146.9	146.9	146.9	146.9	146.9	146.9	146.8	146.4	146.2
107.5°	180.9	180.3	179.6	179.0	179.6	180.3	180.9	181.6	181.9	181.8	181.6
110°	205.1	204.6	204.2	203.8	204.2	204.6	205.1	205.5	205.8	205.8	205.8



TEST NUMBER: P331790-940

CATALOG NUMBER: S122RDIW-S485D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	228.6	228.3	227.9	227.7	227.9	228.3	228.6	228.9	229.3	229.6	230.0
115°	266.0	265.6	265.1	264.7	265.1	265.6	266.0	266.4	266.7	266.9	267.1
117.5°	301.3	300.9	300.4	300.0	300.4	300.9	301.3	301.8	302.2	302.6	302.9
120°	326.2	325.7	325.3	324.9	325.3	325.7	326.2	326.6	326.9	326.9	326.9
122.5°	350.2	349.9	349.6	349.3	349.6	349.9	350.2	350.5	350.9	351.2	351.6
125°	386.9	386.7	386.6	386.5	386.6	386.7	386.9	387.0	387.3	387.7	388.2
127.5°	421.7	421.2	420.8	420.4	420.8	421.2	421.7	422.2	422.7	423.2	423.7
130°	446.4	445.9	445.2	444.7	445.2	445.9	446.4	447.0	447.5	447.7	448.1
132.5°	469.4	468.9	468.4	468.0	468.4	468.9	469.4	469.8	470.4	471.0	471.7
135°	505.5	505.1	504.6	504.2	504.6	505.1	505.5	506.0	506.3	506.4	506.6
137.5°	538.8	538.2	537.6	537.0	537.6	538.2	538.8	539.4	539.8	539.8	539.9
140°	561.6	561.0	560.4	559.8	560.4	561.0	561.6	562.1	562.4	562.4	562.4
142.5°	582.2	581.6	581.0	580.4	581.0	581.6	582.2	582.8	583.0	582.9	582.8
145°	613.1	612.6	612.0	611.4	612.0	612.6	613.1	613.8	613.9	613.9	613.7
147.5°	640.8	640.2	639.6	639.1	639.6	640.2	640.8	641.3	641.4	641.1	640.8
150°	658.4	657.9	657.5	657.1	657.5	657.9	658.4	658.8	658.8	658.4	657.9
152.5°	675.6	675.1	674.6	674.0	674.6	675.1	675.6	676.3	676.3	675.6	675.1
155°	698.1	697.7	697.2	696.8	697.2	697.7	698.1	698.6	698.4	697.7	696.9
157.5°	718.5	717.7	717.0	716.3	717.0	717.7	718.5	719.2	719.0	718.0	717.0
160°	730.3	729.7	729.2	728.5	729.2	729.7	730.3	730.8	730.8	729.9	729.0
162.5°	741.2	740.6	739.9	739.1	739.9	740.6	741.2	741.9	741.8	740.8	739.8
165°	755.2	754.5	753.8	753.0	753.8	754.5	755.2	756.0	755.8	754.7	753.8
167.5°	766.7	765.9	765.2	764.4	765.2	765.9	766.7	767.4	767.3	766.2	765.3
170°	772.8	772.0	771.1	770.2	771.1	772.0	772.8	773.7	773.6	772.7	771.6
172.5°	777.7	776.8	775.9	775.0	775.9	776.8	777.7	778.5	778.5	777.4	776.4
175°	782.7	781.9	781.0	780.2	781.0	781.9	782.7	783.6	783.6	782.6	781.5
177.5°	784.6	783.9	783.2	782.5	783.2	783.9	784.6	785.3	785.3	784.6	783.9
180°	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1



TEST NUMBER: P331790-940

CATALOG NUMBER: S122RDIW-S485D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4
2.5°	921.6	925.3	930.9	934.2	939.4	942.9	944.8	948.2	950.1	956.8	963.7
5°	870.1	875.5	884.8	893.4	902.8	912.4	919.4	927.4	934.7	947.4	960.7
7.5°	811.1	818.5	832.9	846.8	863.0	876.6	888.7	902.3	914.5	932.6	951.5
10°	766.9	779.9	798.9	811.8	833.1	846.8	865.8	880.7	897.8	921.8	943.1
12.5°	728.8	744.5	759.7	777.8	796.9	819.7	840.5	859.7	879.9	904.7	929.7
15°	659.7	682.3	706.0	724.2	750.3	774.2	798.5	824.5	849.2	878.8	911.4
17.5°	570.7	596.9	636.7	668.1	698.6	722.6	752.7	784.2	813.2	848.9	885.2
20°	530.5	549.7	576.8	619.0	665.0	690.6	721.3	755.9	789.2	828.1	867.1
22.5°	498.2	515.4	537.1	570.0	621.3	656.3	688.2	723.4	762.1	801.8	845.0
25°	452.2	464.2	486.9	513.4	548.8	606.4	641.3	676.6	718.6	761.3	810.5
27.5°	417.7	428.5	443.2	468.6	494.8	536.2	591.8	630.3	672.1	720.1	771.2
30°	391.3	403.9	420.3	438.2	466.9	499.2	554.7	599.4	640.7	690.0	744.6
32.5°	372.1	382.1	396.0	414.3	438.1	469.0	513.4	567.7	607.9	659.9	716.8
35°	340.6	352.3	363.6	380.9	400.3	428.6	462.2	520.1	560.1	611.4	668.7
37.5°	314.8	321.9	334.4	348.1	368.5	389.6	418.7	470.7	514.0	564.3	622.9
40°	295.1	304.0	313.3	328.7	345.4	365.6	394.2	432.9	482.5	531.8	589.1
42.5°	275.9	287.2	297.1	307.4	325.6	345.9	369.3	402.0	452.6	499.3	555.0
45°	252.7	260.1	270.4	281.7	296.7	314.1	334.7	363.3	411.9	452.2	504.5
47.5°	225.9	236.6	243.3	254.3	268.6	285.1	304.3	329.0	368.5	406.2	454.7
50°	207.5	218.5	228.1	238.1	250.7	266.7	282.7	306.7	338.3	378.0	423.2
52.5°	191.7	201.4	210.8	220.8	233.2	247.8	263.0	284.0	311.1	347.6	391.6
55°	170.1	176.1	185.8	195.8	206.8	220.8	235.4	253.1	276.4	307.0	342.7
57.5°	148.0	155.0	162.6	172.7	183.8	194.6	207.7	223.7	242.1	269.8	300.3
60°	135.5	140.9	147.2	157.5	167.8	177.5	190.1	203.5	220.8	244.8	270.7
62.5°	121.7	126.7	132.5	141.5	151.6	160.4	171.5	185.7	200.3	222.1	244.9
65°	98.5	105.9	111.6	119.6	127.9	137.2	145.9	157.2	170.1	187.4	207.8
67.5°	81.7	85.4	90.7	98.0	106.5	114.5	122.7	131.5	142.8	156.1	172.3
70°	74.3	75.6	76.6	83.6	91.6	99.6	107.2	115.6	125.2	136.2	150.2
72.5°	65.5	66.8	68.0	71.1	77.5	85.4	93.4	99.6	108.7	117.8	129.1
75°	52.0	53.9	54.9	56.6	58.9	64.3	71.6	77.6	82.9	89.9	98.9
77.5°	39.6	40.7	41.7	43.5	44.9	47.4	51.5	57.0	62.0	66.0	72.2
80°	31.3	31.7	33.0	33.6	35.7	37.3	39.3	43.6	48.6	50.3	54.6
82.5°	23.5	23.9	25.0	25.7	26.6	28.0	30.5	31.7	35.6	37.7	40.5
85°	13.0	12.7	13.6	13.6	14.4	15.0	15.7	17.3	18.3	21.0	21.7
87.5°	8.6	8.6	8.2	7.6	7.0	6.9	6.6	6.5	6.7	7.1	7.8
90°	22.8	23.2	19.9	16.7	13.5	10.3	7.8	6.0	4.2	2.4	0.6
92.5°	21.1	21.0	20.2	19.5	18.7	18.0	16.9	15.7	14.4	13.1	11.8
95°	42.4	42.4	42.1	41.7	41.5	41.2	40.3	38.8	37.4	35.8	34.4
97.5°	71.2	71.2	70.6	70.1	69.6	68.9	68.0	66.7	65.5	64.1	62.9
100°	91.3	91.3	90.9	90.4	90.0	89.5	88.7	87.6	86.4	85.2	84.0
102.5°	113.2	113.0	112.4	111.9	111.4	110.8	110.0	109.1	108.2	107.2	106.3
105°	145.9	145.6	145.3	145.0	144.7	144.4	144.0	143.6	143.1	142.7	142.2
107.5°	181.6	181.5	181.5	181.5	181.5	181.5	181.1	180.5	179.9	179.1	178.5
110°	205.8	205.8	205.8	205.8	205.8	205.8	205.4	204.5	203.6	202.7	201.8



TEST NUMBER: P331790-940

CATALOG NUMBER: S122RDIW-S485D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	230.3	230.7	230.8	230.9	231.0	231.1	230.8	229.9	229.0	228.1	227.2
115°	267.2	267.3	267.6	267.9	268.2	268.5	268.2	267.3	266.4	265.6	264.7
117.5°	303.3	303.6	304.4	305.2	306.0	306.8	306.7	305.5	304.3	303.2	302.0
120°	326.9	326.9	328.1	329.2	330.4	331.5	331.5	330.4	329.2	328.1	326.9
122.5°	352.0	352.3	353.1	353.9	354.7	355.6	355.3	353.8	352.5	351.1	349.6
125°	388.6	389.1	389.5	389.9	390.4	390.8	390.4	389.1	387.7	386.5	385.1
127.5°	424.3	424.8	425.3	425.9	426.4	427.0	426.3	424.6	423.0	421.3	419.6
130°	448.4	448.6	448.9	449.2	449.5	449.8	449.0	447.1	445.1	443.3	441.3
132.5°	472.3	473.0	473.0	472.9	472.8	472.8	471.9	470.4	468.9	467.3	465.7
135°	506.7	506.8	506.6	506.3	506.0	505.7	504.7	503.1	501.5	499.9	498.3
137.5°	540.1	540.2	539.8	539.5	539.0	538.7	537.8	536.5	535.2	533.9	532.5
140°	562.4	562.4	561.7	561.0	560.3	559.5	558.5	557.1	555.8	554.5	553.2
142.5°	582.6	582.6	582.0	581.6	581.0	580.6	579.6	578.4	577.0	575.7	574.4
145°	613.5	613.4	612.5	611.6	610.7	609.8	608.9	607.9	606.8	605.8	604.8
147.5°	640.4	640.2	639.5	638.9	638.4	637.8	636.9	635.6	634.4	633.1	632.0
150°	657.5	657.1	656.5	655.9	655.3	654.7	654.0	653.1	652.2	651.3	650.4
152.5°	674.6	674.0	673.3	672.6	671.9	671.2	670.4	669.5	668.6	667.7	666.8
155°	696.2	695.4	695.0	694.6	694.1	693.7	693.2	692.8	692.3	691.9	691.4
157.5°	716.0	715.1	714.8	714.5	714.3	714.0	713.7	713.4	713.1	712.8	712.5
160°	728.1	727.2	727.0	726.9	726.7	726.7	726.4	726.1	725.8	725.5	725.2
162.5°	738.8	737.8	737.6	737.5	737.4	737.2	737.1	737.0	737.0	736.9	736.8
165°	752.7	751.7	751.7	751.7	751.7	751.7	751.8	751.9	752.1	752.2	752.3
167.5°	764.2	763.2	763.2	763.2	763.3	763.3	763.6	764.0	764.5	764.9	765.4
170°	770.6	769.5	769.7	769.8	770.0	770.2	770.4	770.9	771.3	771.8	772.2
172.5°	775.3	774.3	774.5	774.6	774.7	774.9	775.2	775.6	776.1	776.5	776.9
175°	780.5	779.4	779.8	780.1	780.3	780.7	781.0	781.5	781.9	782.4	782.7
177.5°	783.2	782.5	782.7	783.0	783.2	783.5	783.7	784.1	784.4	784.8	785.2
180°	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1



TEST NUMBER: P331790-940

CATALOG NUMBER: S122RDIW-S485D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4	958.4
2.5°	963.9	964.7	970.1	972.5	977.3	979.2	981.2	980.7	980.7	981.8	989.3
5°	966.0	972.7	982.7	992.3	1001.7	1009.7	1014.9	1020.3	1022.3	1032.0	1040.6
7.5°	962.6	974.8	991.3	1006.0	1023.7	1037.5	1048.9	1059.3	1066.3	1080.4	1094.8
10°	958.1	975.4	994.0	1013.0	1037.3	1055.6	1074.2	1088.6	1093.2	1114.2	1126.2
12.5°	949.0	972.1	995.9	1020.5	1044.2	1069.4	1089.9	1104.3	1120.7	1139.5	1161.6
15°	935.4	962.1	993.0	1024.7	1058.6	1089.2	1111.3	1136.2	1154.1	1174.8	1194.1
17.5°	915.9	950.2	989.5	1026.2	1065.4	1098.3	1128.6	1152.5	1165.2	1177.0	1179.9
20°	900.4	937.4	983.6	1027.0	1066.2	1104.2	1134.2	1154.1	1157.5	1157.8	1140.1
22.5°	883.7	925.4	973.8	1018.2	1065.1	1107.4	1130.7	1139.2	1126.1	1103.5	1069.3
25°	852.8	901.1	957.3	1008.0	1059.3	1099.2	1107.2	1092.3	1046.0	997.3	935.8
27.5°	819.4	873.6	934.0	990.2	1044.9	1069.7	1052.4	998.4	915.0	842.6	754.7
30°	794.9	855.8	915.1	978.0	1028.6	1039.3	999.7	920.1	822.9	713.6	626.1
32.5°	766.9	830.7	895.9	961.0	1003.4	992.9	927.5	829.5	715.5	608.1	525.3
35°	726.9	792.9	863.1	928.4	955.4	910.4	812.5	685.0	568.5	468.2	411.3
37.5°	680.8	752.6	825.6	885.6	883.7	808.7	675.4	543.7	445.8	386.5	345.9
40°	648.0	720.6	799.5	850.2	828.5	730.9	586.4	462.2	390.6	343.3	313.7
42.5°	616.6	689.5	767.9	808.1	770.4	650.5	506.5	409.2	350.1	313.3	289.2
45°	563.1	640.0	712.7	734.9	667.6	535.5	409.6	339.0	299.7	272.4	255.7
47.5°	510.9	586.5	652.7	653.2	562.1	434.3	345.5	293.4	259.8	238.7	226.6
50°	478.8	550.8	606.4	597.7	494.5	386.3	309.0	264.0	236.1	219.8	207.1
52.5°	442.9	512.6	560.8	536.2	437.2	339.9	276.3	238.5	215.3	201.2	189.8
55°	390.6	452.5	486.5	449.2	356.7	282.7	233.4	203.8	186.5	174.5	164.9
57.5°	339.3	390.3	411.7	368.3	293.7	234.4	197.4	175.2	158.0	149.5	144.5
60°	307.0	350.6	365.6	317.7	255.4	205.1	174.9	154.2	141.5	135.9	130.9
62.5°	275.4	310.9	317.2	273.2	222.7	179.6	153.6	136.1	127.7	122.3	117.5
65°	228.5	254.0	251.1	215.8	176.1	142.5	123.5	112.9	106.6	98.9	90.6
67.5°	188.1	203.8	194.3	167.8	134.5	110.8	98.4	90.3	82.5	75.2	73.3
70°	162.5	171.5	161.5	137.2	110.2	92.9	82.9	73.3	68.6	67.0	63.9
72.5°	138.0	141.2	130.4	109.5	89.7	77.0	67.2	61.8	59.3	57.9	55.9
75°	103.5	101.2	91.9	75.6	62.2	53.6	50.6	48.6	47.0	45.7	44.6
77.5°	72.8	69.3	61.0	50.4	43.3	39.2	37.5	36.4	35.6	34.9	33.9
80°	54.6	52.3	44.0	35.9	33.0	30.9	30.0	28.6	28.6	28.0	26.9
82.5°	39.9	37.4	30.1	26.4	24.7	23.5	22.7	21.9	21.7	21.8	21.1
85°	21.0	16.9	15.0	14.4	13.3	12.7	13.0	12.3	12.3	12.3	11.9
87.5°	6.9	5.9	6.0	6.1	6.9	7.5	7.8	8.5	9.5	9.1	9.3
90°	2.4	4.2	6.0	7.8	10.3	13.5	16.7	19.9	23.2	22.8	22.6
92.5°	13.1	14.4	15.7	16.9	18.0	18.7	19.5	20.2	21.0	21.1	21.1
95°	35.8	37.4	38.8	40.3	41.2	41.5	41.7	42.1	42.4	42.4	42.4
97.5°	64.1	65.5	66.7	68.0	68.9	69.6	70.1	70.6	71.2	71.2	71.2
100°	85.2	86.4	87.6	88.7	89.5	90.0	90.4	90.9	91.3	91.3	91.3
102.5°	107.2	108.2	109.1	110.0	110.8	111.4	111.9	112.4	113.0	113.2	113.2
105°	142.7	143.1	143.6	144.0	144.4	144.7	145.0	145.3	145.6	145.9	146.2
107.5°	179.1	179.9	180.5	181.1	181.5	181.5	181.5	181.5	181.5	181.6	181.6
110°	202.7	203.6	204.5	205.4	205.8	205.8	205.8	205.8	205.8	205.8	205.8



TEST NUMBER: P331790-940

CATALOG NUMBER: S122RDIW-S485D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	228.1	229.0	229.9	230.8	231.1	231.0	230.9	230.8	230.7	230.3	230.0
115°	265.6	266.4	267.3	268.2	268.5	268.2	267.9	267.6	267.3	267.2	267.1
117.5°	303.2	304.3	305.5	306.7	306.8	306.0	305.2	304.4	303.6	303.3	302.9
120°	328.1	329.2	330.4	331.5	331.5	330.4	329.2	328.1	326.9	326.9	326.9
122.5°	351.1	352.5	353.8	355.3	355.6	354.7	353.9	353.1	352.3	352.0	351.6
125°	386.5	387.7	389.1	390.4	390.8	390.4	389.9	389.5	389.1	388.6	388.2
127.5°	421.3	423.0	424.6	426.3	427.0	426.4	425.9	425.3	424.8	424.3	423.7
130°	443.3	445.1	447.1	449.0	449.8	449.5	449.2	448.9	448.6	448.4	448.1
132.5°	467.3	468.9	470.4	471.9	472.8	472.8	472.9	473.0	473.0	472.3	471.7
135°	499.9	501.5	503.1	504.7	505.7	506.0	506.3	506.6	506.8	506.7	506.6
137.5°	533.9	535.2	536.5	537.8	538.7	539.0	539.5	539.8	540.2	540.1	539.9
140°	554.5	555.8	557.1	558.5	559.5	560.3	561.0	561.7	562.4	562.4	562.4
142.5°	575.7	577.0	578.4	579.6	580.6	581.0	581.6	582.0	582.6	582.6	582.8
145°	605.8	606.8	607.9	608.9	609.8	610.7	611.6	612.5	613.4	613.5	613.7
147.5°	633.1	634.4	635.6	636.9	637.8	638.4	638.9	639.5	640.2	640.4	640.8
150°	651.3	652.2	653.1	654.0	654.7	655.3	655.9	656.5	657.1	657.5	657.9
152.5°	667.7	668.6	669.5	670.4	671.2	671.9	672.6	673.3	674.0	674.6	675.1
155°	691.9	692.3	692.8	693.2	693.7	694.1	694.6	695.0	695.4	696.2	696.9
157.5°	712.8	713.1	713.4	713.7	714.0	714.3	714.5	714.8	715.1	716.0	717.0
160°	725.5	725.8	726.1	726.4	726.7	726.7	726.9	727.0	727.2	728.1	729.0
162.5°	736.9	737.0	737.0	737.1	737.2	737.4	737.5	737.6	737.8	738.8	739.8
165°	752.2	752.1	751.9	751.8	751.7	751.7	751.7	751.7	751.7	752.7	753.8
167.5°	764.9	764.5	764.0	763.6	763.3	763.3	763.2	763.2	763.2	764.2	765.3
170°	771.8	771.3	770.9	770.4	770.2	770.0	769.8	769.7	769.5	770.6	771.6
172.5°	776.5	776.1	775.6	775.2	774.9	774.7	774.6	774.5	774.3	775.3	776.4
175°	782.4	781.9	781.5	781.0	780.7	780.3	780.1	779.8	779.4	780.5	781.5
177.5°	784.8	784.4	784.1	783.7	783.5	783.2	783.0	782.7	782.5	783.2	783.9
180°	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1



TEST NUMBER: P331790-940

CATALOG NUMBER: S122RDIW-S485D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	958.4	958.4	958.4	958.4	958.4	958.4	958.4
2.5°	991.9	995.4	997.0	997.0	998.9	998.1	997.3
5°	1048.9	1055.3	1056.6	1062.6	1066.9	1065.6	1066.2
7.5°	1105.6	1115.8	1125.9	1130.4	1131.2	1133.9	1134.9
10°	1140.5	1148.9	1164.5	1162.2	1173.8	1180.4	1169.5
12.5°	1174.1	1185.4	1196.2	1199.2	1205.8	1207.9	1203.5
15°	1204.4	1210.4	1211.1	1209.4	1211.5	1209.8	1203.5
17.5°	1176.1	1166.4	1146.7	1137.3	1129.9	1119.0	1114.6
20°	1129.2	1100.5	1067.3	1053.9	1038.3	1007.6	1014.9
22.5°	1028.0	995.3	962.1	923.1	904.6	875.5	873.8
25°	870.5	814.2	752.2	708.9	683.7	654.7	642.0
27.5°	676.8	605.9	555.2	529.5	506.0	483.1	482.1
30°	549.5	496.1	456.9	434.9	420.6	410.9	413.0
32.5°	463.2	426.6	400.1	381.9	371.3	364.0	363.9
35°	378.6	353.7	336.6	329.0	321.4	316.0	316.4
37.5°	324.0	309.0	299.5	291.1	286.3	283.7	282.2
40°	296.0	283.7	276.4	271.4	267.4	263.8	263.1
42.5°	273.9	263.8	256.4	252.4	248.8	246.1	245.5
45°	243.1	234.8	228.1	223.7	222.1	219.8	219.8
47.5°	216.2	208.0	202.9	200.1	197.2	195.7	195.6
50°	198.1	191.8	187.2	185.5	183.2	182.2	181.8
52.5°	181.9	177.2	173.8	172.7	171.7	170.4	170.6
55°	159.8	157.2	155.9	154.8	153.2	151.1	152.5
57.5°	141.2	139.0	135.4	132.2	130.7	129.3	129.8
60°	128.2	123.5	118.9	115.2	114.2	111.2	111.2
62.5°	111.7	105.1	99.4	97.4	96.4	95.0	94.7
65°	85.9	83.3	81.9	80.6	79.9	79.9	79.3
67.5°	71.2	70.1	68.7	68.3	67.7	67.5	67.2
70°	63.0	61.6	60.9	60.6	59.9	60.3	59.3
72.5°	54.9	53.9	53.8	52.9	52.5	52.5	51.8
75°	43.2	43.2	43.0	42.6	42.0	41.6	42.0
77.5°	33.3	33.3	32.7	32.7	32.6	32.7	32.4
80°	26.7	26.9	26.7	26.3	25.9	26.3	25.9
82.5°	21.0	20.6	20.5	20.4	20.4	20.2	20.2
85°	11.9	12.3	11.9	11.7	11.7	11.7	11.9
87.5°	9.0	8.9	8.9	8.9	9.0	9.0	8.7
90°	22.3	22.0	21.9	22.0	22.2	22.4	22.5
92.5°	21.2	21.3	21.3	21.3	21.4	21.4	21.4
95°	42.4	42.4	42.2	41.9	41.6	41.3	41.0
97.5°	71.2	71.2	71.2	71.2	71.2	71.1	71.1
100°	91.3	91.3	91.2	91.1	91.0	90.8	90.7
102.5°	113.3	113.5	113.5	113.3	113.2	113.1	112.9
105°	146.4	146.8	146.9	146.9	146.9	146.9	146.9
107.5°	181.8	181.9	181.6	180.9	180.3	179.6	179.0
110°	205.8	205.8	205.5	205.1	204.6	204.2	203.8



TEST NUMBER: P331790-940

CATALOG NUMBER: S122RDIW-S485D710U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	229.6	229.3	228.9	228.6	228.3	227.9	227.7
115°	266.9	266.7	266.4	266.0	265.6	265.1	264.7
117.5°	302.6	302.2	301.8	301.3	300.9	300.4	300.0
120°	326.9	326.9	326.6	326.2	325.7	325.3	324.9
122.5°	351.2	350.9	350.5	350.2	349.9	349.6	349.3
125°	387.7	387.3	387.0	386.9	386.7	386.6	386.5
127.5°	423.2	422.7	422.2	421.7	421.2	420.8	420.4
130°	447.7	447.5	447.0	446.4	445.9	445.2	444.7
132.5°	471.0	470.4	469.8	469.4	468.9	468.4	468.0
135°	506.4	506.3	506.0	505.5	505.1	504.6	504.2
137.5°	539.8	539.8	539.4	538.8	538.2	537.6	537.0
140°	562.4	562.4	562.1	561.6	561.0	560.4	559.8
142.5°	582.9	583.0	582.8	582.2	581.6	581.0	580.4
145°	613.9	613.9	613.8	613.1	612.6	612.0	611.4
147.5°	641.1	641.4	641.3	640.8	640.2	639.6	639.1
150°	658.4	658.8	658.8	658.4	657.9	657.5	657.1
152.5°	675.6	676.3	676.3	675.6	675.1	674.6	674.0
155°	697.7	698.4	698.6	698.1	697.7	697.2	696.8
157.5°	718.0	719.0	719.2	718.5	717.7	717.0	716.3
160°	729.9	730.8	730.8	730.3	729.7	729.2	728.5
162.5°	740.8	741.8	741.9	741.2	740.6	739.9	739.1
165°	754.7	755.8	756.0	755.2	754.5	753.8	753.0
167.5°	766.2	767.3	767.4	766.7	765.9	765.2	764.4
170°	772.7	773.6	773.7	772.8	772.0	771.1	770.2
172.5°	777.4	778.5	778.5	777.7	776.8	775.9	775.0
175°	782.6	783.6	783.6	782.7	781.9	781.0	780.2
177.5°	784.6	785.3	785.3	784.6	783.9	783.2	782.5
180°	784.1	784.1	784.1	784.1	784.1	784.1	784.1

(END OF REPORT)