

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331796-940

Luminaire Tested: **S122RDIW-S485D970U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331796-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIW-S485D970U940-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 970 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4510.5 lumens
Efficiency: N/A
Efficacy: 99.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 45.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331796-940

CATALOG NUMBER: S122RDIW-S485D970U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

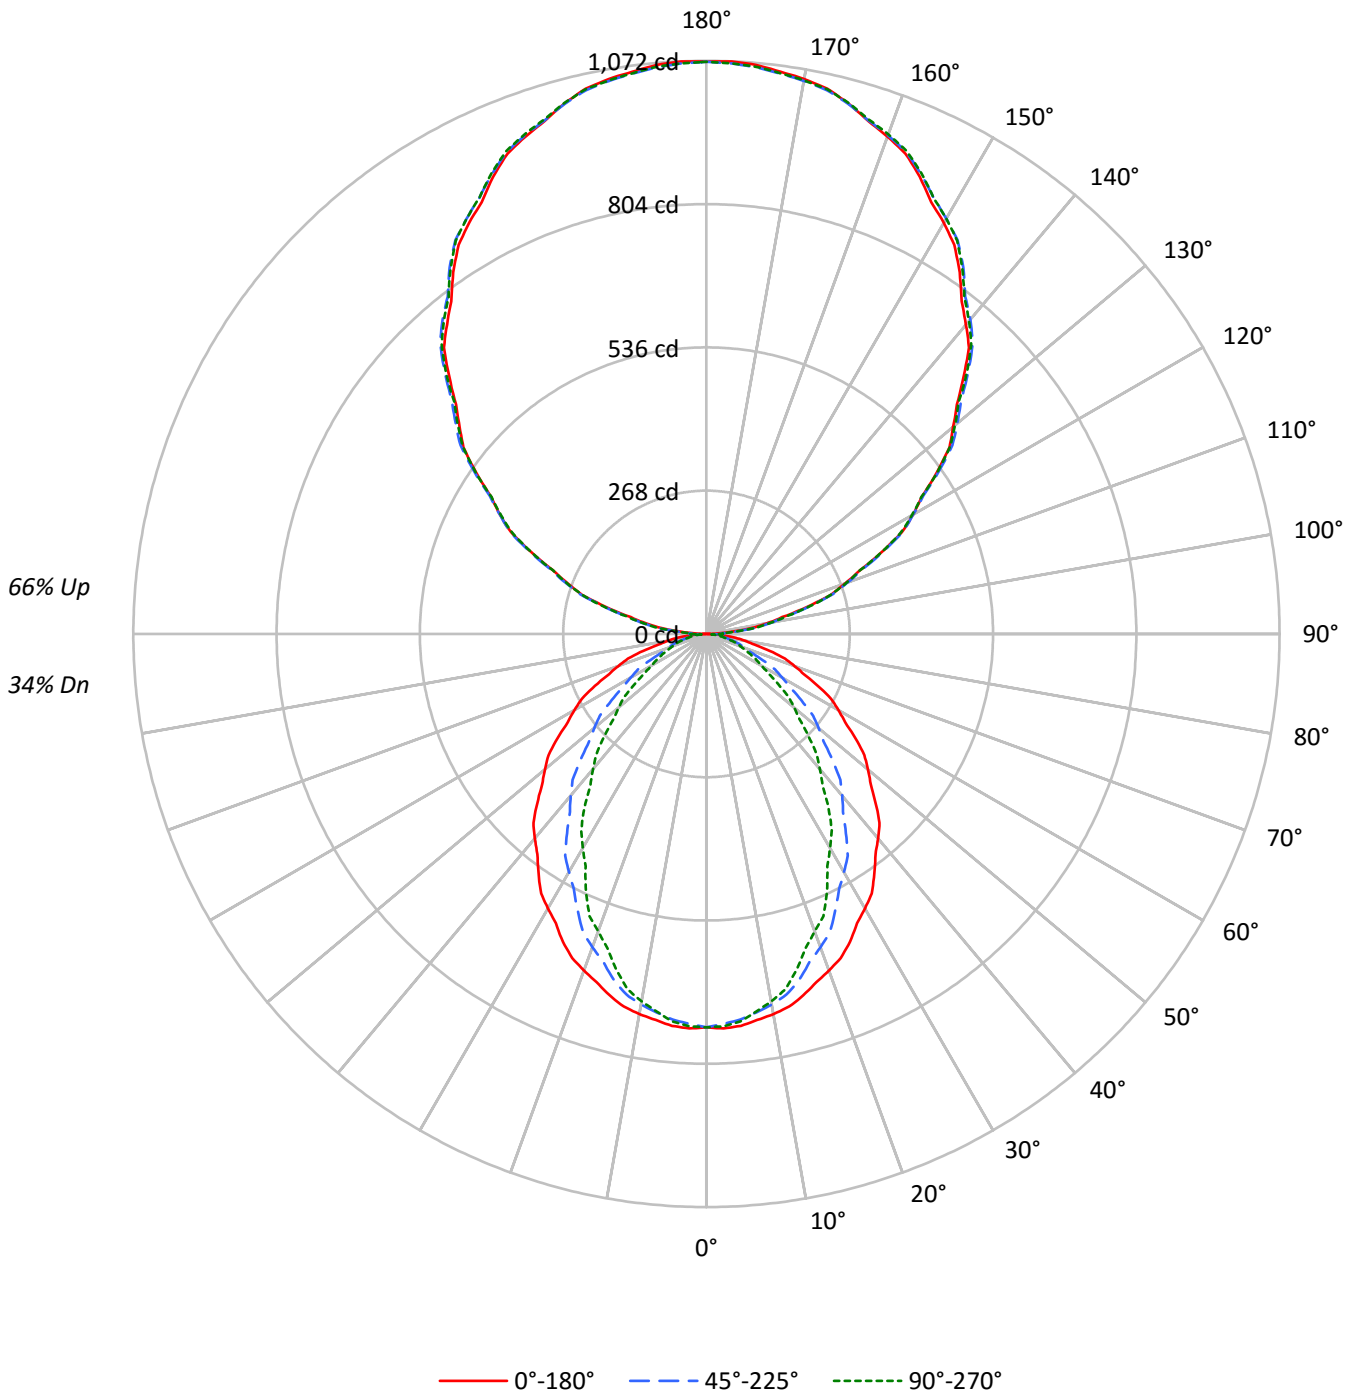



TEST NUMBER: P331796-940

CATALOG NUMBER: S122RDIW-S485D970U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41	34
1	94	90	87	83	85	82	79	76	65	63	61	50	49	48	37	36	35	29
2	86	79	73	69	78	72	67	63	58	54	51	45	42	40	33	31	30	25
3	79	70	63	57	71	63	57	53	51	47	43	40	37	35	29	28	26	21
4	72	62	54	49	65	56	50	45	46	41	37	36	32	30	26	24	23	19
5	66	55	48	42	60	50	44	39	41	36	32	32	29	26	24	22	20	16
6	61	50	42	36	55	45	38	34	37	32	28	29	26	23	22	19	18	15
7	56	45	37	32	51	41	34	29	33	28	25	26	23	20	20	18	16	13
8	52	41	33	28	47	37	31	26	30	26	22	24	21	18	18	16	14	12
9	49	37	30	25	44	34	28	23	28	23	20	22	19	16	17	15	13	11
10	45	34	27	22	41	31	25	21	26	21	18	21	17	15	16	13	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11880	11880	11880
5°	11925	11733	11797
10°	11835	11540	11442
15°	11699	11198	10877
20°	11510	10710	10172
25°	11318	10156	9492
30°	11050	9587	8617
35°	10789	8966	7849
40°	10526	8323	6962
45°	10218	7604	6158
50°	9902	6875	5368
55°	9579	6092	4611
60°	9203	5270	3827
65°	8779	4424	3484
70°	8266	3644	3205
75°	7642	3319	2994
80°	6750	2966	2724
85°	5298	2353	2353



TEST NUMBER: P331796-940

CATALOG NUMBER: S122RDIW-S485D970U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	68.9	1.5
10°-20°	189.1	4.2
20°-30°	265.6	5.9
30°-40°	289.6	6.4
40°-50°	266.3	5.9
50°-60°	209.1	4.6
60°-70°	136.4	3.0
70°-80°	70.3	1.6
80°-90°	22.5	0.5
90°-100°	67.8	1.5
100°-110°	210.6	4.7
110°-120°	360.0	8.0
120°-130°	473.5	10.5
130°-140°	531.4	11.8
140°-150°	521.1	11.6
150°-160°	437.0	9.7
160°-170°	289.9	6.4
170°-180°	101.3	2.2
0°-30°	523.6	11.6
0°-40°	813.2	18.0
0°-60°	1288.6	28.6
0°-90°	1517.8	33.7
90°-120°	638.5	14.2
90°-150°	2164.4	48.0
90°-180°	2993.0	66.4
0°-180°	4510.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	736	736	736	736	736	
5°	736	732	724	729	728	70
15°	700	692	670	658	651	197
25°	635	613	570	544	533	292
35°	547	512	455	414	398	342
45°	448	402	333	287	270	345
55°	340	287	216	178	164	304
65°	230	176	116	94	91	228
75°	122	77	53	49	48	130
85°	29	15	13	13	13	34
90°	1	12	32	30	31	4
95°	47	56	58	58	56	54
105°	194	197	199	200	200	205
115°	361	366	365	364	361	357
125°	526	533	531	528	527	470
135°	680	690	692	691	688	525
145°	826	832	837	838	835	515
155°	944	946	949	953	951	434
165°	1027	1026	1026	1032	1028	289
175°	1068	1066	1064	1070	1065	101
180°	1070	1070	1070	1070	1070	



TEST NUMBER: P331796-940

CATALOG NUMBER: S122RDIW-S485D970U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	735.8	735.8	735.8	735.8	735.8	735.8	735.8	735.8	735.8	735.8	735.8
2.5°	738.5	738.0	737.4	736.7	736.2	735.2	734.0	732.6	731.3	730.0	731.2
5°	735.8	735.1	734.4	733.7	732.9	731.6	729.7	727.7	725.9	723.9	725.2
7.5°	728.3	727.4	726.5	725.5	724.6	723.0	720.8	718.5	716.3	714.1	714.4
10°	721.9	720.9	719.8	718.8	717.7	715.8	712.8	709.8	706.9	703.9	703.5
12.5°	713.9	712.7	711.3	710.1	708.8	706.3	702.5	698.7	694.9	691.2	690.4
15°	699.9	698.3	696.7	695.0	693.4	690.1	685.0	680.0	675.0	669.9	667.2
17.5°	682.8	680.3	677.8	675.3	672.8	668.3	661.9	655.4	649.0	642.5	639.2
20°	669.9	667.0	664.1	661.1	658.1	652.9	645.5	638.1	630.7	623.3	619.6
22.5°	656.1	652.8	649.4	646.1	642.8	637.0	628.7	620.3	612.0	603.6	598.9
25°	635.3	630.6	625.9	621.1	616.4	609.1	599.3	589.6	579.8	570.1	564.0
27.5°	610.3	605.1	599.9	594.9	589.7	581.6	570.6	559.5	548.6	537.5	530.5
30°	592.7	587.1	581.5	575.9	570.2	561.5	549.7	537.8	525.9	514.2	506.6
32.5°	575.7	569.1	562.5	556.0	549.4	540.0	528.0	515.9	503.8	491.8	483.1
35°	547.4	539.8	532.4	524.8	517.2	506.9	493.9	480.9	467.9	454.9	445.5
37.5°	519.2	510.9	502.6	494.3	486.1	474.9	461.1	447.2	433.3	419.5	409.1
40°	499.4	490.6	481.7	472.9	464.0	452.4	438.0	423.7	409.3	394.9	384.4
42.5°	479.2	469.8	460.5	451.2	441.8	429.7	414.9	400.0	385.2	370.4	359.5
45°	447.5	437.7	427.7	417.8	407.9	395.1	379.6	364.1	348.5	333.0	322.4
47.5°	416.6	406.1	395.7	385.1	374.6	361.3	345.3	329.2	313.2	297.1	286.7
50°	394.2	383.7	373.3	362.7	352.2	338.9	322.5	306.3	290.0	273.7	263.5
52.5°	372.4	361.4	350.4	339.5	328.5	315.0	299.1	283.2	267.2	251.4	241.5
55°	340.3	328.8	317.2	305.7	294.2	280.4	264.4	248.4	232.4	216.4	207.6
57.5°	307.4	295.6	283.7	271.9	260.0	246.5	231.1	215.7	200.4	185.0	176.8
60°	285.0	273.2	261.4	249.5	237.6	224.2	208.9	193.7	178.4	163.2	155.6
62.5°	263.1	251.4	239.5	227.7	215.8	202.7	188.2	173.6	159.1	144.5	137.3
65°	229.8	217.8	205.8	193.8	181.8	169.2	155.9	142.5	129.2	115.8	110.8
67.5°	197.5	185.7	173.7	161.8	149.9	137.9	126.0	114.0	102.0	90.1	87.7
70°	175.1	163.6	152.0	140.5	128.9	118.1	107.9	97.6	87.5	77.2	75.8
72.5°	153.8	142.8	131.7	120.6	109.6	100.0	91.8	83.6	75.3	67.1	65.9
75°	122.5	112.2	101.8	91.5	81.1	73.4	68.4	63.3	58.3	53.2	52.3
77.5°	91.8	82.7	73.6	64.5	55.5	49.7	47.3	44.9	42.4	39.9	39.3
80°	72.6	65.0	57.5	49.9	42.4	37.9	36.4	35.0	33.4	31.9	31.4
82.5°	55.0	49.1	43.2	37.4	31.5	28.0	27.0	25.9	25.0	24.0	23.6
85°	28.6	25.5	22.4	19.4	16.2	14.4	14.0	13.6	13.1	12.7	12.7
87.5°	8.7	8.2	7.8	7.3	6.9	7.0	7.9	8.8	9.7	10.6	10.3
90°	0.9	3.3	5.7	8.1	10.5	13.9	18.4	22.7	27.2	31.6	31.2
92.5°	16.1	17.8	19.6	21.4	23.2	24.5	25.6	26.7	27.6	28.7	28.8
95°	47.0	49.0	51.0	53.0	55.0	56.2	56.6	57.0	57.4	57.8	57.8
97.5°	85.8	87.6	89.3	91.1	92.8	94.2	94.9	95.7	96.4	97.2	97.2
100°	114.7	116.3	117.9	119.5	121.1	122.3	122.8	123.4	124.0	124.7	124.7
102.5°	145.1	146.3	147.6	148.9	150.2	151.2	151.9	152.8	153.5	154.3	154.4
105°	194.2	194.7	195.4	196.0	196.6	197.1	197.5	197.9	198.3	198.7	199.1
107.5°	243.7	244.6	245.4	246.3	247.2	247.6	247.6	247.6	247.6	247.6	247.8
110°	275.4	276.7	277.9	279.1	280.3	280.9	280.9	280.9	280.9	280.9	280.9



TEST NUMBER: P331796-940

CATALOG NUMBER: S122RDIW-S485D970U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	310.1	311.4	312.5	313.8	315.0	315.5	315.3	315.1	315.0	314.9	314.3
115°	361.2	362.5	363.6	364.9	366.0	366.5	366.0	365.7	365.2	364.9	364.7
117.5°	412.2	413.8	415.4	417.1	418.7	418.8	417.8	416.6	415.5	414.4	413.9
120°	446.2	447.8	449.4	451.0	452.6	452.6	451.0	449.4	447.8	446.2	446.2
122.5°	477.2	479.2	481.1	483.0	484.9	485.4	484.2	483.1	482.0	480.8	480.4
125°	525.7	527.4	529.2	531.1	532.9	533.5	532.9	532.3	531.6	531.1	530.5
127.5°	572.8	575.1	577.4	579.7	581.9	582.7	582.0	581.3	580.6	579.9	579.1
130°	602.4	605.0	607.6	610.3	612.9	613.9	613.6	613.1	612.8	612.3	612.0
132.5°	635.6	637.8	639.9	642.0	644.2	645.2	645.3	645.4	645.5	645.6	644.7
135°	680.1	682.3	684.5	686.7	688.9	690.2	690.6	691.0	691.4	691.8	691.6
137.5°	726.8	728.7	730.5	732.3	734.1	735.3	735.8	736.3	736.8	737.4	737.2
140°	755.0	756.9	758.7	760.5	762.2	763.7	764.7	765.7	766.7	767.7	767.7
142.5°	784.0	785.8	787.6	789.3	791.2	792.5	793.1	793.8	794.5	795.1	795.3
145°	825.5	826.9	828.3	829.7	831.2	832.4	833.7	834.8	836.1	837.2	837.4
147.5°	862.6	864.2	865.9	867.5	869.2	870.5	871.3	872.1	872.9	873.7	874.1
150°	887.8	889.0	890.2	891.4	892.6	893.7	894.5	895.3	896.1	896.9	897.4
152.5°	910.3	911.4	912.7	913.8	915.1	916.1	917.1	918.0	919.0	920.0	920.7
155°	943.8	944.4	945.0	945.7	946.2	946.8	947.4	948.1	948.6	949.2	950.2
157.5°	972.5	972.9	973.3	973.7	974.1	974.6	974.9	975.3	975.6	976.0	977.3
160°	989.9	990.2	990.7	991.0	991.5	991.8	992.0	992.2	992.4	992.6	993.8
162.5°	1005.8	1005.8	1005.9	1006.0	1006.1	1006.2	1006.5	1006.7	1006.8	1007.0	1008.4
165°	1026.9	1026.7	1026.5	1026.3	1026.1	1026.0	1026.0	1026.0	1026.0	1026.0	1027.4
167.5°	1044.6	1044.0	1043.4	1042.8	1042.2	1041.9	1041.9	1041.8	1041.8	1041.7	1043.1
170°	1054.0	1053.4	1052.8	1052.2	1051.6	1051.2	1051.0	1050.8	1050.6	1050.4	1051.8
172.5°	1060.5	1059.9	1059.3	1058.7	1058.1	1057.7	1057.5	1057.3	1057.1	1056.9	1058.3
175°	1068.4	1067.8	1067.3	1066.7	1066.0	1065.5	1065.1	1064.7	1064.3	1063.9	1065.3
177.5°	1071.7	1071.2	1070.8	1070.2	1069.8	1069.3	1069.1	1068.7	1068.4	1068.1	1069.1
180°	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2



TEST NUMBER: P331796-940

CATALOG NUMBER: S122RDIW-S485D970U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	735.8	735.8	735.8	735.8	735.8	735.8	735.8	735.8
2.5°	732.4	733.6	734.8	735.2	735.0	734.8	734.5	734.3
5°	726.6	727.9	729.2	729.7	729.2	728.8	728.3	727.9
7.5°	714.8	715.2	715.6	715.4	714.6	713.8	713.1	712.3
10°	703.0	702.6	702.1	701.5	700.6	699.7	698.8	697.9
12.5°	689.6	688.8	688.0	686.8	685.3	683.9	682.3	680.9
15°	664.3	661.6	658.7	656.6	655.1	653.6	652.1	650.7
17.5°	635.8	632.5	629.1	626.2	623.7	621.1	618.6	616.0
20°	615.9	612.2	608.5	605.0	601.8	598.5	595.3	592.0
22.5°	594.1	589.3	584.6	580.9	578.5	576.1	573.7	571.2
25°	557.9	551.9	545.8	541.6	539.4	537.2	535.0	532.8
27.5°	523.4	516.3	509.3	504.0	500.4	497.0	493.4	489.9
30°	499.0	491.5	483.9	478.1	474.1	470.2	466.2	462.2
32.5°	474.5	465.9	457.3	451.1	447.4	443.6	439.8	436.0
35°	436.2	426.9	417.6	411.3	408.0	404.7	401.5	398.2
37.5°	398.9	388.6	378.4	371.3	367.7	363.9	360.2	356.4
40°	373.9	363.4	352.8	345.7	341.9	338.0	334.1	330.3
42.5°	348.7	337.8	327.0	319.7	315.9	312.2	308.4	304.7
45°	311.9	301.5	291.0	283.9	280.4	276.8	273.2	269.7
47.5°	276.3	265.8	255.4	248.5	245.3	242.1	238.8	235.6
50°	253.2	243.1	232.8	226.2	223.1	220.0	216.9	213.7
52.5°	231.6	221.8	211.9	205.5	202.7	199.8	196.9	194.0
55°	198.7	189.8	180.9	175.0	172.3	169.4	166.7	163.8
57.5°	168.7	160.6	152.5	147.2	144.8	142.5	140.1	137.7
60°	148.0	140.5	133.0	128.0	125.6	123.2	120.9	118.5
62.5°	130.1	123.0	115.7	111.5	110.0	108.6	107.2	105.8
65°	105.8	100.8	95.8	93.0	92.6	92.1	91.7	91.2
67.5°	85.4	83.1	80.8	79.5	78.9	78.5	78.0	77.5
70°	74.3	72.9	71.3	70.3	69.7	69.1	68.5	67.9
72.5°	64.6	63.4	62.2	61.3	61.0	60.6	60.3	59.9
75°	51.2	50.2	49.1	48.5	48.4	48.2	48.1	48.0
77.5°	38.8	38.2	37.6	37.2	36.9	36.7	36.5	36.2
80°	30.8	30.2	29.6	29.3	29.3	29.3	29.3	29.3
82.5°	23.3	22.9	22.6	22.4	22.4	22.4	22.4	22.4
85°	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7
87.5°	10.2	10.0	9.8	9.7	9.7	9.8	9.8	9.9
90°	30.8	30.4	30.0	29.9	30.1	30.3	30.5	30.7
92.5°	28.9	29.0	29.1	29.1	29.2	29.2	29.2	29.2
95°	57.8	57.8	57.8	57.6	57.2	56.8	56.4	56.0
97.5°	97.2	97.2	97.2	97.2	97.1	97.1	97.0	97.0
100°	124.7	124.7	124.7	124.6	124.3	124.1	123.9	123.8
102.5°	154.6	154.7	154.9	154.9	154.7	154.4	154.3	154.1
105°	199.5	199.9	200.3	200.5	200.5	200.5	200.5	200.5
107.5°	248.0	248.2	248.3	247.9	247.0	246.0	245.1	244.2
110°	280.9	280.9	280.9	280.6	280.0	279.4	278.7	278.2



TEST NUMBER: P331796-940

CATALOG NUMBER: S122RDIW-S485D970U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	313.9	313.4	312.9	312.5	312.0	311.6	311.1	310.7
115°	364.4	364.3	364.1	363.6	363.1	362.5	361.9	361.2
117.5°	413.4	413.0	412.4	411.9	411.3	410.7	410.1	409.5
120°	446.2	446.2	446.2	445.9	445.2	444.7	444.1	443.4
122.5°	479.9	479.4	478.9	478.5	478.0	477.6	477.2	476.7
125°	529.9	529.2	528.7	528.2	528.1	527.9	527.6	527.4
127.5°	578.4	577.7	576.9	576.2	575.6	575.0	574.4	573.7
130°	611.5	611.2	610.7	610.1	609.3	608.5	607.7	606.9
132.5°	643.8	642.9	642.0	641.3	640.7	640.0	639.4	638.7
135°	691.4	691.3	691.0	690.6	690.0	689.4	688.8	688.2
137.5°	737.0	736.9	736.7	736.2	735.4	734.6	733.8	733.0
140°	767.7	767.7	767.7	767.3	766.5	765.7	764.9	764.1
142.5°	795.5	795.7	795.8	795.5	794.7	793.9	793.1	792.3
145°	837.7	837.9	838.0	837.8	837.0	836.2	835.4	834.6
147.5°	874.6	875.0	875.5	875.3	874.6	873.8	873.1	872.3
150°	898.0	898.7	899.3	899.3	898.7	898.0	897.4	896.9
152.5°	921.5	922.3	923.0	923.0	922.3	921.5	920.7	920.0
155°	951.3	952.3	953.2	953.4	952.9	952.3	951.6	951.0
157.5°	978.7	980.1	981.4	981.6	980.7	979.7	978.7	977.8
160°	995.0	996.2	997.4	997.6	996.8	996.0	995.2	994.4
162.5°	1009.8	1011.1	1012.5	1012.7	1011.7	1010.8	1009.8	1008.9
165°	1028.9	1030.2	1031.6	1031.8	1030.8	1029.8	1028.9	1027.8
167.5°	1044.6	1046.0	1047.3	1047.5	1046.5	1045.4	1044.4	1043.4
170°	1053.2	1054.6	1056.1	1056.1	1054.9	1053.7	1052.5	1051.3
172.5°	1059.7	1061.1	1062.5	1062.7	1061.4	1060.2	1059.0	1057.8
175°	1066.8	1068.2	1069.5	1069.7	1068.4	1067.3	1066.0	1064.9
177.5°	1070.1	1070.9	1071.9	1071.9	1070.9	1070.1	1069.1	1068.1
180°	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2

(END OF REPORT)