

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331816-940

Luminaire Tested: **S122RDIW-S675D970U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331816-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIW-S675D970U940-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 970 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5065.8 lumens
Efficiency: N/A
Efficacy: 96.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 52.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331816-940

CATALOG NUMBER: S122RDIW-S675D970U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

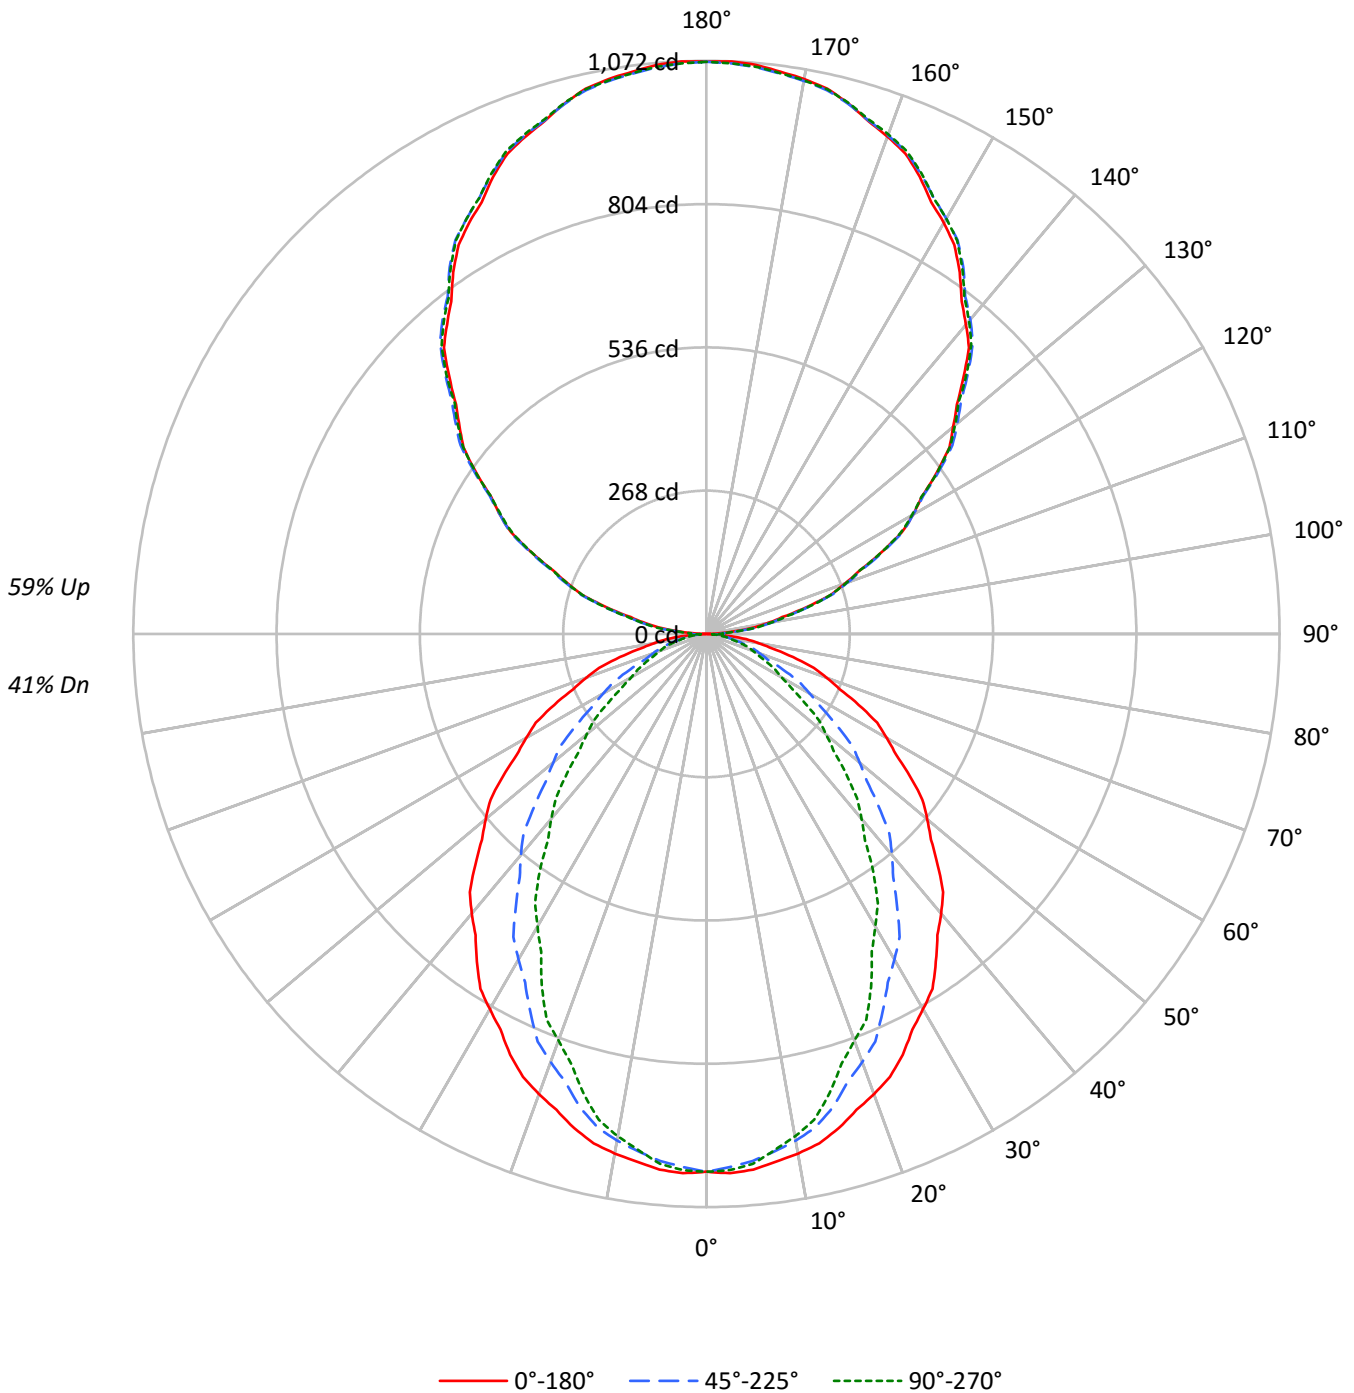



TEST NUMBER: P331816-940

CATALOG NUMBER: S122RDIW-S675D970U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	78	78	78	62	62	62	48	48	48	41
1	96	92	88	85	87	84	81	78	69	67	65	55	54	53	43	42	41	35
2	88	81	75	70	80	74	69	65	61	57	54	49	47	45	38	37	35	30
3	80	71	64	59	73	65	59	54	54	50	46	44	41	38	34	32	30	26
4	74	63	56	50	67	58	52	46	48	43	40	39	36	33	31	28	26	23
5	68	57	49	43	62	52	45	40	43	38	34	35	32	29	28	25	23	20
6	62	51	43	37	57	47	40	35	39	34	30	32	28	25	25	23	21	18
7	58	46	38	33	53	42	36	31	36	30	27	29	25	23	23	21	19	16
8	54	42	34	29	49	39	32	27	33	27	24	27	23	20	21	19	17	14
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	20	17	15	13
10	47	35	28	23	43	32	26	22	28	23	19	23	19	17	18	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	16239	16239	16239
5°	16302	16037	16126
10°	16179	15775	15641
15°	15992	15308	14867
20°	15735	14639	13904
25°	15471	13881	12975
30°	15105	13103	11779
35°	14747	12254	10730
40°	14389	11377	9516
45°	13967	10392	8416
50°	13536	9399	7340
55°	13095	8329	6303
60°	12581	7201	5231
65°	12000	6052	4768
70°	11301	4985	4381
75°	10449	4548	4086
80°	9224	4063	3719
85°	7243	3205	3205



TEST NUMBER: P331816-940

CATALOG NUMBER: S122RDIW-S675D970U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.2	1.9
10°-20°	258.5	5.1
20°-30°	363.0	7.2
30°-40°	395.9	7.8
40°-50°	364.0	7.2
50°-60°	285.9	5.6
60°-70°	186.4	3.7
70°-80°	96.1	1.9
80°-90°	29.2	0.6
90°-100°	67.8	1.3
100°-110°	210.6	4.2
110°-120°	360.0	7.1
120°-130°	473.5	9.3
130°-140°	531.4	10.5
140°-150°	521.1	10.3
150°-160°	437.0	8.6
160°-170°	289.9	5.7
170°-180°	101.3	2.0
0°-30°	715.7	14.1
0°-40°	1111.6	21.9
0°-60°	1761.4	34.8
0°-90°	2073.1	40.9
90°-120°	638.5	12.6
90°-150°	2164.4	42.7
90°-180°	2993.0	59.1
0°-180°	5065.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1006	1006	1006	1006	1006	
5°	1006	1001	990	997	995	95
15°	957	946	916	899	889	269
25°	868	838	779	743	728	399
35°	748	700	622	566	544	468
45°	612	549	455	393	369	472
55°	465	393	296	243	224	416
65°	314	240	158	129	125	311
75°	168	106	73	67	66	177
85°	39	21	17	17	17	46
90°	1	12	32	30	31	4
95°	47	56	58	58	56	54
105°	194	197	199	200	200	205
115°	361	366	365	364	361	357
125°	526	533	531	528	527	470
135°	680	690	692	691	688	525
145°	826	832	837	838	835	515
155°	944	946	949	953	951	434
165°	1027	1026	1026	1032	1028	289
175°	1068	1066	1064	1070	1065	101
180°	1070	1070	1070	1070	1070	



TEST NUMBER: P331816-940

CATALOG NUMBER: S122RDIW-S675D970U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8
2.5°	1009.5	1008.7	1007.9	1007.1	1006.3	1005.0	1003.2	1001.4	999.7	997.9	999.5
5°	1005.8	1004.9	1003.9	1002.8	1001.8	1000.1	997.4	994.8	992.1	989.5	991.3
7.5°	995.5	994.3	993.0	991.8	990.5	988.3	985.3	982.2	979.1	976.1	976.5
10°	986.8	985.3	983.9	982.5	981.1	978.4	974.3	970.3	966.3	962.2	961.6
12.5°	975.8	974.1	972.3	970.6	968.8	965.5	960.3	955.1	949.9	944.7	943.6
15°	956.7	954.5	952.3	950.0	947.8	943.3	936.4	929.5	922.7	915.8	912.0
17.5°	933.3	929.9	926.5	923.0	919.6	913.6	904.7	895.9	887.1	878.2	873.7
20°	915.8	911.7	907.7	903.7	899.6	892.5	882.3	872.3	862.2	852.0	846.9
22.5°	896.8	892.3	887.8	883.2	878.7	870.8	859.3	847.9	836.5	825.1	818.6
25°	868.4	861.9	855.5	849.0	842.6	832.6	819.3	805.9	792.6	779.2	770.9
27.5°	834.2	827.2	820.1	813.1	806.0	795.0	780.0	764.9	749.8	734.8	725.1
30°	810.2	802.5	794.8	787.1	779.4	767.5	751.3	735.1	718.9	702.8	692.4
32.5°	786.8	777.8	768.9	759.9	750.9	738.2	721.7	705.2	688.7	672.2	660.4
35°	748.2	738.0	727.6	717.3	707.0	692.9	675.1	657.4	639.5	621.7	608.9
37.5°	709.7	698.3	687.0	675.6	664.3	649.2	630.3	611.3	592.3	573.3	559.3
40°	682.7	670.6	658.4	646.3	634.2	618.3	598.7	579.1	559.5	539.8	525.5
42.5°	655.1	642.3	629.5	616.7	604.0	587.4	567.1	546.9	526.6	506.3	491.4
45°	611.7	598.2	584.6	571.1	557.5	540.1	518.9	497.7	476.4	455.1	440.8
47.5°	569.4	555.1	540.7	526.4	512.0	493.9	472.0	450.0	428.1	406.2	391.9
50°	538.9	524.5	510.1	495.8	481.4	463.2	440.9	418.7	396.4	374.2	360.2
52.5°	509.1	494.0	479.0	464.0	449.0	430.6	408.8	387.1	365.3	343.6	330.1
55°	465.2	449.4	433.6	417.9	402.1	383.3	361.4	339.6	317.7	295.9	283.7
57.5°	420.2	404.0	387.8	371.7	355.4	336.9	315.8	294.9	273.8	252.9	241.7
60°	389.6	373.4	357.2	341.1	324.9	306.4	285.5	264.7	243.9	223.0	212.7
62.5°	359.7	343.6	327.3	311.2	295.0	277.0	257.2	237.3	217.4	197.5	187.7
65°	314.1	297.7	281.2	264.9	248.5	231.2	213.0	194.8	176.6	158.4	151.5
67.5°	270.0	253.7	237.5	221.2	204.9	188.6	172.2	155.9	139.5	123.1	119.9
70°	239.4	223.6	207.9	192.1	176.3	161.4	147.5	133.5	119.6	105.6	103.5
72.5°	210.3	195.1	180.0	164.9	149.7	136.6	125.4	114.1	103.0	91.8	90.1
75°	167.5	153.4	139.2	125.0	110.8	100.3	93.5	86.6	79.7	72.9	71.4
77.5°	125.5	113.0	100.6	88.2	75.8	67.9	64.6	61.3	58.0	54.7	53.8
80°	99.2	88.9	78.6	68.3	58.0	51.8	49.8	47.7	45.7	43.7	42.9
82.5°	75.2	67.1	59.1	51.0	43.0	38.3	36.9	35.5	34.2	32.8	32.3
85°	39.1	34.9	30.7	26.4	22.1	19.7	19.1	18.5	17.9	17.3	17.3
87.5°	11.9	11.1	10.2	9.4	8.6	8.6	9.5	10.3	11.2	12.1	11.9
90°	0.9	3.3	5.7	8.1	10.5	13.9	18.4	22.7	27.2	31.6	31.2
92.5°	16.1	17.8	19.6	21.4	23.2	24.5	25.6	26.7	27.6	28.7	28.8
95°	47.0	49.0	51.0	53.0	55.0	56.2	56.6	57.0	57.4	57.8	57.8
97.5°	85.8	87.6	89.3	91.1	92.8	94.2	94.9	95.7	96.4	97.2	97.2
100°	114.7	116.3	117.9	119.5	121.1	122.3	122.8	123.4	124.0	124.7	124.7
102.5°	145.1	146.3	147.6	148.9	150.2	151.2	151.9	152.8	153.5	154.3	154.4
105°	194.2	194.7	195.4	196.0	196.6	197.1	197.5	197.9	198.3	198.7	199.1
107.5°	243.7	244.6	245.4	246.3	247.2	247.6	247.6	247.6	247.6	247.6	247.8
110°	275.4	276.7	277.9	279.1	280.3	280.9	280.9	280.9	280.9	280.9	280.9



TEST NUMBER: P331816-940

CATALOG NUMBER: S122RDIW-S675D970U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	310.1	311.4	312.5	313.8	315.0	315.5	315.3	315.1	315.0	314.9	314.3
115°	361.2	362.5	363.6	364.9	366.0	366.5	366.0	365.7	365.2	364.9	364.7
117.5°	412.2	413.8	415.4	417.1	418.7	418.8	417.8	416.6	415.5	414.4	413.9
120°	446.2	447.8	449.4	451.0	452.6	452.6	451.0	449.4	447.8	446.2	446.2
122.5°	477.2	479.2	481.1	483.0	484.9	485.4	484.2	483.1	482.0	480.8	480.4
125°	525.7	527.4	529.2	531.1	532.9	533.5	532.9	532.3	531.6	531.1	530.5
127.5°	572.8	575.1	577.4	579.7	581.9	582.7	582.0	581.3	580.6	579.9	579.1
130°	602.4	605.0	607.6	610.3	612.9	613.9	613.6	613.1	612.8	612.3	612.0
132.5°	635.6	637.8	639.9	642.0	644.2	645.2	645.3	645.4	645.5	645.6	644.7
135°	680.1	682.3	684.5	686.7	688.9	690.2	690.6	691.0	691.4	691.8	691.6
137.5°	726.8	728.7	730.5	732.3	734.1	735.3	735.8	736.3	736.8	737.4	737.2
140°	755.0	756.9	758.7	760.5	762.2	763.7	764.7	765.7	766.7	767.7	767.7
142.5°	784.0	785.8	787.6	789.3	791.2	792.5	793.1	793.8	794.5	795.1	795.3
145°	825.5	826.9	828.3	829.7	831.2	832.4	833.7	834.8	836.1	837.2	837.4
147.5°	862.6	864.2	865.9	867.5	869.2	870.5	871.3	872.1	872.9	873.7	874.1
150°	887.8	889.0	890.2	891.4	892.6	893.7	894.5	895.3	896.1	896.9	897.4
152.5°	910.3	911.4	912.7	913.8	915.1	916.1	917.1	918.0	919.0	920.0	920.7
155°	943.8	944.4	945.0	945.7	946.2	946.8	947.4	948.1	948.6	949.2	950.2
157.5°	972.5	972.9	973.3	973.7	974.1	974.6	974.9	975.3	975.6	976.0	977.3
160°	989.9	990.2	990.7	991.0	991.5	991.8	992.0	992.2	992.4	992.6	993.8
162.5°	1005.8	1005.8	1005.9	1006.0	1006.1	1006.2	1006.5	1006.7	1006.8	1007.0	1008.4
165°	1026.9	1026.7	1026.5	1026.3	1026.1	1026.0	1026.0	1026.0	1026.0	1026.0	1027.4
167.5°	1044.6	1044.0	1043.4	1042.8	1042.2	1041.9	1041.9	1041.8	1041.8	1041.7	1043.1
170°	1054.0	1053.4	1052.8	1052.2	1051.6	1051.2	1051.0	1050.8	1050.6	1050.4	1051.8
172.5°	1060.5	1059.9	1059.3	1058.7	1058.1	1057.7	1057.5	1057.3	1057.1	1056.9	1058.3
175°	1068.4	1067.8	1067.3	1066.7	1066.0	1065.5	1065.1	1064.7	1064.3	1063.9	1065.3
177.5°	1071.7	1071.2	1070.8	1070.2	1069.8	1069.3	1069.1	1068.7	1068.4	1068.1	1069.1
180°	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2



TEST NUMBER: P331816-940

CATALOG NUMBER: S122RDIW-S675D970U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8	1005.8
2.5°	1001.1	1002.7	1004.3	1005.0	1004.7	1004.3	1004.1	1003.7
5°	993.1	995.0	996.8	997.4	996.8	996.1	995.6	995.0
7.5°	977.0	977.6	978.1	977.9	976.8	975.8	974.7	973.7
10°	961.0	960.4	959.7	958.9	957.6	956.4	955.2	954.0
12.5°	942.5	941.5	940.3	938.8	936.7	934.8	932.7	930.7
15°	908.1	904.2	900.4	897.4	895.5	893.4	891.4	889.4
17.5°	869.2	864.5	860.0	856.0	852.5	849.0	845.5	842.0
20°	842.0	836.9	831.8	827.1	822.6	818.1	813.7	809.2
22.5°	812.1	805.6	799.1	794.2	790.8	787.5	784.2	780.9
25°	762.6	754.3	746.0	740.4	737.4	734.3	731.3	728.3
27.5°	715.4	705.8	696.2	688.8	684.0	679.2	674.4	669.6
30°	682.2	671.8	661.5	653.6	648.1	642.7	637.2	631.8
32.5°	648.6	636.9	625.1	616.6	611.4	606.4	601.2	596.1
35°	596.3	583.5	570.8	562.1	557.7	553.2	548.8	544.4
37.5°	545.2	531.2	517.2	507.6	502.5	497.4	492.3	487.2
40°	511.0	496.7	482.3	472.5	467.3	462.0	456.7	451.5
42.5°	476.6	461.7	446.9	436.9	431.9	426.8	421.7	416.5
45°	426.4	412.1	397.7	388.1	383.3	378.4	373.5	368.6
47.5°	377.6	363.4	349.0	339.7	335.3	330.9	326.5	322.1
50°	346.3	332.3	318.3	309.2	305.0	300.7	296.5	292.2
52.5°	316.6	303.1	289.6	281.0	277.1	273.1	269.2	265.3
55°	271.6	259.4	247.3	239.3	235.5	231.6	227.7	223.9
57.5°	230.6	219.5	208.4	201.2	198.0	194.7	191.5	188.2
60°	202.4	192.1	181.7	175.0	171.7	168.5	165.2	162.0
62.5°	177.9	168.0	158.2	152.3	150.3	148.5	146.5	144.5
65°	144.6	137.8	130.9	127.2	126.5	125.9	125.3	124.8
67.5°	116.7	113.6	110.5	108.5	107.9	107.3	106.6	105.9
70°	101.6	99.5	97.5	96.1	95.2	94.4	93.6	92.8
72.5°	88.4	86.7	85.0	83.9	83.4	82.9	82.4	81.9
75°	70.0	68.6	67.1	66.3	66.2	66.0	65.7	65.5
77.5°	53.0	52.2	51.4	50.8	50.5	50.2	49.8	49.5
80°	42.1	41.3	40.5	40.0	40.0	40.0	40.0	40.0
82.5°	31.8	31.3	30.9	30.6	30.6	30.6	30.6	30.6
85°	17.3	17.3	17.3	17.3	17.3	17.3	17.3	17.3
87.5°	11.7	11.4	11.1	11.1	11.1	11.1	11.2	11.2
90°	30.8	30.4	30.0	29.9	30.1	30.3	30.5	30.7
92.5°	28.9	29.0	29.1	29.1	29.2	29.2	29.2	29.2
95°	57.8	57.8	57.8	57.6	57.2	56.8	56.4	56.0
97.5°	97.2	97.2	97.2	97.2	97.1	97.1	97.0	97.0
100°	124.7	124.7	124.7	124.6	124.3	124.1	123.9	123.8
102.5°	154.6	154.7	154.9	154.9	154.7	154.4	154.3	154.1
105°	199.5	199.9	200.3	200.5	200.5	200.5	200.5	200.5
107.5°	248.0	248.2	248.3	247.9	247.0	246.0	245.1	244.2
110°	280.9	280.9	280.9	280.6	280.0	279.4	278.7	278.2



TEST NUMBER: P331816-940

CATALOG NUMBER: S122RDIW-S675D970U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	313.9	313.4	312.9	312.5	312.0	311.6	311.1	310.7
115°	364.4	364.3	364.1	363.6	363.1	362.5	361.9	361.2
117.5°	413.4	413.0	412.4	411.9	411.3	410.7	410.1	409.5
120°	446.2	446.2	446.2	445.9	445.2	444.7	444.1	443.4
122.5°	479.9	479.4	478.9	478.5	478.0	477.6	477.2	476.7
125°	529.9	529.2	528.7	528.2	528.1	527.9	527.6	527.4
127.5°	578.4	577.7	576.9	576.2	575.6	575.0	574.4	573.7
130°	611.5	611.2	610.7	610.1	609.3	608.5	607.7	606.9
132.5°	643.8	642.9	642.0	641.3	640.7	640.0	639.4	638.7
135°	691.4	691.3	691.0	690.6	690.0	689.4	688.8	688.2
137.5°	737.0	736.9	736.7	736.2	735.4	734.6	733.8	733.0
140°	767.7	767.7	767.7	767.3	766.5	765.7	764.9	764.1
142.5°	795.5	795.7	795.8	795.5	794.7	793.9	793.1	792.3
145°	837.7	837.9	838.0	837.8	837.0	836.2	835.4	834.6
147.5°	874.6	875.0	875.5	875.3	874.6	873.8	873.1	872.3
150°	898.0	898.7	899.3	899.3	898.7	898.0	897.4	896.9
152.5°	921.5	922.3	923.0	923.0	922.3	921.5	920.7	920.0
155°	951.3	952.3	953.2	953.4	952.9	952.3	951.6	951.0
157.5°	978.7	980.1	981.4	981.6	980.7	979.7	978.7	977.8
160°	995.0	996.2	997.4	997.6	996.8	996.0	995.2	994.4
162.5°	1009.8	1011.1	1012.5	1012.7	1011.7	1010.8	1009.8	1008.9
165°	1028.9	1030.2	1031.6	1031.8	1030.8	1029.8	1028.9	1027.8
167.5°	1044.6	1046.0	1047.3	1047.5	1046.5	1045.4	1044.4	1043.4
170°	1053.2	1054.6	1056.1	1056.1	1054.9	1053.7	1052.5	1051.3
172.5°	1059.7	1061.1	1062.5	1062.7	1061.4	1060.2	1059.0	1057.8
175°	1066.8	1068.2	1069.5	1069.7	1068.4	1067.3	1066.0	1064.9
177.5°	1070.1	1070.9	1071.9	1071.9	1070.9	1070.1	1069.1	1068.1
180°	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2

(END OF REPORT)