

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331840-940

Luminaire Tested: **S122RDIW-S865D1240U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331840-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122RDIW-S865D1240U940-4F0-1E-UDD-F1  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1240 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6525.8 lumens  
Efficiency: N/A  
Efficacy: 93.5 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 69.8  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331840-940

CATALOG NUMBER: S122RDIW-S865D1240U940-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

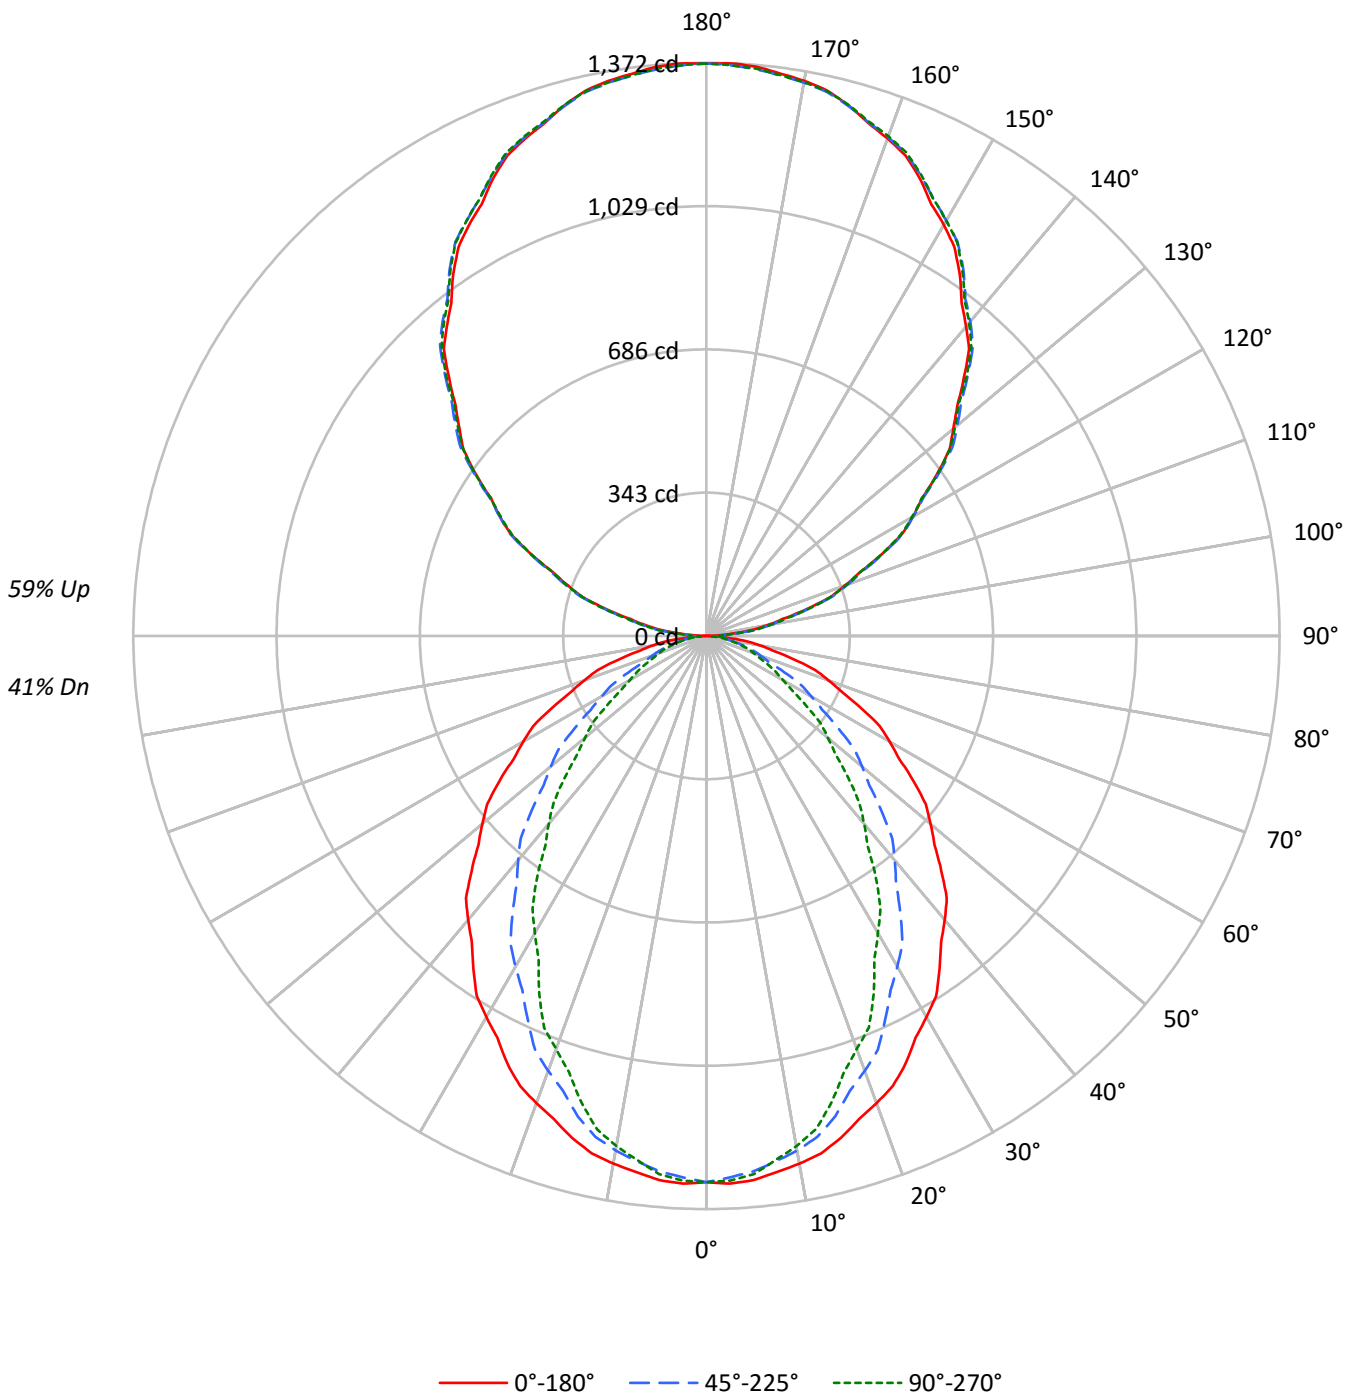



TEST NUMBER: P331840-940

CATALOG NUMBER: S122RDIW-S865D1240U940-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	78	78	78	63	63	63	48	48	48	41
1	96	92	88	85	88	84	81	78	69	67	65	56	54	53	43	42	41	36
2	88	81	75	70	80	74	69	65	61	58	55	49	47	45	38	37	35	30
3	80	71	64	59	73	65	59	55	54	50	46	44	41	38	34	32	31	26
4	74	63	56	50	67	58	52	47	48	44	40	39	36	33	31	29	27	23
5	68	57	49	43	62	52	45	40	44	38	34	36	32	29	28	26	23	20
6	63	51	43	37	57	47	40	35	39	34	30	32	28	26	26	23	21	18
7	58	46	38	33	53	42	36	31	36	31	27	29	26	23	23	21	19	16
8	54	42	34	29	49	39	32	27	33	27	24	27	23	20	22	19	17	14
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	20	17	15	13
10	47	35	28	23	43	33	26	22	28	23	19	23	19	17	19	16	14	12

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	21111	21111	21111
5°	21191	20846	20960
10°	21028	20505	20330
15°	20787	19896	19323
20°	20452	19029	18076
25°	20110	18045	16864
30°	19634	17031	15310
35°	19170	15930	13947
40°	18704	14790	12370
45°	18155	13511	10942
50°	17595	12215	9540
55°	17022	10826	8194
60°	16353	9361	6801
65°	15595	7866	6193
70°	14691	6477	5693
75°	13587	5908	5315
80°	11985	5281	4844
85°	9429	4168	4168



TEST NUMBER: P331840-940

CATALOG NUMBER: S122RDIW-S865D1240U940-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	122.4	1.9
10°-20°	336.0	5.1
20°-30°	471.9	7.2
30°-40°	514.6	7.9
40°-50°	473.1	7.3
50°-60°	371.6	5.7
60°-70°	242.3	3.7
70°-80°	124.9	1.9
80°-90°	37.9	0.6
90°-100°	86.8	1.3
100°-110°	269.6	4.1
110°-120°	460.9	7.1
120°-130°	606.1	9.3
130°-140°	680.3	10.4
140°-150°	667.1	10.2
150°-160°	559.5	8.6
160°-170°	371.1	5.7
170°-180°	129.7	2.0
0°-30°	930.3	14.3
0°-40°	1444.9	22.1
0°-60°	2289.6	35.1
0°-90°	2694.7	41.3
90°-120°	817.4	12.5
90°-150°	2770.9	42.5
90°-180°	3831.0	58.7
0°-180°	6525.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1308	1308	1308	1308	1308	
5°	1308	1301	1286	1296	1293	124
15°	1244	1229	1190	1168	1156	350
25°	1129	1089	1013	966	947	519
35°	973	910	808	736	708	608
45°	795	713	592	511	479	614
55°	605	510	385	316	291	540
65°	408	312	206	168	162	405
75°	218	137	95	87	85	230
85°	51	27	22	22	22	60
90°	1	16	40	38	39	5
95°	60	71	74	74	72	69
105°	249	252	254	257	257	263
115°	462	469	467	466	462	457
125°	673	683	680	677	675	601
135°	871	883	886	884	881	672
145°	1057	1065	1072	1073	1068	660
155°	1208	1212	1215	1220	1218	556
165°	1315	1314	1314	1321	1316	371
175°	1368	1364	1362	1369	1363	130
180°	1370	1370	1370	1370	1370	



TEST NUMBER: P331840-940

CATALOG NUMBER: S122RDIW-S865D1240U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5
2.5°	1312.2	1311.2	1310.1	1309.0	1308.1	1306.4	1304.0	1301.7	1299.4	1297.1	1299.2
5°	1307.5	1306.2	1304.8	1303.5	1302.3	1299.8	1296.5	1293.1	1289.6	1286.2	1288.5
7.5°	1294.0	1292.4	1290.8	1289.1	1287.5	1284.7	1280.7	1276.7	1272.6	1268.6	1269.4
10°	1282.6	1280.8	1279.0	1277.1	1275.2	1271.8	1266.5	1261.2	1256.0	1250.7	1249.9
12.5°	1268.5	1266.1	1263.9	1261.7	1259.4	1254.9	1248.1	1241.4	1234.7	1228.0	1226.5
15°	1243.6	1240.7	1237.8	1234.9	1232.0	1226.1	1217.2	1208.3	1199.3	1190.3	1185.4
17.5°	1213.1	1208.6	1204.3	1199.8	1195.4	1187.5	1176.0	1164.5	1153.1	1141.6	1135.7
20°	1190.3	1185.1	1179.8	1174.6	1169.3	1160.1	1146.9	1133.8	1120.7	1107.5	1100.9
22.5°	1165.7	1159.8	1154.0	1148.1	1142.2	1131.8	1117.0	1102.2	1087.4	1072.5	1064.0
25°	1128.8	1120.4	1112.0	1103.6	1095.2	1082.3	1064.9	1047.6	1030.2	1012.9	1002.1
27.5°	1084.3	1075.1	1066.0	1056.9	1047.8	1033.4	1013.8	994.3	974.6	955.1	942.5
30°	1053.1	1043.1	1033.1	1023.1	1013.2	997.6	976.6	955.6	934.5	913.5	900.1
32.5°	1022.8	1011.1	999.4	987.7	976.1	959.6	938.1	916.6	895.2	873.7	858.4
35°	972.6	959.2	945.8	932.4	919.0	900.7	877.5	854.4	831.3	808.2	791.6
37.5°	922.5	907.8	893.0	878.2	863.5	843.8	819.2	794.5	769.9	745.2	726.9
40°	887.4	871.6	855.9	840.1	824.3	803.7	778.2	752.7	727.2	701.7	683.0
42.5°	851.5	834.8	818.2	801.6	785.0	763.5	737.2	710.8	684.5	658.1	638.8
45°	795.1	777.5	759.9	742.3	724.7	702.0	674.5	646.8	619.2	591.7	572.9
47.5°	740.2	721.6	702.9	684.2	665.6	641.9	613.5	585.0	556.4	528.0	509.4
50°	700.5	681.8	663.2	644.4	625.8	602.0	573.1	544.1	515.2	486.3	468.1
52.5°	661.6	642.1	622.7	603.2	583.6	559.7	531.5	503.1	474.8	446.6	429.0
55°	604.7	584.2	563.7	543.1	522.6	498.1	469.8	441.3	413.0	384.6	368.8
57.5°	546.2	525.1	504.1	483.0	462.1	437.9	410.5	383.3	356.0	328.7	314.2
60°	506.4	485.4	464.4	443.4	422.3	398.2	371.1	344.0	317.0	289.9	276.5
62.5°	467.6	446.6	425.5	404.5	383.4	360.1	334.2	308.4	282.6	256.7	244.0
65°	408.2	386.9	365.6	344.3	323.1	300.5	276.9	253.2	229.5	205.9	197.0
67.5°	351.0	329.8	308.7	287.5	266.4	245.1	223.9	202.6	181.3	160.0	155.9
70°	311.2	290.7	270.2	249.7	229.2	209.8	191.7	173.5	155.4	137.2	134.6
72.5°	273.3	253.7	234.0	214.4	194.7	177.5	163.0	148.4	133.8	119.3	117.1
75°	217.8	199.3	180.9	162.5	144.1	130.5	121.5	112.5	103.6	94.7	92.8
77.5°	163.1	146.9	130.7	114.6	98.4	88.3	83.9	79.6	75.3	71.0	69.9
80°	128.9	115.6	102.2	88.7	75.3	67.3	64.6	62.1	59.4	56.8	55.7
82.5°	97.7	87.3	76.8	66.3	55.9	49.8	48.0	46.2	44.4	42.6	42.0
85°	50.9	45.4	39.9	34.3	28.8	25.7	24.9	24.1	23.3	22.5	22.5
87.5°	15.3	14.3	13.3	12.2	11.1	11.1	12.3	13.4	14.5	15.7	15.3
90°	1.2	4.3	7.3	10.4	13.5	17.8	23.5	29.2	34.8	40.5	39.9
92.5°	20.6	22.8	25.1	27.4	29.6	31.4	32.7	34.1	35.4	36.7	36.8
95°	60.1	62.7	65.3	67.9	70.4	72.0	72.5	72.9	73.5	74.0	74.0
97.5°	109.9	112.1	114.4	116.6	118.9	120.5	121.5	122.4	123.4	124.4	124.4
100°	146.9	148.9	151.0	153.0	155.1	156.5	157.2	158.0	158.8	159.5	159.5
102.5°	185.7	187.3	189.0	190.6	192.3	193.6	194.6	195.6	196.5	197.5	197.7
105°	248.6	249.3	250.1	250.9	251.6	252.4	252.8	253.3	253.9	254.4	254.9
107.5°	311.9	313.1	314.2	315.3	316.5	317.0	317.0	317.0	317.0	317.0	317.3
110°	352.7	354.2	355.7	357.3	358.8	359.6	359.6	359.6	359.6	359.6	359.6



TEST NUMBER: P331840-940

CATALOG NUMBER: S122RDIW-S865D1240U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	397.1	398.6	400.1	401.7	403.2	403.9	403.7	403.5	403.2	403.1	402.4
115°	462.5	464.0	465.6	467.1	468.7	469.1	468.7	468.1	467.6	467.1	466.9
117.5°	527.7	529.8	531.8	533.9	535.9	536.3	534.8	533.3	531.9	530.5	529.9
120°	571.1	573.2	575.3	577.4	579.4	579.4	577.4	575.3	573.2	571.1	571.1
122.5°	610.9	613.4	615.9	618.3	620.8	621.3	619.9	618.5	617.0	615.5	614.9
125°	672.9	675.2	677.5	679.8	682.2	683.0	682.2	681.4	680.6	679.8	679.1
127.5°	733.3	736.2	739.1	742.1	745.0	746.0	745.1	744.1	743.2	742.3	741.4
130°	771.2	774.5	777.9	781.2	784.5	786.0	785.5	785.0	784.4	783.9	783.4
132.5°	813.8	816.5	819.2	821.9	824.7	826.1	826.2	826.3	826.3	826.4	825.4
135°	870.7	873.4	876.3	879.1	882.0	883.6	884.1	884.7	885.2	885.6	885.4
137.5°	930.5	932.8	935.1	937.5	939.8	941.3	941.9	942.6	943.3	944.0	943.8
140°	966.6	968.9	971.3	973.6	975.9	977.7	978.9	980.3	981.5	982.8	982.8
142.5°	1003.6	1005.9	1008.3	1010.6	1012.9	1014.4	1015.3	1016.2	1017.1	1018.0	1018.2
145°	1056.8	1058.6	1060.4	1062.2	1064.0	1065.7	1067.2	1068.7	1070.3	1071.8	1072.1
147.5°	1104.2	1106.3	1108.5	1110.7	1112.9	1114.5	1115.4	1116.5	1117.5	1118.6	1119.1
150°	1136.6	1138.1	1139.7	1141.2	1142.7	1144.1	1145.0	1146.1	1147.1	1148.2	1148.9
152.5°	1165.3	1166.8	1168.3	1169.8	1171.4	1172.8	1174.0	1175.3	1176.5	1177.8	1178.8
155°	1208.3	1209.1	1209.8	1210.6	1211.4	1212.1	1212.9	1213.6	1214.4	1215.2	1216.5
157.5°	1245.0	1245.5	1246.1	1246.6	1247.1	1247.6	1248.0	1248.5	1248.9	1249.5	1251.2
160°	1267.2	1267.7	1268.3	1268.8	1269.3	1269.7	1269.9	1270.2	1270.4	1270.7	1272.2
162.5°	1287.5	1287.7	1287.8	1287.9	1288.0	1288.2	1288.4	1288.7	1289.0	1289.2	1290.9
165°	1314.6	1314.4	1314.1	1313.8	1313.6	1313.5	1313.5	1313.5	1313.5	1313.5	1315.3
167.5°	1337.3	1336.5	1335.8	1335.0	1334.2	1333.8	1333.7	1333.7	1333.6	1333.6	1335.4
170°	1349.3	1348.5	1347.8	1347.0	1346.2	1345.8	1345.5	1345.2	1345.0	1344.7	1346.5
172.5°	1357.6	1356.9	1356.1	1355.3	1354.6	1354.1	1353.8	1353.5	1353.3	1353.0	1354.9
175°	1367.8	1367.1	1366.3	1365.5	1364.8	1364.1	1363.6	1363.1	1362.5	1362.0	1363.9
177.5°	1372.0	1371.4	1370.7	1370.1	1369.5	1369.0	1368.6	1368.2	1367.8	1367.3	1368.6
180°	1370.1	1370.1	1370.1	1370.1	1370.1	1370.1	1370.1	1370.1	1370.1	1370.1	1370.1



TEST NUMBER: P331840-940

CATALOG NUMBER: S122RDIW-S865D1240U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5
2.5°	1301.3	1303.4	1305.5	1306.4	1305.9	1305.5	1305.1	1304.7
5°	1290.9	1293.2	1295.7	1296.5	1295.7	1294.9	1294.1	1293.2
7.5°	1270.1	1270.7	1271.4	1271.0	1269.7	1268.4	1266.9	1265.6
10°	1249.1	1248.3	1247.5	1246.3	1244.7	1243.2	1241.6	1240.0
12.5°	1225.1	1223.7	1222.3	1220.3	1217.6	1215.0	1212.4	1209.8
15°	1180.4	1175.4	1170.4	1166.5	1164.0	1161.3	1158.7	1156.0
17.5°	1129.7	1123.7	1117.8	1112.6	1108.0	1103.6	1099.0	1094.5
20°	1094.4	1087.8	1081.2	1075.0	1069.3	1063.5	1057.7	1052.0
22.5°	1055.6	1047.1	1038.7	1032.2	1028.0	1023.6	1019.3	1015.0
25°	991.3	980.5	969.7	962.3	958.4	954.5	950.6	946.6
27.5°	930.0	917.4	904.8	895.5	889.2	882.9	876.6	870.4
30°	886.6	873.3	859.8	849.5	842.5	835.4	828.3	821.2
32.5°	843.1	827.8	812.5	801.5	794.9	788.2	781.5	774.8
35°	775.0	758.5	741.9	730.8	725.0	719.2	713.4	707.6
37.5°	708.7	690.5	672.3	659.8	653.2	646.5	639.9	633.3
40°	664.3	645.7	627.0	614.2	607.4	600.6	593.7	586.9
42.5°	619.6	600.2	580.9	567.9	561.3	554.7	548.0	541.4
45°	554.3	535.7	516.9	504.4	498.1	491.9	485.5	479.2
47.5°	490.8	472.3	453.7	441.6	435.9	430.1	424.4	418.7
50°	450.0	431.9	413.8	401.9	396.4	390.8	385.3	379.8
52.5°	411.5	394.0	376.5	365.2	360.1	355.0	349.9	344.8
55°	353.0	337.2	321.5	311.0	306.0	301.0	296.0	291.1
57.5°	299.8	285.3	270.9	261.5	257.3	253.1	248.9	244.7
60°	263.1	249.7	236.2	227.5	223.2	219.0	214.8	210.6
62.5°	231.2	218.5	205.6	198.0	195.5	193.0	190.4	187.9
65°	188.0	179.1	170.1	165.2	164.4	163.7	162.9	162.1
67.5°	151.8	147.7	143.6	141.1	140.3	139.4	138.6	137.8
70°	132.0	129.4	126.7	124.9	123.9	122.8	121.7	120.6
72.5°	114.9	112.6	110.4	109.1	108.3	107.7	107.1	106.5
75°	91.0	89.2	87.3	86.2	86.0	85.7	85.4	85.2
77.5°	68.9	67.9	66.8	66.1	65.6	65.2	64.8	64.4
80°	54.7	53.7	52.6	52.1	52.1	52.1	52.1	52.1
82.5°	41.4	40.7	40.0	39.8	39.8	39.8	39.8	39.8
85°	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
87.5°	15.1	14.7	14.4	14.3	14.4	14.4	14.4	14.4
90°	39.4	39.0	38.4	38.3	38.5	38.8	39.1	39.3
92.5°	37.0	37.1	37.2	37.3	37.3	37.4	37.5	37.5
95°	74.0	74.0	74.0	73.7	73.2	72.7	72.2	71.7
97.5°	124.4	124.4	124.4	124.4	124.3	124.3	124.2	124.2
100°	159.5	159.5	159.5	159.4	159.2	158.9	158.6	158.4
102.5°	197.9	198.1	198.3	198.3	198.0	197.8	197.5	197.2
105°	255.4	255.9	256.5	256.7	256.7	256.7	256.7	256.7
107.5°	317.4	317.6	317.9	317.4	316.2	315.0	313.8	312.6
110°	359.6	359.6	359.6	359.2	358.5	357.7	356.9	356.1





TEST NUMBER: P331840-940

CATALOG NUMBER: S122RDIW-S865D1240U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	401.8	401.2	400.6	400.0	399.4	398.9	398.3	397.7
115°	466.6	466.4	466.1	465.6	464.8	464.0	463.2	462.5
117.5°	529.2	528.6	528.0	527.4	526.6	525.8	525.0	524.2
120°	571.1	571.1	571.1	570.8	570.0	569.3	568.5	567.8
122.5°	614.4	613.8	613.1	612.5	612.0	611.4	610.8	610.3
125°	678.3	677.5	676.8	676.3	676.0	675.7	675.5	675.2
127.5°	740.5	739.5	738.6	737.7	736.9	736.1	735.3	734.4
130°	782.9	782.4	781.9	781.1	780.1	779.1	778.0	776.9
132.5°	824.2	823.0	822.0	821.0	820.2	819.3	818.5	817.7
135°	885.2	884.9	884.7	884.1	883.3	882.6	881.8	881.0
137.5°	943.5	943.3	943.2	942.5	941.5	940.5	939.4	938.4
140°	982.8	982.8	982.8	982.3	981.2	980.3	979.2	978.2
142.5°	1018.3	1018.6	1018.8	1018.3	1017.4	1016.3	1015.3	1014.2
145°	1072.4	1072.6	1072.8	1072.5	1071.5	1070.4	1069.4	1068.4
147.5°	1119.6	1120.3	1120.8	1120.6	1119.6	1118.7	1117.7	1116.7
150°	1149.7	1150.5	1151.2	1151.2	1150.5	1149.7	1148.9	1148.2
152.5°	1179.7	1180.6	1181.6	1181.6	1180.6	1179.7	1178.8	1177.8
155°	1217.8	1219.1	1220.3	1220.6	1219.9	1219.1	1218.3	1217.5
157.5°	1252.9	1254.6	1256.4	1256.7	1255.4	1254.2	1252.9	1251.7
160°	1273.8	1275.3	1276.8	1277.1	1276.1	1275.1	1274.1	1273.0
162.5°	1292.7	1294.4	1296.2	1296.5	1295.2	1294.0	1292.7	1291.6
165°	1317.1	1318.8	1320.7	1320.9	1319.6	1318.4	1317.1	1315.8
167.5°	1337.2	1339.0	1340.8	1341.0	1339.7	1338.4	1337.0	1335.7
170°	1348.3	1350.1	1351.9	1352.0	1350.5	1349.0	1347.4	1345.9
172.5°	1356.6	1358.4	1360.2	1360.3	1358.8	1357.3	1355.8	1354.2
175°	1365.7	1367.4	1369.2	1369.4	1367.8	1366.3	1364.8	1363.2
177.5°	1369.8	1371.1	1372.3	1372.3	1371.1	1369.8	1368.6	1367.3
180°	1370.1	1370.1	1370.1	1370.1	1370.1	1370.1	1370.1	1370.1

(END OF REPORT)