

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331844-940

Luminaire Tested: **S122RDIW-S865D1440U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331844-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122RDIW-S865D1440U940-4F0-1E-UDD-F1  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1440 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7149.9 lumens  
Efficiency: N/A  
Efficacy: 93.3 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 76.6  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331844-940

CATALOG NUMBER: S122RDIW-S865D1440U940-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

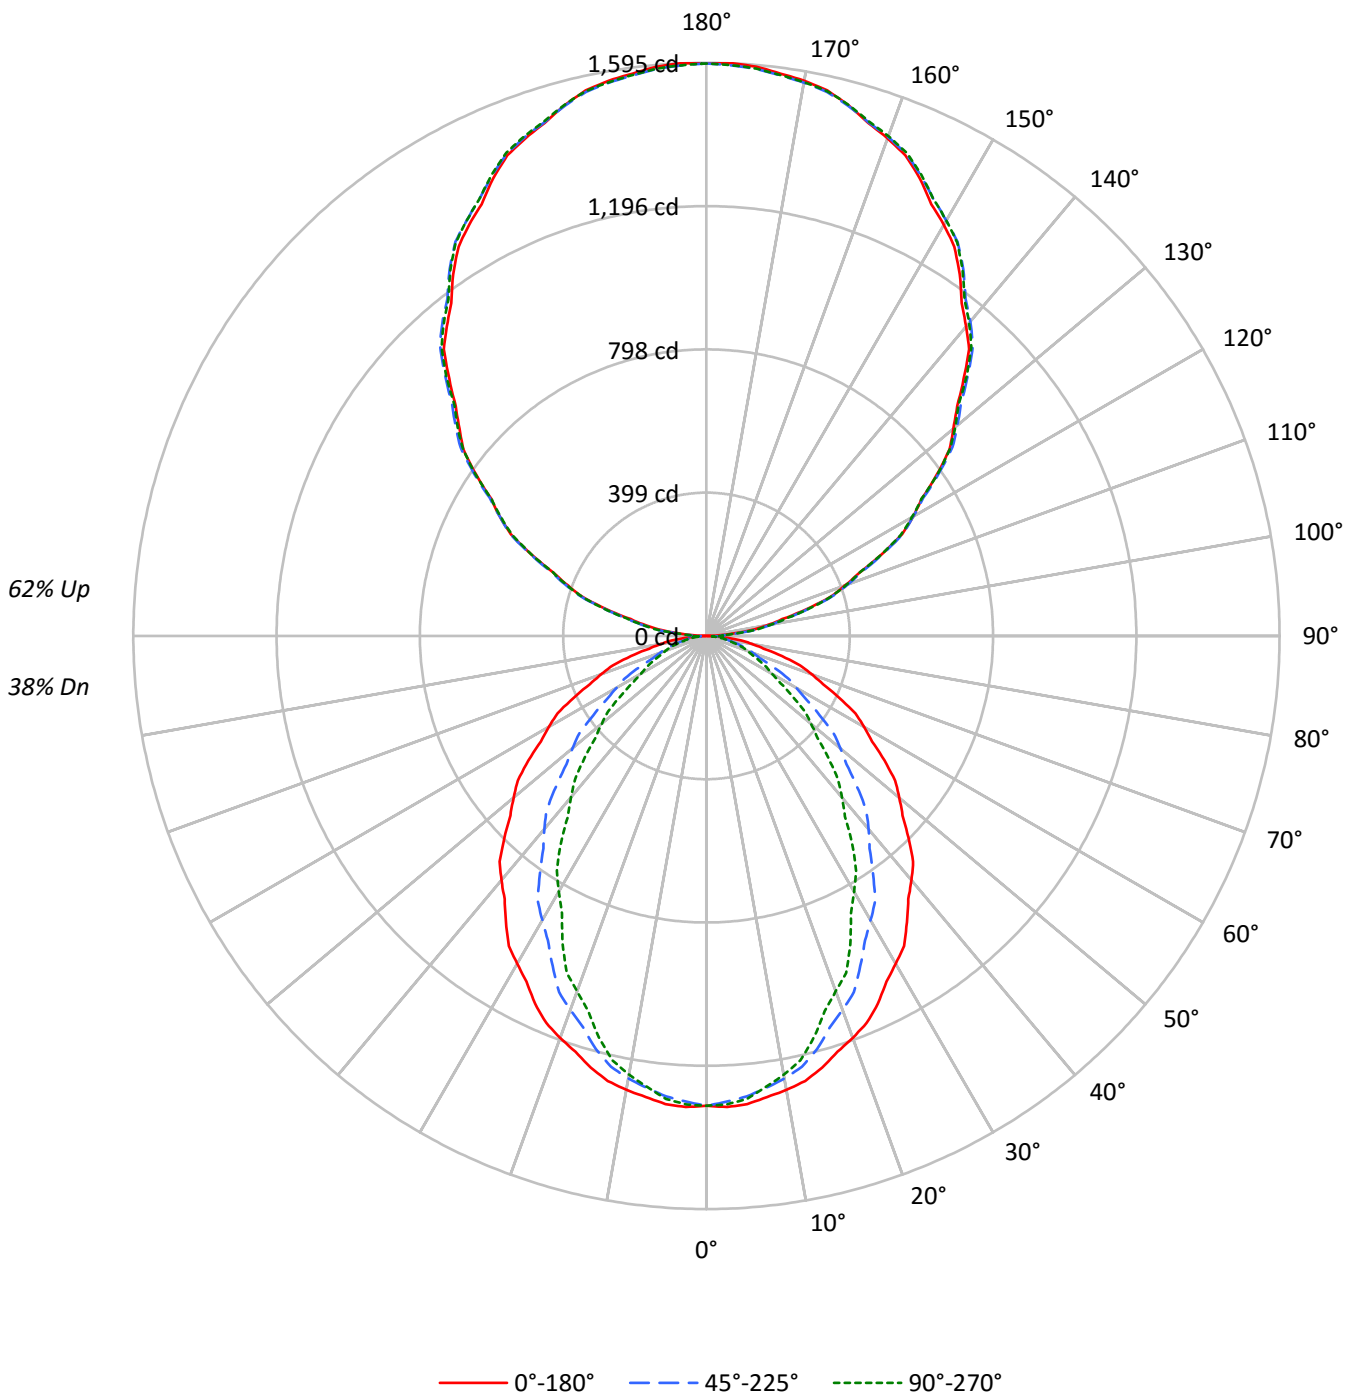



TEST NUMBER: P331844-940

CATALOG NUMBER: S122RDIW-S865D1440U940-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	95	95	95	95	77	77	77	60	60	60	45	45	45	38
1	95	91	88	84	86	83	80	77	67	65	63	53	52	51	40	39	38	32
2	87	80	74	69	79	73	68	64	60	56	53	47	45	43	36	34	33	28
3	80	71	64	58	72	64	58	54	53	48	45	42	39	37	32	30	28	24
4	73	63	55	49	66	57	51	46	47	42	39	38	34	32	29	27	25	21
5	67	56	48	42	61	51	44	39	42	37	33	34	30	28	26	24	22	18
6	62	50	42	37	56	46	39	34	38	33	29	31	27	24	24	21	19	16
7	57	45	38	32	52	42	35	30	35	30	26	28	24	22	22	19	17	15
8	53	41	34	29	48	38	31	27	32	27	23	26	22	19	20	18	16	13
9	49	38	30	26	45	35	28	24	29	24	21	24	20	17	19	16	14	12
10	46	35	28	23	42	32	26	21	27	22	19	22	18	16	17	15	13	11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	21111	21111	21111
5°	21191	20846	20960
10°	21028	20505	20330
15°	20787	19896	19323
20°	20452	19029	18076
25°	20110	18045	16864
30°	19634	17031	15310
35°	19170	15930	13947
40°	18704	14790	12370
45°	18155	13511	10942
50°	17595	12215	9540
55°	17022	10826	8194
60°	16353	9361	6801
65°	15595	7866	6193
70°	14691	6477	5693
75°	13587	5908	5315
80°	11985	5281	4844
85°	9429	4168	4168



TEST NUMBER: P331844-940

CATALOG NUMBER: S122RDIW-S865D1440U940-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	122.4	1.7
10°-20°	336.0	4.7
20°-30°	471.9	6.6
30°-40°	514.6	7.2
40°-50°	473.1	6.6
50°-60°	371.6	5.2
60°-70°	242.3	3.4
70°-80°	124.9	1.7
80°-90°	38.8	0.5
90°-100°	100.9	1.4
100°-110°	313.5	4.4
110°-120°	535.9	7.5
120°-130°	704.7	9.9
130°-140°	791.0	11.1
140°-150°	775.6	10.8
150°-160°	650.5	9.1
160°-170°	431.5	6.0
170°-180°	150.8	2.1
0°-30°	930.3	13.0
0°-40°	1444.9	20.2
0°-60°	2289.6	32.0
0°-90°	2695.5	37.7
90°-120°	950.3	13.3
90°-150°	3221.6	45.1
90°-180°	4454.0	62.3
0°-180°	7149.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1308	1308	1308	1308	1308	
5°	1308	1301	1286	1296	1293	124
15°	1244	1229	1190	1168	1156	350
25°	1129	1089	1013	966	947	519
35°	973	910	808	736	708	608
45°	795	713	592	511	479	614
55°	605	510	385	316	291	540
65°	408	312	206	168	162	405
75°	218	137	95	87	85	230
85°	51	27	22	22	22	60
90°	1	18	47	45	46	6
95°	70	83	86	86	83	80
105°	289	293	296	298	298	305
115°	538	545	543	542	538	532
125°	782	794	790	787	785	699
135°	1012	1026	1030	1028	1024	782
145°	1229	1238	1246	1247	1242	767
155°	1405	1409	1413	1419	1416	646
165°	1528	1527	1527	1536	1530	431
175°	1590	1586	1584	1592	1585	151
180°	1593	1593	1593	1593	1593	



TEST NUMBER: P331844-940

CATALOG NUMBER: S122RDIW-S865D1440U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5
2.5°	1312.2	1311.2	1310.1	1309.0	1308.1	1306.4	1304.0	1301.7	1299.4	1297.1	1299.2
5°	1307.5	1306.2	1304.8	1303.5	1302.3	1299.8	1296.5	1293.1	1289.6	1286.2	1288.5
7.5°	1294.0	1292.4	1290.8	1289.1	1287.5	1284.7	1280.7	1276.7	1272.6	1268.6	1269.4
10°	1282.6	1280.8	1279.0	1277.1	1275.2	1271.8	1266.5	1261.2	1256.0	1250.7	1249.9
12.5°	1268.5	1266.1	1263.9	1261.7	1259.4	1254.9	1248.1	1241.4	1234.7	1228.0	1226.5
15°	1243.6	1240.7	1237.8	1234.9	1232.0	1226.1	1217.2	1208.3	1199.3	1190.3	1185.4
17.5°	1213.1	1208.6	1204.3	1199.8	1195.4	1187.5	1176.0	1164.5	1153.1	1141.6	1135.7
20°	1190.3	1185.1	1179.8	1174.6	1169.3	1160.1	1146.9	1133.8	1120.7	1107.5	1100.9
22.5°	1165.7	1159.8	1154.0	1148.1	1142.2	1131.8	1117.0	1102.2	1087.4	1072.5	1064.0
25°	1128.8	1120.4	1112.0	1103.6	1095.2	1082.3	1064.9	1047.6	1030.2	1012.9	1002.1
27.5°	1084.3	1075.1	1066.0	1056.9	1047.8	1033.4	1013.8	994.3	974.6	955.1	942.5
30°	1053.1	1043.1	1033.1	1023.1	1013.2	997.6	976.6	955.6	934.5	913.5	900.1
32.5°	1022.8	1011.1	999.4	987.7	976.1	959.6	938.1	916.6	895.2	873.7	858.4
35°	972.6	959.2	945.8	932.4	919.0	900.7	877.5	854.4	831.3	808.2	791.6
37.5°	922.5	907.8	893.0	878.2	863.5	843.8	819.2	794.5	769.9	745.2	726.9
40°	887.4	871.6	855.9	840.1	824.3	803.7	778.2	752.7	727.2	701.7	683.0
42.5°	851.5	834.8	818.2	801.6	785.0	763.5	737.2	710.8	684.5	658.1	638.8
45°	795.1	777.5	759.9	742.3	724.7	702.0	674.5	646.8	619.2	591.7	572.9
47.5°	740.2	721.6	702.9	684.2	665.6	641.9	613.5	585.0	556.4	528.0	509.4
50°	700.5	681.8	663.2	644.4	625.8	602.0	573.1	544.1	515.2	486.3	468.1
52.5°	661.6	642.1	622.7	603.2	583.6	559.7	531.5	503.1	474.8	446.6	429.0
55°	604.7	584.2	563.7	543.1	522.6	498.1	469.8	441.3	413.0	384.6	368.8
57.5°	546.2	525.1	504.1	483.0	462.1	437.9	410.5	383.3	356.0	328.7	314.2
60°	506.4	485.4	464.4	443.4	422.3	398.2	371.1	344.0	317.0	289.9	276.5
62.5°	467.6	446.6	425.5	404.5	383.4	360.1	334.2	308.4	282.6	256.7	244.0
65°	408.2	386.9	365.6	344.3	323.1	300.5	276.9	253.2	229.5	205.9	197.0
67.5°	351.0	329.8	308.7	287.5	266.4	245.1	223.9	202.6	181.3	160.0	155.9
70°	311.2	290.7	270.2	249.7	229.2	209.8	191.7	173.5	155.4	137.2	134.6
72.5°	273.3	253.7	234.0	214.4	194.7	177.5	163.0	148.4	133.8	119.3	117.1
75°	217.8	199.3	180.9	162.5	144.1	130.5	121.5	112.5	103.6	94.7	92.8
77.5°	163.1	146.9	130.7	114.6	98.4	88.3	83.9	79.6	75.3	71.0	69.9
80°	128.9	115.6	102.2	88.7	75.3	67.3	64.6	62.1	59.4	56.8	55.7
82.5°	97.7	87.3	76.8	66.3	55.9	49.8	48.0	46.2	44.4	42.6	42.0
85°	50.9	45.4	39.9	34.3	28.8	25.7	24.9	24.1	23.3	22.5	22.5
87.5°	15.4	14.4	13.5	12.5	11.6	11.7	13.0	14.4	15.7	16.9	16.7
90°	1.3	4.9	8.5	12.1	15.7	20.8	27.4	33.9	40.5	47.1	46.5
92.5°	23.9	26.6	29.2	31.8	34.4	36.6	38.1	39.7	41.2	42.7	42.9
95°	69.9	72.9	75.9	78.8	81.9	83.6	84.3	84.8	85.4	86.1	86.1
97.5°	127.7	130.4	133.0	135.6	138.2	140.1	141.2	142.4	143.5	144.6	144.6
100°	170.8	173.1	175.5	177.9	180.3	181.9	182.8	183.7	184.6	185.5	185.5
102.5°	215.9	217.8	219.7	221.6	223.6	225.1	226.2	227.3	228.5	229.6	229.9
105°	289.0	289.9	290.8	291.7	292.6	293.4	294.0	294.5	295.2	295.8	296.3
107.5°	362.7	364.0	365.3	366.7	367.9	368.6	368.6	368.6	368.6	368.6	368.8
110°	410.0	411.8	413.6	415.4	417.1	418.1	418.1	418.1	418.1	418.1	418.1



TEST NUMBER: P331844-940

CATALOG NUMBER: S122RDIW-S865D1440U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	461.6	463.4	465.2	467.0	468.8	469.6	469.3	469.1	468.9	468.6	467.9
115°	537.7	539.5	541.3	543.1	544.9	545.5	544.9	544.3	543.7	543.1	542.8
117.5°	613.6	615.9	618.3	620.7	623.1	623.5	621.8	620.1	618.4	616.8	616.1
120°	664.1	666.5	668.9	671.3	673.7	673.7	671.3	668.9	666.5	664.1	664.1
122.5°	710.3	713.2	716.0	718.9	721.8	722.4	720.8	719.1	717.4	715.7	715.0
125°	782.4	785.1	787.7	790.4	793.2	794.1	793.2	792.3	791.4	790.4	789.5
127.5°	852.6	856.0	859.3	862.8	866.2	867.4	866.3	865.2	864.2	863.1	861.9
130°	896.6	900.5	904.5	908.3	912.2	913.8	913.2	912.7	912.0	911.4	910.9
132.5°	946.1	949.3	952.4	955.6	958.8	960.5	960.6	960.6	960.8	960.9	959.6
135°	1012.3	1015.6	1018.9	1022.1	1025.4	1027.3	1028.0	1028.6	1029.1	1029.7	1029.5
137.5°	1081.9	1084.6	1087.3	1089.9	1092.6	1094.4	1095.2	1095.9	1096.7	1097.5	1097.3
140°	1123.8	1126.5	1129.3	1131.9	1134.6	1136.7	1138.2	1139.7	1141.2	1142.6	1142.6
142.5°	1166.9	1169.6	1172.2	1174.9	1177.6	1179.5	1180.4	1181.5	1182.5	1183.6	1183.7
145°	1228.7	1230.8	1232.9	1234.9	1237.1	1239.0	1240.8	1242.6	1244.4	1246.2	1246.4
147.5°	1283.8	1286.3	1288.8	1291.4	1293.9	1295.7	1296.9	1298.1	1299.3	1300.5	1301.2
150°	1321.4	1323.2	1325.1	1326.9	1328.6	1330.1	1331.3	1332.5	1333.7	1334.9	1335.8
152.5°	1354.8	1356.6	1358.3	1360.1	1362.0	1363.6	1365.0	1366.5	1367.9	1369.3	1370.5
155°	1404.8	1405.7	1406.6	1407.5	1408.4	1409.3	1410.2	1411.0	1411.9	1412.8	1414.3
157.5°	1447.5	1448.1	1448.8	1449.4	1449.9	1450.5	1451.1	1451.6	1452.2	1452.7	1454.6
160°	1473.4	1474.0	1474.5	1475.2	1475.8	1476.2	1476.5	1476.8	1477.1	1477.4	1479.2
162.5°	1497.0	1497.2	1497.3	1497.4	1497.5	1497.7	1498.0	1498.3	1498.6	1498.9	1500.9
165°	1528.5	1528.2	1527.9	1527.6	1527.3	1527.1	1527.1	1527.1	1527.1	1527.1	1529.2
167.5°	1554.8	1553.9	1553.0	1552.1	1551.2	1550.8	1550.7	1550.7	1550.6	1550.5	1552.6
170°	1568.8	1567.9	1567.0	1566.1	1565.2	1564.6	1564.3	1564.1	1563.7	1563.4	1565.5
172.5°	1578.5	1577.6	1576.7	1575.8	1574.9	1574.3	1574.0	1573.7	1573.4	1573.1	1575.2
175°	1590.3	1589.4	1588.5	1587.6	1586.7	1586.0	1585.4	1584.7	1584.2	1583.6	1585.7
177.5°	1595.2	1594.5	1593.8	1593.0	1592.3	1591.7	1591.2	1590.7	1590.3	1589.7	1591.2
180°	1593.0	1593.0	1593.0	1593.0	1593.0	1593.0	1593.0	1593.0	1593.0	1593.0	1593.0



TEST NUMBER: P331844-940

CATALOG NUMBER: S122RDIW-S865D1440U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5
2.5°	1301.3	1303.4	1305.5	1306.4	1305.9	1305.5	1305.1	1304.7
5°	1290.9	1293.2	1295.7	1296.5	1295.7	1294.9	1294.1	1293.2
7.5°	1270.1	1270.7	1271.4	1271.0	1269.7	1268.4	1266.9	1265.6
10°	1249.1	1248.3	1247.5	1246.3	1244.7	1243.2	1241.6	1240.0
12.5°	1225.1	1223.7	1222.3	1220.3	1217.6	1215.0	1212.4	1209.8
15°	1180.4	1175.4	1170.4	1166.5	1164.0	1161.3	1158.7	1156.0
17.5°	1129.7	1123.7	1117.8	1112.6	1108.0	1103.6	1099.0	1094.5
20°	1094.4	1087.8	1081.2	1075.0	1069.3	1063.5	1057.7	1052.0
22.5°	1055.6	1047.1	1038.7	1032.2	1028.0	1023.6	1019.3	1015.0
25°	991.3	980.5	969.7	962.3	958.4	954.5	950.6	946.6
27.5°	930.0	917.4	904.8	895.5	889.2	882.9	876.6	870.4
30°	886.6	873.3	859.8	849.5	842.5	835.4	828.3	821.2
32.5°	843.1	827.8	812.5	801.5	794.9	788.2	781.5	774.8
35°	775.0	758.5	741.9	730.8	725.0	719.2	713.4	707.6
37.5°	708.7	690.5	672.3	659.8	653.2	646.5	639.9	633.3
40°	664.3	645.7	627.0	614.2	607.4	600.6	593.7	586.9
42.5°	619.6	600.2	580.9	567.9	561.3	554.7	548.0	541.4
45°	554.3	535.7	516.9	504.4	498.1	491.9	485.5	479.2
47.5°	490.8	472.3	453.7	441.6	435.9	430.1	424.4	418.7
50°	450.0	431.9	413.8	401.9	396.4	390.8	385.3	379.8
52.5°	411.5	394.0	376.5	365.2	360.1	355.0	349.9	344.8
55°	353.0	337.2	321.5	311.0	306.0	301.0	296.0	291.1
57.5°	299.8	285.3	270.9	261.5	257.3	253.1	248.9	244.7
60°	263.1	249.7	236.2	227.5	223.2	219.0	214.8	210.6
62.5°	231.2	218.5	205.6	198.0	195.5	193.0	190.4	187.9
65°	188.0	179.1	170.1	165.2	164.4	163.7	162.9	162.1
67.5°	151.8	147.7	143.6	141.1	140.3	139.4	138.6	137.8
70°	132.0	129.4	126.7	124.9	123.9	122.8	121.7	120.6
72.5°	114.9	112.6	110.4	109.1	108.3	107.7	107.1	106.5
75°	91.0	89.2	87.3	86.2	86.0	85.7	85.4	85.2
77.5°	68.9	67.9	66.8	66.1	65.6	65.2	64.8	64.4
80°	54.7	53.7	52.6	52.1	52.1	52.1	52.1	52.1
82.5°	41.4	40.7	40.0	39.8	39.8	39.8	39.8	39.8
85°	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
87.5°	16.3	16.0	15.7	15.5	15.6	15.6	15.7	15.8
90°	45.8	45.3	44.7	44.5	44.9	45.1	45.4	45.7
92.5°	43.0	43.1	43.2	43.3	43.3	43.4	43.5	43.5
95°	86.1	86.1	86.1	85.7	85.2	84.5	83.9	83.4
97.5°	144.6	144.6	144.6	144.6	144.5	144.5	144.5	144.4
100°	185.5	185.5	185.5	185.4	185.0	184.8	184.5	184.1
102.5°	230.1	230.3	230.6	230.5	230.2	230.0	229.6	229.3
105°	296.9	297.6	298.1	298.5	298.5	298.5	298.5	298.5
107.5°	369.1	369.3	369.5	369.0	367.7	366.2	364.9	363.5
110°	418.1	418.1	418.1	417.6	416.7	415.8	414.9	414.0





TEST NUMBER: P331844-940

CATALOG NUMBER: S122RDIW-S865D1440U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	467.2	466.5	465.7	465.0	464.4	463.8	463.1	462.4
115°	542.5	542.2	541.9	541.3	540.4	539.5	538.6	537.7
117.5°	615.4	614.7	613.9	613.1	612.2	611.3	610.4	609.5
120°	664.1	664.1	664.1	663.6	662.7	661.8	660.9	660.0
122.5°	714.3	713.5	712.8	712.1	711.5	710.9	710.2	709.5
125°	788.6	787.7	786.8	786.3	786.0	785.7	785.4	785.1
127.5°	860.9	859.8	858.7	857.7	856.8	855.8	854.9	853.9
130°	910.3	909.6	909.0	908.1	907.0	905.8	904.6	903.4
132.5°	958.3	957.0	955.6	954.5	953.6	952.6	951.6	950.7
135°	1029.1	1028.9	1028.6	1028.0	1027.1	1026.2	1025.3	1024.4
137.5°	1097.0	1096.8	1096.5	1095.8	1094.7	1093.4	1092.3	1091.0
140°	1142.6	1142.6	1142.6	1142.1	1140.9	1139.7	1138.4	1137.3
142.5°	1184.0	1184.3	1184.5	1184.0	1182.9	1181.6	1180.4	1179.2
145°	1246.8	1247.1	1247.3	1246.9	1245.7	1244.6	1243.3	1242.2
147.5°	1301.8	1302.4	1303.1	1302.9	1301.7	1300.6	1299.5	1298.3
150°	1336.7	1337.6	1338.5	1338.5	1337.6	1336.7	1335.8	1334.9
152.5°	1371.5	1372.7	1373.9	1373.9	1372.7	1371.5	1370.5	1369.3
155°	1415.9	1417.4	1418.8	1419.2	1418.3	1417.4	1416.5	1415.6
157.5°	1456.7	1458.7	1460.8	1461.1	1459.6	1458.2	1456.8	1455.4
160°	1481.0	1482.7	1484.5	1484.9	1483.6	1482.5	1481.3	1480.1
162.5°	1503.0	1505.0	1507.0	1507.3	1505.9	1504.5	1503.1	1501.6
165°	1531.3	1533.4	1535.5	1535.8	1534.3	1532.9	1531.3	1529.8
167.5°	1554.7	1556.8	1558.9	1559.2	1557.6	1556.0	1554.5	1552.9
170°	1567.6	1569.7	1571.8	1571.9	1570.1	1568.3	1566.6	1564.8
172.5°	1577.3	1579.4	1581.4	1581.6	1579.8	1578.1	1576.3	1574.5
175°	1587.8	1589.8	1592.0	1592.1	1590.3	1588.5	1586.7	1584.9
177.5°	1592.7	1594.1	1595.5	1595.5	1594.1	1592.7	1591.2	1589.7
180°	1593.0	1593.0	1593.0	1593.0	1593.0	1593.0	1593.0	1593.0

(END OF REPORT)