

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331832-940

Luminaire Tested: **S122RDIW-S865D710U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331832-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122RDIW-S865D710U940-4F0-1E-UDD-F1  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 710 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4884.8 lumens  
Efficiency: N/A  
Efficacy: 91.1 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 53.6  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331832-940

CATALOG NUMBER: S122RDIW-S865D710U940-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

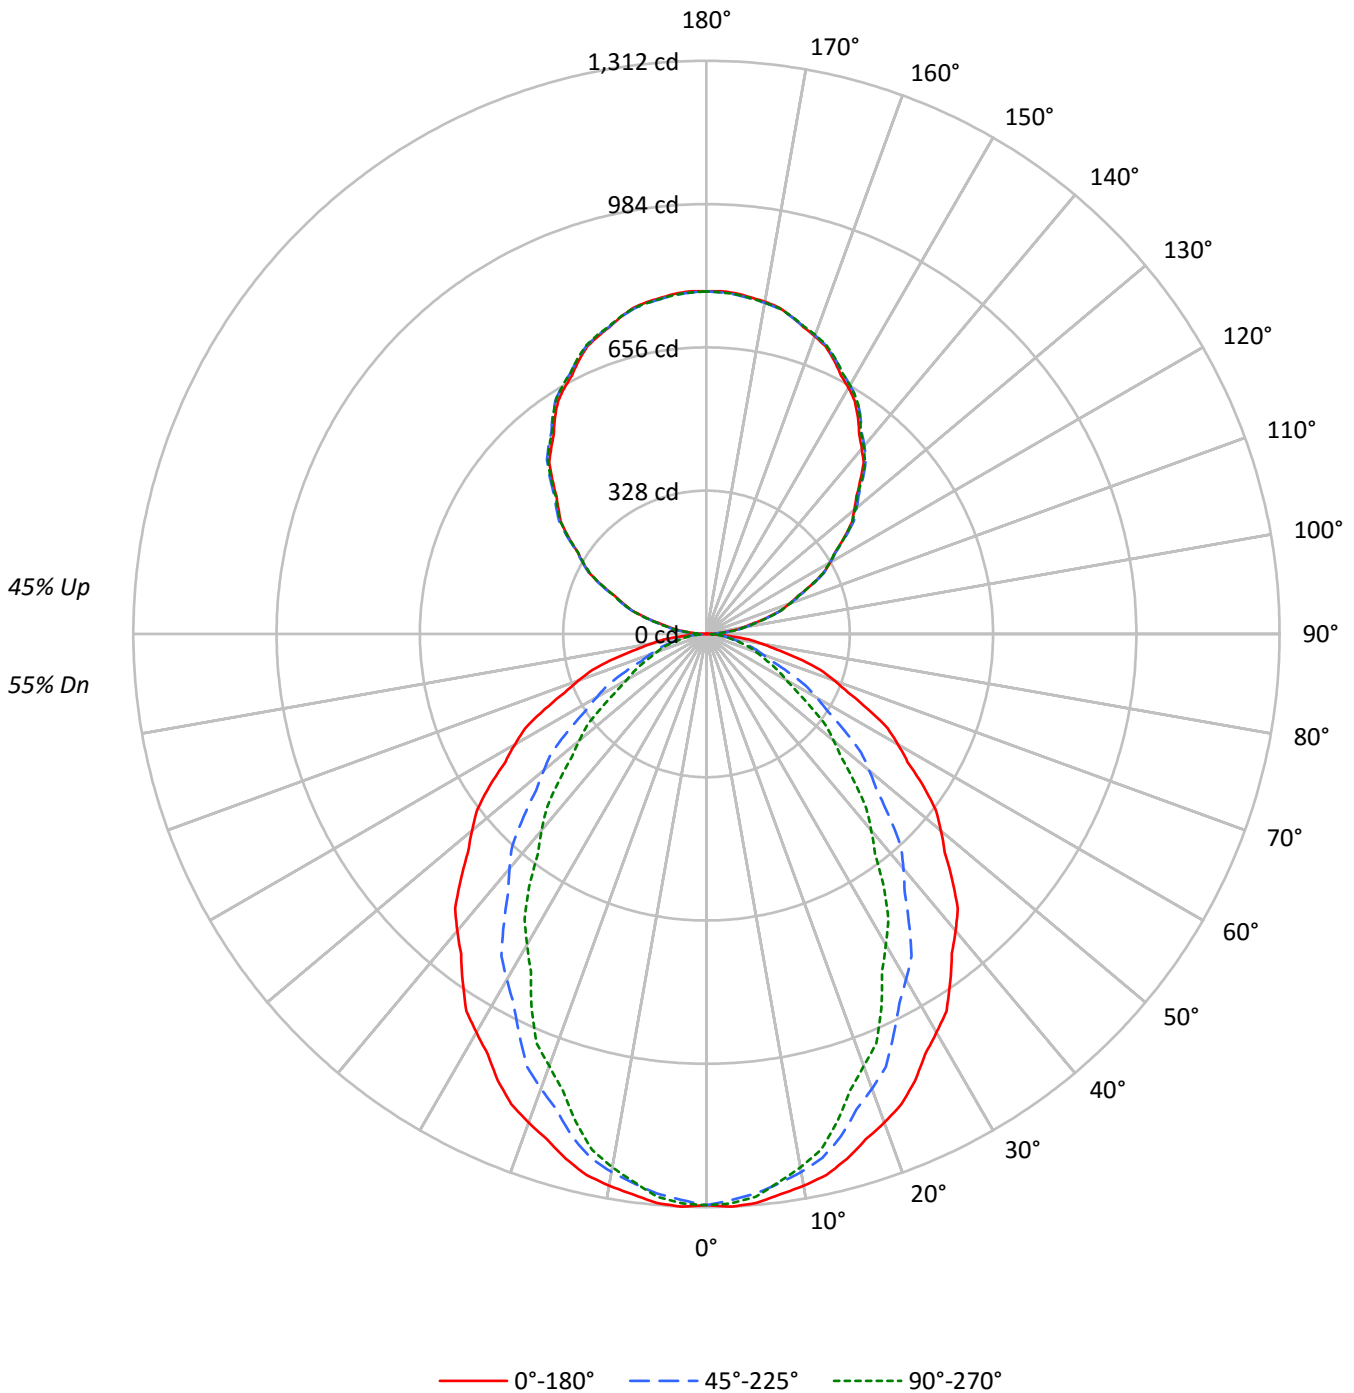



TEST NUMBER: P331832-940

CATALOG NUMBER: S122RDIW-S865D710U940-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55
1	99	95	92	88	92	89	85	83	76	74	72	65	63	62	55	53	52	47
2	91	84	78	73	84	78	73	69	68	64	60	58	55	52	49	47	45	41
3	83	74	67	61	77	69	63	58	60	55	51	52	48	45	44	41	39	35
4	77	66	58	52	71	62	55	50	54	48	44	46	42	39	39	36	34	31
5	70	59	51	45	65	55	48	43	48	43	39	42	38	34	36	32	30	27
6	65	53	45	40	60	50	43	38	44	38	34	38	34	30	33	29	27	24
7	60	48	40	35	56	45	38	33	40	34	30	35	30	27	30	26	24	21
8	56	44	36	31	52	41	35	30	37	31	27	32	27	24	28	24	22	19
9	52	40	33	28	49	38	31	27	34	28	24	29	25	22	26	22	20	18
10	49	37	30	25	46	35	29	24	31	26	22	27	23	20	24	20	18	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	21111	21111	21111
5°	21191	20846	20960
10°	21028	20505	20330
15°	20787	19896	19323
20°	20452	19029	18076
25°	20110	18045	16864
30°	19634	17031	15310
35°	19170	15930	13947
40°	18704	14790	12370
45°	18155	13511	10942
50°	17595	12215	9540
55°	17022	10826	8194
60°	16353	9361	6801
65°	15595	7866	6193
70°	14691	6477	5693
75°	13587	5908	5315
80°	11985	5281	4844
85°	9429	4168	4168



TEST NUMBER: P331832-940

CATALOG NUMBER: S122RDIW-S865D710U940-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	122.4	2.5
10°-20°	336.0	6.9
20°-30°	471.9	9.7
30°-40°	514.6	10.5
40°-50°	473.1	9.7
50°-60°	371.6	7.6
60°-70°	242.3	5.0
70°-80°	124.9	2.6
80°-90°	35.6	0.7
90°-100°	49.7	1.0
100°-110°	154.3	3.2
110°-120°	263.8	5.4
120°-130°	346.9	7.1
130°-140°	389.3	8.0
140°-150°	381.7	7.8
150°-160°	320.2	6.6
160°-170°	212.4	4.3
170°-180°	74.2	1.5
0°-30°	930.3	19.0
0°-40°	1444.9	29.6
0°-60°	2289.6	46.9
0°-90°	2692.3	55.1
90°-120°	467.8	9.6
90°-150°	1585.7	32.5
90°-180°	2193.0	44.9
0°-180°	4884.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1308	1308	1308	1308	1308	
5°	1308	1301	1286	1296	1293	124
15°	1244	1229	1190	1168	1156	350
25°	1129	1089	1013	966	947	519
35°	973	910	808	736	708	608
45°	795	713	592	511	479	614
55°	605	510	385	316	291	540
65°	408	312	206	168	162	405
75°	218	137	95	87	85	230
85°	51	27	22	22	22	60
90°	1	9	23	22	22	4
95°	34	41	42	42	41	39
105°	142	144	146	147	147	150
115°	265	268	267	267	265	262
125°	385	391	389	387	386	344
135°	498	505	507	506	504	385
145°	605	609	613	614	611	378
155°	691	693	695	698	697	318
165°	752	752	752	756	753	212
175°	783	781	779	784	780	74
180°	784	784	784	784	784	



TEST NUMBER: P331832-940

CATALOG NUMBER: S122RDIW-S865D710U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5
2.5°	1312.2	1311.2	1310.1	1309.0	1308.1	1306.4	1304.0	1301.7	1299.4	1297.1	1299.2
5°	1307.5	1306.2	1304.8	1303.5	1302.3	1299.8	1296.5	1293.1	1289.6	1286.2	1288.5
7.5°	1294.0	1292.4	1290.8	1289.1	1287.5	1284.7	1280.7	1276.7	1272.6	1268.6	1269.4
10°	1282.6	1280.8	1279.0	1277.1	1275.2	1271.8	1266.5	1261.2	1256.0	1250.7	1249.9
12.5°	1268.5	1266.1	1263.9	1261.7	1259.4	1254.9	1248.1	1241.4	1234.7	1228.0	1226.5
15°	1243.6	1240.7	1237.8	1234.9	1232.0	1226.1	1217.2	1208.3	1199.3	1190.3	1185.4
17.5°	1213.1	1208.6	1204.3	1199.8	1195.4	1187.5	1176.0	1164.5	1153.1	1141.6	1135.7
20°	1190.3	1185.1	1179.8	1174.6	1169.3	1160.1	1146.9	1133.8	1120.7	1107.5	1100.9
22.5°	1165.7	1159.8	1154.0	1148.1	1142.2	1131.8	1117.0	1102.2	1087.4	1072.5	1064.0
25°	1128.8	1120.4	1112.0	1103.6	1095.2	1082.3	1064.9	1047.6	1030.2	1012.9	1002.1
27.5°	1084.3	1075.1	1066.0	1056.9	1047.8	1033.4	1013.8	994.3	974.6	955.1	942.5
30°	1053.1	1043.1	1033.1	1023.1	1013.2	997.6	976.6	955.6	934.5	913.5	900.1
32.5°	1022.8	1011.1	999.4	987.7	976.1	959.6	938.1	916.6	895.2	873.7	858.4
35°	972.6	959.2	945.8	932.4	919.0	900.7	877.5	854.4	831.3	808.2	791.6
37.5°	922.5	907.8	893.0	878.2	863.5	843.8	819.2	794.5	769.9	745.2	726.9
40°	887.4	871.6	855.9	840.1	824.3	803.7	778.2	752.7	727.2	701.7	683.0
42.5°	851.5	834.8	818.2	801.6	785.0	763.5	737.2	710.8	684.5	658.1	638.8
45°	795.1	777.5	759.9	742.3	724.7	702.0	674.5	646.8	619.2	591.7	572.9
47.5°	740.2	721.6	702.9	684.2	665.6	641.9	613.5	585.0	556.4	528.0	509.4
50°	700.5	681.8	663.2	644.4	625.8	602.0	573.1	544.1	515.2	486.3	468.1
52.5°	661.6	642.1	622.7	603.2	583.6	559.7	531.5	503.1	474.8	446.6	429.0
55°	604.7	584.2	563.7	543.1	522.6	498.1	469.8	441.3	413.0	384.6	368.8
57.5°	546.2	525.1	504.1	483.0	462.1	437.9	410.5	383.3	356.0	328.7	314.2
60°	506.4	485.4	464.4	443.4	422.3	398.2	371.1	344.0	317.0	289.9	276.5
62.5°	467.6	446.6	425.5	404.5	383.4	360.1	334.2	308.4	282.6	256.7	244.0
65°	408.2	386.9	365.6	344.3	323.1	300.5	276.9	253.2	229.5	205.9	197.0
67.5°	351.0	329.8	308.7	287.5	266.4	245.1	223.9	202.6	181.3	160.0	155.9
70°	311.2	290.7	270.2	249.7	229.2	209.8	191.7	173.5	155.4	137.2	134.6
72.5°	273.3	253.7	234.0	214.4	194.7	177.5	163.0	148.4	133.8	119.3	117.1
75°	217.8	199.3	180.9	162.5	144.1	130.5	121.5	112.5	103.6	94.7	92.8
77.5°	163.1	146.9	130.7	114.6	98.4	88.3	83.9	79.6	75.3	71.0	69.9
80°	128.9	115.6	102.2	88.7	75.3	67.3	64.6	62.1	59.4	56.8	55.7
82.5°	97.7	87.3	76.8	66.3	55.9	49.8	48.0	46.2	44.4	42.6	42.0
85°	50.9	45.4	39.9	34.3	28.8	25.7	24.9	24.1	23.3	22.5	22.5
87.5°	15.2	13.9	12.7	11.3	10.0	9.6	10.3	10.9	11.6	12.2	11.9
90°	0.6	2.4	4.2	6.0	7.8	10.3	13.5	16.7	19.9	23.2	22.8
92.5°	11.8	13.1	14.4	15.7	16.9	18.0	18.7	19.5	20.2	21.0	21.1
95°	34.4	35.8	37.4	38.8	40.3	41.2	41.5	41.7	42.1	42.4	42.4
97.5°	62.9	64.1	65.5	66.7	68.0	68.9	69.6	70.1	70.6	71.2	71.2
100°	84.0	85.2	86.4	87.6	88.7	89.5	90.0	90.4	90.9	91.3	91.3
102.5°	106.3	107.2	108.2	109.1	110.0	110.8	111.4	111.9	112.4	113.0	113.2
105°	142.2	142.7	143.1	143.6	144.0	144.4	144.7	145.0	145.3	145.6	145.9
107.5°	178.5	179.1	179.9	180.5	181.1	181.5	181.5	181.5	181.5	181.5	181.6
110°	201.8	202.7	203.6	204.5	205.4	205.8	205.8	205.8	205.8	205.8	205.8



TEST NUMBER: P331832-940

CATALOG NUMBER: S122RDIW-S865D710U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	227.2	228.1	229.0	229.9	230.8	231.1	231.0	230.9	230.8	230.7	230.3
115°	264.7	265.6	266.4	267.3	268.2	268.5	268.2	267.9	267.6	267.3	267.2
117.5°	302.0	303.2	304.3	305.5	306.7	306.8	306.0	305.2	304.4	303.6	303.3
120°	326.9	328.1	329.2	330.4	331.5	331.5	330.4	329.2	328.1	326.9	326.9
122.5°	349.6	351.1	352.5	353.8	355.3	355.6	354.7	353.9	353.1	352.3	352.0
125°	385.1	386.5	387.7	389.1	390.4	390.8	390.4	389.9	389.5	389.1	388.6
127.5°	419.6	421.3	423.0	424.6	426.3	427.0	426.4	425.9	425.3	424.8	424.3
130°	441.3	443.3	445.1	447.1	449.0	449.8	449.5	449.2	448.9	448.6	448.4
132.5°	465.7	467.3	468.9	470.4	471.9	472.8	472.8	472.9	473.0	473.0	472.3
135°	498.3	499.9	501.5	503.1	504.7	505.7	506.0	506.3	506.6	506.8	506.7
137.5°	532.5	533.9	535.2	536.5	537.8	538.7	539.0	539.5	539.8	540.2	540.1
140°	553.2	554.5	555.8	557.1	558.5	559.5	560.3	561.0	561.7	562.4	562.4
142.5°	574.4	575.7	577.0	578.4	579.6	580.6	581.0	581.6	582.0	582.6	582.6
145°	604.8	605.8	606.8	607.9	608.9	609.8	610.7	611.6	612.5	613.4	613.5
147.5°	632.0	633.1	634.4	635.6	636.9	637.8	638.4	638.9	639.5	640.2	640.4
150°	650.4	651.3	652.2	653.1	654.0	654.7	655.3	655.9	656.5	657.1	657.5
152.5°	666.8	667.7	668.6	669.5	670.4	671.2	671.9	672.6	673.3	674.0	674.6
155°	691.4	691.9	692.3	692.8	693.2	693.7	694.1	694.6	695.0	695.4	696.2
157.5°	712.5	712.8	713.1	713.4	713.7	714.0	714.3	714.5	714.8	715.1	716.0
160°	725.2	725.5	725.8	726.1	726.4	726.7	726.7	726.9	727.0	727.2	728.1
162.5°	736.8	736.9	737.0	737.0	737.1	737.2	737.4	737.5	737.6	737.8	738.8
165°	752.3	752.2	752.1	751.9	751.8	751.7	751.7	751.7	751.7	751.7	752.7
167.5°	765.4	764.9	764.5	764.0	763.6	763.3	763.3	763.2	763.2	763.2	764.2
170°	772.2	771.8	771.3	770.9	770.4	770.2	770.0	769.8	769.7	769.5	770.6
172.5°	776.9	776.5	776.1	775.6	775.2	774.9	774.7	774.6	774.5	774.3	775.3
175°	782.7	782.4	781.9	781.5	781.0	780.7	780.3	780.1	779.8	779.4	780.5
177.5°	785.2	784.8	784.4	784.1	783.7	783.5	783.2	783.0	782.7	782.5	783.2
180°	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1



TEST NUMBER: P331832-940

CATALOG NUMBER: S122RDIW-S865D710U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5	1307.5
2.5°	1301.3	1303.4	1305.5	1306.4	1305.9	1305.5	1305.1	1304.7
5°	1290.9	1293.2	1295.7	1296.5	1295.7	1294.9	1294.1	1293.2
7.5°	1270.1	1270.7	1271.4	1271.0	1269.7	1268.4	1266.9	1265.6
10°	1249.1	1248.3	1247.5	1246.3	1244.7	1243.2	1241.6	1240.0
12.5°	1225.1	1223.7	1222.3	1220.3	1217.6	1215.0	1212.4	1209.8
15°	1180.4	1175.4	1170.4	1166.5	1164.0	1161.3	1158.7	1156.0
17.5°	1129.7	1123.7	1117.8	1112.6	1108.0	1103.6	1099.0	1094.5
20°	1094.4	1087.8	1081.2	1075.0	1069.3	1063.5	1057.7	1052.0
22.5°	1055.6	1047.1	1038.7	1032.2	1028.0	1023.6	1019.3	1015.0
25°	991.3	980.5	969.7	962.3	958.4	954.5	950.6	946.6
27.5°	930.0	917.4	904.8	895.5	889.2	882.9	876.6	870.4
30°	886.6	873.3	859.8	849.5	842.5	835.4	828.3	821.2
32.5°	843.1	827.8	812.5	801.5	794.9	788.2	781.5	774.8
35°	775.0	758.5	741.9	730.8	725.0	719.2	713.4	707.6
37.5°	708.7	690.5	672.3	659.8	653.2	646.5	639.9	633.3
40°	664.3	645.7	627.0	614.2	607.4	600.6	593.7	586.9
42.5°	619.6	600.2	580.9	567.9	561.3	554.7	548.0	541.4
45°	554.3	535.7	516.9	504.4	498.1	491.9	485.5	479.2
47.5°	490.8	472.3	453.7	441.6	435.9	430.1	424.4	418.7
50°	450.0	431.9	413.8	401.9	396.4	390.8	385.3	379.8
52.5°	411.5	394.0	376.5	365.2	360.1	355.0	349.9	344.8
55°	353.0	337.2	321.5	311.0	306.0	301.0	296.0	291.1
57.5°	299.8	285.3	270.9	261.5	257.3	253.1	248.9	244.7
60°	263.1	249.7	236.2	227.5	223.2	219.0	214.8	210.6
62.5°	231.2	218.5	205.6	198.0	195.5	193.0	190.4	187.9
65°	188.0	179.1	170.1	165.2	164.4	163.7	162.9	162.1
67.5°	151.8	147.7	143.6	141.1	140.3	139.4	138.6	137.8
70°	132.0	129.4	126.7	124.9	123.9	122.8	121.7	120.6
72.5°	114.9	112.6	110.4	109.1	108.3	107.7	107.1	106.5
75°	91.0	89.2	87.3	86.2	86.0	85.7	85.4	85.2
77.5°	68.9	67.9	66.8	66.1	65.6	65.2	64.8	64.4
80°	54.7	53.7	52.6	52.1	52.1	52.1	52.1	52.1
82.5°	41.4	40.7	40.0	39.8	39.8	39.8	39.8	39.8
85°	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
87.5°	11.7	11.4	11.1	11.0	11.1	11.1	11.1	11.1
90°	22.6	22.3	22.0	21.9	22.0	22.2	22.4	22.5
92.5°	21.1	21.2	21.3	21.3	21.3	21.4	21.4	21.4
95°	42.4	42.4	42.4	42.2	41.9	41.6	41.3	41.0
97.5°	71.2	71.2	71.2	71.2	71.2	71.2	71.1	71.1
100°	91.3	91.3	91.3	91.2	91.1	91.0	90.8	90.7
102.5°	113.2	113.3	113.5	113.5	113.3	113.2	113.1	112.9
105°	146.2	146.4	146.8	146.9	146.9	146.9	146.9	146.9
107.5°	181.6	181.8	181.9	181.6	180.9	180.3	179.6	179.0
110°	205.8	205.8	205.8	205.5	205.1	204.6	204.2	203.8





TEST NUMBER: P331832-940

CATALOG NUMBER: S122RDIW-S865D710U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	230.0	229.6	229.3	228.9	228.6	228.3	227.9	227.7
115°	267.1	266.9	266.7	266.4	266.0	265.6	265.1	264.7
117.5°	302.9	302.6	302.2	301.8	301.3	300.9	300.4	300.0
120°	326.9	326.9	326.9	326.6	326.2	325.7	325.3	324.9
122.5°	351.6	351.2	350.9	350.5	350.2	349.9	349.6	349.3
125°	388.2	387.7	387.3	387.0	386.9	386.7	386.6	386.5
127.5°	423.7	423.2	422.7	422.2	421.7	421.2	420.8	420.4
130°	448.1	447.7	447.5	447.0	446.4	445.9	445.2	444.7
132.5°	471.7	471.0	470.4	469.8	469.4	468.9	468.4	468.0
135°	506.6	506.4	506.3	506.0	505.5	505.1	504.6	504.2
137.5°	539.9	539.8	539.8	539.4	538.8	538.2	537.6	537.0
140°	562.4	562.4	562.4	562.1	561.6	561.0	560.4	559.8
142.5°	582.8	582.9	583.0	582.8	582.2	581.6	581.0	580.4
145°	613.7	613.9	613.9	613.8	613.1	612.6	612.0	611.4
147.5°	640.8	641.1	641.4	641.3	640.8	640.2	639.6	639.1
150°	657.9	658.4	658.8	658.8	658.4	657.9	657.5	657.1
152.5°	675.1	675.6	676.3	676.3	675.6	675.1	674.6	674.0
155°	696.9	697.7	698.4	698.6	698.1	697.7	697.2	696.8
157.5°	717.0	718.0	719.0	719.2	718.5	717.7	717.0	716.3
160°	729.0	729.9	730.8	730.8	730.3	729.7	729.2	728.5
162.5°	739.8	740.8	741.8	741.9	741.2	740.6	739.9	739.1
165°	753.8	754.7	755.8	756.0	755.2	754.5	753.8	753.0
167.5°	765.3	766.2	767.3	767.4	766.7	765.9	765.2	764.4
170°	771.6	772.7	773.6	773.7	772.8	772.0	771.1	770.2
172.5°	776.4	777.4	778.5	778.5	777.7	776.8	775.9	775.0
175°	781.5	782.6	783.6	783.6	782.7	781.9	781.0	780.2
177.5°	783.9	784.6	785.3	785.3	784.6	783.9	783.2	782.5
180°	784.1	784.1	784.1	784.1	784.1	784.1	784.1	784.1

(END OF REPORT)