

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332199-927

Luminaire Tested: **S123DIW-S1000D1320U927-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332199-927  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIW-S1000D1320U927-4F0-1E-UDD-A1  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1000 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 1320 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6985.9 lumens  
Efficiency: N/A  
Efficacy: 100.1 lumens/watt  
Spacing Criteria (0/90/45): 1.37 / 1.23 / 1.49  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 69.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332199-927

CATALOG NUMBER: S123DIW-S1000D1320U927-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

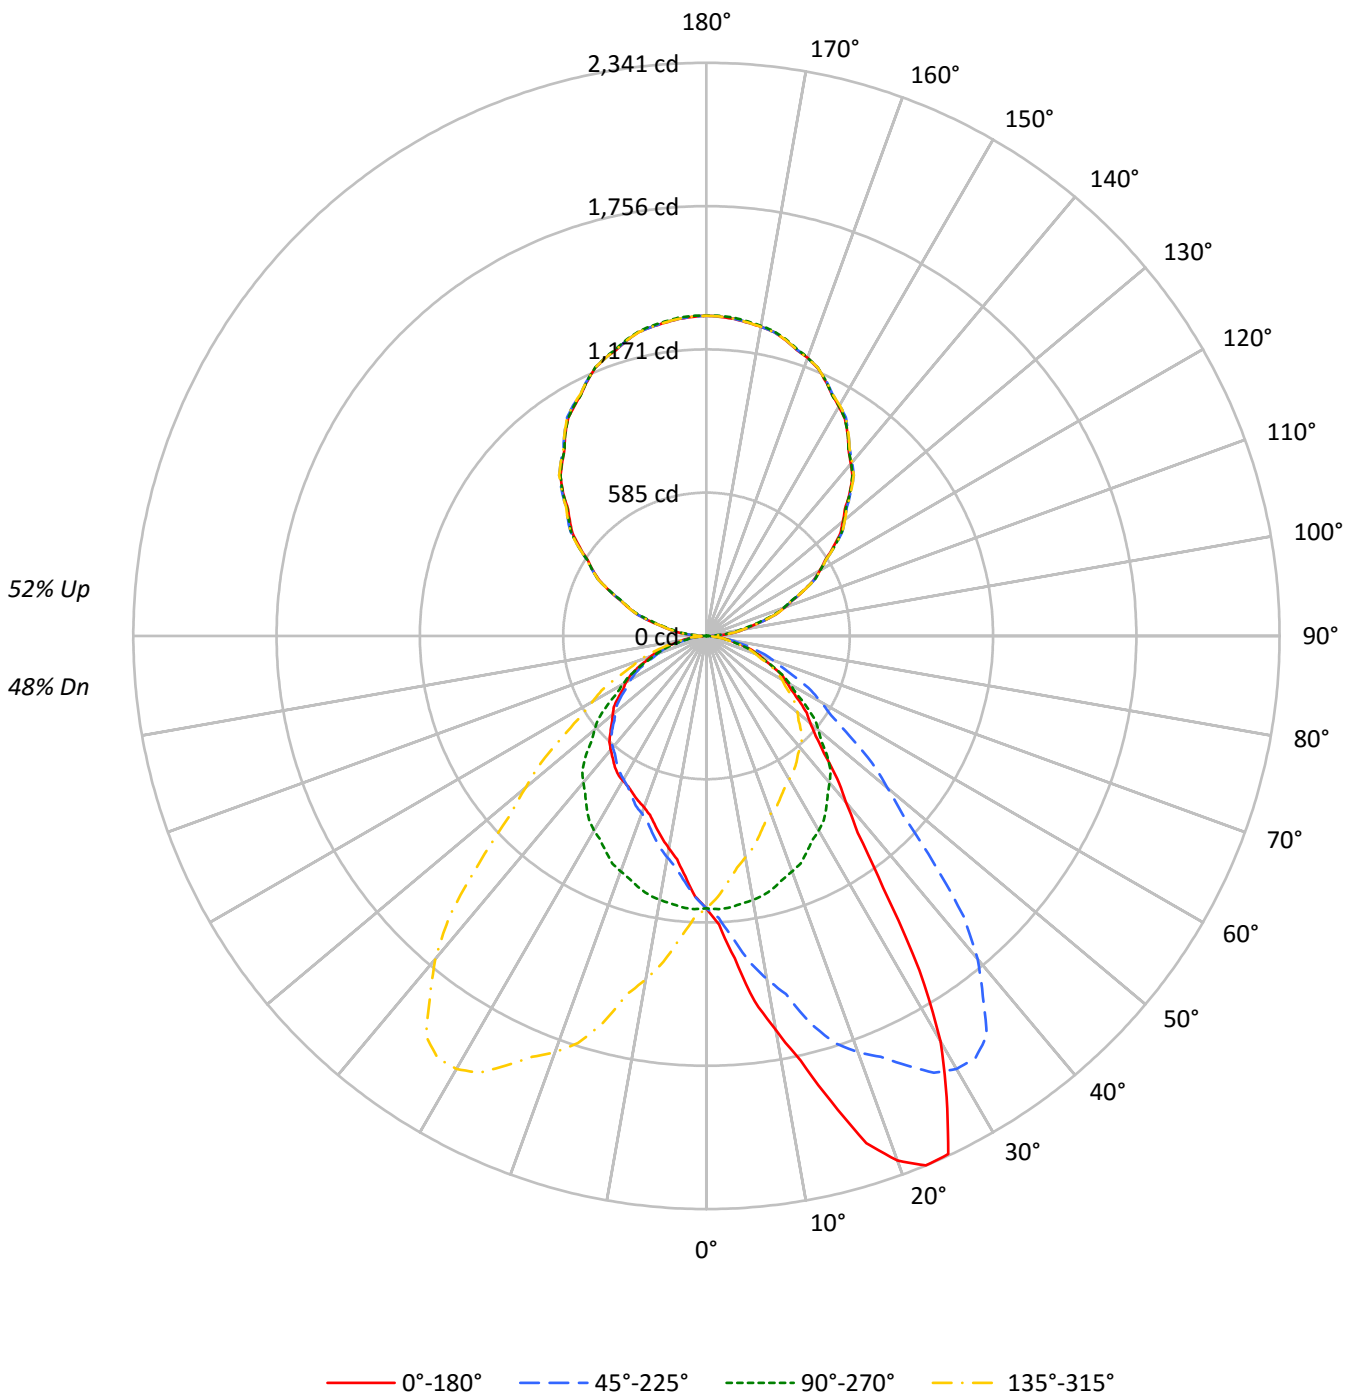



TEST NUMBER: P332199-927

CATALOG NUMBER: S123DIW-S1000D1320U927-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	107	107	107	107	98	98	98	98	82	82	82	68	68	68	54	54	54	48	48	48	48	
1	98	93	90	86	90	86	83	80	73	70	68	60	58	57	48	47	46	41	41	41	41	
2	89	82	76	71	82	76	70	66	64	60	57	53	50	48	43	41	39	35	35	35	35	
3	81	72	65	59	75	67	60	55	56	52	48	47	44	41	38	36	34	30	30	30	30	
4	75	64	56	50	68	59	52	47	50	45	41	42	38	35	34	32	29	26	26	26	26	
5	68	57	49	43	63	53	46	41	45	40	35	38	34	31	31	28	26	22	22	22	22	
6	63	51	43	37	58	48	40	35	41	35	31	34	30	27	28	25	23	20	20	20	20	
7	58	46	38	33	54	43	36	31	37	31	27	31	27	24	26	23	20	18	18	18	18	
8	54	42	34	29	50	39	32	27	34	28	24	28	24	21	24	20	18	16	16	16	16	
9	50	38	31	26	46	36	29	24	31	25	22	26	22	19	22	19	16	14	14	14	14	
10	47	35	28	23	43	33	26	22	28	23	20	24	20	17	20	17	15	13	13	13	13	

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	11976	11976	11976	11976
5°	14282	12028	10659	12028
10°	17876	11967	9627	11967
15°	21926	11870	8963	11870
20°	26120	11720	8534	11720
25°	27736	11537	8438	11537
30°	23772	11404	8483	11404
35°	16533	11213	8571	11213
40°	12452	10991	8545	10991
45°	10339	10660	8435	10660
50°	9262	9984	8359	9984
55°	8659	9256	8255	9256
60°	8122	8495	8170	8495
65°	7636	7743	7908	7743
70°	7160	6889	7531	6889
75°	6413	6030	6904	6030
80°	5610	4947	5945	4947
85°	4397	3594	3989	3594



TEST NUMBER: P332199-927

CATALOG NUMBER: S123DIW-S1000D1320U927-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	109.6	1.6
10°-20°	351.5	5.0
20°-30°	589.8	8.4
30°-40°	667.9	9.6
40°-50°	598.9	8.6
50°-60°	483.3	6.9
60°-70°	336.8	4.8
70°-80°	177.0	2.5
80°-90°	47.2	0.7
90°-100°	85.2	1.2
100°-110°	255.0	3.7
110°-120°	433.8	6.2
120°-130°	570.5	8.2
130°-140°	641.3	9.2
140°-150°	630.4	9.0
150°-160°	530.7	7.6
160°-170°	353.3	5.1
170°-180°	123.7	1.8
0°-30°	1050.9	15.0
0°-40°	1718.8	24.6
0°-60°	2801.1	40.1
0°-90°	3362.1	48.1
90°-120°	774.0	11.1
90°-150°	2616.2	37.4
90°-180°	3624.0	51.9
0°-180°	6985.9	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1113	1113	1113	1113	1113	
5°	1322	1113	986	1113	1322	137
15°	1968	1065	804	1065	1968	568
25°	2335	971	710	971	2335	1024
35°	1258	853	652	853	1258	817
45°	679	700	554	700	679	537
55°	461	493	440	493	461	414
65°	300	304	310	304	300	298
75°	154	145	166	145	154	165
85°	36	29	32	29	36	43
90°	31	1	31	1	31	17
95°	80	61	80	61	80	82
105°	244	231	244	231	244	259
115°	438	437	438	437	438	433
125°	632	639	632	639	632	565
135°	828	829	828	829	828	637
145°	1006	1006	1006	1006	1006	628
155°	1150	1152	1150	1152	1150	529
165°	1250	1254	1250	1254	1250	353
175°	1300	1305	1300	1305	1300	123
180°	1308	1308	1308	1308	1308	



TEST NUMBER: P332199-927

CATALOG NUMBER: S123DIW-S1000D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6
2.5°	1180.7	1180.0	1177.7	1179.5	1176.1	1171.3	1170.8	1166.6	1154.1	1153.2	1149.8
5°	1321.8	1317.5	1316.9	1316.4	1308.8	1298.6	1279.2	1277.6	1251.7	1238.8	1223.1
7.5°	1504.4	1506.7	1498.8	1491.9	1468.9	1453.7	1432.8	1406.2	1374.4	1342.2	1320.7
10°	1635.5	1653.4	1631.3	1616.1	1602.1	1575.7	1545.0	1506.7	1468.5	1423.7	1389.7
12.5°	1776.2	1784.9	1780.4	1766.2	1744.5	1704.2	1649.8	1607.7	1572.4	1497.9	1467.8
15°	1967.6	2000.5	1979.5	1930.9	1932.1	1893.8	1822.6	1744.5	1703.0	1637.7	1548.8
17.5°	2171.6	2175.7	2166.8	2126.3	2099.4	2046.8	1981.1	1906.1	1822.1	1743.1	1648.8
20°	2280.3	2277.0	2258.2	2237.1	2190.8	2149.8	2078.1	1994.6	1886.7	1809.1	1706.2
22.5°	2340.7	2335.3	2326.3	2308.7	2270.2	2226.2	2161.8	2070.4	1967.9	1860.9	1741.9
25°	2335.3	2342.2	2343.4	2338.5	2325.1	2298.6	2247.9	2175.2	2072.7	1935.3	1811.3
27.5°	2123.9	2133.9	2162.7	2188.2	2216.8	2245.9	2242.0	2205.9	2130.1	2011.4	1859.8
30°	1912.6	1891.1	1944.4	2011.8	2057.6	2138.5	2183.8	2186.5	2143.9	2042.0	1894.3
32.5°	1619.4	1643.1	1666.7	1749.6	1849.7	1940.5	2030.7	2103.2	2111.6	2043.8	1914.5
35°	1258.2	1287.9	1330.9	1374.1	1481.9	1574.6	1733.1	1871.1	1981.1	1995.7	1916.4
37.5°	1013.9	1028.6	1055.8	1099.1	1169.6	1279.5	1402.2	1576.6	1735.9	1854.4	1859.6
40°	886.2	890.6	921.3	954.2	1011.3	1101.8	1212.4	1366.5	1557.4	1722.9	1791.9
42.5°	790.5	799.9	813.0	844.6	890.1	958.2	1061.0	1188.4	1363.3	1553.8	1688.8
45°	679.2	690.0	698.1	719.1	751.5	797.3	869.0	985.4	1118.6	1315.3	1497.0
47.5°	605.7	606.6	612.6	628.4	650.5	684.8	735.5	810.3	932.6	1092.2	1278.7
50°	553.1	561.7	563.9	576.2	593.5	618.9	660.9	724.5	824.8	965.0	1136.4
52.5°	516.0	518.6	524.7	533.6	548.7	568.4	604.8	654.7	733.3	852.8	1010.4
55°	461.4	461.4	467.4	474.4	483.0	500.8	525.1	561.7	621.5	714.3	844.7
57.5°	411.0	413.7	417.9	420.0	427.4	439.1	459.4	487.2	531.9	603.2	706.9
60°	377.3	382.2	381.7	386.0	392.4	401.6	418.8	441.5	481.4	538.5	625.9
62.5°	348.0	347.7	347.6	352.8	359.3	368.0	379.2	398.8	432.7	483.3	557.7
65°	299.8	298.7	302.5	305.6	307.8	314.3	322.9	340.2	362.8	400.5	458.2
67.5°	256.8	253.7	255.7	256.8	260.5	265.5	273.6	284.3	302.3	332.6	376.0
70°	227.5	224.8	224.3	225.3	228.5	232.3	238.3	248.5	265.2	289.5	321.3
72.5°	197.3	195.4	195.4	197.7	199.2	201.7	205.9	215.3	228.5	246.8	276.5
75°	154.2	154.2	154.2	154.7	156.3	158.5	161.7	166.6	176.8	189.7	209.7
77.5°	115.6	115.5	114.8	114.7	117.1	118.0	118.8	123.3	129.0	137.8	152.3
80°	90.5	87.9	89.0	90.5	91.7	92.2	93.8	94.9	99.7	104.6	114.8
82.5°	67.3	65.0	65.2	67.7	67.9	68.4	70.1	71.6	73.4	77.9	83.3
85°	35.6	35.6	36.1	36.1	36.7	36.1	37.7	38.3	38.3	41.0	44.2
87.5°	19.1	18.1	18.5	18.9	18.3	18.6	18.9	19.1	19.3	19.6	19.4
90°	30.8	30.3	29.9	29.5	29.0	28.3	27.4	26.5	25.6	24.6	21.7
92.5°	41.5	41.7	42.1	42.3	42.6	42.4	41.7	40.9	40.2	39.5	37.8
95°	80.2	80.2	80.2	80.2	80.2	79.7	78.7	77.9	76.9	76.0	74.2
97.5°	123.3	123.4	123.5	123.6	123.7	123.2	122.2	121.0	120.0	119.0	117.6
100°	156.1	155.7	155.3	154.8	154.3	153.8	153.0	152.4	151.7	151.1	149.9
102.5°	189.9	190.0	190.0	190.1	190.2	190.0	189.3	188.5	187.9	187.2	185.7
105°	244.5	244.1	243.6	243.2	242.7	242.5	242.5	242.5	242.5	242.5	240.4
107.5°	301.4	301.7	302.0	302.3	302.5	302.3	301.6	300.9	300.2	299.4	298.6
110°	340.1	340.6	341.0	341.4	341.9	341.7	340.8	339.8	339.0	338.0	337.5



TEST NUMBER: P332199-927

CATALOG NUMBER: S123DIW-S1000D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	381.2	381.3	381.4	381.4	381.5	381.0	379.9	378.8	377.8	376.7	376.6
115°	437.7	437.9	438.2	438.4	438.6	438.6	438.4	438.2	437.9	437.7	438.2
117.5°	495.0	495.7	496.3	496.9	497.6	497.9	498.0	498.0	498.0	498.1	498.7
120°	535.3	535.8	536.2	536.7	537.1	537.5	537.7	537.9	538.1	538.4	539.6
122.5°	573.9	574.6	575.2	575.8	576.5	577.1	577.7	578.3	578.8	579.5	580.0
125°	631.8	632.8	633.7	634.6	635.6	636.4	637.4	638.3	639.2	640.1	640.6
127.5°	689.6	690.7	691.7	692.8	693.8	695.0	696.2	697.5	698.8	700.1	700.6
130°	727.5	729.0	730.6	732.2	733.8	735.1	736.0	736.9	737.8	738.7	739.4
132.5°	766.9	768.1	769.4	770.6	771.8	773.0	774.0	775.2	776.3	777.4	777.8
135°	828.1	828.5	829.0	829.5	830.0	830.6	831.6	832.4	833.4	834.2	834.5
137.5°	882.2	883.0	883.9	884.8	885.7	886.5	887.5	888.4	889.4	890.4	889.8
140°	917.5	919.1	920.7	922.3	923.9	924.8	925.0	925.3	925.5	925.7	925.5
142.5°	953.7	954.9	956.2	957.4	958.6	959.3	959.6	959.8	960.0	960.3	959.8
145°	1005.8	1006.8	1007.7	1008.6	1009.6	1010.1	1010.3	1010.5	1010.7	1011.0	1010.3
147.5°	1052.3	1053.7	1055.0	1056.5	1057.8	1058.4	1058.4	1058.4	1058.4	1058.4	1057.8
150°	1081.9	1083.2	1084.7	1086.0	1087.3	1088.1	1088.1	1088.1	1088.1	1088.1	1087.6
152.5°	1110.6	1111.8	1113.0	1114.2	1115.4	1115.8	1115.5	1115.1	1114.8	1114.4	1114.1
155°	1149.7	1151.3	1152.9	1154.5	1156.1	1156.4	1155.6	1154.6	1153.7	1152.8	1152.5
157.5°	1185.3	1186.5	1187.8	1189.1	1190.3	1190.6	1189.5	1188.6	1187.6	1186.7	1186.5
160°	1208.2	1209.2	1210.1	1211.0	1212.0	1211.8	1210.7	1209.5	1208.4	1207.2	1207.2
162.5°	1225.5	1227.0	1228.4	1229.9	1231.4	1231.5	1230.4	1229.2	1228.1	1226.9	1226.8
165°	1250.4	1252.0	1253.6	1255.2	1256.8	1256.9	1255.5	1254.2	1252.8	1251.4	1251.4
167.5°	1271.5	1273.0	1274.4	1275.8	1277.2	1277.2	1275.8	1274.4	1273.0	1271.5	1271.4
170°	1282.2	1283.8	1285.5	1287.1	1288.6	1288.6	1287.1	1285.5	1283.8	1282.2	1282.2
172.5°	1290.5	1292.0	1293.6	1295.3	1296.9	1297.0	1295.5	1294.1	1292.7	1291.3	1291.3
175°	1299.7	1301.3	1302.9	1304.5	1306.1	1306.2	1304.9	1303.5	1302.1	1300.8	1300.8
177.5°	1304.6	1305.9	1307.2	1308.4	1309.8	1309.9	1308.8	1307.7	1306.5	1305.4	1305.4
180°	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0



TEST NUMBER: P332199-927

CATALOG NUMBER: S123DIW-S1000D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6
2.5°	1147.2	1143.7	1140.3	1134.2	1129.0	1121.7	1119.5	1117.0	1109.2	1102.3	1097.1
5°	1217.2	1204.3	1185.4	1168.2	1154.1	1135.3	1124.5	1113.2	1097.0	1082.4	1070.6
7.5°	1290.5	1265.1	1235.8	1204.0	1174.6	1146.1	1123.1	1102.6	1080.0	1058.5	1041.8
10°	1348.8	1312.1	1271.1	1226.9	1189.2	1152.5	1121.8	1094.9	1065.7	1040.4	1019.4
12.5°	1415.2	1360.8	1304.3	1250.6	1206.0	1155.2	1117.9	1083.6	1050.7	1020.2	996.6
15°	1493.7	1424.7	1358.0	1284.0	1216.2	1152.5	1108.3	1065.2	1026.9	995.7	965.5
17.5°	1565.4	1487.2	1399.1	1309.3	1227.3	1151.9	1090.0	1041.2	993.4	955.1	925.0
20°	1605.9	1516.9	1417.2	1324.0	1233.4	1149.3	1081.4	1023.2	971.4	931.0	897.0
22.5°	1640.8	1536.8	1433.6	1333.9	1233.0	1142.4	1065.4	1005.5	949.4	909.8	873.7
25°	1677.0	1552.5	1449.1	1332.1	1219.4	1125.6	1039.3	971.4	915.4	869.0	831.8
27.5°	1708.1	1551.5	1428.6	1302.8	1198.0	1104.0	1011.9	939.1	879.6	829.2	791.5
30°	1728.8	1553.6	1407.5	1283.0	1177.3	1080.3	990.8	917.5	855.0	803.7	768.2
32.5°	1741.8	1552.3	1388.1	1255.4	1144.5	1058.8	968.0	892.1	827.8	777.4	743.1
35°	1749.3	1542.9	1354.7	1198.3	1091.6	1008.1	932.1	853.3	786.0	739.1	700.3
37.5°	1734.2	1522.9	1315.9	1143.4	1026.5	944.2	880.3	813.3	748.8	697.1	663.7
40°	1710.5	1510.0	1285.7	1104.5	981.7	902.4	848.0	782.2	718.6	669.6	638.3
42.5°	1665.2	1483.6	1252.5	1061.4	935.1	855.8	805.7	750.8	690.5	644.5	613.2
45°	1554.7	1426.4	1202.7	996.7	866.3	784.3	740.1	700.3	645.8	601.0	574.1
47.5°	1401.4	1340.2	1130.7	928.5	794.5	715.7	669.7	637.6	597.9	561.7	535.8
50°	1294.8	1269.6	1081.9	881.9	746.6	669.6	625.3	596.2	567.7	531.6	507.8
52.5°	1172.0	1187.6	1025.0	833.6	697.9	622.1	580.5	557.4	531.4	501.8	481.1
55°	998.9	1055.5	926.7	752.6	625.3	553.1	513.7	493.2	478.2	456.1	438.2
57.5°	836.9	908.9	820.4	669.0	554.1	491.7	454.0	431.7	422.0	410.4	396.4
60°	740.7	811.8	744.5	612.9	506.2	446.9	413.4	394.6	384.9	376.8	365.0
62.5°	654.9	726.9	670.3	556.0	459.1	404.2	375.1	356.6	349.1	344.9	334.8
65°	536.9	598.9	561.2	467.4	391.9	343.4	317.0	304.0	297.1	295.4	288.9
67.5°	437.0	484.2	456.7	387.7	328.3	286.4	264.0	252.9	247.6	247.0	242.2
70°	371.5	415.7	394.6	332.1	280.8	248.0	228.5	218.9	215.6	215.1	212.4
72.5°	320.5	351.3	334.6	282.5	242.9	213.0	198.8	188.7	185.0	185.8	183.9
75°	237.2	260.4	250.6	214.5	182.8	163.3	151.5	145.0	141.8	143.4	141.2
77.5°	170.6	185.4	176.6	151.6	132.0	118.0	109.2	105.2	102.3	102.2	101.2
80°	128.8	137.4	132.6	117.5	101.3	89.5	82.5	79.8	78.2	77.6	77.1
82.5°	91.7	99.1	93.4	83.0	72.0	64.9	60.9	57.4	56.2	56.5	55.9
85°	46.3	49.0	46.9	40.4	36.1	32.9	30.7	29.1	28.0	28.6	27.5
87.5°	19.7	19.6	17.7	15.4	14.1	12.4	11.9	10.5	10.1	10.6	10.6
90°	18.7	15.8	12.8	10.1	7.8	5.6	3.3	1.0	3.3	5.6	7.8
92.5°	36.0	34.4	32.7	31.1	29.5	28.0	26.4	24.9	26.4	28.0	29.5
95°	72.4	70.6	68.8	67.0	65.4	63.8	62.2	60.6	62.2	63.8	65.4
97.5°	116.3	115.0	113.7	112.4	111.2	110.0	108.8	107.7	108.8	110.0	111.2
100°	148.8	147.6	146.5	145.2	143.9	142.4	141.1	139.7	141.1	142.4	143.9
102.5°	184.2	182.7	181.2	180.0	179.2	178.4	177.5	176.7	177.5	178.4	179.2
105°	238.4	236.3	234.2	233.0	232.5	232.1	231.6	231.2	231.6	232.1	232.5
107.5°	297.8	296.9	296.1	295.6	295.3	295.0	294.8	294.5	294.8	295.0	295.3
110°	337.2	336.7	336.2	335.7	335.3	334.9	334.4	333.9	334.4	334.9	335.3





TEST NUMBER: P332199-927

CATALOG NUMBER: S123DIW-S1000D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	376.4	376.4	376.3	376.1	375.8	375.6	375.3	375.0	375.3	375.6	375.8
115°	438.6	439.0	439.5	439.4	438.7	438.0	437.4	436.7	437.4	438.0	438.7
117.5°	499.3	499.9	500.5	500.6	500.1	499.6	499.2	498.8	499.2	499.6	500.1
120°	540.7	541.8	543.0	542.8	541.5	540.1	538.7	537.3	538.7	540.1	541.5
122.5°	580.7	581.2	581.9	581.6	580.7	579.6	578.6	577.7	578.6	579.6	580.7
125°	641.0	641.4	641.9	641.8	641.1	640.4	639.8	639.1	639.8	640.4	641.1
127.5°	701.1	701.6	702.1	701.6	700.1	698.7	697.3	695.8	697.3	698.7	700.1
130°	740.1	740.8	741.5	740.9	739.1	737.3	735.4	733.6	735.4	737.3	739.1
132.5°	778.4	778.9	779.3	778.7	776.9	775.1	773.2	771.4	773.2	775.1	776.9
135°	834.7	835.0	835.2	834.6	833.2	831.9	830.5	829.2	830.5	831.9	833.2
137.5°	889.2	888.6	888.0	887.2	886.0	884.9	883.7	882.6	883.7	884.9	886.0
140°	925.3	925.0	924.8	924.2	923.0	921.9	920.7	919.6	920.7	921.9	923.0
142.5°	959.4	959.0	958.6	957.8	956.7	955.5	954.4	953.2	954.4	955.5	956.7
145°	1009.6	1008.9	1008.3	1007.7	1007.3	1006.8	1006.3	1005.8	1006.3	1006.8	1007.3
147.5°	1057.2	1056.5	1055.9	1055.2	1054.4	1053.5	1052.7	1051.9	1052.7	1053.5	1054.4
150°	1087.1	1086.7	1086.2	1085.8	1085.3	1084.9	1084.4	1083.9	1084.4	1084.9	1085.3
152.5°	1113.8	1113.6	1113.3	1112.8	1112.1	1111.5	1110.9	1110.2	1110.9	1111.5	1112.1
155°	1152.3	1152.1	1151.9	1151.8	1151.8	1151.8	1151.8	1151.8	1151.8	1151.8	1151.8
157.5°	1186.3	1186.1	1186.0	1186.0	1186.3	1186.5	1186.8	1187.1	1186.8	1186.5	1186.3
160°	1207.2	1207.2	1207.2	1207.4	1207.9	1208.4	1208.9	1209.3	1208.9	1208.4	1207.9
162.5°	1226.6	1226.5	1226.2	1226.5	1227.1	1227.7	1228.4	1229.0	1228.4	1227.7	1227.1
165°	1251.4	1251.4	1251.4	1251.8	1252.4	1253.2	1253.8	1254.5	1253.8	1253.2	1252.4
167.5°	1271.2	1271.0	1270.8	1271.2	1272.1	1273.0	1273.9	1274.9	1273.9	1273.0	1272.1
170°	1282.2	1282.2	1282.2	1282.7	1283.7	1284.5	1285.5	1286.3	1285.5	1284.5	1283.7
172.5°	1291.3	1291.3	1291.3	1291.7	1292.7	1293.6	1294.5	1295.4	1294.5	1293.6	1292.7
175°	1300.8	1300.8	1300.8	1301.2	1302.1	1303.1	1303.9	1304.9	1303.9	1303.1	1302.1
177.5°	1305.4	1305.4	1305.4	1305.8	1306.5	1307.3	1308.1	1308.8	1308.1	1307.3	1306.5
180°	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0



TEST NUMBER: P332199-927

CATALOG NUMBER: S123DIW-S1000D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6
2.5°	1094.1	1091.1	1086.8	1080.3	1075.1	1066.9	1066.9	1068.3	1068.3	1067.8	1066.9
5°	1060.9	1052.8	1043.1	1031.8	1019.9	1008.1	1005.9	1001.6	998.4	996.2	993.5
7.5°	1025.9	1011.5	997.4	981.5	967.1	955.1	946.8	939.9	935.5	930.7	927.3
10°	1002.1	984.4	967.7	950.9	932.6	918.1	908.9	902.4	897.5	893.3	891.1
12.5°	974.1	953.7	935.3	919.4	899.4	884.4	875.7	872.7	867.0	857.9	853.1
15°	933.1	914.3	892.2	867.9	858.2	839.9	829.7	824.8	821.6	814.5	812.4
17.5°	898.1	873.4	848.6	830.5	812.5	797.6	791.9	785.8	781.6	775.9	774.1
20°	870.1	848.0	825.3	805.9	787.0	770.9	766.0	761.7	757.4	754.7	752.6
22.5°	841.6	819.5	800.7	782.6	762.5	751.9	746.6	741.9	738.9	737.0	734.8
25°	801.6	782.2	761.2	745.0	728.8	721.8	718.6	715.9	713.8	711.1	710.5
27.5°	765.8	744.7	727.6	712.6	700.9	695.1	692.0	690.6	691.1	692.1	692.7
30°	739.1	719.7	705.7	692.7	681.9	676.5	676.0	676.0	678.2	678.7	679.8
32.5°	714.5	698.5	684.5	672.0	663.8	660.1	662.2	662.2	663.9	665.4	667.3
35°	678.7	664.6	653.9	643.1	636.1	637.7	638.8	639.8	642.5	645.8	648.0
37.5°	644.5	632.3	621.2	612.7	609.5	612.4	615.0	617.3	620.4	622.8	625.0
40°	620.0	610.8	600.0	592.5	593.5	595.2	597.3	600.0	602.7	604.3	606.5
42.5°	597.1	587.5	579.3	573.1	574.6	576.6	577.9	579.3	582.4	585.3	586.6
45°	562.3	554.7	547.2	543.4	544.5	545.6	546.6	548.3	551.0	553.1	553.7
47.5°	523.1	517.8	512.8	509.1	510.8	510.4	511.8	515.2	516.1	517.4	520.4
50°	498.1	493.2	487.4	486.2	486.2	486.2	486.8	491.1	491.1	493.2	495.4
52.5°	470.5	467.4	463.6	461.7	460.8	460.8	463.0	465.2	466.1	469.1	471.3
55°	429.7	426.4	423.2	421.5	420.5	421.5	425.9	426.9	429.7	431.3	432.8
57.5°	387.1	384.6	382.0	381.1	380.9	382.3	384.7	387.9	388.6	393.6	396.0
60°	359.0	355.2	353.1	353.1	352.0	356.9	355.8	361.2	362.3	365.5	369.2
62.5°	330.1	325.0	324.2	324.2	325.7	327.1	328.6	331.0	333.8	337.9	340.8
65°	283.5	280.8	284.6	284.1	283.0	286.2	286.2	288.9	292.2	296.0	301.9
67.5°	239.5	238.1	238.4	238.4	240.0	241.9	243.4	245.7	249.6	253.6	257.5
70°	209.7	211.4	208.7	210.8	212.4	212.9	214.0	217.2	221.6	224.3	228.5
72.5°	180.8	180.7	181.0	181.9	183.5	184.5	185.5	189.3	193.9	196.2	199.7
75°	139.1	138.6	140.1	140.1	142.8	143.9	145.0	146.6	150.9	154.2	156.9
77.5°	101.6	102.2	101.9	103.7	103.0	103.1	106.5	108.1	108.6	114.9	116.4
80°	76.5	77.6	78.2	78.7	79.2	78.2	81.9	83.6	83.6	87.3	90.0
82.5°	55.0	55.6	57.0	57.6	57.7	58.8	59.1	60.3	61.6	63.2	66.7
85°	27.5	29.1	29.6	29.1	29.6	28.6	30.2	30.7	31.3	31.3	31.3
87.5°	10.7	11.6	11.8	12.8	13.0	14.0	14.2	13.5	13.7	15.1	13.5
90°	10.1	12.8	15.8	18.7	21.7	24.6	25.6	26.5	27.4	28.3	29.0
92.5°	31.1	32.7	34.4	36.0	37.8	39.5	40.2	40.9	41.7	42.4	42.6
95°	67.0	68.8	70.6	72.4	74.2	76.0	76.9	77.9	78.7	79.7	80.2
97.5°	112.4	113.7	115.0	116.3	117.6	119.0	120.0	121.0	122.2	123.2	123.7
100°	145.2	146.5	147.6	148.8	149.9	151.1	151.7	152.4	153.0	153.8	154.3
102.5°	180.0	181.2	182.7	184.2	185.7	187.2	187.9	188.5	189.3	190.0	190.2
105°	233.0	234.2	236.3	238.4	240.4	242.5	242.5	242.5	242.5	242.5	242.7
107.5°	295.6	296.1	296.9	297.8	298.6	299.4	300.2	300.9	301.6	302.3	302.5
110°	335.7	336.2	336.7	337.2	337.5	338.0	339.0	339.8	340.8	341.7	341.9



TEST NUMBER: P332199-927

CATALOG NUMBER: S123DIW-S1000D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	376.1	376.3	376.4	376.4	376.6	376.7	377.8	378.8	379.9	381.0	381.5
115°	439.4	439.5	439.0	438.6	438.2	437.7	437.9	438.2	438.4	438.6	438.6
117.5°	500.6	500.5	499.9	499.3	498.7	498.1	498.0	498.0	498.0	497.9	497.6
120°	542.8	543.0	541.8	540.7	539.6	538.4	538.1	537.9	537.7	537.5	537.1
122.5°	581.6	581.9	581.2	580.7	580.0	579.5	578.8	578.3	577.7	577.1	576.5
125°	641.8	641.9	641.4	641.0	640.6	640.1	639.2	638.3	637.4	636.4	635.6
127.5°	701.6	702.1	701.6	701.1	700.6	700.1	698.8	697.5	696.2	695.0	693.8
130°	740.9	741.5	740.8	740.1	739.4	738.7	737.8	736.9	736.0	735.1	733.8
132.5°	778.7	779.3	778.9	778.4	777.8	777.4	776.3	775.2	774.0	773.0	771.8
135°	834.6	835.2	835.0	834.7	834.5	834.2	833.4	832.4	831.6	830.6	830.0
137.5°	887.2	888.0	888.6	889.2	889.8	890.4	889.4	888.4	887.5	886.5	885.7
140°	924.2	924.8	925.0	925.3	925.5	925.7	925.5	925.3	925.0	924.8	923.9
142.5°	957.8	958.6	959.0	959.4	959.8	960.3	960.0	959.8	959.6	959.3	958.6
145°	1007.7	1008.3	1008.9	1009.6	1010.3	1011.0	1010.7	1010.5	1010.3	1010.1	1009.6
147.5°	1055.2	1055.9	1056.5	1057.2	1057.8	1058.4	1058.4	1058.4	1058.4	1058.4	1057.8
150°	1085.8	1086.2	1086.7	1087.1	1087.6	1088.1	1088.1	1088.1	1088.1	1088.1	1087.3
152.5°	1112.8	1113.3	1113.6	1113.8	1114.1	1114.4	1114.8	1115.1	1115.5	1115.8	1115.4
155°	1151.8	1151.9	1152.1	1152.3	1152.5	1152.8	1153.7	1154.6	1155.6	1156.4	1156.1
157.5°	1186.0	1186.0	1186.1	1186.3	1186.5	1186.7	1187.6	1188.6	1189.5	1190.6	1190.3
160°	1207.4	1207.2	1207.2	1207.2	1207.2	1207.2	1208.4	1209.5	1210.7	1211.8	1212.0
162.5°	1226.5	1226.2	1226.5	1226.6	1226.8	1226.9	1228.1	1229.2	1230.4	1231.5	1231.4
165°	1251.8	1251.4	1251.4	1251.4	1251.4	1251.4	1252.8	1254.2	1255.5	1256.9	1256.8
167.5°	1271.2	1270.8	1271.0	1271.2	1271.4	1271.5	1273.0	1274.4	1275.8	1277.2	1277.2
170°	1282.7	1282.2	1282.2	1282.2	1282.2	1282.2	1283.8	1285.5	1287.1	1288.6	1288.6
172.5°	1291.7	1291.3	1291.3	1291.3	1291.3	1291.3	1292.7	1294.1	1295.5	1297.0	1296.9
175°	1301.2	1300.8	1300.8	1300.8	1300.8	1300.8	1302.1	1303.5	1304.9	1306.2	1306.1
177.5°	1305.8	1305.4	1305.4	1305.4	1305.4	1305.4	1306.5	1307.7	1308.8	1309.9	1309.8
180°	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0



TEST NUMBER: P332199-927

CATALOG NUMBER: S123DIW-S1000D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6
2.5°	1063.9	1063.5	1066.5	1064.4	1066.5	1063.5	1063.9	1066.9	1067.8	1068.3	1068.3
5°	990.3	991.9	986.5	986.5	986.5	991.9	990.3	993.5	996.2	998.4	1001.6
7.5°	924.7	922.3	922.6	919.6	922.6	922.3	924.7	927.3	930.7	935.5	939.9
10°	884.6	881.4	880.3	880.8	880.3	881.4	884.6	891.1	893.3	897.5	902.4
12.5°	851.4	850.8	843.7	843.8	843.7	850.8	851.4	853.1	857.9	867.0	872.7
15°	812.4	802.2	801.1	804.3	801.1	802.2	812.4	812.4	814.5	821.6	824.8
17.5°	773.2	767.9	768.2	766.6	768.2	767.9	773.2	774.1	775.9	781.6	785.8
20°	752.6	749.3	748.8	745.0	748.8	749.3	752.6	752.6	754.7	757.4	761.7
22.5°	733.6	732.5	732.8	728.6	732.8	732.5	733.6	734.8	737.0	738.9	741.9
25°	710.0	712.6	710.5	710.5	710.5	712.6	710.0	710.5	711.1	713.8	715.9
27.5°	694.0	693.9	692.8	692.8	692.8	693.9	694.0	692.7	692.1	691.1	690.6
30°	681.9	681.4	682.5	682.5	682.5	681.4	681.9	679.8	678.7	678.2	676.0
32.5°	669.9	670.6	670.8	671.2	670.8	670.6	669.9	667.3	665.4	663.9	662.2
35°	651.2	651.7	653.4	652.3	653.4	651.7	651.2	648.0	645.8	642.5	639.8
37.5°	626.0	628.4	627.9	628.8	627.9	628.4	626.0	625.0	622.8	620.4	617.3
40°	607.0	608.6	608.1	608.1	608.1	608.6	607.0	606.5	604.3	602.7	600.0
42.5°	587.6	588.7	587.4	586.5	587.4	588.7	587.6	586.6	585.3	582.4	579.3
45°	555.8	554.7	556.3	554.1	556.3	554.7	555.8	553.7	553.1	551.0	548.3
47.5°	520.2	521.3	521.7	523.3	521.7	521.3	520.2	520.4	517.4	516.1	515.2
50°	496.5	499.7	499.7	499.2	499.7	499.7	496.5	495.4	493.2	491.1	491.1
52.5°	473.2	474.7	476.9	476.7	476.9	474.7	473.2	471.3	469.1	466.1	465.2
55°	437.2	438.2	439.3	439.9	439.3	438.2	437.2	432.8	431.3	429.7	426.9
57.5°	399.9	399.4	402.0	402.8	402.0	399.4	399.9	396.0	393.6	388.6	387.9
60°	373.6	373.6	377.9	379.5	377.9	373.6	373.6	369.2	365.5	362.3	361.2
62.5°	345.5	347.3	351.6	349.4	351.6	347.3	345.5	340.8	337.9	333.8	331.0
65°	304.6	308.9	308.3	310.5	308.3	308.9	304.6	301.9	296.0	292.2	288.9
67.5°	261.7	264.4	268.3	268.7	268.3	264.4	261.7	257.5	253.6	249.6	245.7
70°	232.9	235.6	237.7	239.3	237.7	235.6	232.9	228.5	224.3	221.6	217.2
72.5°	204.9	206.3	211.4	209.1	211.4	206.3	204.9	199.7	196.2	193.9	189.3
75°	160.7	164.4	167.6	166.0	167.6	164.4	160.7	156.9	154.2	150.9	146.6
77.5°	118.8	122.6	124.1	122.7	124.1	122.6	118.8	116.4	114.9	108.6	108.1
80°	93.8	93.2	96.5	95.9	96.5	93.2	93.8	90.0	87.3	83.6	83.6
82.5°	68.8	68.3	69.8	70.1	69.8	68.3	68.8	66.7	63.2	61.6	60.3
85°	33.4	35.0	32.9	32.3	32.9	35.0	33.4	31.3	31.3	31.3	30.7
87.5°	13.6	13.8	13.4	13.1	13.4	13.8	13.6	13.5	15.1	13.7	13.5
90°	29.5	29.9	30.3	30.8	30.3	29.9	29.5	29.0	28.3	27.4	26.5
92.5°	42.3	42.1	41.7	41.5	41.7	42.1	42.3	42.6	42.4	41.7	40.9
95°	80.2	80.2	80.2	80.2	80.2	80.2	80.2	80.2	79.7	78.7	77.9
97.5°	123.6	123.5	123.4	123.3	123.4	123.5	123.6	123.7	123.2	122.2	121.0
100°	154.8	155.3	155.7	156.1	155.7	155.3	154.8	154.3	153.8	153.0	152.4
102.5°	190.1	190.0	190.0	189.9	190.0	190.0	190.1	190.2	190.0	189.3	188.5
105°	243.2	243.6	244.1	244.5	244.1	243.6	243.2	242.7	242.5	242.5	242.5
107.5°	302.3	302.0	301.7	301.4	301.7	302.0	302.3	302.5	302.3	301.6	300.9
110°	341.4	341.0	340.6	340.1	340.6	341.0	341.4	341.9	341.7	340.8	339.8



TEST NUMBER: P332199-927

CATALOG NUMBER: S123DIW-S1000D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	381.4	381.4	381.3	381.2	381.3	381.4	381.4	381.5	381.0	379.9	378.8
115°	438.4	438.2	437.9	437.7	437.9	438.2	438.4	438.6	438.6	438.4	438.2
117.5°	496.9	496.3	495.7	495.0	495.7	496.3	496.9	497.6	497.9	498.0	498.0
120°	536.7	536.2	535.8	535.3	535.8	536.2	536.7	537.1	537.5	537.7	537.9
122.5°	575.8	575.2	574.6	573.9	574.6	575.2	575.8	576.5	577.1	577.7	578.3
125°	634.6	633.7	632.8	631.8	632.8	633.7	634.6	635.6	636.4	637.4	638.3
127.5°	692.8	691.7	690.7	689.6	690.7	691.7	692.8	693.8	695.0	696.2	697.5
130°	732.2	730.6	729.0	727.5	729.0	730.6	732.2	733.8	735.1	736.0	736.9
132.5°	770.6	769.4	768.1	766.9	768.1	769.4	770.6	771.8	773.0	774.0	775.2
135°	829.5	829.0	828.5	828.1	828.5	829.0	829.5	830.0	830.6	831.6	832.4
137.5°	884.8	883.9	883.0	882.2	883.0	883.9	884.8	885.7	886.5	887.5	888.4
140°	922.3	920.7	919.1	917.5	919.1	920.7	922.3	923.9	924.8	925.0	925.3
142.5°	957.4	956.2	954.9	953.7	954.9	956.2	957.4	958.6	959.3	959.6	959.8
145°	1008.6	1007.7	1006.8	1005.8	1006.8	1007.7	1008.6	1009.6	1010.1	1010.3	1010.5
147.5°	1056.5	1055.0	1053.7	1052.3	1053.7	1055.0	1056.5	1057.8	1058.4	1058.4	1058.4
150°	1086.0	1084.7	1083.2	1081.9	1083.2	1084.7	1086.0	1087.3	1088.1	1088.1	1088.1
152.5°	1114.2	1113.0	1111.8	1110.6	1111.8	1113.0	1114.2	1115.4	1115.8	1115.5	1115.1
155°	1154.5	1152.9	1151.3	1149.7	1151.3	1152.9	1154.5	1156.1	1156.4	1155.6	1154.6
157.5°	1189.1	1187.8	1186.5	1185.3	1186.5	1187.8	1189.1	1190.3	1190.6	1189.5	1188.6
160°	1211.0	1210.1	1209.2	1208.2	1209.2	1210.1	1211.0	1212.0	1211.8	1210.7	1209.5
162.5°	1229.9	1228.4	1227.0	1225.5	1227.0	1228.4	1229.9	1231.4	1231.5	1230.4	1229.2
165°	1255.2	1253.6	1252.0	1250.4	1252.0	1253.6	1255.2	1256.8	1256.9	1255.5	1254.2
167.5°	1275.8	1274.4	1273.0	1271.5	1273.0	1274.4	1275.8	1277.2	1277.2	1275.8	1274.4
170°	1287.1	1285.5	1283.8	1282.2	1283.8	1285.5	1287.1	1288.6	1288.6	1287.1	1285.5
172.5°	1295.3	1293.6	1292.0	1290.5	1292.0	1293.6	1295.3	1296.9	1297.0	1295.5	1294.1
175°	1304.5	1302.9	1301.3	1299.7	1301.3	1302.9	1304.5	1306.1	1306.2	1304.9	1303.5
177.5°	1308.4	1307.2	1305.9	1304.6	1305.9	1307.2	1308.4	1309.8	1309.9	1308.8	1307.7
180°	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0



TEST NUMBER: P332199-927

CATALOG NUMBER: S123DIW-S1000D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6
2.5°	1066.9	1066.9	1075.1	1080.3	1086.8	1091.1	1094.1	1097.1	1102.3	1109.2	1117.0
5°	1005.9	1008.1	1019.9	1031.8	1043.1	1052.8	1060.9	1070.6	1082.4	1097.0	1113.2
7.5°	946.8	955.1	967.1	981.5	997.4	1011.5	1025.9	1041.8	1058.5	1080.0	1102.6
10°	908.9	918.1	932.6	950.9	967.7	984.4	1002.1	1019.4	1040.4	1065.7	1094.9
12.5°	875.7	884.4	899.4	919.4	935.3	953.7	974.1	996.6	1020.2	1050.7	1083.6
15°	829.7	839.9	858.2	867.9	892.2	914.3	933.1	965.5	995.7	1026.9	1065.2
17.5°	791.9	797.6	812.5	830.5	848.6	873.4	898.1	925.0	955.1	993.4	1041.2
20°	766.0	770.9	787.0	805.9	825.3	848.0	870.1	897.0	931.0	971.4	1023.2
22.5°	746.6	751.9	762.5	782.6	800.7	819.5	841.6	873.7	909.8	949.4	1005.5
25°	718.6	721.8	728.8	745.0	761.2	782.2	801.6	831.8	869.0	915.4	971.4
27.5°	692.0	695.1	700.9	712.6	727.6	744.7	765.8	791.5	829.2	879.6	939.1
30°	676.0	676.5	681.9	692.7	705.7	719.7	739.1	768.2	803.7	855.0	917.5
32.5°	662.2	660.1	663.8	672.0	684.5	698.5	714.5	743.1	777.4	827.8	892.1
35°	638.8	637.7	636.1	643.1	653.9	664.6	678.7	700.3	739.1	786.0	853.3
37.5°	615.0	612.4	609.5	612.7	621.2	632.3	644.5	663.7	697.1	748.8	813.3
40°	597.3	595.2	593.5	592.5	600.0	610.8	620.0	638.3	669.6	718.6	782.2
42.5°	577.9	576.6	574.6	573.1	579.3	587.5	597.1	613.2	644.5	690.5	750.8
45°	546.6	545.6	544.5	543.4	547.2	554.7	562.3	574.1	601.0	645.8	700.3
47.5°	511.8	510.4	510.8	509.1	512.8	517.8	523.1	535.8	561.7	597.9	637.6
50°	486.8	486.2	486.2	486.2	487.4	493.2	498.1	507.8	531.6	567.7	596.2
52.5°	463.0	460.8	460.8	461.7	463.6	467.4	470.5	481.1	501.8	531.4	557.4
55°	425.9	421.5	420.5	421.5	423.2	426.4	429.7	438.2	456.1	478.2	493.2
57.5°	384.7	382.3	380.9	381.1	382.0	384.6	387.1	396.4	410.4	422.0	431.7
60°	355.8	356.9	352.0	353.1	353.1	355.2	359.0	365.0	376.8	384.9	394.6
62.5°	328.6	327.1	325.7	324.2	324.2	325.0	330.1	334.8	344.9	349.1	356.6
65°	286.2	286.2	283.0	284.1	284.6	280.8	283.5	288.9	295.4	297.1	304.0
67.5°	243.4	241.9	240.0	238.4	238.4	238.1	239.5	242.2	247.0	247.6	252.9
70°	214.0	212.9	212.4	210.8	208.7	211.4	209.7	212.4	215.1	215.6	218.9
72.5°	185.5	184.5	183.5	181.9	181.0	180.7	180.8	183.9	185.8	185.0	188.7
75°	145.0	143.9	142.8	140.1	140.1	138.6	139.1	141.2	143.4	141.8	145.0
77.5°	106.5	103.1	103.0	103.7	101.9	102.2	101.6	101.2	102.2	102.3	105.2
80°	81.9	78.2	79.2	78.7	78.2	77.6	76.5	77.1	77.6	78.2	79.8
82.5°	59.1	58.8	57.7	57.6	57.0	55.6	55.0	55.9	56.5	56.2	57.4
85°	30.2	28.6	29.6	29.1	29.6	29.1	27.5	27.5	28.6	28.0	29.1
87.5°	14.2	14.0	13.0	12.8	11.8	11.6	10.7	10.6	10.6	10.1	10.5
90°	25.6	24.6	21.7	18.7	15.8	12.8	10.1	7.8	5.6	3.3	1.0
92.5°	40.2	39.5	37.8	36.0	34.4	32.7	31.1	29.5	28.0	26.4	24.9
95°	76.9	76.0	74.2	72.4	70.6	68.8	67.0	65.4	63.8	62.2	60.6
97.5°	120.0	119.0	117.6	116.3	115.0	113.7	112.4	111.2	110.0	108.8	107.7
100°	151.7	151.1	149.9	148.8	147.6	146.5	145.2	143.9	142.4	141.1	139.7
102.5°	187.9	187.2	185.7	184.2	182.7	181.2	180.0	179.2	178.4	177.5	176.7
105°	242.5	242.5	240.4	238.4	236.3	234.2	233.0	232.5	232.1	231.6	231.2
107.5°	300.2	299.4	298.6	297.8	296.9	296.1	295.6	295.3	295.0	294.8	294.5
110°	339.0	338.0	337.5	337.2	336.7	336.2	335.7	335.3	334.9	334.4	333.9



TEST NUMBER: P332199-927

CATALOG NUMBER: S123DIW-S1000D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	377.8	376.7	376.6	376.4	376.4	376.3	376.1	375.8	375.6	375.3	375.0
115°	437.9	437.7	438.2	438.6	439.0	439.5	439.4	438.7	438.0	437.4	436.7
117.5°	498.0	498.1	498.7	499.3	499.9	500.5	500.6	500.1	499.6	499.2	498.8
120°	538.1	538.4	539.6	540.7	541.8	543.0	542.8	541.5	540.1	538.7	537.3
122.5°	578.8	579.5	580.0	580.7	581.2	581.9	581.6	580.7	579.6	578.6	577.7
125°	639.2	640.1	640.6	641.0	641.4	641.9	641.8	641.1	640.4	639.8	639.1
127.5°	698.8	700.1	700.6	701.1	701.6	702.1	701.6	700.1	698.7	697.3	695.8
130°	737.8	738.7	739.4	740.1	740.8	741.5	740.9	739.1	737.3	735.4	733.6
132.5°	776.3	777.4	777.8	778.4	778.9	779.3	778.7	776.9	775.1	773.2	771.4
135°	833.4	834.2	834.5	834.7	835.0	835.2	834.6	833.2	831.9	830.5	829.2
137.5°	889.4	890.4	889.8	889.2	888.6	888.0	887.2	886.0	884.9	883.7	882.6
140°	925.5	925.7	925.5	925.3	925.0	924.8	924.2	923.0	921.9	920.7	919.6
142.5°	960.0	960.3	959.8	959.4	959.0	958.6	957.8	956.7	955.5	954.4	953.2
145°	1010.7	1011.0	1010.3	1009.6	1008.9	1008.3	1007.7	1007.3	1006.8	1006.3	1005.8
147.5°	1058.4	1058.4	1057.8	1057.2	1056.5	1055.9	1055.2	1054.4	1053.5	1052.7	1051.9
150°	1088.1	1088.1	1087.6	1087.1	1086.7	1086.2	1085.8	1085.3	1084.9	1084.4	1083.9
152.5°	1114.8	1114.4	1114.1	1113.8	1113.6	1113.3	1112.8	1112.1	1111.5	1110.9	1110.2
155°	1153.7	1152.8	1152.5	1152.3	1152.1	1151.9	1151.8	1151.8	1151.8	1151.8	1151.8
157.5°	1187.6	1186.7	1186.5	1186.3	1186.1	1186.0	1186.0	1186.3	1186.5	1186.8	1187.1
160°	1208.4	1207.2	1207.2	1207.2	1207.2	1207.2	1207.4	1207.9	1208.4	1208.9	1209.3
162.5°	1228.1	1226.9	1226.8	1226.6	1226.5	1226.2	1226.5	1227.1	1227.7	1228.4	1229.0
165°	1252.8	1251.4	1251.4	1251.4	1251.4	1251.4	1251.8	1252.4	1253.2	1253.8	1254.5
167.5°	1273.0	1271.5	1271.4	1271.2	1271.0	1270.8	1271.2	1272.1	1273.0	1273.9	1274.9
170°	1283.8	1282.2	1282.2	1282.2	1282.2	1282.2	1282.7	1283.7	1284.5	1285.5	1286.3
172.5°	1292.7	1291.3	1291.3	1291.3	1291.3	1291.3	1291.7	1292.7	1293.6	1294.5	1295.4
175°	1302.1	1300.8	1300.8	1300.8	1300.8	1300.8	1301.2	1302.1	1303.1	1303.9	1304.9
177.5°	1306.5	1305.4	1305.4	1305.4	1305.4	1305.4	1305.8	1306.5	1307.3	1308.1	1308.8
180°	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0



TEST NUMBER: P332199-927

CATALOG NUMBER: S123DIW-S1000D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6
2.5°	1119.5	1121.7	1129.0	1134.2	1140.3	1143.7	1147.2	1149.8	1153.2	1154.1	1166.6
5°	1124.5	1135.3	1154.1	1168.2	1185.4	1204.3	1217.2	1223.1	1238.8	1251.7	1277.6
7.5°	1123.1	1146.1	1174.6	1204.0	1235.8	1265.1	1290.5	1320.7	1342.2	1374.4	1406.2
10°	1121.8	1152.5	1189.2	1226.9	1271.1	1312.1	1348.8	1389.7	1423.7	1468.5	1506.7
12.5°	1117.9	1155.2	1206.0	1250.6	1304.3	1360.8	1415.2	1467.8	1497.9	1572.4	1607.7
15°	1108.3	1152.5	1216.2	1284.0	1358.0	1424.7	1493.7	1548.8	1637.7	1703.0	1744.5
17.5°	1090.0	1151.9	1227.3	1309.3	1399.1	1487.2	1565.4	1648.8	1743.1	1822.1	1906.1
20°	1081.4	1149.3	1233.4	1324.0	1417.2	1516.9	1605.9	1706.2	1809.1	1886.7	1994.6
22.5°	1065.4	1142.4	1233.0	1333.9	1433.6	1536.8	1640.8	1741.9	1860.9	1967.9	2070.4
25°	1039.3	1125.6	1219.4	1332.1	1449.1	1552.5	1677.0	1811.3	1935.3	2072.7	2175.2
27.5°	1011.9	1104.0	1198.0	1302.8	1428.6	1551.5	1708.1	1859.8	2011.4	2130.1	2205.9
30°	990.8	1080.3	1177.3	1283.0	1407.5	1553.6	1728.8	1894.3	2042.0	2143.9	2186.5
32.5°	968.0	1058.8	1144.5	1255.4	1388.1	1552.3	1741.8	1914.5	2043.8	2111.6	2103.2
35°	932.1	1008.1	1091.6	1198.3	1354.7	1542.9	1749.3	1916.4	1995.7	1981.1	1871.1
37.5°	880.3	944.2	1026.5	1143.4	1315.9	1522.9	1734.2	1859.6	1854.4	1735.9	1576.6
40°	848.0	902.4	981.7	1104.5	1285.7	1510.0	1710.5	1791.9	1722.9	1557.4	1366.5
42.5°	805.7	855.8	935.1	1061.4	1252.5	1483.6	1665.2	1688.8	1553.8	1363.3	1188.4
45°	740.1	784.3	866.3	996.7	1202.7	1426.4	1554.7	1497.0	1315.3	1118.6	985.4
47.5°	669.7	715.7	794.5	928.5	1130.7	1340.2	1401.4	1278.7	1092.2	932.6	810.3
50°	625.3	669.6	746.6	881.9	1081.9	1269.6	1294.8	1136.4	965.0	824.8	724.5
52.5°	580.5	622.1	697.9	833.6	1025.0	1187.6	1172.0	1010.4	852.8	733.3	654.7
55°	513.7	553.1	625.3	752.6	926.7	1055.5	998.9	844.7	714.3	621.5	561.7
57.5°	454.0	491.7	554.1	669.0	820.4	908.9	836.9	706.9	603.2	531.9	487.2
60°	413.4	446.9	506.2	612.9	744.5	811.8	740.7	625.9	538.5	481.4	441.5
62.5°	375.1	404.2	459.1	556.0	670.3	726.9	654.9	557.7	483.3	432.7	398.8
65°	317.0	343.4	391.9	467.4	561.2	598.9	536.9	458.2	400.5	362.8	340.2
67.5°	264.0	286.4	328.3	387.7	456.7	484.2	437.0	376.0	332.6	302.3	284.3
70°	228.5	248.0	280.8	332.1	394.6	415.7	371.5	321.3	289.5	265.2	248.5
72.5°	198.8	213.0	242.9	282.5	334.6	351.3	320.5	276.5	246.8	228.5	215.3
75°	151.5	163.3	182.8	214.5	250.6	260.4	237.2	209.7	189.7	176.8	166.6
77.5°	109.2	118.0	132.0	151.6	176.6	185.4	170.6	152.3	137.8	129.0	123.3
80°	82.5	89.5	101.3	117.5	132.6	137.4	128.8	114.8	104.6	99.7	94.9
82.5°	60.9	64.9	72.0	83.0	93.4	99.1	91.7	83.3	77.9	73.4	71.6
85°	30.7	32.9	36.1	40.4	46.9	49.0	46.3	44.2	41.0	38.3	38.3
87.5°	11.9	12.4	14.1	15.4	17.7	19.6	19.7	19.4	19.6	19.3	19.1
90°	3.3	5.6	7.8	10.1	12.8	15.8	18.7	21.7	24.6	25.6	26.5
92.5°	26.4	28.0	29.5	31.1	32.7	34.4	36.0	37.8	39.5	40.2	40.9
95°	62.2	63.8	65.4	67.0	68.8	70.6	72.4	74.2	76.0	76.9	77.9
97.5°	108.8	110.0	111.2	112.4	113.7	115.0	116.3	117.6	119.0	120.0	121.0
100°	141.1	142.4	143.9	145.2	146.5	147.6	148.8	149.9	151.1	151.7	152.4
102.5°	177.5	178.4	179.2	180.0	181.2	182.7	184.2	185.7	187.2	187.9	188.5
105°	231.6	232.1	232.5	233.0	234.2	236.3	238.4	240.4	242.5	242.5	242.5
107.5°	294.8	295.0	295.3	295.6	296.1	296.9	297.8	298.6	299.4	300.2	300.9
110°	334.4	334.9	335.3	335.7	336.2	336.7	337.2	337.5	338.0	339.0	339.8





TEST NUMBER: P332199-927

CATALOG NUMBER: S123DIW-S1000D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	375.3	375.6	375.8	376.1	376.3	376.4	376.4	376.6	376.7	377.8	378.8
115°	437.4	438.0	438.7	439.4	439.5	439.0	438.6	438.2	437.7	437.9	438.2
117.5°	499.2	499.6	500.1	500.6	500.5	499.9	499.3	498.7	498.1	498.0	498.0
120°	538.7	540.1	541.5	542.8	543.0	541.8	540.7	539.6	538.4	538.1	537.9
122.5°	578.6	579.6	580.7	581.6	581.9	581.2	580.7	580.0	579.5	578.8	578.3
125°	639.8	640.4	641.1	641.8	641.9	641.4	641.0	640.6	640.1	639.2	638.3
127.5°	697.3	698.7	700.1	701.6	702.1	701.6	701.1	700.6	700.1	698.8	697.5
130°	735.4	737.3	739.1	740.9	741.5	740.8	740.1	739.4	738.7	737.8	736.9
132.5°	773.2	775.1	776.9	778.7	779.3	778.9	778.4	777.8	777.4	776.3	775.2
135°	830.5	831.9	833.2	834.6	835.2	835.0	834.7	834.5	834.2	833.4	832.4
137.5°	883.7	884.9	886.0	887.2	888.0	888.6	889.2	889.8	890.4	889.4	888.4
140°	920.7	921.9	923.0	924.2	924.8	925.0	925.3	925.5	925.7	925.5	925.3
142.5°	954.4	955.5	956.7	957.8	958.6	959.0	959.4	959.8	960.3	960.0	959.8
145°	1006.3	1006.8	1007.3	1007.7	1008.3	1008.9	1009.6	1010.3	1011.0	1010.7	1010.5
147.5°	1052.7	1053.5	1054.4	1055.2	1055.9	1056.5	1057.2	1057.8	1058.4	1058.4	1058.4
150°	1084.4	1084.9	1085.3	1085.8	1086.2	1086.7	1087.1	1087.6	1088.1	1088.1	1088.1
152.5°	1110.9	1111.5	1112.1	1112.8	1113.3	1113.6	1113.8	1114.1	1114.4	1114.8	1115.1
155°	1151.8	1151.8	1151.8	1151.8	1151.9	1152.1	1152.3	1152.5	1152.8	1153.7	1154.6
157.5°	1186.8	1186.5	1186.3	1186.0	1186.0	1186.1	1186.3	1186.5	1186.7	1187.6	1188.6
160°	1208.9	1208.4	1207.9	1207.4	1207.2	1207.2	1207.2	1207.2	1207.2	1208.4	1209.5
162.5°	1228.4	1227.7	1227.1	1226.5	1226.2	1226.5	1226.6	1226.8	1226.9	1228.1	1229.2
165°	1253.8	1253.2	1252.4	1251.8	1251.4	1251.4	1251.4	1251.4	1251.4	1252.8	1254.2
167.5°	1273.9	1273.0	1272.1	1271.2	1270.8	1271.0	1271.2	1271.4	1271.5	1273.0	1274.4
170°	1285.5	1284.5	1283.7	1282.7	1282.2	1282.2	1282.2	1282.2	1282.2	1283.8	1285.5
172.5°	1294.5	1293.6	1292.7	1291.7	1291.3	1291.3	1291.3	1291.3	1291.3	1292.7	1294.1
175°	1303.9	1303.1	1302.1	1301.2	1300.8	1300.8	1300.8	1300.8	1300.8	1302.1	1303.5
177.5°	1308.1	1307.3	1306.5	1305.8	1305.4	1305.4	1305.4	1305.4	1305.4	1306.5	1307.7
180°	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0



TEST NUMBER: P332199-927

CATALOG NUMBER: S123DIW-S1000D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6	1112.6
2.5°	1170.8	1171.3	1176.1	1179.5	1177.7	1180.0	1180.7
5°	1279.2	1298.6	1308.8	1316.4	1316.9	1317.5	1321.8
7.5°	1432.8	1453.7	1468.9	1491.9	1498.8	1506.7	1504.4
10°	1545.0	1575.7	1602.1	1616.1	1631.3	1653.4	1635.5
12.5°	1649.8	1704.2	1744.5	1766.2	1780.4	1784.9	1776.2
15°	1822.6	1893.8	1932.1	1930.9	1979.5	2000.5	1967.6
17.5°	1981.1	2046.8	2099.4	2126.3	2166.8	2175.7	2171.6
20°	2078.1	2149.8	2190.8	2237.1	2258.2	2277.0	2280.3
22.5°	2161.8	2226.2	2270.2	2308.7	2326.3	2335.3	2340.7
25°	2247.9	2298.6	2325.1	2338.5	2343.4	2342.2	2335.3
27.5°	2242.0	2245.9	2216.8	2188.2	2162.7	2133.9	2123.9
30°	2183.8	2138.5	2057.6	2011.8	1944.4	1891.1	1912.6
32.5°	2030.7	1940.5	1849.7	1749.6	1666.7	1643.1	1619.4
35°	1733.1	1574.6	1481.9	1374.1	1330.9	1287.9	1258.2
37.5°	1402.2	1279.5	1169.6	1099.1	1055.8	1028.6	1013.9
40°	1212.4	1101.8	1011.3	954.2	921.3	890.6	886.2
42.5°	1061.0	958.2	890.1	844.6	813.0	799.9	790.5
45°	869.0	797.3	751.5	719.1	698.1	690.0	679.2
47.5°	735.5	684.8	650.5	628.4	612.6	606.6	605.7
50°	660.9	618.9	593.5	576.2	563.9	561.7	553.1
52.5°	604.8	568.4	548.7	533.6	524.7	518.6	516.0
55°	525.1	500.8	483.0	474.4	467.4	461.4	461.4
57.5°	459.4	439.1	427.4	420.0	417.9	413.7	411.0
60°	418.8	401.6	392.4	386.0	381.7	382.2	377.3
62.5°	379.2	368.0	359.3	352.8	347.6	347.7	348.0
65°	322.9	314.3	307.8	305.6	302.5	298.7	299.8
67.5°	273.6	265.5	260.5	256.8	255.7	253.7	256.8
70°	238.3	232.3	228.5	225.3	224.3	224.8	227.5
72.5°	205.9	201.7	199.2	197.7	195.4	195.4	197.3
75°	161.7	158.5	156.3	154.7	154.2	154.2	154.2
77.5°	118.8	118.0	117.1	114.7	114.8	115.5	115.6
80°	93.8	92.2	91.7	90.5	89.0	87.9	90.5
82.5°	70.1	68.4	67.9	67.7	65.2	65.0	67.3
85°	37.7	36.1	36.7	36.1	36.1	35.6	35.6
87.5°	18.9	18.6	18.3	18.9	18.5	18.1	19.1
90°	27.4	28.3	29.0	29.5	29.9	30.3	30.8
92.5°	41.7	42.4	42.6	42.3	42.1	41.7	41.5
95°	78.7	79.7	80.2	80.2	80.2	80.2	80.2
97.5°	122.2	123.2	123.7	123.6	123.5	123.4	123.3
100°	153.0	153.8	154.3	154.8	155.3	155.7	156.1
102.5°	189.3	190.0	190.2	190.1	190.0	190.0	189.9
105°	242.5	242.5	242.7	243.2	243.6	244.1	244.5
107.5°	301.6	302.3	302.5	302.3	302.0	301.7	301.4
110°	340.8	341.7	341.9	341.4	341.0	340.6	340.1



TEST NUMBER: P332199-927

CATALOG NUMBER: S123DIW-S1000D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	379.9	381.0	381.5	381.4	381.4	381.3	381.2
115°	438.4	438.6	438.6	438.4	438.2	437.9	437.7
117.5°	498.0	497.9	497.6	496.9	496.3	495.7	495.0
120°	537.7	537.5	537.1	536.7	536.2	535.8	535.3
122.5°	577.7	577.1	576.5	575.8	575.2	574.6	573.9
125°	637.4	636.4	635.6	634.6	633.7	632.8	631.8
127.5°	696.2	695.0	693.8	692.8	691.7	690.7	689.6
130°	736.0	735.1	733.8	732.2	730.6	729.0	727.5
132.5°	774.0	773.0	771.8	770.6	769.4	768.1	766.9
135°	831.6	830.6	830.0	829.5	829.0	828.5	828.1
137.5°	887.5	886.5	885.7	884.8	883.9	883.0	882.2
140°	925.0	924.8	923.9	922.3	920.7	919.1	917.5
142.5°	959.6	959.3	958.6	957.4	956.2	954.9	953.7
145°	1010.3	1010.1	1009.6	1008.6	1007.7	1006.8	1005.8
147.5°	1058.4	1058.4	1057.8	1056.5	1055.0	1053.7	1052.3
150°	1088.1	1088.1	1087.3	1086.0	1084.7	1083.2	1081.9
152.5°	1115.5	1115.8	1115.4	1114.2	1113.0	1111.8	1110.6
155°	1155.6	1156.4	1156.1	1154.5	1152.9	1151.3	1149.7
157.5°	1189.5	1190.6	1190.3	1189.1	1187.8	1186.5	1185.3
160°	1210.7	1211.8	1212.0	1211.0	1210.1	1209.2	1208.2
162.5°	1230.4	1231.5	1231.4	1229.9	1228.4	1227.0	1225.5
165°	1255.5	1256.9	1256.8	1255.2	1253.6	1252.0	1250.4
167.5°	1275.8	1277.2	1277.2	1275.8	1274.4	1273.0	1271.5
170°	1287.1	1288.6	1288.6	1287.1	1285.5	1283.8	1282.2
172.5°	1295.5	1297.0	1296.9	1295.3	1293.6	1292.0	1290.5
175°	1304.9	1306.2	1306.1	1304.5	1302.9	1301.3	1299.7
177.5°	1308.8	1309.9	1309.8	1308.4	1307.2	1305.9	1304.6
180°	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0

(END OF REPORT)