

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332131-927

Luminaire Tested: **S123DIW-S560D755U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332131-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S560D755U927-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 755 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3912.5 lumens
Efficiency: N/A
Efficacy: 104.1 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 37.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332131-927

CATALOG NUMBER: S123DIW-S560D755U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

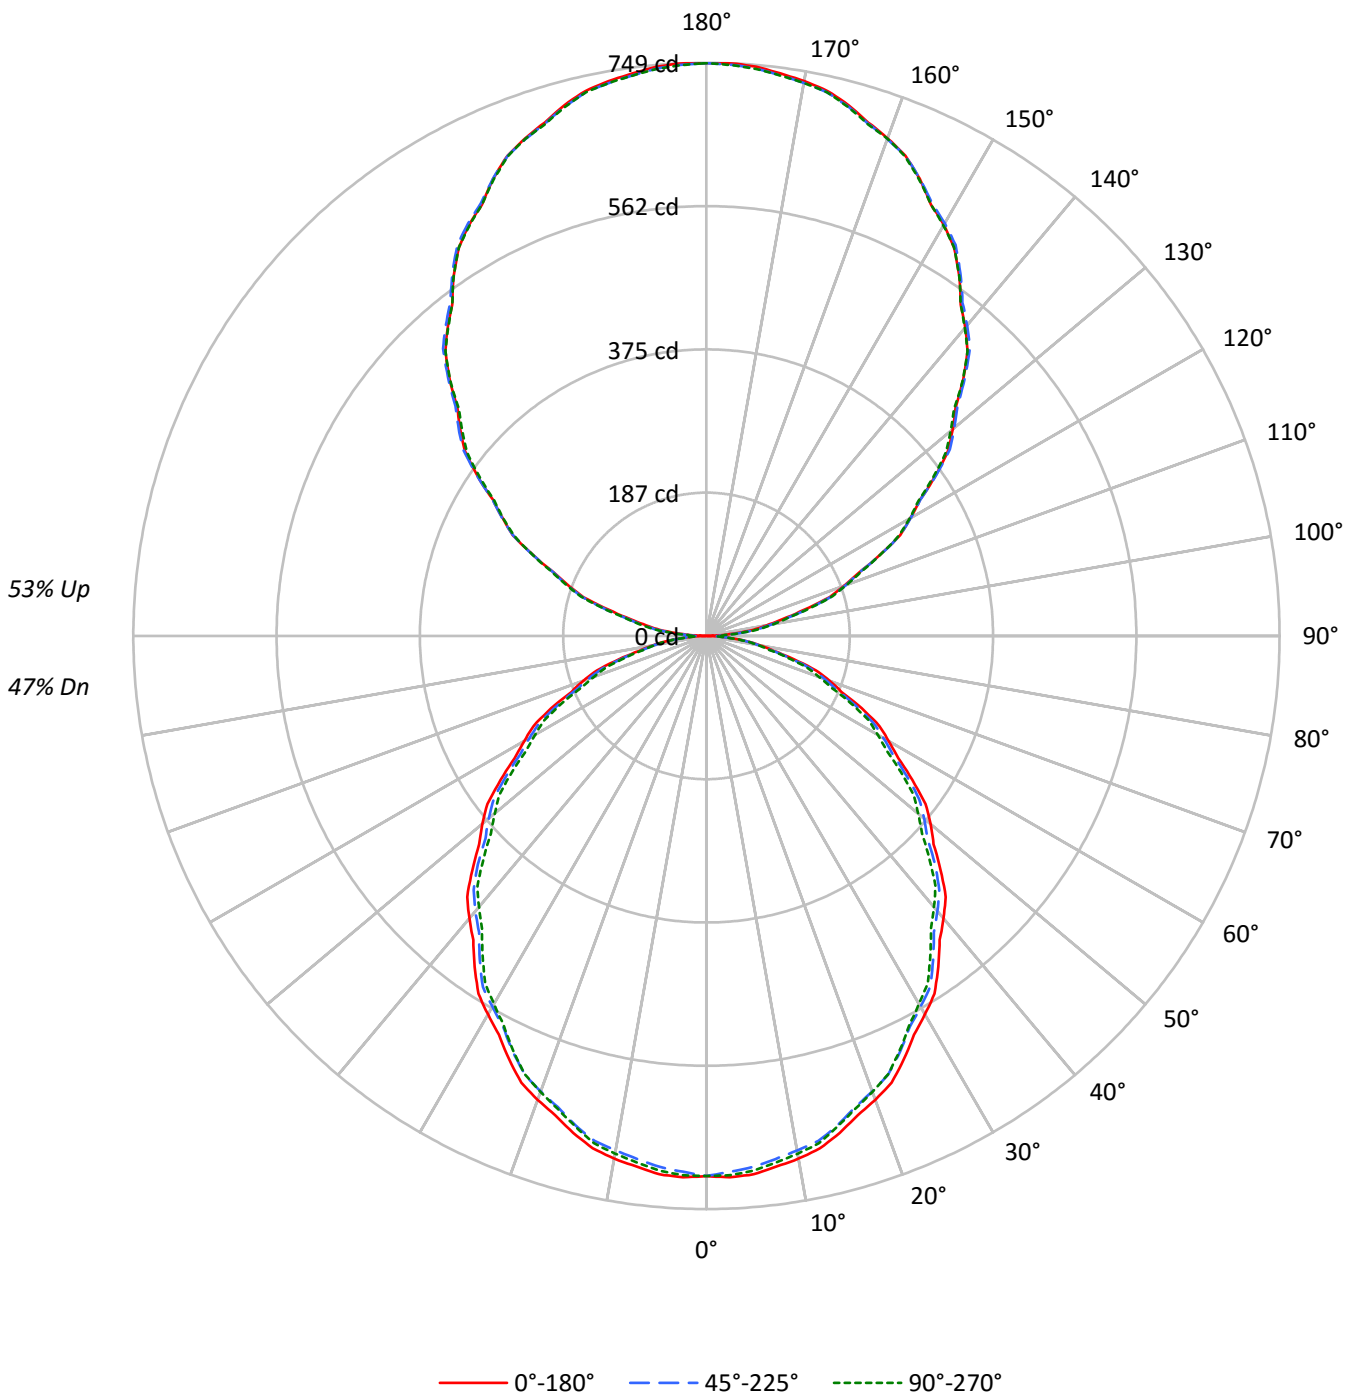



TEST NUMBER: P332131-927

CATALOG NUMBER: S123DIW-S560D755U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	98	98	98	98	82	82	82	67	67	67	53	53	53	47
1	97	93	89	85	89	85	82	79	71	69	67	59	57	56	47	46	45	39
2	88	81	75	70	81	75	69	65	63	59	55	52	49	46	41	39	38	33
3	81	71	64	58	74	66	59	54	55	50	46	46	42	39	37	34	32	28
4	74	63	55	49	67	58	51	46	49	44	40	41	37	34	33	30	28	24
5	68	56	48	42	62	52	45	39	44	38	34	36	32	29	29	26	24	21
6	62	50	42	36	57	46	39	34	39	34	30	33	29	25	27	24	21	18
7	58	45	37	32	53	42	35	30	36	30	26	30	26	22	24	21	19	16
8	53	41	33	28	49	38	31	26	33	27	23	27	23	20	22	19	17	14
9	50	37	30	25	46	35	28	24	30	24	21	25	21	18	21	18	15	13
10	46	34	27	22	43	32	25	21	27	22	19	23	19	16	19	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7597	7597	7597
5°	7632	7527	7580
10°	7581	7462	7508
15°	7492	7377	7392
20°	7389	7257	7263
25°	7251	7114	7099
30°	7097	6954	6901
35°	6937	6786	6699
40°	6770	6600	6497
45°	6587	6428	6272
50°	6402	6219	6047
55°	6161	6001	5819
60°	5918	5748	5565
65°	5703	5471	5300
70°	5385	5155	4925
75°	4924	4745	4541
80°	4438	4252	4215
85°	3890	3742	3606



TEST NUMBER: P332131-927

CATALOG NUMBER: S123DIW-S560D755U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	66.5	1.7
10°-20°	187.7	4.8
20°-30°	277.3	7.1
30°-40°	323.9	8.3
40°-50°	325.6	8.3
50°-60°	286.0	7.3
60°-70°	213.1	5.4
70°-80°	121.4	3.1
80°-90°	37.1	0.9
90°-100°	48.8	1.2
100°-110°	145.9	3.7
110°-120°	248.2	6.3
120°-130°	326.5	8.3
130°-140°	367.0	9.4
140°-150°	360.7	9.2
150°-160°	303.7	7.8
160°-170°	202.2	5.2
170°-180°	70.8	1.8
0°-30°	531.5	13.6
0°-40°	855.4	21.9
0°-60°	1467.0	37.5
0°-90°	1838.6	47.0
90°-120°	442.9	11.3
90°-150°	1497.2	38.3
90°-180°	2074.0	53.0
0°-180°	3912.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	706	706	706	706	706	
5°	706	703	697	702	702	67
15°	672	670	662	666	663	189
25°	610	607	599	599	598	281
35°	528	524	516	513	510	330
45°	433	430	422	415	412	334
55°	328	327	320	313	310	294
65°	224	221	215	210	208	221
75°	118	116	114	111	109	127
85°	32	30	30	29	29	35
90°	1	7	14	16	18	4
95°	35	39	44	46	46	39
105°	132	134	139	139	140	142
115°	250	251	250	251	250	247
125°	366	367	366	364	362	326
135°	474	478	477	475	474	366
145°	576	577	579	578	576	359
155°	659	659	660	662	658	303
165°	718	716	716	719	716	202
175°	747	745	744	748	744	71
180°	748	748	748	748	748	



TEST NUMBER: P332131-927

CATALOG NUMBER: S123DIW-S560D755U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	705.8	705.8	705.8	705.8	705.8	705.8	705.8	705.8	705.8	705.8	705.8
2.5°	708.1	707.7	707.3	706.9	706.5	705.6	704.4	703.2	702.1	700.9	702.0
5°	706.3	705.7	705.0	704.3	703.6	702.6	701.1	699.6	698.2	696.6	698.0
7.5°	699.4	698.8	698.1	697.4	696.7	695.6	694.1	692.5	691.0	689.5	690.7
10°	693.6	692.9	692.3	691.6	690.9	689.7	687.9	686.2	684.4	682.7	683.9
12.5°	685.9	685.2	684.7	684.1	683.6	682.5	680.8	679.1	677.6	675.9	676.8
15°	672.3	671.8	671.3	670.7	670.2	669.1	667.3	665.6	663.8	662.0	663.1
17.5°	656.7	656.0	655.3	654.6	653.9	652.7	650.9	649.2	647.5	645.6	646.4
20°	645.1	644.3	643.4	642.6	641.8	640.6	638.8	637.1	635.3	633.5	634.1
22.5°	631.9	631.1	630.3	629.5	628.7	627.4	625.7	623.9	622.2	620.4	620.8
25°	610.5	609.7	608.9	608.1	607.2	605.9	604.2	602.5	600.7	599.0	599.0
27.5°	587.6	586.8	586.0	585.2	584.4	583.0	581.1	579.3	577.4	575.5	575.6
30°	571.0	570.4	569.7	569.0	568.3	567.0	565.1	563.2	561.4	559.5	559.5
32.5°	554.5	553.7	552.7	551.8	551.0	549.8	548.3	546.8	545.4	544.0	543.2
35°	527.9	527.1	526.3	525.5	524.7	523.4	521.7	519.9	518.2	516.4	515.6
37.5°	500.7	499.7	498.7	497.6	496.6	495.3	493.5	491.7	489.9	488.1	487.2
40°	481.8	481.0	480.2	479.4	478.6	477.2	475.3	473.5	471.6	469.7	468.6
42.5°	462.9	462.0	461.1	460.1	459.2	457.8	455.9	454.1	452.2	450.3	449.2
45°	432.7	432.1	431.6	431.0	430.5	429.4	427.6	425.9	424.1	422.3	420.7
47.5°	402.7	401.9	401.2	400.4	399.6	398.3	396.7	395.1	393.4	391.7	390.1
50°	382.3	381.6	381.0	380.2	379.6	378.4	376.6	374.9	373.1	371.4	369.9
52.5°	360.9	360.4	360.0	359.6	359.1	357.9	356.1	354.3	352.4	350.5	349.3
55°	328.3	328.1	328.0	327.9	327.7	326.8	325.0	323.3	321.5	319.8	318.3
57.5°	297.2	296.8	296.3	295.9	295.4	294.5	293.0	291.7	290.3	288.8	287.6
60°	274.9	274.7	274.6	274.5	274.3	273.5	271.9	270.2	268.6	267.0	265.8
62.5°	255.0	254.6	254.3	254.0	253.6	252.6	251.0	249.4	247.7	246.1	244.9
65°	223.9	223.2	222.6	221.9	221.3	220.2	218.9	217.5	216.2	214.8	213.7
67.5°	191.0	190.4	189.8	189.3	188.6	187.8	186.8	185.8	184.7	183.8	182.8
70°	171.1	170.3	169.5	168.7	167.9	167.1	166.3	165.5	164.6	163.8	162.9
72.5°	150.3	149.6	149.1	148.5	147.9	147.1	146.2	145.3	144.3	143.5	142.6
75°	118.4	117.8	117.2	116.7	116.2	115.7	115.3	114.9	114.5	114.1	113.4
77.5°	90.1	89.8	89.4	89.2	88.9	88.5	88.0	87.5	87.0	86.5	86.1
80°	71.6	71.2	70.8	70.4	69.9	69.6	69.4	69.1	68.8	68.6	68.4
82.5°	53.6	53.6	53.5	53.4	53.3	53.2	53.2	53.2	53.1	53.1	52.8
85°	31.5	31.3	31.1	30.7	30.5	30.3	30.3	30.3	30.3	30.3	30.1
87.5°	12.8	12.7	12.6	12.5	12.5	12.6	12.8	13.1	13.3	13.5	13.5
90°	0.6	1.9	3.2	4.5	5.8	7.3	9.0	10.7	12.4	14.1	14.7
92.5°	14.3	15.1	16.0	16.9	17.7	18.7	19.6	20.7	21.6	22.6	23.0
95°	34.7	35.6	36.5	37.5	38.3	39.3	40.4	41.4	42.5	43.5	44.0
97.5°	61.6	62.3	63.0	63.7	64.3	65.0	65.8	66.5	67.3	68.1	68.7
100°	79.9	80.7	81.5	82.3	83.1	83.8	84.4	85.2	85.8	86.4	86.8
102.5°	101.2	101.6	102.1	102.5	103.0	103.7	104.6	105.4	106.2	107.1	107.5
105°	132.3	132.5	132.8	133.1	133.3	134.0	135.2	136.4	137.6	138.8	138.8
107.5°	168.5	168.7	168.8	169.0	169.1	169.4	169.9	170.4	170.9	171.3	171.7
110°	191.1	191.4	191.6	191.9	192.1	192.4	192.7	192.9	193.2	193.5	194.0



TEST NUMBER: P332131-927

CATALOG NUMBER: S123DIW-S560D755U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	214.6	214.8	214.9	215.1	215.2	215.3	215.4	215.5	215.5	215.6	216.2
115°	249.9	250.3	250.6	251.0	251.4	251.5	251.3	251.0	250.7	250.5	250.6
117.5°	285.4	285.7	285.9	286.2	286.5	286.5	286.1	285.7	285.4	285.0	285.0
120°	307.5	308.3	309.1	309.9	310.7	310.7	310.1	309.4	308.8	308.1	308.0
122.5°	330.6	331.1	331.7	332.3	332.9	333.0	332.6	332.3	332.0	331.6	331.3
125°	365.8	366.1	366.5	366.9	367.3	367.3	367.1	366.9	366.5	366.3	365.8
127.5°	398.2	399.0	399.9	400.7	401.6	401.8	401.6	401.2	400.9	400.7	399.9
130°	419.9	420.9	421.9	422.9	424.0	424.4	424.0	423.6	423.2	422.8	422.2
132.5°	441.5	442.5	443.5	444.6	445.7	446.0	445.8	445.4	445.1	444.9	444.3
135°	474.5	475.3	476.1	476.9	477.6	478.0	477.8	477.7	477.6	477.4	476.9
137.5°	505.1	505.7	506.4	507.1	507.7	508.2	508.5	508.9	509.2	509.5	509.0
140°	526.2	526.9	527.6	528.2	528.9	529.3	529.4	529.5	529.7	529.8	529.7
142.5°	545.6	546.2	546.8	547.5	548.1	548.6	548.8	549.1	549.3	549.5	549.4
145°	575.7	575.9	576.2	576.4	576.7	577.0	577.4	577.8	578.2	578.6	578.5
147.5°	602.0	602.5	602.9	603.4	603.9	604.3	604.7	605.0	605.4	605.8	605.8
150°	620.4	620.6	620.8	621.2	621.4	621.6	621.9	622.2	622.4	622.7	622.7
152.5°	635.4	635.7	636.1	636.5	636.8	637.1	637.2	637.4	637.5	637.7	637.9
155°	659.2	659.2	659.2	659.2	659.2	659.2	659.3	659.5	659.6	659.7	660.3
157.5°	679.4	679.2	679.1	678.9	678.7	678.7	678.8	678.9	679.1	679.1	679.7
160°	692.1	691.8	691.6	691.3	691.0	690.9	690.9	690.9	690.9	690.9	691.6
162.5°	703.4	703.0	702.6	702.3	701.9	701.8	701.9	702.0	702.1	702.2	702.8
165°	718.0	717.6	717.2	716.8	716.4	716.1	716.1	716.1	716.1	716.1	716.9
167.5°	729.6	729.0	728.6	728.0	727.5	727.3	727.4	727.5	727.6	727.7	728.5
170°	736.2	735.6	735.1	734.6	734.0	733.8	733.8	733.8	733.8	733.8	734.7
172.5°	741.3	740.8	740.3	739.7	739.3	738.9	738.9	738.9	738.9	738.9	739.8
175°	746.7	746.2	745.7	745.2	744.7	744.4	744.4	744.4	744.4	744.4	745.2
177.5°	749.0	748.5	748.1	747.7	747.3	747.1	747.1	747.1	747.1	747.1	747.7
180°	748.5	748.5	748.5	748.5	748.5	748.5	748.5	748.5	748.5	748.5	748.5



TEST NUMBER: P332131-927

CATALOG NUMBER: S123DIW-S560D755U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	705.8	705.8	705.8	705.8	705.8	705.8	705.8	705.8
2.5°	703.1	704.1	705.2	705.7	705.6	705.4	705.4	705.3
5°	699.3	700.7	702.0	702.6	702.3	702.0	701.8	701.5
7.5°	691.9	693.1	694.3	694.8	694.7	694.5	694.3	694.2
10°	685.1	686.3	687.5	688.0	687.8	687.5	687.2	686.9
12.5°	677.6	678.6	679.5	679.8	679.6	679.5	679.3	679.1
15°	664.2	665.3	666.4	666.5	665.7	664.9	664.1	663.3
17.5°	647.2	647.9	648.7	648.9	648.6	648.3	648.0	647.7
20°	634.6	635.2	635.6	635.7	635.3	634.9	634.5	634.1
22.5°	621.3	621.7	622.2	622.1	621.6	621.1	620.6	620.0
25°	599.2	599.4	599.4	599.4	599.0	598.6	598.1	597.7
27.5°	575.8	575.8	575.9	575.8	575.2	574.7	574.2	573.7
30°	559.5	559.5	559.5	559.0	558.1	557.1	556.2	555.2
32.5°	542.5	541.7	540.9	540.3	539.8	539.3	538.8	538.3
35°	514.8	514.0	513.2	512.5	511.7	511.1	510.4	509.8
37.5°	486.2	485.2	484.3	483.5	483.2	482.7	482.3	481.8
40°	467.5	466.4	465.4	464.5	464.0	463.5	463.0	462.4
42.5°	448.1	447.0	445.9	445.1	444.6	444.1	443.5	443.0
45°	419.1	417.5	415.9	414.7	414.1	413.4	412.7	412.0
47.5°	388.6	387.0	385.4	384.3	383.7	383.1	382.5	381.9
50°	368.4	366.9	365.4	364.3	363.5	362.7	361.9	361.1
52.5°	348.0	346.7	345.5	344.4	343.6	342.8	342.0	341.2
55°	316.8	315.4	313.9	312.8	312.1	311.4	310.8	310.1
57.5°	286.2	284.9	283.6	282.5	281.7	281.0	280.2	279.4
60°	264.6	263.4	262.1	261.2	260.5	259.8	259.2	258.5
62.5°	243.7	242.5	241.3	240.4	240.0	239.6	239.1	238.6
65°	212.6	211.6	210.5	209.8	209.4	209.0	208.6	208.1
67.5°	181.9	180.9	180.0	179.2	178.6	178.1	177.5	177.0
70°	161.9	161.1	160.1	159.2	158.6	157.9	157.2	156.5
72.5°	141.8	140.9	140.1	139.5	139.2	138.8	138.5	138.1
75°	112.7	112.1	111.4	110.8	110.4	110.0	109.6	109.2
77.5°	85.6	85.2	84.7	84.4	84.4	84.4	84.4	84.4
80°	68.3	68.1	68.0	68.0	68.0	68.0	68.0	68.0
82.5°	52.5	52.3	52.0	51.9	51.8	51.7	51.6	51.5
85°	29.8	29.5	29.2	29.2	29.2	29.2	29.2	29.2
87.5°	13.5	13.5	13.5	13.5	13.5	13.6	13.7	13.7
90°	15.1	15.7	16.2	16.6	16.9	17.1	17.3	17.7
92.5°	23.4	23.8	24.2	24.4	24.2	24.1	23.9	23.8
95°	44.5	45.1	45.6	45.9	45.9	45.9	45.9	45.9
97.5°	69.3	69.9	70.5	70.7	70.7	70.7	70.6	70.6
100°	87.2	87.6	88.0	88.3	88.6	88.9	89.1	89.4
102.5°	107.9	108.3	108.7	108.8	108.8	108.8	108.7	108.7
105°	138.8	138.8	138.8	138.9	139.2	139.4	139.7	140.0
107.5°	172.1	172.6	173.0	173.2	173.0	172.9	172.7	172.5
110°	194.5	195.0	195.5	195.7	195.4	195.1	194.9	194.6



TEST NUMBER: P332131-927

CATALOG NUMBER: S123DIW-S560D755U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	216.8	217.5	218.1	218.3	218.3	218.2	218.2	218.2
115°	250.7	250.9	251.0	251.0	250.9	250.7	250.6	250.5
117.5°	285.0	284.9	284.9	284.8	284.4	284.0	283.7	283.3
120°	307.8	307.7	307.6	307.4	307.1	306.9	306.6	306.3
122.5°	331.0	330.6	330.3	329.9	329.5	329.2	328.8	328.4
125°	365.3	364.7	364.2	363.7	363.2	362.7	362.1	361.6
127.5°	399.2	398.5	397.8	397.0	396.5	395.9	395.3	394.7
130°	421.8	421.2	420.6	419.9	419.1	418.1	417.2	416.3
132.5°	443.6	443.0	442.4	441.7	441.0	440.3	439.6	438.9
135°	476.4	475.9	475.4	475.0	474.7	474.4	474.2	473.9
137.5°	508.4	507.9	507.4	506.8	506.4	505.8	505.3	504.9
140°	529.5	529.4	529.3	528.7	527.8	526.9	526.0	525.1
142.5°	549.3	549.1	549.0	548.6	547.9	547.2	546.4	545.7
145°	578.3	578.2	578.1	577.7	577.2	576.7	576.2	575.7
147.5°	605.8	605.8	605.8	605.4	604.6	603.8	603.0	602.2
150°	622.7	622.7	622.7	622.3	621.5	620.8	620.0	619.2
152.5°	638.2	638.3	638.6	638.3	637.6	637.0	636.3	635.6
155°	660.8	661.3	661.8	661.6	660.7	659.8	658.9	658.0
157.5°	680.2	680.8	681.4	681.2	680.5	679.8	679.1	678.3
160°	692.2	692.8	693.5	693.6	693.1	692.5	692.0	691.5
162.5°	703.5	704.2	704.8	704.7	703.9	703.1	702.2	701.3
165°	717.7	718.5	719.3	719.2	718.4	717.4	716.5	715.6
167.5°	729.3	730.2	730.9	730.9	730.2	729.3	728.5	727.7
170°	735.6	736.6	737.4	737.4	736.6	735.6	734.7	733.8
172.5°	740.6	741.4	742.2	742.2	741.2	740.4	739.4	738.6
175°	746.0	746.7	747.5	747.5	746.6	745.6	744.7	743.8
177.5°	748.4	749.0	749.6	749.6	748.8	748.1	747.3	746.6
180°	748.5	748.5	748.5	748.5	748.5	748.5	748.5	748.5

(END OF REPORT)