

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332483-927

Luminaire Tested: **S123RDIW-S1165D1320U927-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332483-927  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIW-S1165D1320U927-4F0-1E-UDD-A1  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1165 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING  
UPLIGHT 1320 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 7249.1 lumens  
Efficiency: N/A  
Efficacy: 95.1 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.22 / 1.36  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: General Diffuse  
  
Input Watts (W): 76.2  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332483-927

CATALOG NUMBER: S123RDIW-S1165D1320U927-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

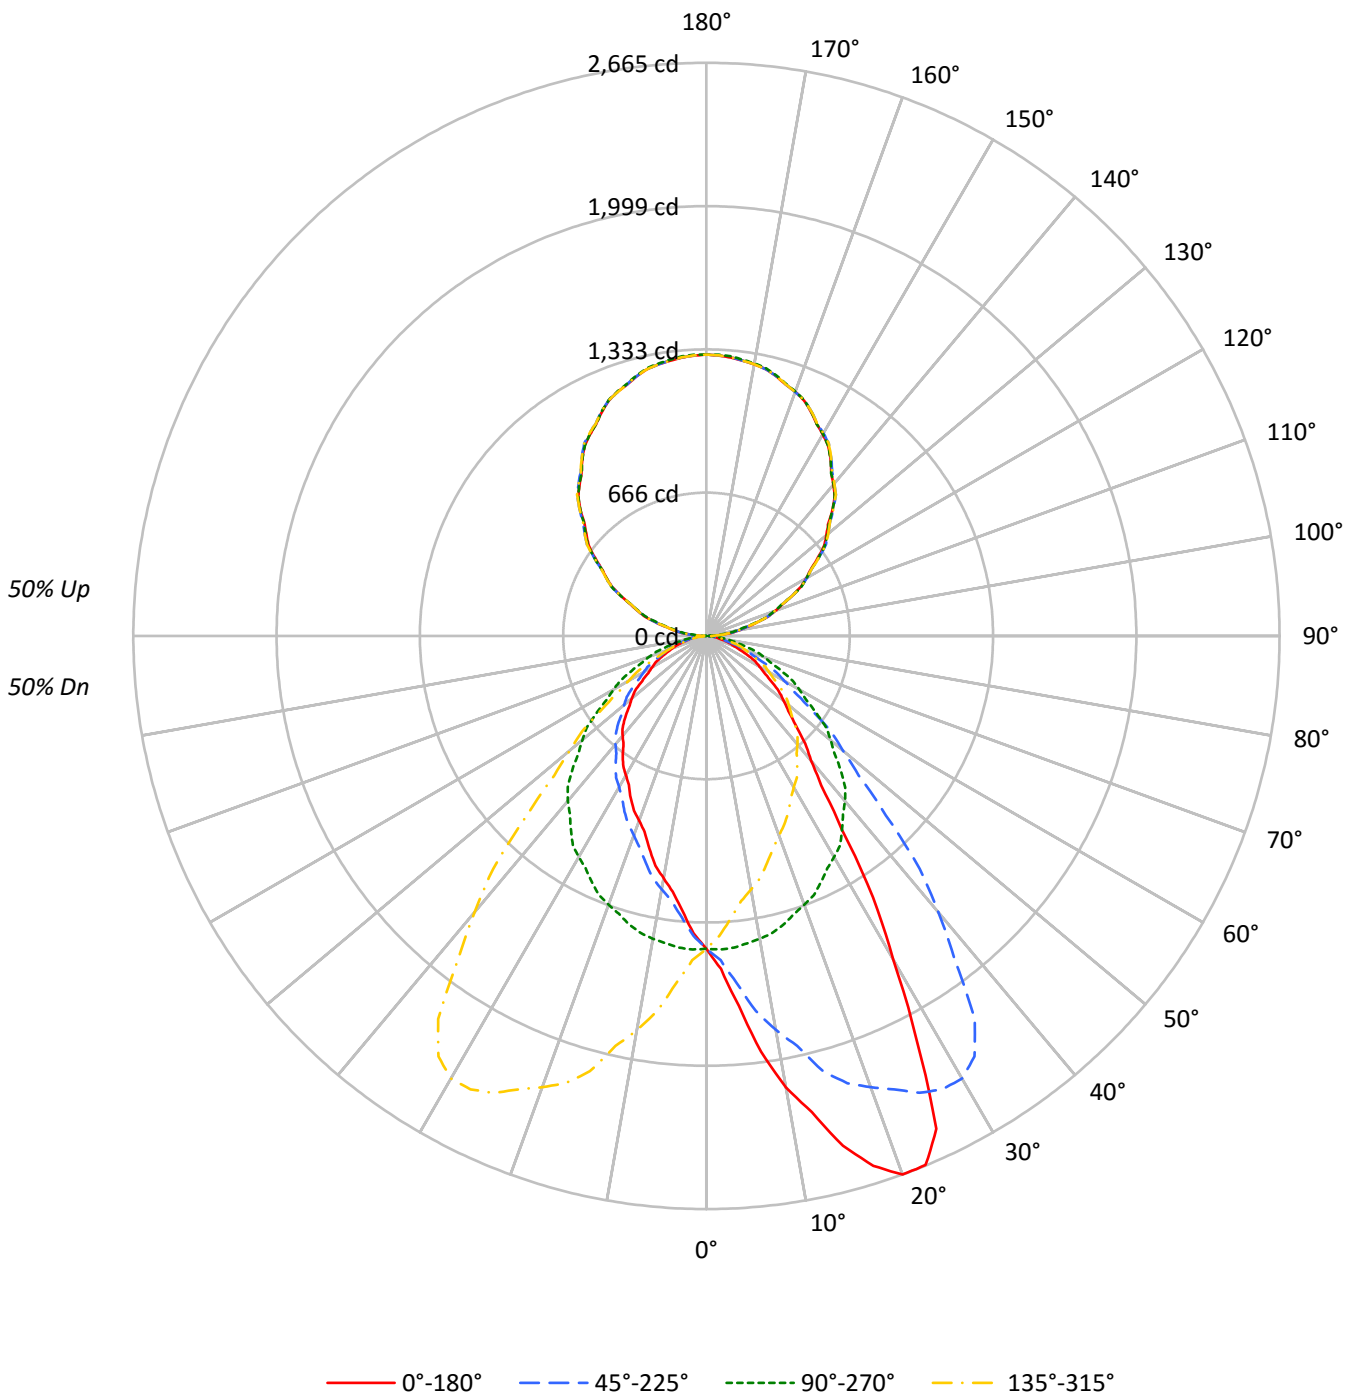



TEST NUMBER: P332483-927

CATALOG NUMBER: S123RDIW-S1165D1320U927-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50
1	98	94	91	87	91	87	84	81	74	72	70	62	60	59	51	49	49	43
2	90	83	77	72	83	77	72	68	65	62	59	55	52	50	45	43	42	37
3	83	73	66	61	76	68	62	57	58	54	50	49	46	43	41	38	36	32
4	76	65	58	52	70	61	54	49	52	47	43	44	40	37	37	34	32	28
5	70	59	51	45	64	54	48	42	47	42	37	40	36	33	33	30	28	25
6	64	53	45	39	59	49	42	37	42	37	33	36	32	29	30	27	25	22
7	60	48	40	35	55	45	38	33	39	33	29	33	29	26	28	25	22	20
8	55	43	36	31	51	41	34	29	35	30	26	30	26	23	26	22	20	18
9	52	40	32	27	48	37	31	26	32	27	23	28	24	21	24	21	18	16
10	48	37	29	25	45	34	28	24	30	25	21	26	22	19	22	19	17	15

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	15655	15655	15655	15655
5°	18662	15722	13846	15722
10°	23302	15632	12508	15632
15°	27351	15473	11407	15473
20°	30525	15234	10470	15234
25°	30037	14982	9894	14982
30°	21592	14751	9302	14751
35°	14416	14448	8918	14448
40°	10621	14085	8521	14085
45°	8910	13449	8132	13449
50°	7860	12616	7591	12616
55°	6893	11661	6848	11661
60°	6140	10749	6273	10749
65°	5392	9770	5835	9770
70°	4233	8897	5331	8897
75°	3730	7769	4870	7769
80°	3242	6602	4785	6602
85°	2618	5298	5076	5298



TEST NUMBER: P332483-927

CATALOG NUMBER: S123RDIW-S1165D1320U927-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	143.0	2.0
10°-20°	446.9	6.2
20°-30°	702.0	9.7
30°-40°	732.4	10.1
40°-50°	626.8	8.6
50°-60°	477.7	6.6
60°-70°	306.2	4.2
70°-80°	147.3	2.0
80°-90°	42.8	0.6
90°-100°	85.2	1.2
100°-110°	255.0	3.5
110°-120°	433.8	6.0
120°-130°	570.5	7.9
130°-140°	641.3	8.8
140°-150°	630.4	8.7
150°-160°	530.7	7.3
160°-170°	353.3	4.9
170°-180°	123.7	1.7
0°-30°	1291.9	17.8
0°-40°	2024.3	27.9
0°-60°	3128.9	43.2
0°-90°	3625.2	50.0
90°-120°	774.0	10.7
90°-150°	2616.2	36.1
90°-180°	3624.0	50.0
0°-180°	7249.1	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1454	1454	1454	1454	1454	
5°	1727	1455	1281	1455	1727	178
15°	2454	1388	1024	1388	2454	696
25°	2529	1262	833	1262	2529	1087
35°	1097	1100	679	1100	1097	719
45°	585	884	534	884	585	460
55°	367	621	365	621	367	332
65°	212	384	229	384	212	208
75°	90	187	117	187	90	96
85°	21	43	41	43	21	25
90°	31	1	31	1	31	16
95°	80	61	80	61	80	82
105°	244	231	244	231	244	259
115°	438	437	438	437	438	433
125°	632	639	632	639	632	565
135°	828	829	828	829	828	637
145°	1006	1006	1006	1006	1006	628
155°	1150	1152	1150	1152	1150	529
165°	1250	1254	1250	1254	1250	353
175°	1300	1305	1300	1305	1300	123
180°	1308	1308	1308	1308	1308	



TEST NUMBER: P332483-927

CATALOG NUMBER: S123RDIW-S1165D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4
2.5°	1549.1	1551.1	1544.6	1543.6	1536.1	1534.1	1534.1	1523.7	1517.2	1508.8	1503.8
5°	1727.2	1737.2	1732.2	1720.9	1702.2	1697.9	1686.1	1667.4	1646.2	1620.1	1607.7
7.5°	1949.6	1963.2	1958.0	1940.6	1921.0	1905.3	1871.8	1840.9	1797.4	1759.3	1726.6
10°	2131.9	2117.6	2106.3	2089.5	2071.5	2042.2	2007.4	1959.4	1904.0	1860.4	1811.9
12.5°	2268.3	2266.0	2251.8	2234.5	2209.0	2181.2	2138.3	2080.0	2015.5	1952.6	1897.0
15°	2454.4	2458.1	2448.8	2430.7	2394.6	2345.4	2280.7	2256.5	2164.2	2095.8	2027.3
17.5°	2583.1	2582.4	2581.2	2556.1	2519.3	2484.3	2424.2	2360.4	2277.0	2180.5	2088.2
20°	2664.8	2658.6	2659.9	2631.9	2604.5	2564.0	2505.4	2412.7	2344.2	2232.8	2137.5
22.5°	2662.8	2661.7	2666.3	2656.7	2636.9	2605.8	2559.8	2481.4	2394.1	2281.6	2174.4
25°	2529.1	2524.1	2553.4	2561.5	2593.3	2598.8	2585.1	2542.2	2459.4	2343.6	2211.0
27.5°	2116.7	2113.9	2168.3	2236.3	2322.4	2389.4	2454.2	2485.4	2459.4	2376.5	2243.6
30°	1737.2	1795.6	1823.0	1921.4	2031.0	2161.8	2276.3	2385.3	2412.0	2376.0	2267.0
32.5°	1442.2	1493.3	1516.2	1600.7	1702.8	1855.9	2027.7	2182.1	2291.1	2318.6	2253.0
35°	1097.1	1097.7	1150.0	1187.3	1282.0	1439.6	1606.4	1813.1	2018.6	2174.2	2190.4
37.5°	875.4	878.5	910.1	947.4	1018.4	1101.7	1248.6	1420.5	1657.8	1896.8	2036.9
40°	755.9	761.4	785.1	821.9	872.9	935.8	1050.4	1212.3	1410.2	1676.1	1893.4
42.5°	679.1	688.2	700.4	728.7	760.3	819.3	911.9	1037.0	1217.0	1468.4	1719.1
45°	585.3	590.3	599.6	612.7	641.3	682.4	744.7	828.7	978.2	1180.5	1431.4
47.5°	516.3	513.7	523.5	534.1	553.2	581.1	622.9	691.5	798.1	960.4	1173.3
50°	469.4	468.8	475.7	483.8	501.8	522.4	556.7	608.3	693.0	827.5	1022.4
52.5°	425.6	428.0	432.8	442.9	456.0	472.6	503.4	540.6	613.3	729.4	891.8
55°	367.3	369.2	376.0	381.7	391.0	407.8	427.1	458.3	508.1	589.0	722.9
57.5°	318.1	317.2	323.8	325.1	335.7	349.4	364.3	388.5	424.6	484.8	575.0
60°	285.2	283.3	288.9	293.3	298.9	310.1	322.5	346.2	374.9	419.1	496.2
62.5°	255.2	254.4	258.5	262.8	267.5	277.7	288.1	306.3	329.0	366.2	427.5
65°	211.7	213.6	215.4	217.3	219.8	226.0	236.0	248.4	264.0	290.2	334.4
67.5°	166.4	168.3	168.9	172.7	178.1	182.0	188.1	199.2	209.9	232.0	257.1
70°	134.5	133.9	134.5	136.3	143.2	150.0	158.1	166.3	173.1	188.6	209.8
72.5°	115.6	114.5	116.1	116.5	119.8	121.7	126.7	134.4	143.2	153.8	169.0
75°	89.7	89.7	89.7	89.7	92.1	93.4	95.3	97.1	100.2	105.2	116.5
77.5°	66.2	66.4	67.3	67.9	68.4	69.1	70.3	72.1	73.2	75.8	80.7
80°	52.3	52.9	52.3	52.9	52.9	54.2	54.8	56.6	57.3	60.4	62.3
82.5°	39.4	39.0	39.4	40.0	40.0	41.2	41.4	42.7	42.9	44.4	46.3
85°	21.2	20.0	21.2	20.5	21.8	20.5	21.2	22.4	22.4	23.1	25.5
87.5°	11.2	12.0	10.9	11.4	11.2	11.6	11.5	11.2	12.1	11.4	11.3
90°	30.8	30.3	29.9	29.5	29.0	28.3	27.4	26.5	25.6	24.6	21.7
92.5°	41.5	41.7	42.1	42.3	42.6	42.4	41.7	40.9	40.2	39.5	37.8
95°	80.2	80.2	80.2	80.2	80.2	79.7	78.7	77.9	76.9	76.0	74.2
97.5°	123.3	123.4	123.5	123.6	123.7	123.2	122.2	121.0	120.0	119.0	117.6
100°	156.1	155.7	155.3	154.8	154.3	153.8	153.0	152.4	151.7	151.1	149.9
102.5°	189.9	190.0	190.0	190.1	190.2	190.0	189.3	188.5	187.9	187.2	185.7
105°	244.5	244.1	243.6	243.2	242.7	242.5	242.5	242.5	242.5	242.5	240.4
107.5°	301.4	301.7	302.0	302.3	302.5	302.3	301.6	300.9	300.2	299.4	298.6
110°	340.1	340.6	341.0	341.4	341.9	341.7	340.8	339.8	339.0	338.0	337.5



TEST NUMBER: P332483-927

CATALOG NUMBER: S123RDIW-S1165D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	381.2	381.3	381.4	381.4	381.5	381.0	379.9	378.8	377.8	376.7	376.6
115°	437.7	437.9	438.2	438.4	438.6	438.6	438.4	438.2	437.9	437.7	438.2
117.5°	495.0	495.7	496.3	496.9	497.6	497.9	498.0	498.0	498.0	498.1	498.7
120°	535.3	535.8	536.2	536.7	537.1	537.5	537.7	537.9	538.1	538.4	539.6
122.5°	573.9	574.6	575.2	575.8	576.5	577.1	577.7	578.3	578.8	579.5	580.0
125°	631.8	632.8	633.7	634.6	635.6	636.4	637.4	638.3	639.2	640.1	640.6
127.5°	689.6	690.7	691.7	692.8	693.8	695.0	696.2	697.5	698.8	700.1	700.6
130°	727.5	729.0	730.6	732.2	733.8	735.1	736.0	736.9	737.8	738.7	739.4
132.5°	766.9	768.1	769.4	770.6	771.8	773.0	774.0	775.2	776.3	777.4	777.8
135°	828.1	828.5	829.0	829.5	830.0	830.6	831.6	832.4	833.4	834.2	834.5
137.5°	882.2	883.0	883.9	884.8	885.7	886.5	887.5	888.4	889.4	890.4	889.8
140°	917.5	919.1	920.7	922.3	923.9	924.8	925.0	925.3	925.5	925.7	925.5
142.5°	953.7	954.9	956.2	957.4	958.6	959.3	959.6	959.8	960.0	960.3	959.8
145°	1005.8	1006.8	1007.7	1008.6	1009.6	1010.1	1010.3	1010.5	1010.7	1011.0	1010.3
147.5°	1052.3	1053.7	1055.0	1056.5	1057.8	1058.4	1058.4	1058.4	1058.4	1058.4	1057.8
150°	1081.9	1083.2	1084.7	1086.0	1087.3	1088.1	1088.1	1088.1	1088.1	1088.1	1087.6
152.5°	1110.6	1111.8	1113.0	1114.2	1115.4	1115.8	1115.5	1115.1	1114.8	1114.4	1114.1
155°	1149.7	1151.3	1152.9	1154.5	1156.1	1156.4	1155.6	1154.6	1153.7	1152.8	1152.5
157.5°	1185.3	1186.5	1187.8	1189.1	1190.3	1190.6	1189.5	1188.6	1187.6	1186.7	1186.5
160°	1208.2	1209.2	1210.1	1211.0	1212.0	1211.8	1210.7	1209.5	1208.4	1207.2	1207.2
162.5°	1225.5	1227.0	1228.4	1229.9	1231.4	1231.5	1230.4	1229.2	1228.1	1226.9	1226.8
165°	1250.4	1252.0	1253.6	1255.2	1256.8	1256.9	1255.5	1254.2	1252.8	1251.4	1251.4
167.5°	1271.5	1273.0	1274.4	1275.8	1277.2	1277.2	1275.8	1274.4	1273.0	1271.5	1271.4
170°	1282.2	1283.8	1285.5	1287.1	1288.6	1288.6	1287.1	1285.5	1283.8	1282.2	1282.2
172.5°	1290.5	1292.0	1293.6	1295.3	1296.9	1297.0	1295.5	1294.1	1292.7	1291.3	1291.3
175°	1299.7	1301.3	1302.9	1304.5	1306.1	1306.2	1304.9	1303.5	1302.1	1300.8	1300.8
177.5°	1304.6	1305.9	1307.2	1308.4	1309.8	1309.9	1308.8	1307.7	1306.5	1305.4	1305.4
180°	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0



TEST NUMBER: P332483-927

CATALOG NUMBER: S123RDIW-S1165D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4
2.5°	1501.8	1500.3	1493.3	1485.3	1474.9	1467.9	1462.4	1459.4	1450.5	1439.6	1432.0
5°	1594.6	1575.9	1555.9	1531.7	1509.3	1486.2	1471.9	1455.1	1434.6	1411.5	1395.3
7.5°	1693.9	1657.3	1617.9	1577.2	1536.9	1500.8	1468.9	1441.6	1408.9	1375.9	1352.7
10°	1770.1	1716.6	1661.2	1604.5	1552.8	1504.3	1466.9	1430.2	1391.0	1353.0	1324.4
12.5°	1839.4	1768.9	1705.0	1635.4	1569.3	1511.2	1457.5	1414.2	1367.1	1326.6	1294.0
15°	1927.1	1854.8	1777.6	1671.7	1584.0	1510.5	1445.1	1388.5	1331.2	1281.4	1249.6
17.5°	2009.0	1900.3	1796.5	1708.3	1594.2	1502.4	1422.6	1354.9	1292.0	1239.1	1200.1
20°	2042.9	1937.6	1825.0	1712.2	1600.1	1497.5	1404.6	1329.9	1264.6	1204.8	1168.7
22.5°	2063.2	1944.1	1825.4	1704.3	1585.2	1478.5	1386.7	1304.6	1233.7	1176.9	1132.3
25°	2087.1	1945.1	1814.3	1694.8	1573.4	1457.6	1348.6	1261.5	1184.9	1124.5	1077.1
27.5°	2102.8	1935.8	1781.2	1648.4	1525.2	1409.8	1310.0	1217.6	1140.0	1076.0	1025.2
30°	2105.7	1928.3	1755.8	1612.0	1486.8	1381.0	1275.2	1186.8	1104.5	1036.6	989.4
32.5°	2109.7	1909.9	1721.4	1568.7	1440.5	1335.7	1239.8	1155.3	1071.2	1004.3	956.0
35°	2093.3	1899.7	1669.3	1493.7	1365.4	1263.9	1177.4	1099.5	1016.8	952.0	902.9
37.5°	2022.5	1859.2	1615.3	1409.3	1275.2	1181.1	1110.6	1042.7	966.9	897.0	850.6
40°	1951.3	1819.3	1573.4	1358.0	1217.9	1121.3	1057.9	1002.4	929.0	863.6	813.8
42.5°	1845.2	1765.1	1533.5	1304.2	1153.1	1060.1	1006.5	954.6	890.1	823.7	776.9
45°	1650.6	1661.2	1452.0	1218.5	1063.4	970.0	919.6	883.5	826.2	771.4	723.5
47.5°	1406.5	1505.5	1356.2	1127.2	968.9	881.3	837.2	805.6	767.1	713.3	669.6
50°	1247.1	1388.5	1279.5	1066.0	909.7	822.5	778.9	753.4	719.8	677.4	635.7
52.5°	1100.2	1252.0	1186.8	997.7	845.4	765.7	723.1	702.1	675.4	635.6	597.9
55°	897.2	1051.0	1036.1	894.7	749.0	677.4	645.1	621.4	603.3	573.5	543.6
57.5°	725.7	871.6	879.2	780.1	664.1	593.3	565.5	547.6	535.8	513.3	485.7
60°	617.7	751.5	777.7	703.0	603.3	541.1	513.7	499.3	490.0	472.0	450.8
62.5°	528.0	641.9	671.5	617.7	545.0	486.8	465.3	451.5	445.2	429.6	410.9
65°	404.1	498.8	527.4	497.5	459.5	412.8	395.4	383.6	378.0	369.2	355.5
67.5°	303.9	372.8	404.3	383.2	369.5	339.9	328.8	322.5	317.5	311.6	300.1
70°	244.1	295.1	327.5	321.9	310.7	295.1	287.0	282.7	277.7	272.7	262.8
72.5°	196.2	231.4	261.7	264.6	255.4	252.3	245.2	243.4	240.3	234.3	228.9
75°	130.2	154.4	175.5	183.7	187.4	190.5	187.4	186.8	186.2	181.2	178.1
77.5°	85.3	98.4	111.7	125.6	131.3	135.6	136.6	138.9	137.2	134.6	133.1
80°	65.4	68.5	77.8	89.7	99.0	102.7	105.2	106.5	105.8	105.2	102.7
82.5°	47.5	50.1	54.4	62.7	70.6	76.8	78.3	78.1	79.5	79.9	77.8
85°	25.5	26.1	27.4	28.7	33.0	39.8	41.7	42.9	44.2	44.2	40.5
87.5°	11.7	10.6	11.0	10.5	11.6	11.6	14.1	16.2	17.1	15.5	16.0
90°	18.7	15.8	12.8	10.1	7.8	5.6	3.3	1.0	3.3	5.6	7.8
92.5°	36.0	34.4	32.7	31.1	29.5	28.0	26.4	24.9	26.4	28.0	29.5
95°	72.4	70.6	68.8	67.0	65.4	63.8	62.2	60.6	62.2	63.8	65.4
97.5°	116.3	115.0	113.7	112.4	111.2	110.0	108.8	107.7	108.8	110.0	111.2
100°	148.8	147.6	146.5	145.2	143.9	142.4	141.1	139.7	141.1	142.4	143.9
102.5°	184.2	182.7	181.2	180.0	179.2	178.4	177.5	176.7	177.5	178.4	179.2
105°	238.4	236.3	234.2	233.0	232.5	232.1	231.6	231.2	231.6	232.1	232.5
107.5°	297.8	296.9	296.1	295.6	295.3	295.0	294.8	294.5	294.8	295.0	295.3
110°	337.2	336.7	336.2	335.7	335.3	334.9	334.4	333.9	334.4	334.9	335.3





TEST NUMBER: P332483-927

CATALOG NUMBER: S123RDIW-S1165D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	376.4	376.4	376.3	376.1	375.8	375.6	375.3	375.0	375.3	375.6	375.8
115°	438.6	439.0	439.5	439.4	438.7	438.0	437.4	436.7	437.4	438.0	438.7
117.5°	499.3	499.9	500.5	500.6	500.1	499.6	499.2	498.8	499.2	499.6	500.1
120°	540.7	541.8	543.0	542.8	541.5	540.1	538.7	537.3	538.7	540.1	541.5
122.5°	580.7	581.2	581.9	581.6	580.7	579.6	578.6	577.7	578.6	579.6	580.7
125°	641.0	641.4	641.9	641.8	641.1	640.4	639.8	639.1	639.8	640.4	641.1
127.5°	701.1	701.6	702.1	701.6	700.1	698.7	697.3	695.8	697.3	698.7	700.1
130°	740.1	740.8	741.5	740.9	739.1	737.3	735.4	733.6	735.4	737.3	739.1
132.5°	778.4	778.9	779.3	778.7	776.9	775.1	773.2	771.4	773.2	775.1	776.9
135°	834.7	835.0	835.2	834.6	833.2	831.9	830.5	829.2	830.5	831.9	833.2
137.5°	889.2	888.6	888.0	887.2	886.0	884.9	883.7	882.6	883.7	884.9	886.0
140°	925.3	925.0	924.8	924.2	923.0	921.9	920.7	919.6	920.7	921.9	923.0
142.5°	959.4	959.0	958.6	957.8	956.7	955.5	954.4	953.2	954.4	955.5	956.7
145°	1009.6	1008.9	1008.3	1007.7	1007.3	1006.8	1006.3	1005.8	1006.3	1006.8	1007.3
147.5°	1057.2	1056.5	1055.9	1055.2	1054.4	1053.5	1052.7	1051.9	1052.7	1053.5	1054.4
150°	1087.1	1086.7	1086.2	1085.8	1085.3	1084.9	1084.4	1083.9	1084.4	1084.9	1085.3
152.5°	1113.8	1113.6	1113.3	1112.8	1112.1	1111.5	1110.9	1110.2	1110.9	1111.5	1112.1
155°	1152.3	1152.1	1151.9	1151.8	1151.8	1151.8	1151.8	1151.8	1151.8	1151.8	1151.8
157.5°	1186.3	1186.1	1186.0	1186.0	1186.3	1186.5	1186.8	1187.1	1186.8	1186.5	1186.3
160°	1207.2	1207.2	1207.2	1207.4	1207.9	1208.4	1208.9	1209.3	1208.9	1208.4	1207.9
162.5°	1226.6	1226.5	1226.2	1226.5	1227.1	1227.7	1228.4	1229.0	1228.4	1227.7	1227.1
165°	1251.4	1251.4	1251.4	1251.8	1252.4	1253.2	1253.8	1254.5	1253.8	1253.2	1252.4
167.5°	1271.2	1271.0	1270.8	1271.2	1272.1	1273.0	1273.9	1274.9	1273.9	1273.0	1272.1
170°	1282.2	1282.2	1282.2	1282.7	1283.7	1284.5	1285.5	1286.3	1285.5	1284.5	1283.7
172.5°	1291.3	1291.3	1291.3	1291.7	1292.7	1293.6	1294.5	1295.4	1294.5	1293.6	1292.7
175°	1300.8	1300.8	1300.8	1301.2	1302.1	1303.1	1303.9	1304.9	1303.9	1303.1	1302.1
177.5°	1305.4	1305.4	1305.4	1305.8	1306.5	1307.3	1308.1	1308.8	1308.1	1307.3	1306.5
180°	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0



TEST NUMBER: P332483-927

CATALOG NUMBER: S123RDIW-S1165D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4
2.5°	1429.6	1423.1	1418.6	1408.7	1402.2	1395.2	1388.2	1392.7	1392.2	1391.7	1391.7
5°	1381.6	1367.3	1354.2	1337.4	1326.8	1313.8	1303.8	1302.5	1305.0	1296.3	1291.3
7.5°	1334.0	1314.5	1295.9	1277.4	1257.7	1242.1	1232.2	1227.6	1221.2	1215.8	1210.3
10°	1300.7	1277.6	1259.6	1236.5	1215.4	1196.7	1184.9	1176.8	1172.4	1168.1	1160.0
12.5°	1266.3	1243.8	1220.8	1194.7	1174.6	1152.9	1144.0	1135.0	1126.6	1121.7	1110.6
15°	1216.0	1186.8	1162.4	1135.0	1112.6	1091.5	1079.0	1061.0	1058.4	1052.3	1041.0
17.5°	1165.5	1133.8	1100.3	1080.0	1054.7	1032.7	1013.8	1007.7	989.8	983.1	973.4
20°	1125.7	1096.5	1071.0	1044.2	1007.4	986.9	971.9	963.8	949.5	940.8	934.5
22.5°	1091.3	1061.6	1032.1	1000.8	970.6	947.5	936.6	924.0	916.2	904.0	897.2
25°	1042.3	1009.9	974.4	940.8	919.0	901.6	884.2	872.9	861.7	856.1	843.7
27.5°	985.2	951.4	918.2	892.7	865.9	848.7	833.0	823.0	809.5	800.1	793.2
30°	953.9	914.0	885.3	862.4	828.1	811.9	800.1	787.7	777.7	767.7	760.9
32.5°	917.5	881.1	854.0	825.5	799.2	781.5	766.2	755.3	746.8	737.3	730.5
35°	860.5	830.0	801.9	773.3	754.0	735.9	717.9	708.5	700.4	691.7	685.6
37.5°	808.9	780.4	753.8	726.6	702.7	688.0	673.4	666.3	655.4	649.5	643.2
40°	777.1	749.0	720.4	694.3	669.3	658.1	645.1	634.5	624.5	620.1	613.3
42.5°	742.2	714.2	690.0	661.9	641.4	626.2	614.2	602.6	595.1	588.7	584.9
45°	690.5	665.6	641.9	613.9	594.6	581.5	567.8	557.2	550.4	546.1	539.2
47.5°	640.3	615.4	591.4	567.0	548.3	533.4	519.7	512.3	503.2	497.9	493.2
50°	604.0	581.5	556.0	533.6	514.9	499.9	488.8	479.4	471.3	464.5	461.4
52.5°	570.6	546.7	524.7	503.7	484.0	467.1	456.9	447.0	440.9	433.1	429.5
55°	515.6	492.5	473.8	453.3	434.0	419.6	407.2	398.5	392.3	383.6	378.6
57.5°	463.8	443.2	420.9	403.1	383.2	371.1	360.8	349.0	341.4	334.5	329.6
60°	429.0	405.4	386.0	369.2	351.8	336.2	326.9	317.5	309.4	302.6	298.3
62.5°	392.6	371.9	353.6	335.3	319.4	305.9	295.0	287.2	280.0	275.7	271.3
65°	336.8	320.7	302.0	287.0	272.1	262.1	253.4	246.5	241.6	238.4	234.7
67.5°	285.5	269.8	253.5	238.8	228.9	221.3	215.6	209.7	207.2	203.2	200.7
70°	252.2	236.0	221.7	210.5	200.5	194.9	191.2	186.8	184.3	179.4	176.8
72.5°	215.8	204.1	193.8	184.6	176.6	171.5	166.8	161.4	157.4	151.9	149.4
75°	170.0	159.4	151.3	145.0	140.1	133.2	126.4	120.8	118.9	117.1	116.5
77.5°	125.9	119.1	113.3	108.1	101.9	96.9	95.4	94.1	93.8	92.8	92.8
80°	99.0	92.8	88.4	82.1	78.4	78.4	78.4	77.2	77.8	77.8	77.8
82.5°	73.6	67.9	65.5	63.3	62.5	63.0	63.0	63.3	62.9	63.8	63.4
85°	37.9	38.6	39.8	39.2	39.8	39.8	41.1	40.5	41.1	39.8	41.1
87.5°	16.0	18.0	19.1	20.2	21.3	21.4	22.0	22.3	22.9	23.1	23.2
90°	10.1	12.8	15.8	18.7	21.7	24.6	25.6	26.5	27.4	28.3	29.0
92.5°	31.1	32.7	34.4	36.0	37.8	39.5	40.2	40.9	41.7	42.4	42.6
95°	67.0	68.8	70.6	72.4	74.2	76.0	76.9	77.9	78.7	79.7	80.2
97.5°	112.4	113.7	115.0	116.3	117.6	119.0	120.0	121.0	122.2	123.2	123.7
100°	145.2	146.5	147.6	148.8	149.9	151.1	151.7	152.4	153.0	153.8	154.3
102.5°	180.0	181.2	182.7	184.2	185.7	187.2	187.9	188.5	189.3	190.0	190.2
105°	233.0	234.2	236.3	238.4	240.4	242.5	242.5	242.5	242.5	242.5	242.7
107.5°	295.6	296.1	296.9	297.8	298.6	299.4	300.2	300.9	301.6	302.3	302.5
110°	335.7	336.2	336.7	337.2	337.5	338.0	339.0	339.8	340.8	341.7	341.9



TEST NUMBER: P332483-927

CATALOG NUMBER: S123RDIW-S1165D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	376.1	376.3	376.4	376.4	376.6	376.7	377.8	378.8	379.9	381.0	381.5
115°	439.4	439.5	439.0	438.6	438.2	437.7	437.9	438.2	438.4	438.6	438.6
117.5°	500.6	500.5	499.9	499.3	498.7	498.1	498.0	498.0	498.0	497.9	497.6
120°	542.8	543.0	541.8	540.7	539.6	538.4	538.1	537.9	537.7	537.5	537.1
122.5°	581.6	581.9	581.2	580.7	580.0	579.5	578.8	578.3	577.7	577.1	576.5
125°	641.8	641.9	641.4	641.0	640.6	640.1	639.2	638.3	637.4	636.4	635.6
127.5°	701.6	702.1	701.6	701.1	700.6	700.1	698.8	697.5	696.2	695.0	693.8
130°	740.9	741.5	740.8	740.1	739.4	738.7	737.8	736.9	736.0	735.1	733.8
132.5°	778.7	779.3	778.9	778.4	777.8	777.4	776.3	775.2	774.0	773.0	771.8
135°	834.6	835.2	835.0	834.7	834.5	834.2	833.4	832.4	831.6	830.6	830.0
137.5°	887.2	888.0	888.6	889.2	889.8	890.4	889.4	888.4	887.5	886.5	885.7
140°	924.2	924.8	925.0	925.3	925.5	925.7	925.5	925.3	925.0	924.8	923.9
142.5°	957.8	958.6	959.0	959.4	959.8	960.3	960.0	959.8	959.6	959.3	958.6
145°	1007.7	1008.3	1008.9	1009.6	1010.3	1011.0	1010.7	1010.5	1010.3	1010.1	1009.6
147.5°	1055.2	1055.9	1056.5	1057.2	1057.8	1058.4	1058.4	1058.4	1058.4	1058.4	1057.8
150°	1085.8	1086.2	1086.7	1087.1	1087.6	1088.1	1088.1	1088.1	1088.1	1088.1	1087.3
152.5°	1112.8	1113.3	1113.6	1113.8	1114.1	1114.4	1114.8	1115.1	1115.5	1115.8	1115.4
155°	1151.8	1151.9	1152.1	1152.3	1152.5	1152.8	1153.7	1154.6	1155.6	1156.4	1156.1
157.5°	1186.0	1186.0	1186.1	1186.3	1186.5	1186.7	1187.6	1188.6	1189.5	1190.6	1190.3
160°	1207.4	1207.2	1207.2	1207.2	1207.2	1207.2	1208.4	1209.5	1210.7	1211.8	1212.0
162.5°	1226.5	1226.2	1226.5	1226.6	1226.8	1226.9	1228.1	1229.2	1230.4	1231.5	1231.4
165°	1251.8	1251.4	1251.4	1251.4	1251.4	1251.4	1252.8	1254.2	1255.5	1256.9	1256.8
167.5°	1271.2	1270.8	1271.0	1271.2	1271.4	1271.5	1273.0	1274.4	1275.8	1277.2	1277.2
170°	1282.7	1282.2	1282.2	1282.2	1282.2	1282.2	1283.8	1285.5	1287.1	1288.6	1288.6
172.5°	1291.7	1291.3	1291.3	1291.3	1291.3	1291.3	1292.7	1294.1	1295.5	1297.0	1296.9
175°	1301.2	1300.8	1300.8	1300.8	1300.8	1300.8	1302.1	1303.5	1304.9	1306.2	1306.1
177.5°	1305.8	1305.4	1305.4	1305.4	1305.4	1305.4	1306.5	1307.7	1308.8	1309.9	1309.8
180°	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0



TEST NUMBER: P332483-927

CATALOG NUMBER: S123RDIW-S1165D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4
2.5°	1385.8	1385.2	1385.8	1383.7	1385.8	1385.2	1385.8	1391.7	1391.7	1392.2	1392.7
5°	1289.4	1288.9	1287.0	1281.4	1287.0	1288.9	1289.4	1291.3	1296.3	1305.0	1302.5
7.5°	1205.4	1204.5	1199.0	1199.2	1199.0	1204.5	1205.4	1210.3	1215.8	1221.2	1227.6
10°	1155.6	1156.2	1148.7	1144.4	1148.7	1156.2	1155.6	1160.0	1168.1	1172.4	1176.8
12.5°	1107.3	1104.5	1098.4	1093.6	1098.4	1104.5	1107.3	1110.6	1121.7	1126.6	1135.0
15°	1043.5	1037.3	1022.4	1023.6	1022.4	1037.3	1043.5	1041.0	1052.3	1058.4	1061.0
17.5°	968.4	963.8	963.6	954.9	963.6	963.8	968.4	973.4	983.1	989.8	1007.7
20°	924.6	921.5	922.7	914.0	922.7	921.5	924.6	934.5	940.8	949.5	963.8
22.5°	890.3	887.1	881.9	879.2	881.9	887.1	890.3	897.2	904.0	916.2	924.0
25°	840.0	835.0	830.0	833.1	830.0	835.0	840.0	843.7	856.1	861.7	872.9
27.5°	789.6	785.9	780.9	780.3	780.9	785.9	789.6	793.2	800.1	809.5	823.0
30°	757.7	754.0	751.5	748.4	751.5	754.0	757.7	760.9	767.7	777.7	787.7
32.5°	725.4	724.6	720.2	719.5	720.2	724.6	725.4	730.5	737.3	746.8	755.3
35°	683.0	679.3	678.0	678.7	678.0	679.3	683.0	685.6	691.7	700.4	708.5
37.5°	642.8	637.8	635.6	633.3	635.6	637.8	642.8	643.2	649.5	655.4	666.3
40°	613.9	609.0	607.7	606.4	607.7	609.0	613.9	613.3	620.1	624.5	634.5
42.5°	581.5	579.6	578.8	576.6	578.8	579.6	581.5	584.9	588.7	595.1	602.6
45°	537.3	536.7	533.0	534.2	533.0	536.7	537.3	539.2	546.1	550.4	557.2
47.5°	490.8	488.0	485.4	487.1	485.4	488.0	490.8	493.2	497.9	503.2	512.3
50°	458.9	457.6	452.0	453.3	452.0	457.6	458.9	461.4	464.5	471.3	479.4
52.5°	427.0	422.2	420.2	419.4	420.2	422.2	427.0	429.5	433.1	440.9	447.0
55°	374.2	368.6	366.1	364.9	366.1	368.6	374.2	378.6	383.6	392.3	398.5
57.5°	322.4	320.9	318.9	320.3	318.9	320.9	322.4	329.6	334.5	341.4	349.0
60°	292.0	292.0	292.0	291.4	292.0	292.0	292.0	298.3	302.6	309.4	317.5
62.5°	268.6	267.1	266.6	267.5	266.6	267.1	268.6	271.3	275.7	280.0	287.2
65°	232.9	232.3	229.7	229.1	229.7	232.3	232.9	234.7	238.4	241.6	246.5
67.5°	199.2	196.9	196.1	195.3	196.1	196.9	199.2	200.7	203.2	207.2	209.7
70°	173.7	172.5	168.7	169.4	168.7	172.5	173.7	176.8	179.4	184.3	186.8
72.5°	146.3	145.0	144.3	143.5	144.3	145.0	146.3	149.4	151.9	157.4	161.4
75°	115.8	115.2	114.5	117.1	114.5	115.2	115.8	116.5	117.1	118.9	120.8
77.5°	92.8	92.8	93.2	92.1	93.2	92.8	92.8	92.8	92.8	93.8	94.1
80°	77.8	77.8	77.2	77.2	77.2	77.8	77.8	77.8	77.8	77.8	77.2
82.5°	62.4	62.9	63.3	62.3	63.3	62.9	62.4	63.4	63.8	62.9	63.3
85°	41.1	40.5	41.7	41.1	41.7	40.5	41.1	41.1	39.8	41.1	40.5
87.5°	24.3	23.4	23.5	24.1	23.5	23.4	24.3	23.2	23.1	22.9	22.3
90°	29.5	29.9	30.3	30.8	30.3	29.9	29.5	29.0	28.3	27.4	26.5
92.5°	42.3	42.1	41.7	41.5	41.7	42.1	42.3	42.6	42.4	41.7	40.9
95°	80.2	80.2	80.2	80.2	80.2	80.2	80.2	80.2	79.7	78.7	77.9
97.5°	123.6	123.5	123.4	123.3	123.4	123.5	123.6	123.7	123.2	122.2	121.0
100°	154.8	155.3	155.7	156.1	155.7	155.3	154.8	154.3	153.8	153.0	152.4
102.5°	190.1	190.0	190.0	189.9	190.0	190.0	190.1	190.2	190.0	189.3	188.5
105°	243.2	243.6	244.1	244.5	244.1	243.6	243.2	242.7	242.5	242.5	242.5
107.5°	302.3	302.0	301.7	301.4	301.7	302.0	302.3	302.5	302.3	301.6	300.9
110°	341.4	341.0	340.6	340.1	340.6	341.0	341.4	341.9	341.7	340.8	339.8



TEST NUMBER: P332483-927

CATALOG NUMBER: S123RDIW-S1165D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	381.4	381.4	381.3	381.2	381.3	381.4	381.4	381.5	381.0	379.9	378.8
115°	438.4	438.2	437.9	437.7	437.9	438.2	438.4	438.6	438.6	438.4	438.2
117.5°	496.9	496.3	495.7	495.0	495.7	496.3	496.9	497.6	497.9	498.0	498.0
120°	536.7	536.2	535.8	535.3	535.8	536.2	536.7	537.1	537.5	537.7	537.9
122.5°	575.8	575.2	574.6	573.9	574.6	575.2	575.8	576.5	577.1	577.7	578.3
125°	634.6	633.7	632.8	631.8	632.8	633.7	634.6	635.6	636.4	637.4	638.3
127.5°	692.8	691.7	690.7	689.6	690.7	691.7	692.8	693.8	695.0	696.2	697.5
130°	732.2	730.6	729.0	727.5	729.0	730.6	732.2	733.8	735.1	736.0	736.9
132.5°	770.6	769.4	768.1	766.9	768.1	769.4	770.6	771.8	773.0	774.0	775.2
135°	829.5	829.0	828.5	828.1	828.5	829.0	829.5	830.0	830.6	831.6	832.4
137.5°	884.8	883.9	883.0	882.2	883.0	883.9	884.8	885.7	886.5	887.5	888.4
140°	922.3	920.7	919.1	917.5	919.1	920.7	922.3	923.9	924.8	925.0	925.3
142.5°	957.4	956.2	954.9	953.7	954.9	956.2	957.4	958.6	959.3	959.6	959.8
145°	1008.6	1007.7	1006.8	1005.8	1006.8	1007.7	1008.6	1009.6	1010.1	1010.3	1010.5
147.5°	1056.5	1055.0	1053.7	1052.3	1053.7	1055.0	1056.5	1057.8	1058.4	1058.4	1058.4
150°	1086.0	1084.7	1083.2	1081.9	1083.2	1084.7	1086.0	1087.3	1088.1	1088.1	1088.1
152.5°	1114.2	1113.0	1111.8	1110.6	1111.8	1113.0	1114.2	1115.4	1115.8	1115.5	1115.1
155°	1154.5	1152.9	1151.3	1149.7	1151.3	1152.9	1154.5	1156.1	1156.4	1155.6	1154.6
157.5°	1189.1	1187.8	1186.5	1185.3	1186.5	1187.8	1189.1	1190.3	1190.6	1189.5	1188.6
160°	1211.0	1210.1	1209.2	1208.2	1209.2	1210.1	1211.0	1212.0	1211.8	1210.7	1209.5
162.5°	1229.9	1228.4	1227.0	1225.5	1227.0	1228.4	1229.9	1231.4	1231.5	1230.4	1229.2
165°	1255.2	1253.6	1252.0	1250.4	1252.0	1253.6	1255.2	1256.8	1256.9	1255.5	1254.2
167.5°	1275.8	1274.4	1273.0	1271.5	1273.0	1274.4	1275.8	1277.2	1277.2	1275.8	1274.4
170°	1287.1	1285.5	1283.8	1282.2	1283.8	1285.5	1287.1	1288.6	1288.6	1287.1	1285.5
172.5°	1295.3	1293.6	1292.0	1290.5	1292.0	1293.6	1295.3	1296.9	1297.0	1295.5	1294.1
175°	1304.5	1302.9	1301.3	1299.7	1301.3	1302.9	1304.5	1306.1	1306.2	1304.9	1303.5
177.5°	1308.4	1307.2	1305.9	1304.6	1305.9	1307.2	1308.4	1309.8	1309.9	1308.8	1307.7
180°	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0



TEST NUMBER: P332483-927

CATALOG NUMBER: S123RDIW-S1165D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4
2.5°	1388.2	1395.2	1402.2	1408.7	1418.6	1423.1	1429.6	1432.0	1439.6	1450.5	1459.4
5°	1303.8	1313.8	1326.8	1337.4	1354.2	1367.3	1381.6	1395.3	1411.5	1434.6	1455.1
7.5°	1232.2	1242.1	1257.7	1277.4	1295.9	1314.5	1334.0	1352.7	1375.9	1408.9	1441.6
10°	1184.9	1196.7	1215.4	1236.5	1259.6	1277.6	1300.7	1324.4	1353.0	1391.0	1430.2
12.5°	1144.0	1152.9	1174.6	1194.7	1220.8	1243.8	1266.3	1294.0	1326.6	1367.1	1414.2
15°	1079.0	1091.5	1112.6	1135.0	1162.4	1186.8	1216.0	1249.6	1281.4	1331.2	1388.5
17.5°	1013.8	1032.7	1054.7	1080.0	1100.3	1133.8	1165.5	1200.1	1239.1	1292.0	1354.9
20°	971.9	986.9	1007.4	1044.2	1071.0	1096.5	1125.7	1168.7	1204.8	1264.6	1329.9
22.5°	936.6	947.5	970.6	1000.8	1032.1	1061.6	1091.3	1132.3	1176.9	1233.7	1304.6
25°	884.2	901.6	919.0	940.8	974.4	1009.9	1042.3	1077.1	1124.5	1184.9	1261.5
27.5°	833.0	848.7	865.9	892.7	918.2	951.4	985.2	1025.2	1076.0	1140.0	1217.6
30°	800.1	811.9	828.1	862.4	885.3	914.0	953.9	989.4	1036.6	1104.5	1186.8
32.5°	766.2	781.5	799.2	825.5	854.0	881.1	917.5	956.0	1004.3	1071.2	1155.3
35°	717.9	735.9	754.0	773.3	801.9	830.0	860.5	902.9	952.0	1016.8	1099.5
37.5°	673.4	688.0	702.7	726.6	753.8	780.4	808.9	850.6	897.0	966.9	1042.7
40°	645.1	658.1	669.3	694.3	720.4	749.0	777.1	813.8	863.6	929.0	1002.4
42.5°	614.2	626.2	641.4	661.9	690.0	714.2	742.2	776.9	823.7	890.1	954.6
45°	567.8	581.5	594.6	613.9	641.9	665.6	690.5	723.5	771.4	826.2	883.5
47.5°	519.7	533.4	548.3	567.0	591.4	615.4	640.3	669.6	713.3	767.1	805.6
50°	488.8	499.9	514.9	533.6	556.0	581.5	604.0	635.7	677.4	719.8	753.4
52.5°	456.9	467.1	484.0	503.7	524.7	546.7	570.6	597.9	635.6	675.4	702.1
55°	407.2	419.6	434.0	453.3	473.8	492.5	515.6	543.6	573.5	603.3	621.4
57.5°	360.8	371.1	383.2	403.1	420.9	443.2	463.8	485.7	513.3	535.8	547.6
60°	326.9	336.2	351.8	369.2	386.0	405.4	429.0	450.8	472.0	490.0	499.3
62.5°	295.0	305.9	319.4	335.3	353.6	371.9	392.6	410.9	429.6	445.2	451.5
65°	253.4	262.1	272.1	287.0	302.0	320.7	336.8	355.5	369.2	378.0	383.6
67.5°	215.6	221.3	228.9	238.8	253.5	269.8	285.5	300.1	311.6	317.5	322.5
70°	191.2	194.9	200.5	210.5	221.7	236.0	252.2	262.8	272.7	277.7	282.7
72.5°	166.8	171.5	176.6	184.6	193.8	204.1	215.8	228.9	234.3	240.3	243.4
75°	126.4	133.2	140.1	145.0	151.3	159.4	170.0	178.1	181.2	186.2	186.8
77.5°	95.4	96.9	101.9	108.1	113.3	119.1	125.9	133.1	134.6	137.2	138.9
80°	78.4	78.4	78.4	82.1	88.4	92.8	99.0	102.7	105.2	105.8	106.5
82.5°	63.0	63.0	62.5	63.3	65.5	67.9	73.6	77.8	79.9	79.5	78.1
85°	41.1	39.8	39.8	39.2	39.8	38.6	37.9	40.5	44.2	44.2	42.9
87.5°	22.0	21.4	21.3	20.2	19.1	18.0	16.0	16.0	15.5	17.1	16.2
90°	25.6	24.6	21.7	18.7	15.8	12.8	10.1	7.8	5.6	3.3	1.0
92.5°	40.2	39.5	37.8	36.0	34.4	32.7	31.1	29.5	28.0	26.4	24.9
95°	76.9	76.0	74.2	72.4	70.6	68.8	67.0	65.4	63.8	62.2	60.6
97.5°	120.0	119.0	117.6	116.3	115.0	113.7	112.4	111.2	110.0	108.8	107.7
100°	151.7	151.1	149.9	148.8	147.6	146.5	145.2	143.9	142.4	141.1	139.7
102.5°	187.9	187.2	185.7	184.2	182.7	181.2	180.0	179.2	178.4	177.5	176.7
105°	242.5	242.5	240.4	238.4	236.3	234.2	233.0	232.5	232.1	231.6	231.2
107.5°	300.2	299.4	298.6	297.8	296.9	296.1	295.6	295.3	295.0	294.8	294.5
110°	339.0	338.0	337.5	337.2	336.7	336.2	335.7	335.3	334.9	334.4	333.9



TEST NUMBER: P332483-927

CATALOG NUMBER: S123RDIW-S1165D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	377.8	376.7	376.6	376.4	376.4	376.3	376.1	375.8	375.6	375.3	375.0
115°	437.9	437.7	438.2	438.6	439.0	439.5	439.4	438.7	438.0	437.4	436.7
117.5°	498.0	498.1	498.7	499.3	499.9	500.5	500.6	500.1	499.6	499.2	498.8
120°	538.1	538.4	539.6	540.7	541.8	543.0	542.8	541.5	540.1	538.7	537.3
122.5°	578.8	579.5	580.0	580.7	581.2	581.9	581.6	580.7	579.6	578.6	577.7
125°	639.2	640.1	640.6	641.0	641.4	641.9	641.8	641.1	640.4	639.8	639.1
127.5°	698.8	700.1	700.6	701.1	701.6	702.1	701.6	700.1	698.7	697.3	695.8
130°	737.8	738.7	739.4	740.1	740.8	741.5	740.9	739.1	737.3	735.4	733.6
132.5°	776.3	777.4	777.8	778.4	778.9	779.3	778.7	776.9	775.1	773.2	771.4
135°	833.4	834.2	834.5	834.7	835.0	835.2	834.6	833.2	831.9	830.5	829.2
137.5°	889.4	890.4	889.8	889.2	888.6	888.0	887.2	886.0	884.9	883.7	882.6
140°	925.5	925.7	925.5	925.3	925.0	924.8	924.2	923.0	921.9	920.7	919.6
142.5°	960.0	960.3	959.8	959.4	959.0	958.6	957.8	956.7	955.5	954.4	953.2
145°	1010.7	1011.0	1010.3	1009.6	1008.9	1008.3	1007.7	1007.3	1006.8	1006.3	1005.8
147.5°	1058.4	1058.4	1057.8	1057.2	1056.5	1055.9	1055.2	1054.4	1053.5	1052.7	1051.9
150°	1088.1	1088.1	1087.6	1087.1	1086.7	1086.2	1085.8	1085.3	1084.9	1084.4	1083.9
152.5°	1114.8	1114.4	1114.1	1113.8	1113.6	1113.3	1112.8	1112.1	1111.5	1110.9	1110.2
155°	1153.7	1152.8	1152.5	1152.3	1152.1	1151.9	1151.8	1151.8	1151.8	1151.8	1151.8
157.5°	1187.6	1186.7	1186.5	1186.3	1186.1	1186.0	1186.0	1186.3	1186.5	1186.8	1187.1
160°	1208.4	1207.2	1207.2	1207.2	1207.2	1207.2	1207.4	1207.9	1208.4	1208.9	1209.3
162.5°	1228.1	1226.9	1226.8	1226.6	1226.5	1226.2	1226.5	1227.1	1227.7	1228.4	1229.0
165°	1252.8	1251.4	1251.4	1251.4	1251.4	1251.4	1251.8	1252.4	1253.2	1253.8	1254.5
167.5°	1273.0	1271.5	1271.4	1271.2	1271.0	1270.8	1271.2	1272.1	1273.0	1273.9	1274.9
170°	1283.8	1282.2	1282.2	1282.2	1282.2	1282.2	1282.7	1283.7	1284.5	1285.5	1286.3
172.5°	1292.7	1291.3	1291.3	1291.3	1291.3	1291.3	1291.7	1292.7	1293.6	1294.5	1295.4
175°	1302.1	1300.8	1300.8	1300.8	1300.8	1300.8	1301.2	1302.1	1303.1	1303.9	1304.9
177.5°	1306.5	1305.4	1305.4	1305.4	1305.4	1305.4	1305.8	1306.5	1307.3	1308.1	1308.8
180°	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0



TEST NUMBER: P332483-927

CATALOG NUMBER: S123RDIW-S1165D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4
2.5°	1462.4	1467.9	1474.9	1485.3	1493.3	1500.3	1501.8	1503.8	1508.8	1517.2	1523.7
5°	1471.9	1486.2	1509.3	1531.7	1555.9	1575.9	1594.6	1607.7	1620.1	1646.2	1667.4
7.5°	1468.9	1500.8	1536.9	1577.2	1617.9	1657.3	1693.9	1726.6	1759.3	1797.4	1840.9
10°	1466.9	1504.3	1552.8	1604.5	1661.2	1716.6	1770.1	1811.9	1860.4	1904.0	1959.4
12.5°	1457.5	1511.2	1569.3	1635.4	1705.0	1768.9	1839.4	1897.0	1952.6	2015.5	2080.0
15°	1445.1	1510.5	1584.0	1671.7	1777.6	1854.8	1927.1	2027.3	2095.8	2164.2	2256.5
17.5°	1422.6	1502.4	1594.2	1708.3	1796.5	1900.3	2009.0	2088.2	2180.5	2277.0	2360.4
20°	1404.6	1497.5	1600.1	1712.2	1825.0	1937.6	2042.9	2137.5	2232.8	2344.2	2412.7
22.5°	1386.7	1478.5	1585.2	1704.3	1825.4	1944.1	2063.2	2174.4	2281.6	2394.1	2481.4
25°	1348.6	1457.6	1573.4	1694.8	1814.3	1945.1	2087.1	2211.0	2343.6	2459.4	2542.2
27.5°	1310.0	1409.8	1525.2	1648.4	1781.2	1935.8	2102.8	2243.6	2376.5	2459.4	2485.4
30°	1275.2	1381.0	1486.8	1612.0	1755.8	1928.3	2105.7	2267.0	2376.0	2412.0	2385.3
32.5°	1239.8	1335.7	1440.5	1568.7	1721.4	1909.9	2109.7	2253.0	2318.6	2291.1	2182.1
35°	1177.4	1263.9	1365.4	1493.7	1669.3	1899.7	2093.3	2190.4	2174.2	2018.6	1813.1
37.5°	1110.6	1181.1	1275.2	1409.3	1615.3	1859.2	2022.5	2036.9	1896.8	1657.8	1420.5
40°	1057.9	1121.3	1217.9	1358.0	1573.4	1819.3	1951.3	1893.4	1676.1	1410.2	1212.3
42.5°	1006.5	1060.1	1153.1	1304.2	1533.5	1765.1	1845.2	1719.1	1468.4	1217.0	1037.0
45°	919.6	970.0	1063.4	1218.5	1452.0	1661.2	1650.6	1431.4	1180.5	978.2	828.7
47.5°	837.2	881.3	968.9	1127.2	1356.2	1505.5	1406.5	1173.3	960.4	798.1	691.5
50°	778.9	822.5	909.7	1066.0	1279.5	1388.5	1247.1	1022.4	827.5	693.0	608.3
52.5°	723.1	765.7	845.4	997.7	1186.8	1252.0	1100.2	891.8	729.4	613.3	540.6
55°	645.1	677.4	749.0	894.7	1036.1	1051.0	897.2	722.9	589.0	508.1	458.3
57.5°	565.5	593.3	664.1	780.1	879.2	871.6	725.7	575.0	484.8	424.6	388.5
60°	513.7	541.1	603.3	703.0	777.7	751.5	617.7	496.2	419.1	374.9	346.2
62.5°	465.3	486.8	545.0	617.7	671.5	641.9	528.0	427.5	366.2	329.0	306.3
65°	395.4	412.8	459.5	497.5	527.4	498.8	404.1	334.4	290.2	264.0	248.4
67.5°	328.8	339.9	369.5	383.2	404.3	372.8	303.9	257.1	232.0	209.9	199.2
70°	287.0	295.1	310.7	321.9	327.5	295.1	244.1	209.8	188.6	173.1	166.3
72.5°	245.2	252.3	255.4	264.6	261.7	231.4	196.2	169.0	153.8	143.2	134.4
75°	187.4	190.5	187.4	183.7	175.5	154.4	130.2	116.5	105.2	100.2	97.1
77.5°	136.6	135.6	131.3	125.6	111.7	98.4	85.3	80.7	75.8	73.2	72.1
80°	105.2	102.7	99.0	89.7	77.8	68.5	65.4	62.3	60.4	57.3	56.6
82.5°	78.3	76.8	70.6	62.7	54.4	50.1	47.5	46.3	44.4	42.9	42.7
85°	41.7	39.8	33.0	28.7	27.4	26.1	25.5	25.5	23.1	22.4	22.4
87.5°	14.1	11.6	11.6	10.5	11.0	10.6	11.7	11.3	11.4	12.1	11.2
90°	3.3	5.6	7.8	10.1	12.8	15.8	18.7	21.7	24.6	25.6	26.5
92.5°	26.4	28.0	29.5	31.1	32.7	34.4	36.0	37.8	39.5	40.2	40.9
95°	62.2	63.8	65.4	67.0	68.8	70.6	72.4	74.2	76.0	76.9	77.9
97.5°	108.8	110.0	111.2	112.4	113.7	115.0	116.3	117.6	119.0	120.0	121.0
100°	141.1	142.4	143.9	145.2	146.5	147.6	148.8	149.9	151.1	151.7	152.4
102.5°	177.5	178.4	179.2	180.0	181.2	182.7	184.2	185.7	187.2	187.9	188.5
105°	231.6	232.1	232.5	233.0	234.2	236.3	238.4	240.4	242.5	242.5	242.5
107.5°	294.8	295.0	295.3	295.6	296.1	296.9	297.8	298.6	299.4	300.2	300.9
110°	334.4	334.9	335.3	335.7	336.2	336.7	337.2	337.5	338.0	339.0	339.8





TEST NUMBER: P332483-927

CATALOG NUMBER: S123RDIW-S1165D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	375.3	375.6	375.8	376.1	376.3	376.4	376.4	376.6	376.7	377.8	378.8
115°	437.4	438.0	438.7	439.4	439.5	439.0	438.6	438.2	437.7	437.9	438.2
117.5°	499.2	499.6	500.1	500.6	500.5	499.9	499.3	498.7	498.1	498.0	498.0
120°	538.7	540.1	541.5	542.8	543.0	541.8	540.7	539.6	538.4	538.1	537.9
122.5°	578.6	579.6	580.7	581.6	581.9	581.2	580.7	580.0	579.5	578.8	578.3
125°	639.8	640.4	641.1	641.8	641.9	641.4	641.0	640.6	640.1	639.2	638.3
127.5°	697.3	698.7	700.1	701.6	702.1	701.6	701.1	700.6	700.1	698.8	697.5
130°	735.4	737.3	739.1	740.9	741.5	740.8	740.1	739.4	738.7	737.8	736.9
132.5°	773.2	775.1	776.9	778.7	779.3	778.9	778.4	777.8	777.4	776.3	775.2
135°	830.5	831.9	833.2	834.6	835.2	835.0	834.7	834.5	834.2	833.4	832.4
137.5°	883.7	884.9	886.0	887.2	888.0	888.6	889.2	889.8	890.4	889.4	888.4
140°	920.7	921.9	923.0	924.2	924.8	925.0	925.3	925.5	925.7	925.5	925.3
142.5°	954.4	955.5	956.7	957.8	958.6	959.0	959.4	959.8	960.3	960.0	959.8
145°	1006.3	1006.8	1007.3	1007.7	1008.3	1008.9	1009.6	1010.3	1011.0	1010.7	1010.5
147.5°	1052.7	1053.5	1054.4	1055.2	1055.9	1056.5	1057.2	1057.8	1058.4	1058.4	1058.4
150°	1084.4	1084.9	1085.3	1085.8	1086.2	1086.7	1087.1	1087.6	1088.1	1088.1	1088.1
152.5°	1110.9	1111.5	1112.1	1112.8	1113.3	1113.6	1113.8	1114.1	1114.4	1114.8	1115.1
155°	1151.8	1151.8	1151.8	1151.8	1151.9	1152.1	1152.3	1152.5	1152.8	1153.7	1154.6
157.5°	1186.8	1186.5	1186.3	1186.0	1186.0	1186.1	1186.3	1186.5	1186.7	1187.6	1188.6
160°	1208.9	1208.4	1207.9	1207.4	1207.2	1207.2	1207.2	1207.2	1207.2	1208.4	1209.5
162.5°	1228.4	1227.7	1227.1	1226.5	1226.2	1226.5	1226.6	1226.8	1226.9	1228.1	1229.2
165°	1253.8	1253.2	1252.4	1251.8	1251.4	1251.4	1251.4	1251.4	1251.4	1252.8	1254.2
167.5°	1273.9	1273.0	1272.1	1271.2	1270.8	1271.0	1271.2	1271.4	1271.5	1273.0	1274.4
170°	1285.5	1284.5	1283.7	1282.7	1282.2	1282.2	1282.2	1282.2	1282.2	1283.8	1285.5
172.5°	1294.5	1293.6	1292.7	1291.7	1291.3	1291.3	1291.3	1291.3	1291.3	1292.7	1294.1
175°	1303.9	1303.1	1302.1	1301.2	1300.8	1300.8	1300.8	1300.8	1300.8	1302.1	1303.5
177.5°	1308.1	1307.3	1306.5	1305.8	1305.4	1305.4	1305.4	1305.4	1305.4	1306.5	1307.7
180°	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0



TEST NUMBER: P332483-927

CATALOG NUMBER: S123RDIW-S1165D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4	1454.4
2.5°	1534.1	1534.1	1536.1	1543.6	1544.6	1551.1	1549.1
5°	1686.1	1697.9	1702.2	1720.9	1732.2	1737.2	1727.2
7.5°	1871.8	1905.3	1921.0	1940.6	1958.0	1963.2	1949.6
10°	2007.4	2042.2	2071.5	2089.5	2106.3	2117.6	2131.9
12.5°	2138.3	2181.2	2209.0	2234.5	2251.8	2266.0	2268.3
15°	2280.7	2345.4	2394.6	2430.7	2448.8	2458.1	2454.4
17.5°	2424.2	2484.3	2519.3	2556.1	2581.2	2582.4	2583.1
20°	2505.4	2564.0	2604.5	2631.9	2659.9	2658.6	2664.8
22.5°	2559.8	2605.8	2636.9	2656.7	2666.3	2661.7	2662.8
25°	2585.1	2598.8	2593.3	2561.5	2553.4	2524.1	2529.1
27.5°	2454.2	2389.4	2322.4	2236.3	2168.3	2113.9	2116.7
30°	2276.3	2161.8	2031.0	1921.4	1823.0	1795.6	1737.2
32.5°	2027.7	1855.9	1702.8	1600.7	1516.2	1493.3	1442.2
35°	1606.4	1439.6	1282.0	1187.3	1150.0	1097.7	1097.1
37.5°	1248.6	1101.7	1018.4	947.4	910.1	878.5	875.4
40°	1050.4	935.8	872.9	821.9	785.1	761.4	755.9
42.5°	911.9	819.3	760.3	728.7	700.4	688.2	679.1
45°	744.7	682.4	641.3	612.7	599.6	590.3	585.3
47.5°	622.9	581.1	553.2	534.1	523.5	513.7	516.3
50°	556.7	522.4	501.8	483.8	475.7	468.8	469.4
52.5°	503.4	472.6	456.0	442.9	432.8	428.0	425.6
55°	427.1	407.8	391.0	381.7	376.0	369.2	367.3
57.5°	364.3	349.4	335.7	325.1	323.8	317.2	318.1
60°	322.5	310.1	298.9	293.3	288.9	283.3	285.2
62.5°	288.1	277.7	267.5	262.8	258.5	254.4	255.2
65°	236.0	226.0	219.8	217.3	215.4	213.6	211.7
67.5°	188.1	182.0	178.1	172.7	168.9	168.3	166.4
70°	158.1	150.0	143.2	136.3	134.5	133.9	134.5
72.5°	126.7	121.7	119.8	116.5	116.1	114.5	115.6
75°	95.3	93.4	92.1	89.7	89.7	89.7	89.7
77.5°	70.3	69.1	68.4	67.9	67.3	66.4	66.2
80°	54.8	54.2	52.9	52.9	52.3	52.9	52.3
82.5°	41.4	41.2	40.0	40.0	39.4	39.0	39.4
85°	21.2	20.5	21.8	20.5	21.2	20.0	21.2
87.5°	11.5	11.6	11.2	11.4	10.9	12.0	11.2
90°	27.4	28.3	29.0	29.5	29.9	30.3	30.8
92.5°	41.7	42.4	42.6	42.3	42.1	41.7	41.5
95°	78.7	79.7	80.2	80.2	80.2	80.2	80.2
97.5°	122.2	123.2	123.7	123.6	123.5	123.4	123.3
100°	153.0	153.8	154.3	154.8	155.3	155.7	156.1
102.5°	189.3	190.0	190.2	190.1	190.0	190.0	189.9
105°	242.5	242.5	242.7	243.2	243.6	244.1	244.5
107.5°	301.6	302.3	302.5	302.3	302.0	301.7	301.4
110°	340.8	341.7	341.9	341.4	341.0	340.6	340.1



TEST NUMBER: P332483-927

CATALOG NUMBER: S123RDIW-S1165D1320U927-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	379.9	381.0	381.5	381.4	381.4	381.3	381.2
115°	438.4	438.6	438.6	438.4	438.2	437.9	437.7
117.5°	498.0	497.9	497.6	496.9	496.3	495.7	495.0
120°	537.7	537.5	537.1	536.7	536.2	535.8	535.3
122.5°	577.7	577.1	576.5	575.8	575.2	574.6	573.9
125°	637.4	636.4	635.6	634.6	633.7	632.8	631.8
127.5°	696.2	695.0	693.8	692.8	691.7	690.7	689.6
130°	736.0	735.1	733.8	732.2	730.6	729.0	727.5
132.5°	774.0	773.0	771.8	770.6	769.4	768.1	766.9
135°	831.6	830.6	830.0	829.5	829.0	828.5	828.1
137.5°	887.5	886.5	885.7	884.8	883.9	883.0	882.2
140°	925.0	924.8	923.9	922.3	920.7	919.1	917.5
142.5°	959.6	959.3	958.6	957.4	956.2	954.9	953.7
145°	1010.3	1010.1	1009.6	1008.6	1007.7	1006.8	1005.8
147.5°	1058.4	1058.4	1057.8	1056.5	1055.0	1053.7	1052.3
150°	1088.1	1088.1	1087.3	1086.0	1084.7	1083.2	1081.9
152.5°	1115.5	1115.8	1115.4	1114.2	1113.0	1111.8	1110.6
155°	1155.6	1156.4	1156.1	1154.5	1152.9	1151.3	1149.7
157.5°	1189.5	1190.6	1190.3	1189.1	1187.8	1186.5	1185.3
160°	1210.7	1211.8	1212.0	1211.0	1210.1	1209.2	1208.2
162.5°	1230.4	1231.5	1231.4	1229.9	1228.4	1227.0	1225.5
165°	1255.5	1256.9	1256.8	1255.2	1253.6	1252.0	1250.4
167.5°	1275.8	1277.2	1277.2	1275.8	1274.4	1273.0	1271.5
170°	1287.1	1288.6	1288.6	1287.1	1285.5	1283.8	1282.2
172.5°	1295.5	1297.0	1296.9	1295.3	1293.6	1292.0	1290.5
175°	1304.9	1306.2	1306.1	1304.5	1302.9	1301.3	1299.7
177.5°	1308.8	1309.9	1309.8	1308.4	1307.2	1305.9	1304.6
180°	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0

(END OF REPORT)