

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332488-927

Luminaire Tested: **S123RDIW-S1165D1535U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332488-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S1165D1535U927-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1535 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8334.2 lumens
Efficiency: N/A
Efficacy: 100.5 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 82.9
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332488-927

CATALOG NUMBER: S123RDIW-S1165D1535U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

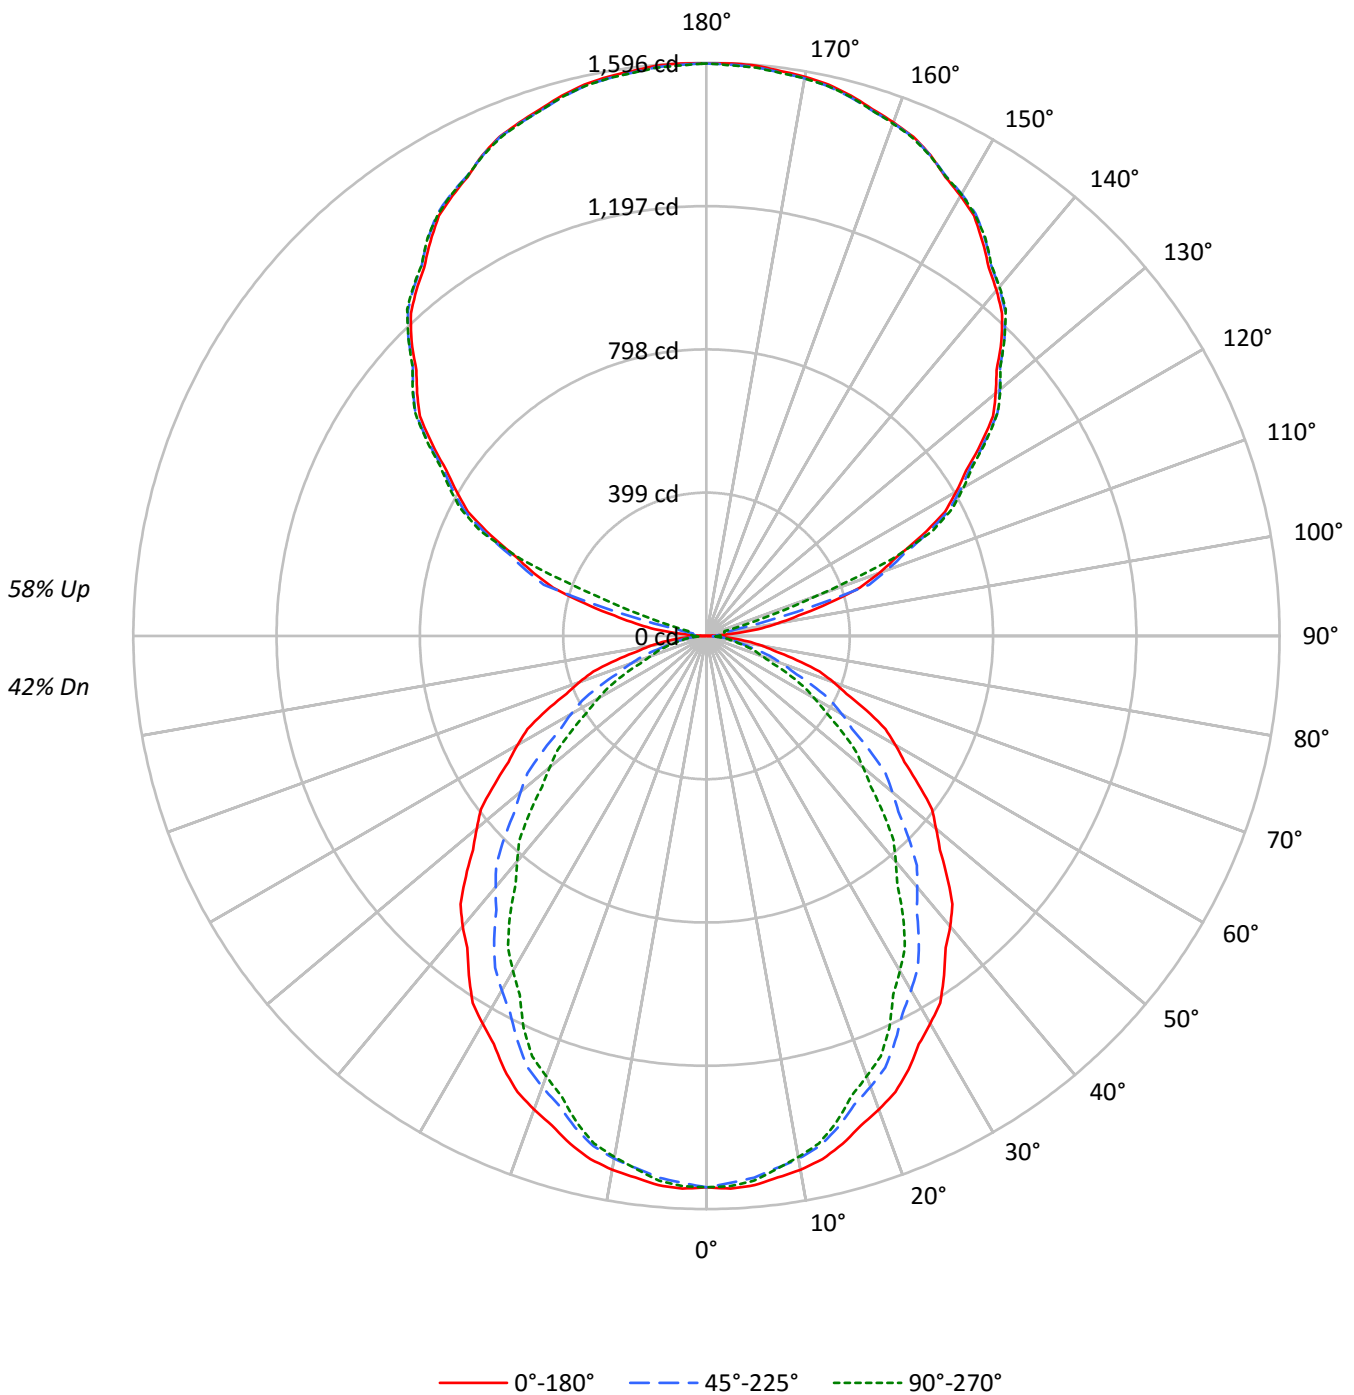



TEST NUMBER: P332488-927

CATALOG NUMBER: S123RDIW-S1165D1535U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	48	48	48	42
1	96	92	88	85	88	84	81	78	69	67	65	56	54	53	43	42	41	36
2	88	81	75	70	80	74	69	64	61	57	54	49	47	45	38	37	35	30
3	80	71	64	58	73	65	59	54	54	50	46	44	41	38	34	32	30	26
4	73	63	55	50	67	58	51	46	48	43	39	39	36	33	31	28	26	22
5	67	56	48	43	61	52	45	40	43	38	34	35	31	28	28	25	23	20
6	62	50	43	37	57	46	40	34	39	34	30	32	28	25	25	23	20	17
7	58	46	38	32	52	42	35	30	35	30	26	29	25	22	23	20	18	16
8	53	41	34	29	49	38	32	27	32	27	23	27	23	20	21	18	16	14
9	50	38	30	26	45	35	28	24	30	24	21	24	21	18	20	17	15	13
10	46	35	28	23	42	32	26	22	27	22	19	23	19	16	18	15	13	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	16527	16527	16527
5°	16590	16361	16455
10°	16497	16156	16101
15°	16319	15778	15611
20°	16076	15306	14948
25°	15824	14775	14301
30°	15493	14162	13387
35°	15152	13548	12550
40°	14838	12826	11514
45°	14425	12113	10577
50°	13971	11302	9530
55°	13508	10376	8552
60°	13082	9384	7481
65°	12528	8308	6406
70°	11833	6977	5174
75°	10821	5490	4870
80°	9651	4860	4475
85°	8151	4310	4001



TEST NUMBER: P332488-927

CATALOG NUMBER: S123RDIW-S1165D1535U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	144.2	1.7
10°-20°	401.2	4.8
20°-30°	577.6	6.9
30°-40°	650.7	7.8
40°-50°	622.5	7.5
50°-60°	509.7	6.1
60°-70°	343.9	4.1
70°-80°	173.0	2.1
80°-90°	50.2	0.6
90°-100°	58.0	0.7
100°-110°	276.2	3.3
110°-120°	663.5	8.0
120°-130°	844.9	10.1
130°-140°	902.7	10.8
140°-150°	844.1	10.1
150°-160°	680.9	8.2
160°-170°	439.5	5.3
170°-180°	151.5	1.8
0°-30°	1123.0	13.5
0°-40°	1773.6	21.3
0°-60°	2905.8	34.9
0°-90°	3473.0	41.7
90°-120°	997.6	12.0
90°-150°	3589.3	43.1
90°-180°	4861.0	58.3
0°-180°	8334.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1535	1535	1535	1535	1535	
5°	1535	1529	1514	1525	1523	146
15°	1464	1450	1416	1410	1401	412
25°	1332	1300	1244	1219	1204	613
35°	1153	1106	1031	979	955	721
45°	948	889	796	727	695	731
55°	720	656	553	483	456	645
65°	492	422	326	268	252	487
75°	260	200	132	120	117	278
85°	66	40	35	32	32	74
90°	1	13	28	33	36	7
95°	72	27	37	44	45	89
105°	353	359	259	62	52	374
115°	662	669	680	691	696	653
125°	933	942	948	950	952	833
135°	1162	1169	1174	1177	1174	894
145°	1341	1349	1351	1354	1354	839
155°	1477	1475	1476	1481	1474	680
165°	1557	1554	1553	1561	1554	440
175°	1594	1588	1589	1597	1588	152
180°	1594	1594	1594	1594	1594	



TEST NUMBER: P332488-927

CATALOG NUMBER: S123RDIW-S1165D1535U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1535.4	1535.4	1535.4	1535.4	1535.4	1535.4	1535.4	1535.4	1535.4	1535.4	1535.4
2.5°	1540.4	1539.4	1538.6	1537.7	1536.8	1535.0	1532.4	1529.7	1527.1	1524.4	1526.9
5°	1535.4	1534.0	1532.6	1531.2	1529.9	1527.5	1524.2	1520.8	1517.5	1514.2	1516.7
7.5°	1521.1	1519.7	1518.2	1516.7	1515.2	1512.3	1508.0	1503.6	1499.4	1495.0	1496.4
10°	1509.3	1507.3	1505.4	1503.4	1501.5	1498.0	1493.0	1488.0	1483.0	1478.1	1478.4
12.5°	1492.3	1490.2	1488.0	1485.8	1483.7	1479.6	1473.5	1467.4	1461.3	1455.2	1455.0
15°	1464.4	1461.3	1458.3	1455.2	1452.2	1446.8	1439.1	1431.3	1423.6	1415.9	1414.4
17.5°	1429.3	1425.8	1422.2	1418.6	1415.2	1408.4	1398.6	1388.7	1378.9	1369.0	1366.1
20°	1403.4	1399.0	1394.6	1390.1	1385.7	1378.2	1367.7	1357.2	1346.6	1336.2	1332.5
22.5°	1374.5	1369.4	1364.3	1359.2	1354.2	1346.0	1334.8	1323.7	1312.5	1301.2	1296.8
25°	1332.4	1325.5	1318.6	1311.6	1304.7	1294.9	1282.1	1269.5	1256.7	1244.0	1238.2
27.5°	1281.4	1273.7	1266.1	1258.5	1250.8	1239.9	1225.7	1211.6	1197.4	1183.2	1175.1
30°	1246.5	1238.2	1229.9	1221.5	1213.3	1201.3	1185.9	1170.4	1154.9	1139.4	1130.0
32.5°	1211.6	1202.2	1192.8	1183.4	1174.0	1161.1	1144.7	1128.3	1111.9	1095.6	1085.3
35°	1153.1	1143.1	1133.1	1123.2	1113.3	1099.7	1082.5	1065.4	1048.2	1031.0	1019.1
37.5°	1093.8	1082.8	1071.7	1060.6	1049.6	1034.8	1016.5	998.2	979.9	961.6	948.1
40°	1056.0	1043.8	1031.6	1019.5	1007.3	991.3	971.7	952.0	932.4	912.8	898.3
42.5°	1013.1	1000.9	988.8	976.6	964.4	948.2	927.9	907.5	887.2	867.0	851.2
45°	947.6	935.2	922.7	910.3	897.8	880.9	859.6	838.3	817.0	795.7	779.9
47.5°	882.1	868.5	854.8	841.1	827.4	809.9	788.6	767.3	746.0	724.8	707.6
50°	834.3	821.3	808.3	795.3	782.3	764.6	742.2	719.8	697.4	674.9	657.7
52.5°	791.5	777.4	763.3	749.2	735.0	716.8	694.7	672.5	650.3	628.1	610.3
55°	719.8	706.2	692.6	679.1	665.5	647.0	623.4	599.9	576.4	552.9	536.9
57.5°	653.5	638.7	623.9	609.2	594.4	575.2	551.6	527.9	504.3	480.7	465.5
60°	607.7	592.5	577.3	562.1	546.8	527.7	504.7	481.8	458.8	435.9	420.9
62.5°	561.8	546.6	531.4	516.2	501.0	481.9	458.9	435.9	413.0	390.0	376.0
65°	491.9	476.7	461.4	446.2	431.0	412.6	391.0	369.4	347.8	326.2	312.7
67.5°	421.9	406.5	391.1	375.7	360.4	342.3	321.6	300.9	280.2	259.5	249.4
70°	376.0	361.2	346.2	331.2	316.3	299.1	279.8	260.4	241.1	221.7	212.0
72.5°	330.3	315.5	300.8	286.1	271.3	255.2	237.6	220.0	202.4	184.8	176.9
75°	260.2	247.0	233.7	220.4	207.2	192.9	177.7	162.4	147.2	132.0	129.2
77.5°	196.5	184.5	172.5	160.5	148.5	137.5	127.8	118.0	108.1	98.4	96.9
80°	155.7	144.3	132.9	121.6	110.3	101.7	95.9	90.1	84.3	78.4	77.6
82.5°	116.8	107.0	97.2	87.4	77.6	71.4	68.7	65.9	63.2	60.5	59.7
85°	66.0	59.9	53.8	47.8	41.7	38.2	37.4	36.5	35.7	34.9	34.3
87.5°	24.2	22.3	20.4	18.5	16.5	15.9	16.6	17.3	18.0	18.6	18.6
90°	1.2	3.8	6.4	9.1	11.7	14.7	18.1	21.5	25.0	28.4	29.5
92.5°	22.0	21.3	20.5	19.8	19.1	20.0	22.6	25.2	27.7	30.3	32.0
95°	72.2	61.5	50.7	39.8	29.1	25.1	28.0	30.9	33.8	36.7	38.6
97.5°	145.2	140.4	135.5	130.6	125.8	113.9	95.0	76.0	57.1	38.1	40.2
100°	200.2	205.4	210.6	215.9	221.2	203.3	162.2	121.2	80.2	39.1	41.2
102.5°	262.7	266.5	270.3	274.0	277.8	257.3	212.5	167.6	122.8	78.0	71.4
105°	352.9	355.8	358.7	361.6	364.5	354.1	330.4	306.7	283.0	259.4	212.8
107.5°	448.1	450.4	452.7	455.1	457.4	460.4	464.1	467.9	471.7	475.4	441.2
110°	511.6	513.7	515.8	517.9	520.1	522.5	525.5	528.3	531.2	534.1	525.5



TEST NUMBER: P332488-927

CATALOG NUMBER: S123RDIW-S1165D1535U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	572.3	574.2	576.1	578.0	579.8	582.3	585.1	588.0	590.9	593.8	594.0
115°	662.0	663.6	665.2	666.8	668.4	670.3	672.7	675.0	677.4	679.8	682.4
117.5°	748.9	750.9	752.8	754.8	756.8	758.4	759.5	760.7	761.9	763.2	765.2
120°	803.0	805.3	807.7	810.1	812.5	814.0	814.8	815.6	816.3	817.1	819.3
122.5°	857.9	859.8	861.8	863.7	865.7	867.2	868.2	869.2	870.1	871.2	872.7
125°	933.2	935.3	937.5	939.5	941.7	943.3	944.3	945.3	946.4	947.5	948.0
127.5°	1006.2	1008.3	1010.4	1012.5	1014.6	1016.3	1017.6	1018.8	1020.1	1021.4	1022.2
130°	1051.6	1053.8	1055.9	1058.0	1060.1	1061.7	1062.7	1063.7	1064.9	1065.9	1066.9
132.5°	1095.3	1097.3	1099.5	1101.5	1103.7	1105.2	1106.0	1106.8	1107.6	1108.5	1109.5
135°	1161.8	1163.4	1165.0	1166.6	1168.2	1169.4	1170.4	1171.6	1172.6	1173.6	1174.4
137.5°	1218.6	1220.7	1222.7	1224.6	1226.6	1228.0	1228.5	1229.1	1229.7	1230.3	1231.5
140°	1256.6	1258.1	1259.7	1261.3	1262.9	1264.0	1264.8	1265.6	1266.4	1267.2	1268.3
142.5°	1291.6	1293.2	1294.7	1296.3	1297.9	1299.1	1299.9	1300.7	1301.5	1302.3	1303.1
145°	1340.6	1342.4	1344.3	1346.2	1348.0	1349.2	1349.7	1350.2	1350.8	1351.3	1351.8
147.5°	1386.8	1388.1	1389.3	1390.4	1391.6	1392.5	1393.1	1393.6	1394.1	1394.6	1395.2
150°	1415.2	1416.0	1416.8	1417.6	1418.4	1419.0	1419.6	1420.1	1420.6	1421.2	1421.7
152.5°	1440.8	1441.2	1441.5	1441.9	1442.3	1442.6	1443.0	1443.3	1443.6	1443.9	1444.9
155°	1476.8	1476.3	1475.8	1475.3	1474.7	1474.6	1474.9	1475.1	1475.4	1475.6	1476.9
157.5°	1504.8	1504.8	1504.7	1504.6	1504.6	1504.4	1504.1	1503.9	1503.6	1503.3	1504.9
160°	1521.9	1521.5	1521.3	1521.1	1520.8	1520.5	1520.3	1520.0	1519.7	1519.5	1521.1
162.5°	1537.9	1537.2	1536.6	1535.9	1535.2	1534.7	1534.5	1534.2	1533.9	1533.7	1535.5
165°	1557.4	1556.6	1555.8	1555.0	1554.2	1553.7	1553.4	1553.2	1552.9	1552.6	1554.7
167.5°	1572.5	1571.5	1570.4	1569.4	1568.3	1567.8	1567.8	1567.8	1567.8	1567.8	1569.9
170°	1581.0	1580.0	1578.9	1577.9	1576.8	1576.3	1576.3	1576.3	1576.3	1576.3	1578.4
172.5°	1586.7	1585.5	1584.2	1582.9	1581.7	1581.1	1581.4	1581.6	1581.8	1582.0	1584.1
175°	1594.0	1592.8	1591.4	1590.1	1588.8	1588.2	1588.6	1588.8	1589.0	1589.4	1591.2
177.5°	1595.9	1594.9	1593.9	1592.8	1591.7	1591.3	1591.6	1591.7	1592.0	1592.2	1593.9
180°	1594.0	1594.0	1594.0	1594.0	1594.0	1594.0	1594.0	1594.0	1594.0	1594.0	1594.0



TEST NUMBER: P332488-927

CATALOG NUMBER: S123RDIW-S1165D1535U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1535.4	1535.4	1535.4	1535.4	1535.4	1535.4	1535.4	1535.4
2.5°	1529.3	1531.8	1534.1	1535.2	1534.7	1534.3	1533.8	1533.3
5°	1519.2	1521.7	1524.2	1525.1	1524.6	1524.0	1523.4	1522.9
7.5°	1497.8	1499.2	1500.6	1500.8	1499.8	1498.9	1497.9	1497.0
10°	1478.7	1478.9	1479.2	1478.7	1477.3	1475.9	1474.5	1473.1
12.5°	1454.8	1454.7	1454.5	1453.7	1452.1	1450.4	1448.8	1447.2
15°	1413.1	1411.7	1410.3	1408.7	1406.7	1404.8	1402.8	1400.9
17.5°	1363.2	1360.2	1357.2	1354.4	1351.5	1348.6	1345.8	1342.8
20°	1329.0	1325.3	1321.8	1318.3	1314.9	1311.6	1308.4	1305.0
22.5°	1292.3	1287.9	1283.3	1279.5	1276.4	1273.4	1270.3	1267.2
25°	1232.4	1226.5	1220.8	1216.3	1213.3	1210.2	1207.2	1204.1
27.5°	1167.0	1159.0	1150.9	1144.5	1139.9	1135.3	1130.6	1125.9
30°	1120.5	1111.2	1101.8	1094.9	1090.4	1086.0	1081.6	1077.1
32.5°	1075.0	1064.7	1054.4	1046.9	1042.3	1037.6	1033.0	1028.3
35°	1007.3	995.4	983.5	975.0	970.0	965.0	960.0	955.1
37.5°	934.5	921.1	907.5	897.7	891.6	885.4	879.3	873.1
40°	884.0	869.6	855.2	844.9	838.4	832.1	825.8	819.4
42.5°	835.5	819.8	804.1	793.4	787.7	782.0	776.3	770.6
45°	764.1	748.4	732.6	721.4	714.8	708.1	701.5	694.8
47.5°	690.4	673.3	656.1	644.6	638.7	632.7	626.8	620.9
50°	640.6	623.4	606.3	594.5	588.2	581.8	575.4	569.1
52.5°	592.5	574.6	556.8	545.0	539.3	533.7	528.0	522.3
55°	520.8	504.7	488.7	477.9	472.4	466.8	461.3	455.7
57.5°	450.4	435.1	420.0	410.0	405.4	400.7	395.9	391.3
60°	405.9	391.0	376.0	366.2	361.6	356.8	352.1	347.5
62.5°	361.9	347.8	333.7	324.3	319.3	314.4	309.5	304.6
65°	299.1	285.6	272.0	263.7	260.7	257.6	254.6	251.5
67.5°	239.2	229.1	219.0	212.3	209.1	205.7	202.5	199.2
70°	202.2	192.6	182.9	176.6	173.5	170.5	167.4	164.4
72.5°	169.0	161.1	153.1	148.5	147.3	146.0	144.7	143.5
75°	126.4	123.7	120.9	119.3	118.7	118.2	117.6	117.1
77.5°	95.4	93.9	92.4	91.3	90.8	90.2	89.7	89.1
80°	76.8	76.0	75.1	74.5	73.9	73.4	72.8	72.2
82.5°	58.9	58.1	57.2	56.7	56.6	56.5	56.4	56.3
85°	33.7	33.2	32.6	32.4	32.4	32.4	32.4	32.4
87.5°	18.6	18.6	18.6	18.5	18.4	18.3	18.1	18.1
90°	30.5	31.6	32.6	33.4	34.0	34.5	35.0	35.5
92.5°	33.7	35.4	37.1	38.0	38.3	38.7	39.0	39.3
95°	40.4	42.2	44.0	45.0	45.0	45.0	45.0	45.0
97.5°	42.4	44.4	46.6	47.8	48.0	48.2	48.6	48.8
100°	43.3	45.4	47.5	48.7	49.0	49.2	49.5	49.7
102.5°	64.9	58.4	51.8	48.8	49.3	49.7	50.2	50.7
105°	166.2	119.6	73.0	50.0	50.5	51.1	51.6	52.1
107.5°	407.0	372.9	338.7	304.1	269.0	233.9	198.8	163.7
110°	516.7	508.0	499.4	476.2	438.6	400.9	363.3	325.7



TEST NUMBER: P332488-927

CATALOG NUMBER: S123RDIW-S1165D1535U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	594.1	594.3	594.5	590.6	582.6	574.6	566.7	558.7
115°	685.1	687.7	690.3	692.1	693.2	694.3	695.3	696.4
117.5°	767.4	769.4	771.6	772.8	772.9	773.2	773.4	773.6
120°	821.4	823.5	825.6	826.6	826.6	826.6	826.6	826.6
122.5°	874.1	875.6	877.1	877.9	878.1	878.3	878.5	878.8
125°	948.5	949.0	949.5	950.1	950.6	951.1	951.6	952.2
127.5°	1023.0	1023.9	1024.7	1024.8	1024.4	1023.8	1023.3	1022.8
130°	1067.9	1069.1	1070.1	1070.3	1069.8	1069.3	1068.7	1068.3
132.5°	1110.6	1111.7	1112.7	1112.9	1112.1	1111.4	1110.6	1109.9
135°	1175.2	1176.0	1176.8	1176.8	1176.0	1175.2	1174.4	1173.6
137.5°	1232.8	1234.1	1235.3	1235.6	1235.2	1234.6	1234.1	1233.6
140°	1269.3	1270.3	1271.4	1271.7	1271.1	1270.7	1270.1	1269.6
142.5°	1303.9	1304.8	1305.6	1305.7	1305.0	1304.2	1303.5	1302.7
145°	1352.3	1352.9	1353.4	1353.7	1353.7	1353.7	1353.7	1353.7
147.5°	1395.7	1396.2	1396.8	1396.4	1395.2	1394.0	1392.7	1391.5
150°	1422.2	1422.8	1423.2	1423.2	1422.4	1421.6	1420.8	1420.0
152.5°	1445.8	1446.8	1447.7	1447.6	1446.4	1445.1	1443.9	1442.7
155°	1478.3	1479.6	1480.9	1480.7	1479.2	1477.6	1476.0	1474.5
157.5°	1506.5	1508.1	1509.7	1509.4	1507.4	1505.3	1503.2	1501.2
160°	1522.7	1524.2	1525.7	1525.7	1523.8	1521.9	1520.1	1518.3
162.5°	1537.2	1539.1	1540.8	1540.9	1539.3	1537.6	1536.0	1534.4
165°	1556.8	1558.9	1561.1	1561.2	1559.3	1557.5	1555.6	1553.8
167.5°	1572.0	1574.1	1576.2	1576.2	1574.1	1572.0	1569.9	1567.8
170°	1580.5	1582.6	1584.8	1584.8	1582.6	1580.5	1578.4	1576.3
172.5°	1586.2	1588.3	1590.4	1590.3	1588.0	1585.7	1583.3	1581.0
175°	1593.0	1594.8	1596.7	1596.6	1594.4	1592.4	1590.2	1588.2
177.5°	1595.5	1597.2	1598.9	1598.7	1596.6	1594.5	1592.4	1590.3
180°	1594.0	1594.0	1594.0	1594.0	1594.0	1594.0	1594.0	1594.0

(END OF REPORT)