

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332425-927

Luminaire Tested: **S123RDIW-S560D1320U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332425-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S560D1320U927-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1320 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5318.0 lumens
Efficiency: N/A
Efficacy: 98.8 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 53.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332425-927

CATALOG NUMBER: S123RDIW-S560D1320U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

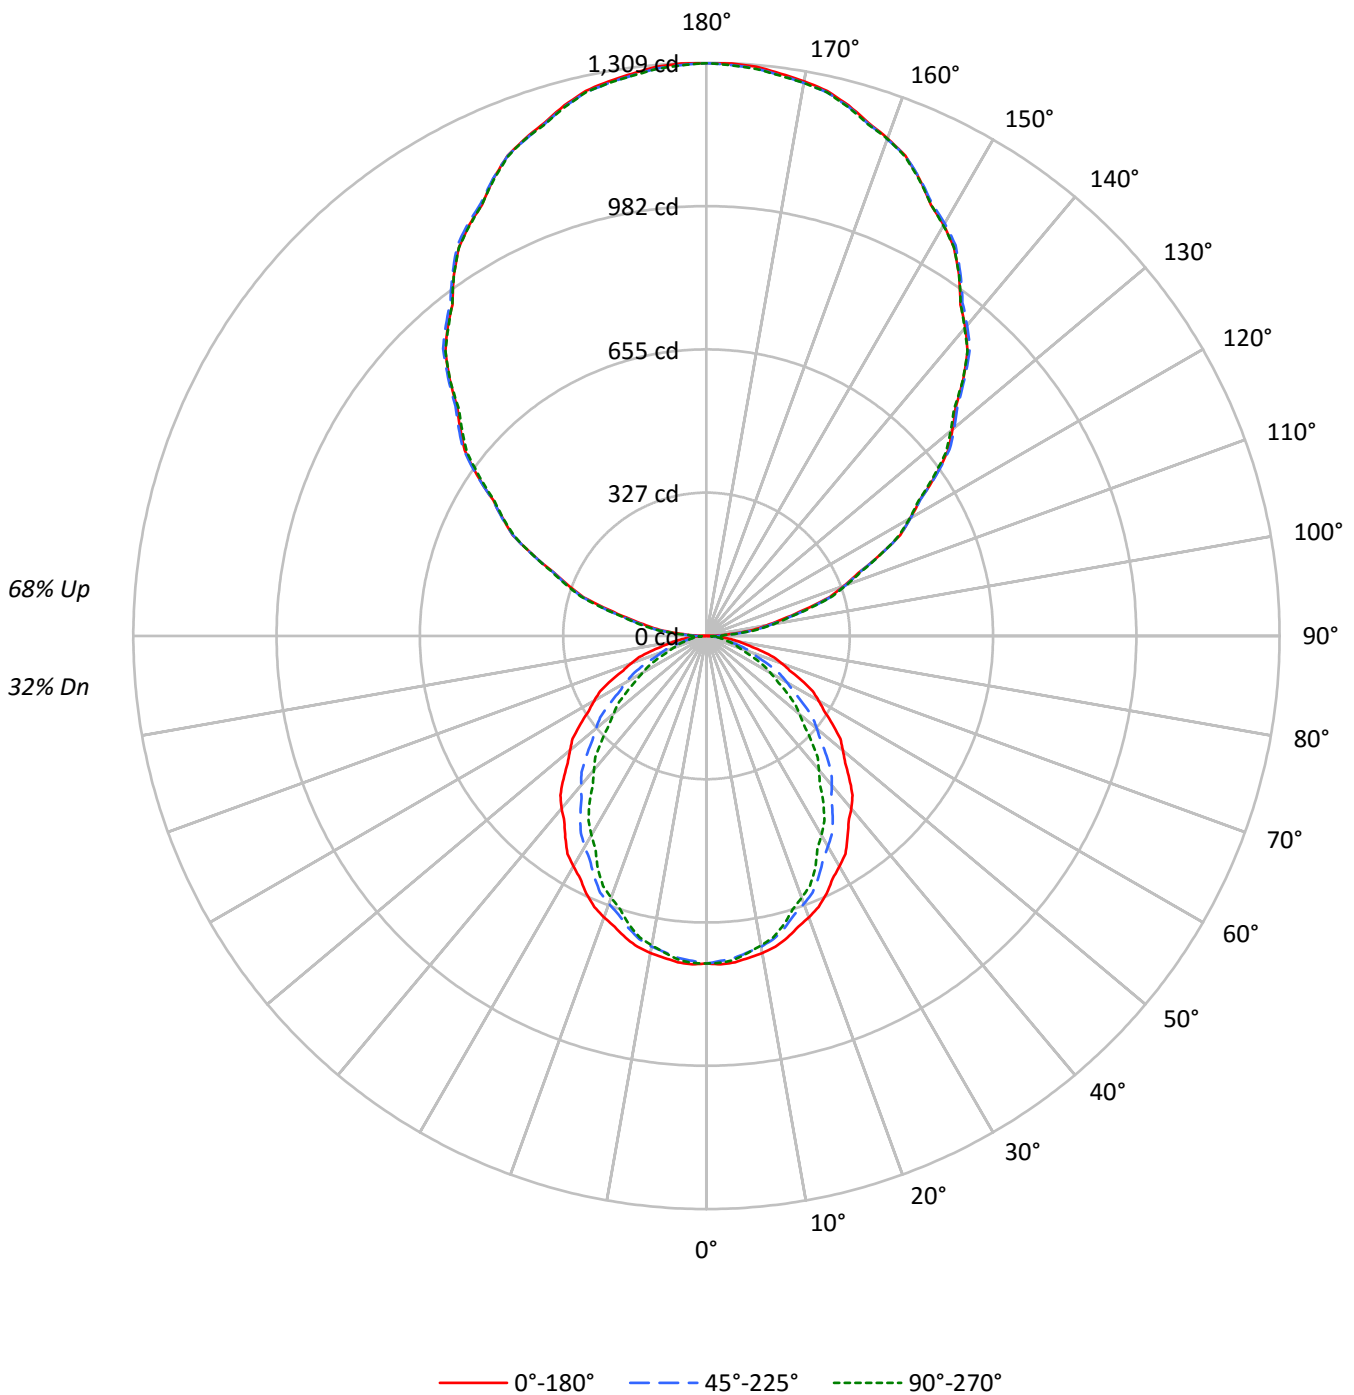



TEST NUMBER: P332425-927

CATALOG NUMBER: S123RDIW-S560D1320U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	73	73	73	56	56	56	39	39	39	32
1	94	90	86	83	84	81	78	75	64	62	60	49	48	47	35	34	34	27
2	86	79	73	68	77	71	66	62	57	53	50	43	41	39	31	30	29	23
3	78	69	62	57	70	63	57	52	50	46	42	38	36	33	28	26	25	20
4	72	61	54	48	64	55	49	44	45	40	36	34	31	29	25	23	21	17
5	66	55	47	41	59	49	43	38	40	35	31	31	28	25	23	20	19	15
6	60	49	41	36	54	44	38	33	36	31	27	28	24	22	20	18	16	13
7	56	44	36	31	50	40	33	29	32	28	24	25	22	19	19	16	15	12
8	52	40	32	27	47	36	30	25	30	25	21	23	20	17	17	15	13	11
9	48	36	29	24	43	33	27	23	27	22	19	21	18	15	16	14	12	10
10	45	33	26	22	40	30	24	20	25	20	17	20	16	14	15	12	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8054	8054	8054
5°	8084	7973	8018
10°	8039	7873	7847
15°	7952	7689	7608
20°	7834	7458	7285
25°	7712	7201	6969
30°	7549	6901	6524
35°	7384	6603	6116
40°	7231	6250	5611
45°	7030	5903	5154
50°	6807	5508	4644
55°	6583	5056	4168
60°	6374	4573	3645
65°	6105	4050	3123
70°	5766	3402	2521
75°	5273	2674	2371
80°	4705	2374	2182
85°	3977	2100	1951



TEST NUMBER: P332425-927

CATALOG NUMBER: S123RDIW-S560D1320U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	70.3	1.3
10°-20°	195.5	3.7
20°-30°	281.5	5.3
30°-40°	317.1	6.0
40°-50°	303.3	5.7
50°-60°	248.4	4.7
60°-70°	167.6	3.2
70°-80°	84.3	1.6
80°-90°	26.2	0.5
90°-100°	85.2	1.6
100°-110°	255.0	4.8
110°-120°	433.8	8.2
120°-130°	570.5	10.7
130°-140°	641.3	12.1
140°-150°	630.4	11.9
150°-160°	530.7	10.0
160°-170°	353.3	6.6
170°-180°	123.7	2.3
0°-30°	547.2	10.3
0°-40°	864.3	16.3
0°-60°	1416.1	26.6
0°-90°	1694.2	31.9
90°-120°	774.0	14.6
90°-150°	2616.2	49.2
90°-180°	3624.0	68.1
0°-180°	5318.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	748	748	748	748	748	
5°	748	745	738	743	742	71
15°	714	706	690	687	683	201
25°	649	633	606	594	587	298
35°	562	539	502	477	465	352
45°	462	433	388	354	339	356
55°	351	320	269	236	222	314
65°	240	206	159	130	123	237
75°	127	97	64	58	57	135
85°	32	19	17	16	16	36
90°	1	11	25	29	31	5
95°	61	68	76	80	80	68
105°	231	234	242	243	244	248
115°	437	439	438	439	438	432
125°	639	642	640	636	632	570
135°	829	835	834	830	828	639
145°	1006	1008	1011	1010	1006	628
155°	1152	1152	1153	1156	1150	530
165°	1254	1252	1251	1257	1250	354
175°	1305	1301	1301	1306	1300	124
180°	1308	1308	1308	1308	1308	



TEST NUMBER: P332425-927

CATALOG NUMBER: S123RDIW-S560D1320U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	748.2	748.2	748.2	748.2	748.2	748.2	748.2	748.2	748.2	748.2	748.2
2.5°	750.7	750.2	749.8	749.3	748.9	748.1	746.8	745.4	744.2	742.9	744.1
5°	748.2	747.6	746.9	746.2	745.5	744.4	742.8	741.2	739.5	737.9	739.1
7.5°	741.3	740.6	739.8	739.1	738.4	737.0	734.9	732.8	730.6	728.6	729.2
10°	735.5	734.5	733.6	732.6	731.7	730.0	727.6	725.2	722.7	720.3	720.4
12.5°	727.2	726.2	725.1	724.1	723.0	721.0	718.0	715.1	712.1	709.2	709.1
15°	713.6	712.2	710.7	709.2	707.7	705.0	701.3	697.5	693.7	690.0	689.3
17.5°	696.5	694.8	693.1	691.3	689.6	686.3	681.5	676.8	671.9	667.2	665.7
20°	683.9	681.8	679.6	677.4	675.3	671.6	666.5	661.4	656.2	651.1	649.4
22.5°	669.8	667.3	664.9	662.3	659.9	655.9	650.5	645.0	639.6	634.1	631.9
25°	649.3	645.9	642.5	639.2	635.8	631.1	624.8	618.6	612.4	606.3	603.4
27.5°	624.4	620.7	617.0	613.2	609.5	604.2	597.3	590.4	583.5	576.6	572.7
30°	607.4	603.4	599.4	595.3	591.3	585.4	577.9	570.4	562.8	555.2	550.6
32.5°	590.4	585.9	581.3	576.7	572.1	565.9	557.9	549.9	541.9	533.9	528.9
35°	561.9	557.1	552.2	547.4	542.5	535.9	527.5	519.2	510.8	502.5	496.6
37.5°	533.1	527.7	522.3	516.8	511.4	504.3	495.4	486.5	477.5	468.6	462.0
40°	514.6	508.7	502.7	496.8	490.8	483.1	473.6	464.0	454.4	444.8	437.8
42.5°	493.7	487.7	481.9	475.9	470.0	462.1	452.2	442.3	432.4	422.5	414.8
45°	461.8	455.7	449.6	443.6	437.5	429.3	418.9	408.5	398.2	387.8	380.1
47.5°	429.8	423.2	416.5	409.9	403.2	394.7	384.3	373.9	363.5	353.2	344.8
50°	406.5	400.2	393.9	387.5	381.2	372.6	361.6	350.8	339.8	328.9	320.5
52.5°	385.7	378.8	371.9	365.0	358.2	349.4	338.5	327.7	316.9	306.1	297.4
55°	350.8	344.1	337.5	330.9	324.3	315.3	303.8	292.4	280.9	269.4	261.6
57.5°	318.5	311.2	304.0	296.8	289.6	280.3	268.8	257.3	245.7	234.2	226.9
60°	296.1	288.8	281.3	273.9	266.5	257.1	246.0	234.8	223.6	212.4	205.1
62.5°	273.8	266.4	259.0	251.5	244.2	234.8	223.6	212.5	201.2	190.0	183.2
65°	239.7	232.3	224.9	217.5	210.0	201.1	190.5	180.1	169.5	159.0	152.4
67.5°	205.6	198.1	190.6	183.1	175.6	166.8	156.7	146.6	136.6	126.4	121.5
70°	183.2	175.9	168.7	161.4	154.2	145.8	136.3	126.9	117.5	108.1	103.3
72.5°	160.9	153.8	146.6	139.4	132.2	124.4	115.8	107.2	98.6	90.1	86.2
75°	126.8	120.3	113.9	107.4	100.9	94.0	86.6	79.1	71.8	64.3	63.0
77.5°	95.8	89.9	84.1	78.2	72.3	67.0	62.3	57.5	52.7	47.9	47.2
80°	75.9	70.3	64.8	59.3	53.7	49.6	46.7	43.9	41.0	38.3	37.8
82.5°	57.0	52.1	47.4	42.6	37.8	34.8	33.4	32.2	30.8	29.5	29.1
85°	32.2	29.2	26.2	23.3	20.3	18.6	18.2	17.8	17.4	17.0	16.7
87.5°	11.9	11.1	10.4	9.7	9.0	8.9	9.4	10.1	10.6	11.2	11.3
90°	1.0	3.3	5.6	7.8	10.1	12.8	15.8	18.7	21.7	24.6	25.6
92.5°	24.9	26.4	28.0	29.5	31.1	32.7	34.4	36.0	37.8	39.5	40.2
95°	60.6	62.2	63.8	65.4	67.0	68.8	70.6	72.4	74.2	76.0	76.9
97.5°	107.7	108.8	110.0	111.2	112.4	113.7	115.0	116.3	117.6	119.0	120.0
100°	139.7	141.1	142.4	143.9	145.2	146.5	147.6	148.8	149.9	151.1	151.7
102.5°	176.7	177.5	178.4	179.2	180.0	181.2	182.7	184.2	185.7	187.2	187.9
105°	231.2	231.6	232.1	232.5	233.0	234.2	236.3	238.4	240.4	242.5	242.5
107.5°	294.5	294.8	295.0	295.3	295.6	296.1	296.9	297.8	298.6	299.4	300.2
110°	333.9	334.4	334.9	335.3	335.7	336.2	336.7	337.2	337.5	338.0	339.0



TEST NUMBER: P332425-927

CATALOG NUMBER: S123RDIW-S560D1320U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	375.0	375.3	375.6	375.8	376.1	376.3	376.4	376.4	376.6	376.7	377.8
115°	436.7	437.4	438.0	438.7	439.4	439.5	439.0	438.6	438.2	437.7	437.9
117.5°	498.8	499.2	499.6	500.1	500.6	500.5	499.9	499.3	498.7	498.1	498.0
120°	537.3	538.7	540.1	541.5	542.8	543.0	541.8	540.7	539.6	538.4	538.1
122.5°	577.7	578.6	579.6	580.7	581.6	581.9	581.2	580.7	580.0	579.5	578.8
125°	639.1	639.8	640.4	641.1	641.8	641.9	641.4	641.0	640.6	640.1	639.2
127.5°	695.8	697.3	698.7	700.1	701.6	702.1	701.6	701.1	700.6	700.1	698.8
130°	733.6	735.4	737.3	739.1	740.9	741.5	740.8	740.1	739.4	738.7	737.8
132.5°	771.4	773.2	775.1	776.9	778.7	779.3	778.9	778.4	777.8	777.4	776.3
135°	829.2	830.5	831.9	833.2	834.6	835.2	835.0	834.7	834.5	834.2	833.4
137.5°	882.6	883.7	884.9	886.0	887.2	888.0	888.6	889.2	889.8	890.4	889.4
140°	919.6	920.7	921.9	923.0	924.2	924.8	925.0	925.3	925.5	925.7	925.5
142.5°	953.2	954.4	955.5	956.7	957.8	958.6	959.0	959.4	959.8	960.3	960.0
145°	1005.8	1006.3	1006.8	1007.3	1007.7	1008.3	1008.9	1009.6	1010.3	1011.0	1010.7
147.5°	1051.9	1052.7	1053.5	1054.4	1055.2	1055.9	1056.5	1057.2	1057.8	1058.4	1058.4
150°	1083.9	1084.4	1084.9	1085.3	1085.8	1086.2	1086.7	1087.1	1087.6	1088.1	1088.1
152.5°	1110.2	1110.9	1111.5	1112.1	1112.8	1113.3	1113.6	1113.8	1114.1	1114.4	1114.8
155°	1151.8	1151.8	1151.8	1151.8	1151.8	1151.9	1152.1	1152.3	1152.5	1152.8	1153.7
157.5°	1187.1	1186.8	1186.5	1186.3	1186.0	1186.0	1186.1	1186.3	1186.5	1186.7	1187.6
160°	1209.3	1208.9	1208.4	1207.9	1207.4	1207.2	1207.2	1207.2	1207.2	1207.2	1208.4
162.5°	1229.0	1228.4	1227.7	1227.1	1226.5	1226.2	1226.5	1226.6	1226.8	1226.9	1228.1
165°	1254.5	1253.8	1253.2	1252.4	1251.8	1251.4	1251.4	1251.4	1251.4	1251.4	1252.8
167.5°	1274.9	1273.9	1273.0	1272.1	1271.2	1270.8	1271.0	1271.2	1271.4	1271.5	1273.0
170°	1286.3	1285.5	1284.5	1283.7	1282.7	1282.2	1282.2	1282.2	1282.2	1282.2	1283.8
172.5°	1295.4	1294.5	1293.6	1292.7	1291.7	1291.3	1291.3	1291.3	1291.3	1291.3	1292.7
175°	1304.9	1303.9	1303.1	1302.1	1301.2	1300.8	1300.8	1300.8	1300.8	1300.8	1302.1
177.5°	1308.8	1308.1	1307.3	1306.5	1305.8	1305.4	1305.4	1305.4	1305.4	1305.4	1306.5
180°	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0



TEST NUMBER: P332425-927

CATALOG NUMBER: S123RDIW-S560D1320U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	748.2	748.2	748.2	748.2	748.2	748.2	748.2	748.2
2.5°	745.3	746.5	747.7	748.1	747.9	747.7	747.5	747.3
5°	740.3	741.6	742.8	743.2	743.0	742.7	742.4	742.1
7.5°	729.9	730.6	731.3	731.3	730.9	730.5	730.0	729.5
10°	720.6	720.7	720.8	720.6	719.9	719.2	718.6	717.9
12.5°	709.0	708.9	708.8	708.4	707.6	706.8	706.1	705.3
15°	688.6	687.9	687.3	686.4	685.5	684.6	683.7	682.7
17.5°	664.3	662.9	661.4	660.0	658.6	657.2	655.8	654.4
20°	647.6	645.9	644.1	642.5	640.8	639.2	637.5	636.0
22.5°	629.8	627.6	625.4	623.5	622.0	620.5	619.0	617.5
25°	600.6	597.7	594.9	592.7	591.3	589.8	588.3	586.8
27.5°	568.7	564.8	560.9	557.8	555.5	553.3	551.0	548.7
30°	546.1	541.5	536.9	533.5	531.4	529.3	527.0	524.9
32.5°	523.9	518.8	513.8	510.2	507.9	505.6	503.4	501.1
35°	490.8	485.1	479.3	475.2	472.7	470.3	467.9	465.4
37.5°	455.4	448.9	442.3	437.5	434.5	431.5	428.5	425.5
40°	430.8	423.7	416.8	411.7	408.6	405.5	402.4	399.3
42.5°	407.2	399.5	391.8	386.6	383.8	381.0	378.3	375.5
45°	372.4	364.7	357.0	351.6	348.3	345.1	341.8	338.6
47.5°	336.4	328.1	319.7	314.1	311.2	308.3	305.5	302.5
50°	312.2	303.8	295.5	289.7	286.6	283.5	280.4	277.3
52.5°	288.8	280.0	271.3	265.6	262.8	260.1	257.3	254.5
55°	253.8	246.0	238.1	232.9	230.2	227.5	224.8	222.1
57.5°	219.4	212.1	204.7	199.9	197.6	195.3	193.0	190.7
60°	197.8	190.5	183.2	178.5	176.2	173.9	171.6	169.3
62.5°	176.3	169.5	162.6	158.0	155.7	153.2	150.8	148.5
65°	145.8	139.2	132.5	128.5	127.1	125.6	124.1	122.6
67.5°	116.6	111.6	106.7	103.5	101.9	100.3	98.7	97.1
70°	98.5	93.9	89.1	86.0	84.5	83.1	81.6	80.1
72.5°	82.3	78.5	74.6	72.4	71.8	71.1	70.5	69.9
75°	61.6	60.3	58.9	58.1	57.8	57.6	57.3	57.0
77.5°	46.5	45.8	45.0	44.5	44.3	44.0	43.7	43.4
80°	37.4	37.0	36.6	36.3	36.0	35.7	35.5	35.2
82.5°	28.7	28.3	27.9	27.6	27.6	27.6	27.5	27.4
85°	16.5	16.2	15.9	15.8	15.8	15.8	15.8	15.8
87.5°	11.4	11.5	11.6	11.6	11.6	11.6	11.5	11.5
90°	26.5	27.4	28.3	29.0	29.5	29.9	30.3	30.8
92.5°	40.9	41.7	42.4	42.6	42.3	42.1	41.7	41.5
95°	77.9	78.7	79.7	80.2	80.2	80.2	80.2	80.2
97.5°	121.0	122.2	123.2	123.7	123.6	123.5	123.4	123.3
100°	152.4	153.0	153.8	154.3	154.8	155.3	155.7	156.1
102.5°	188.5	189.3	190.0	190.2	190.1	190.0	190.0	189.9
105°	242.5	242.5	242.5	242.7	243.2	243.6	244.1	244.5
107.5°	300.9	301.6	302.3	302.5	302.3	302.0	301.7	301.4
110°	339.8	340.8	341.7	341.9	341.4	341.0	340.6	340.1



TEST NUMBER: P332425-927

CATALOG NUMBER: S123RDIW-S560D1320U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	378.8	379.9	381.0	381.5	381.4	381.4	381.3	381.2
115°	438.2	438.4	438.6	438.6	438.4	438.2	437.9	437.7
117.5°	498.0	498.0	497.9	497.6	496.9	496.3	495.7	495.0
120°	537.9	537.7	537.5	537.1	536.7	536.2	535.8	535.3
122.5°	578.3	577.7	577.1	576.5	575.8	575.2	574.6	573.9
125°	638.3	637.4	636.4	635.6	634.6	633.7	632.8	631.8
127.5°	697.5	696.2	695.0	693.8	692.8	691.7	690.7	689.6
130°	736.9	736.0	735.1	733.8	732.2	730.6	729.0	727.5
132.5°	775.2	774.0	773.0	771.8	770.6	769.4	768.1	766.9
135°	832.4	831.6	830.6	830.0	829.5	829.0	828.5	828.1
137.5°	888.4	887.5	886.5	885.7	884.8	883.9	883.0	882.2
140°	925.3	925.0	924.8	923.9	922.3	920.7	919.1	917.5
142.5°	959.8	959.6	959.3	958.6	957.4	956.2	954.9	953.7
145°	1010.5	1010.3	1010.1	1009.6	1008.6	1007.7	1006.8	1005.8
147.5°	1058.4	1058.4	1058.4	1057.8	1056.5	1055.0	1053.7	1052.3
150°	1088.1	1088.1	1088.1	1087.3	1086.0	1084.7	1083.2	1081.9
152.5°	1115.1	1115.5	1115.8	1115.4	1114.2	1113.0	1111.8	1110.6
155°	1154.6	1155.6	1156.4	1156.1	1154.5	1152.9	1151.3	1149.7
157.5°	1188.6	1189.5	1190.6	1190.3	1189.1	1187.8	1186.5	1185.3
160°	1209.5	1210.7	1211.8	1212.0	1211.0	1210.1	1209.2	1208.2
162.5°	1229.2	1230.4	1231.5	1231.4	1229.9	1228.4	1227.0	1225.5
165°	1254.2	1255.5	1256.9	1256.8	1255.2	1253.6	1252.0	1250.4
167.5°	1274.4	1275.8	1277.2	1277.2	1275.8	1274.4	1273.0	1271.5
170°	1285.5	1287.1	1288.6	1288.6	1287.1	1285.5	1283.8	1282.2
172.5°	1294.1	1295.5	1297.0	1296.9	1295.3	1293.6	1292.0	1290.5
175°	1303.5	1304.9	1306.2	1306.1	1304.5	1302.9	1301.3	1299.7
177.5°	1307.7	1308.8	1309.9	1309.8	1308.4	1307.2	1305.9	1304.6
180°	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0	1308.0

(END OF REPORT)