

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332428-927

Luminaire Tested: **S123RDIW-S560D1535U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332428-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S560D1535U927-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1535 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6555.9 lumens
Efficiency: N/A
Efficacy: 108.2 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 60.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332428-927

CATALOG NUMBER: S123RDIW-S560D1535U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

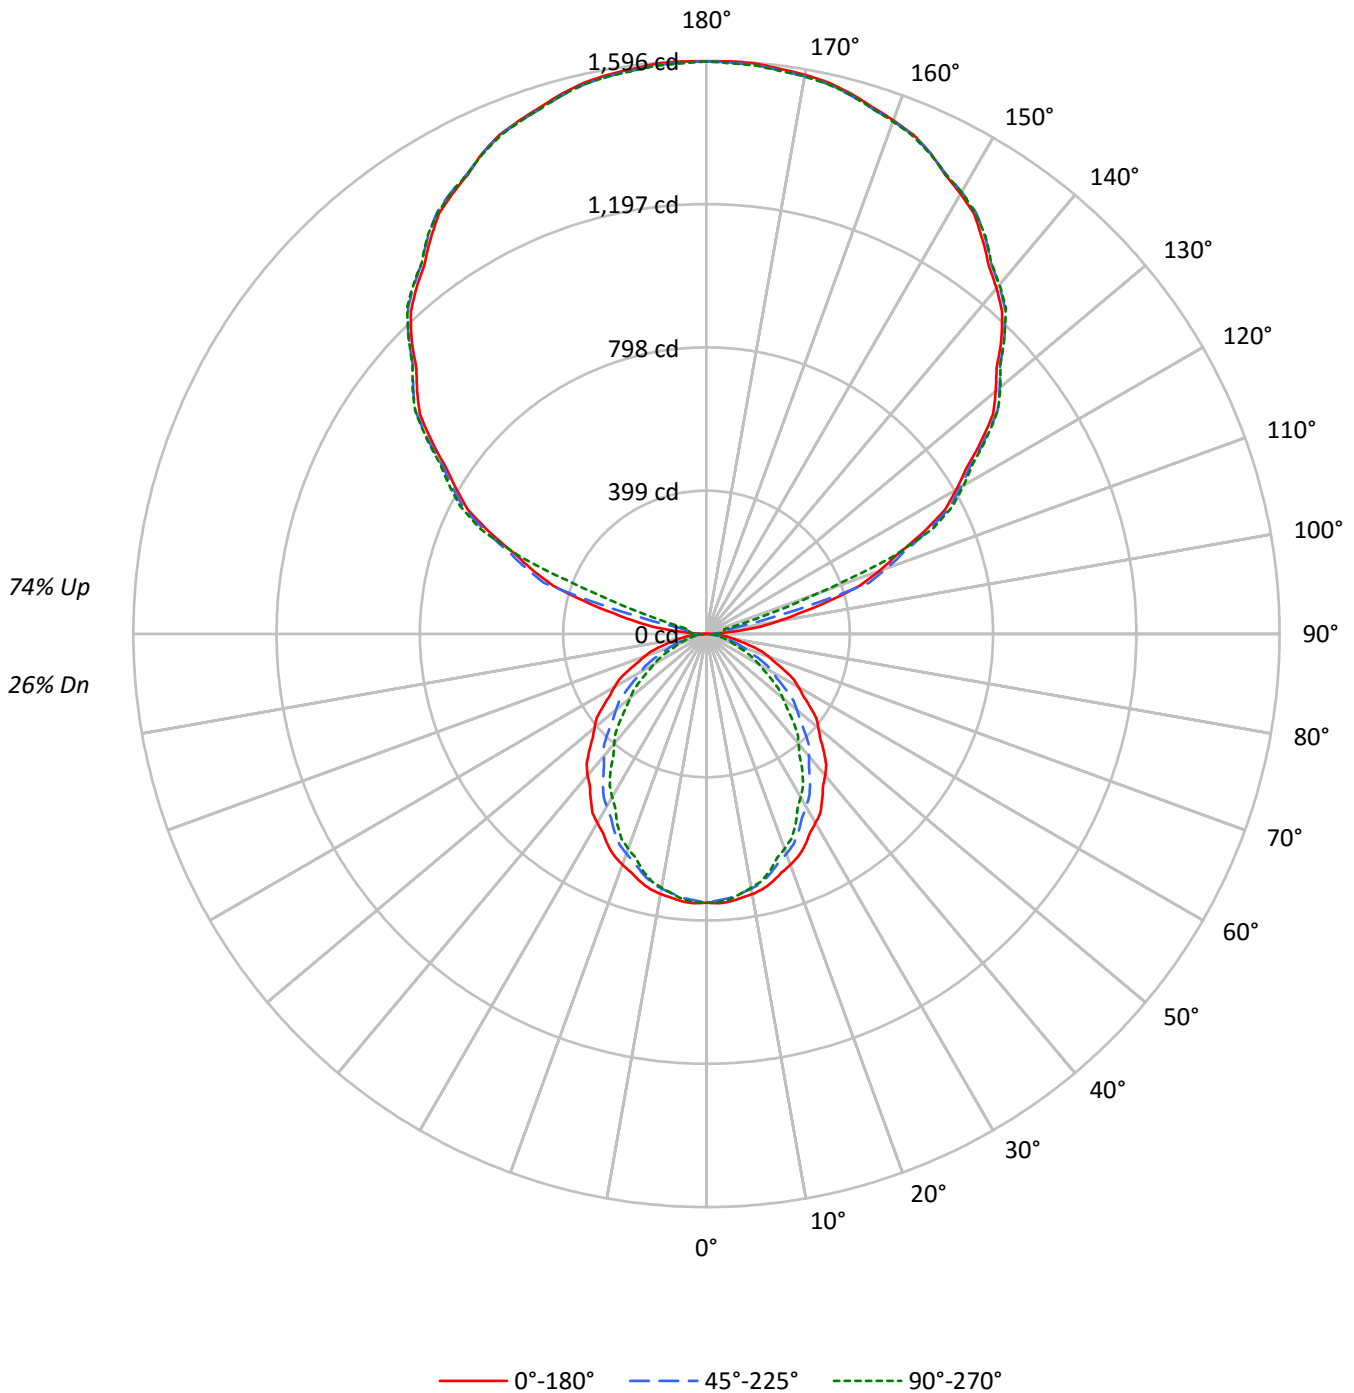



TEST NUMBER: P332428-927

CATALOG NUMBER: S123RDIW-S560D1535U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	70	70	70	51	51	51	34	34	34	26
1	93	88	85	81	82	79	76	73	61	59	57	45	44	43	30	30	29	22
2	84	77	72	67	75	69	64	60	54	51	48	40	38	36	27	26	25	19
3	77	68	61	56	68	61	55	50	48	44	40	35	33	31	24	22	21	16
4	70	60	53	47	63	54	48	43	42	38	34	31	29	26	21	20	18	14
5	65	54	46	40	57	48	42	37	38	33	30	28	25	23	19	17	16	12
6	59	48	40	35	53	43	36	32	34	29	26	25	22	20	18	16	14	11
7	55	43	36	30	49	39	32	28	31	26	23	23	20	17	16	14	13	10
8	51	39	32	27	45	35	29	24	28	23	20	21	18	16	15	13	11	9
9	47	36	28	24	42	32	26	22	26	21	18	19	16	14	14	12	10	8
10	44	32	26	21	39	29	23	19	23	19	16	18	15	13	13	11	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8054	8054	8054
5°	8084	7973	8018
10°	8039	7873	7847
15°	7952	7689	7608
20°	7834	7458	7285
25°	7712	7201	6969
30°	7549	6901	6524
35°	7384	6603	6116
40°	7231	6250	5611
45°	7030	5903	5154
50°	6807	5508	4644
55°	6583	5056	4168
60°	6374	4573	3645
65°	6105	4050	3123
70°	5766	3402	2521
75°	5273	2674	2371
80°	4705	2374	2182
85°	3977	2100	1951



TEST NUMBER: P332428-927

CATALOG NUMBER: S123RDIW-S560D1535U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	70.3	1.1
10°-20°	195.5	3.0
20°-30°	281.5	4.3
30°-40°	317.1	4.8
40°-50°	303.3	4.6
50°-60°	248.4	3.8
60°-70°	167.6	2.6
70°-80°	84.3	1.3
80°-90°	26.8	0.4
90°-100°	58.0	0.9
100°-110°	276.2	4.2
110°-120°	663.5	10.1
120°-130°	844.9	12.9
130°-140°	902.7	13.8
140°-150°	844.1	12.9
150°-160°	680.9	10.4
160°-170°	439.5	6.7
170°-180°	151.5	2.3
0°-30°	547.2	8.3
0°-40°	864.3	13.2
0°-60°	1416.1	21.6
0°-90°	1694.7	25.9
90°-120°	997.6	15.2
90°-150°	3589.3	54.7
90°-180°	4861.0	74.1
0°-180°	6555.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	748	748	748	748	748	
5°	748	745	738	743	742	71
15°	714	706	690	687	683	201
25°	649	633	606	594	587	298
35°	562	539	502	477	465	352
45°	462	433	388	354	339	356
55°	351	320	269	236	222	314
65°	240	206	159	130	123	237
75°	127	97	64	58	57	135
85°	32	19	17	16	16	36
90°	1	13	28	33	36	5
95°	72	27	37	44	45	89
105°	353	359	259	62	52	374
115°	662	669	680	691	696	653
125°	933	942	948	950	952	833
135°	1162	1169	1174	1177	1174	894
145°	1341	1349	1351	1354	1354	839
155°	1477	1475	1476	1481	1474	680
165°	1557	1554	1553	1561	1554	440
175°	1594	1588	1589	1597	1588	152
180°	1594	1594	1594	1594	1594	



TEST NUMBER: P332428-927

CATALOG NUMBER: S123RDIW-S560D1535U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	748.2	748.2	748.2	748.2	748.2	748.2	748.2	748.2	748.2	748.2	748.2
2.5°	750.7	750.2	749.8	749.3	748.9	748.1	746.8	745.4	744.2	742.9	744.1
5°	748.2	747.6	746.9	746.2	745.5	744.4	742.8	741.2	739.5	737.9	739.1
7.5°	741.3	740.6	739.8	739.1	738.4	737.0	734.9	732.8	730.6	728.6	729.2
10°	735.5	734.5	733.6	732.6	731.7	730.0	727.6	725.2	722.7	720.3	720.4
12.5°	727.2	726.2	725.1	724.1	723.0	721.0	718.0	715.1	712.1	709.2	709.1
15°	713.6	712.2	710.7	709.2	707.7	705.0	701.3	697.5	693.7	690.0	689.3
17.5°	696.5	694.8	693.1	691.3	689.6	686.3	681.5	676.8	671.9	667.2	665.7
20°	683.9	681.8	679.6	677.4	675.3	671.6	666.5	661.4	656.2	651.1	649.4
22.5°	669.8	667.3	664.9	662.3	659.9	655.9	650.5	645.0	639.6	634.1	631.9
25°	649.3	645.9	642.5	639.2	635.8	631.1	624.8	618.6	612.4	606.3	603.4
27.5°	624.4	620.7	617.0	613.2	609.5	604.2	597.3	590.4	583.5	576.6	572.7
30°	607.4	603.4	599.4	595.3	591.3	585.4	577.9	570.4	562.8	555.2	550.6
32.5°	590.4	585.9	581.3	576.7	572.1	565.9	557.9	549.9	541.9	533.9	528.9
35°	561.9	557.1	552.2	547.4	542.5	535.9	527.5	519.2	510.8	502.5	496.6
37.5°	533.1	527.7	522.3	516.8	511.4	504.3	495.4	486.5	477.5	468.6	462.0
40°	514.6	508.7	502.7	496.8	490.8	483.1	473.6	464.0	454.4	444.8	437.8
42.5°	493.7	487.7	481.9	475.9	470.0	462.1	452.2	442.3	432.4	422.5	414.8
45°	461.8	455.7	449.6	443.6	437.5	429.3	418.9	408.5	398.2	387.8	380.1
47.5°	429.8	423.2	416.5	409.9	403.2	394.7	384.3	373.9	363.5	353.2	344.8
50°	406.5	400.2	393.9	387.5	381.2	372.6	361.6	350.8	339.8	328.9	320.5
52.5°	385.7	378.8	371.9	365.0	358.2	349.4	338.5	327.7	316.9	306.1	297.4
55°	350.8	344.1	337.5	330.9	324.3	315.3	303.8	292.4	280.9	269.4	261.6
57.5°	318.5	311.2	304.0	296.8	289.6	280.3	268.8	257.3	245.7	234.2	226.9
60°	296.1	288.8	281.3	273.9	266.5	257.1	246.0	234.8	223.6	212.4	205.1
62.5°	273.8	266.4	259.0	251.5	244.2	234.8	223.6	212.5	201.2	190.0	183.2
65°	239.7	232.3	224.9	217.5	210.0	201.1	190.5	180.1	169.5	159.0	152.4
67.5°	205.6	198.1	190.6	183.1	175.6	166.8	156.7	146.6	136.6	126.4	121.5
70°	183.2	175.9	168.7	161.4	154.2	145.8	136.3	126.9	117.5	108.1	103.3
72.5°	160.9	153.8	146.6	139.4	132.2	124.4	115.8	107.2	98.6	90.1	86.2
75°	126.8	120.3	113.9	107.4	100.9	94.0	86.6	79.1	71.8	64.3	63.0
77.5°	95.8	89.9	84.1	78.2	72.3	67.0	62.3	57.5	52.7	47.9	47.2
80°	75.9	70.3	64.8	59.3	53.7	49.6	46.7	43.9	41.0	38.3	37.8
82.5°	57.0	52.1	47.4	42.6	37.8	34.8	33.4	32.2	30.8	29.5	29.1
85°	32.2	29.2	26.2	23.3	20.3	18.6	18.2	17.8	17.4	17.0	16.7
87.5°	11.9	11.2	10.5	9.9	9.3	9.3	10.0	10.6	11.3	12.0	12.1
90°	1.2	3.8	6.4	9.1	11.7	14.7	18.1	21.5	25.0	28.4	29.5
92.5°	22.0	21.3	20.5	19.8	19.1	20.0	22.6	25.2	27.7	30.3	32.0
95°	72.2	61.5	50.7	39.8	29.1	25.1	28.0	30.9	33.8	36.7	38.6
97.5°	145.2	140.4	135.5	130.6	125.8	113.9	95.0	76.0	57.1	38.1	40.2
100°	200.2	205.4	210.6	215.9	221.2	203.3	162.2	121.2	80.2	39.1	41.2
102.5°	262.7	266.5	270.3	274.0	277.8	257.3	212.5	167.6	122.8	78.0	71.4
105°	352.9	355.8	358.7	361.6	364.5	354.1	330.4	306.7	283.0	259.4	212.8
107.5°	448.1	450.4	452.7	455.1	457.4	460.4	464.1	467.9	471.7	475.4	441.2
110°	511.6	513.7	515.8	517.9	520.1	522.5	525.5	528.3	531.2	534.1	525.5



TEST NUMBER: P332428-927

CATALOG NUMBER: S123RDIW-S560D1535U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	572.3	574.2	576.1	578.0	579.8	582.3	585.1	588.0	590.9	593.8	594.0
115°	662.0	663.6	665.2	666.8	668.4	670.3	672.7	675.0	677.4	679.8	682.4
117.5°	748.9	750.9	752.8	754.8	756.8	758.4	759.5	760.7	761.9	763.2	765.2
120°	803.0	805.3	807.7	810.1	812.5	814.0	814.8	815.6	816.3	817.1	819.3
122.5°	857.9	859.8	861.8	863.7	865.7	867.2	868.2	869.2	870.1	871.2	872.7
125°	933.2	935.3	937.5	939.5	941.7	943.3	944.3	945.3	946.4	947.5	948.0
127.5°	1006.2	1008.3	1010.4	1012.5	1014.6	1016.3	1017.6	1018.8	1020.1	1021.4	1022.2
130°	1051.6	1053.8	1055.9	1058.0	1060.1	1061.7	1062.7	1063.7	1064.9	1065.9	1066.9
132.5°	1095.3	1097.3	1099.5	1101.5	1103.7	1105.2	1106.0	1106.8	1107.6	1108.5	1109.5
135°	1161.8	1163.4	1165.0	1166.6	1168.2	1169.4	1170.4	1171.6	1172.6	1173.6	1174.4
137.5°	1218.6	1220.7	1222.7	1224.6	1226.6	1228.0	1228.5	1229.1	1229.7	1230.3	1231.5
140°	1256.6	1258.1	1259.7	1261.3	1262.9	1264.0	1264.8	1265.6	1266.4	1267.2	1268.3
142.5°	1291.6	1293.2	1294.7	1296.3	1297.9	1299.1	1299.9	1300.7	1301.5	1302.3	1303.1
145°	1340.6	1342.4	1344.3	1346.2	1348.0	1349.2	1349.7	1350.2	1350.8	1351.3	1351.8
147.5°	1386.8	1388.1	1389.3	1390.4	1391.6	1392.5	1393.1	1393.6	1394.1	1394.6	1395.2
150°	1415.2	1416.0	1416.8	1417.6	1418.4	1419.0	1419.6	1420.1	1420.6	1421.2	1421.7
152.5°	1440.8	1441.2	1441.5	1441.9	1442.3	1442.6	1443.0	1443.3	1443.6	1443.9	1444.9
155°	1476.8	1476.3	1475.8	1475.3	1474.7	1474.6	1474.9	1475.1	1475.4	1475.6	1476.9
157.5°	1504.8	1504.8	1504.7	1504.6	1504.6	1504.4	1504.1	1503.9	1503.6	1503.3	1504.9
160°	1521.9	1521.5	1521.3	1521.1	1520.8	1520.5	1520.3	1520.0	1519.7	1519.5	1521.1
162.5°	1537.9	1537.2	1536.6	1535.9	1535.2	1534.7	1534.5	1534.2	1533.9	1533.7	1535.5
165°	1557.4	1556.6	1555.8	1555.0	1554.2	1553.7	1553.4	1553.2	1552.9	1552.6	1554.7
167.5°	1572.5	1571.5	1570.4	1569.4	1568.3	1567.8	1567.8	1567.8	1567.8	1567.8	1569.9
170°	1581.0	1580.0	1578.9	1577.9	1576.8	1576.3	1576.3	1576.3	1576.3	1576.3	1578.4
172.5°	1586.7	1585.5	1584.2	1582.9	1581.7	1581.1	1581.4	1581.6	1581.8	1582.0	1584.1
175°	1594.0	1592.8	1591.4	1590.1	1588.8	1588.2	1588.6	1588.8	1589.0	1589.4	1591.2
177.5°	1595.9	1594.9	1593.9	1592.8	1591.7	1591.3	1591.6	1591.7	1592.0	1592.2	1593.9
180°	1594.0	1594.0	1594.0	1594.0	1594.0	1594.0	1594.0	1594.0	1594.0	1594.0	1594.0



TEST NUMBER: P332428-927

CATALOG NUMBER: S123RDIW-S560D1535U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	748.2	748.2	748.2	748.2	748.2	748.2	748.2	748.2
2.5°	745.3	746.5	747.7	748.1	747.9	747.7	747.5	747.3
5°	740.3	741.6	742.8	743.2	743.0	742.7	742.4	742.1
7.5°	729.9	730.6	731.3	731.3	730.9	730.5	730.0	729.5
10°	720.6	720.7	720.8	720.6	719.9	719.2	718.6	717.9
12.5°	709.0	708.9	708.8	708.4	707.6	706.8	706.1	705.3
15°	688.6	687.9	687.3	686.4	685.5	684.6	683.7	682.7
17.5°	664.3	662.9	661.4	660.0	658.6	657.2	655.8	654.4
20°	647.6	645.9	644.1	642.5	640.8	639.2	637.5	636.0
22.5°	629.8	627.6	625.4	623.5	622.0	620.5	619.0	617.5
25°	600.6	597.7	594.9	592.7	591.3	589.8	588.3	586.8
27.5°	568.7	564.8	560.9	557.8	555.5	553.3	551.0	548.7
30°	546.1	541.5	536.9	533.5	531.4	529.3	527.0	524.9
32.5°	523.9	518.8	513.8	510.2	507.9	505.6	503.4	501.1
35°	490.8	485.1	479.3	475.2	472.7	470.3	467.9	465.4
37.5°	455.4	448.9	442.3	437.5	434.5	431.5	428.5	425.5
40°	430.8	423.7	416.8	411.7	408.6	405.5	402.4	399.3
42.5°	407.2	399.5	391.8	386.6	383.8	381.0	378.3	375.5
45°	372.4	364.7	357.0	351.6	348.3	345.1	341.8	338.6
47.5°	336.4	328.1	319.7	314.1	311.2	308.3	305.5	302.5
50°	312.2	303.8	295.5	289.7	286.6	283.5	280.4	277.3
52.5°	288.8	280.0	271.3	265.6	262.8	260.1	257.3	254.5
55°	253.8	246.0	238.1	232.9	230.2	227.5	224.8	222.1
57.5°	219.4	212.1	204.7	199.9	197.6	195.3	193.0	190.7
60°	197.8	190.5	183.2	178.5	176.2	173.9	171.6	169.3
62.5°	176.3	169.5	162.6	158.0	155.7	153.2	150.8	148.5
65°	145.8	139.2	132.5	128.5	127.1	125.6	124.1	122.6
67.5°	116.6	111.6	106.7	103.5	101.9	100.3	98.7	97.1
70°	98.5	93.9	89.1	86.0	84.5	83.1	81.6	80.1
72.5°	82.3	78.5	74.6	72.4	71.8	71.1	70.5	69.9
75°	61.6	60.3	58.9	58.1	57.8	57.6	57.3	57.0
77.5°	46.5	45.8	45.0	44.5	44.3	44.0	43.7	43.4
80°	37.4	37.0	36.6	36.3	36.0	35.7	35.5	35.2
82.5°	28.7	28.3	27.9	27.6	27.6	27.6	27.5	27.4
85°	16.5	16.2	15.9	15.8	15.8	15.8	15.8	15.8
87.5°	12.2	12.3	12.4	12.4	12.4	12.4	12.4	12.4
90°	30.5	31.6	32.6	33.4	34.0	34.5	35.0	35.5
92.5°	33.7	35.4	37.1	38.0	38.3	38.7	39.0	39.3
95°	40.4	42.2	44.0	45.0	45.0	45.0	45.0	45.0
97.5°	42.4	44.4	46.6	47.8	48.0	48.2	48.6	48.8
100°	43.3	45.4	47.5	48.7	49.0	49.2	49.5	49.7
102.5°	64.9	58.4	51.8	48.8	49.3	49.7	50.2	50.7
105°	166.2	119.6	73.0	50.0	50.5	51.1	51.6	52.1
107.5°	407.0	372.9	338.7	304.1	269.0	233.9	198.8	163.7
110°	516.7	508.0	499.4	476.2	438.6	400.9	363.3	325.7



TEST NUMBER: P332428-927

CATALOG NUMBER: S123RDIW-S560D1535U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	594.1	594.3	594.5	590.6	582.6	574.6	566.7	558.7
115°	685.1	687.7	690.3	692.1	693.2	694.3	695.3	696.4
117.5°	767.4	769.4	771.6	772.8	772.9	773.2	773.4	773.6
120°	821.4	823.5	825.6	826.6	826.6	826.6	826.6	826.6
122.5°	874.1	875.6	877.1	877.9	878.1	878.3	878.5	878.8
125°	948.5	949.0	949.5	950.1	950.6	951.1	951.6	952.2
127.5°	1023.0	1023.9	1024.7	1024.8	1024.4	1023.8	1023.3	1022.8
130°	1067.9	1069.1	1070.1	1070.3	1069.8	1069.3	1068.7	1068.3
132.5°	1110.6	1111.7	1112.7	1112.9	1112.1	1111.4	1110.6	1109.9
135°	1175.2	1176.0	1176.8	1176.8	1176.0	1175.2	1174.4	1173.6
137.5°	1232.8	1234.1	1235.3	1235.6	1235.2	1234.6	1234.1	1233.6
140°	1269.3	1270.3	1271.4	1271.7	1271.1	1270.7	1270.1	1269.6
142.5°	1303.9	1304.8	1305.6	1305.7	1305.0	1304.2	1303.5	1302.7
145°	1352.3	1352.9	1353.4	1353.7	1353.7	1353.7	1353.7	1353.7
147.5°	1395.7	1396.2	1396.8	1396.4	1395.2	1394.0	1392.7	1391.5
150°	1422.2	1422.8	1423.2	1423.2	1422.4	1421.6	1420.8	1420.0
152.5°	1445.8	1446.8	1447.7	1447.6	1446.4	1445.1	1443.9	1442.7
155°	1478.3	1479.6	1480.9	1480.7	1479.2	1477.6	1476.0	1474.5
157.5°	1506.5	1508.1	1509.7	1509.4	1507.4	1505.3	1503.2	1501.2
160°	1522.7	1524.2	1525.7	1525.7	1523.8	1521.9	1520.1	1518.3
162.5°	1537.2	1539.1	1540.8	1540.9	1539.3	1537.6	1536.0	1534.4
165°	1556.8	1558.9	1561.1	1561.2	1559.3	1557.5	1555.6	1553.8
167.5°	1572.0	1574.1	1576.2	1576.2	1574.1	1572.0	1569.9	1567.8
170°	1580.5	1582.6	1584.8	1584.8	1582.6	1580.5	1578.4	1576.3
172.5°	1586.2	1588.3	1590.4	1590.3	1588.0	1585.7	1583.3	1581.0
175°	1593.0	1594.8	1596.7	1596.6	1594.4	1592.4	1590.2	1588.2
177.5°	1595.5	1597.2	1598.9	1598.7	1596.6	1594.5	1592.4	1590.3
180°	1594.0	1594.0	1594.0	1594.0	1594.0	1594.0	1594.0	1594.0

(END OF REPORT)