

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332414-927

Luminaire Tested: **S123RDIW-S560D755U927-4F0-1E-UDD-A**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332414-927  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIW-S560D755U927-4F0-1E-UDD-A  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 560 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING  
UPLIGHT 755 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 4159.7 lumens  
Efficiency: N/A  
Efficacy: 110.6 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.22 / 1.36  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: General Diffuse  
  
Input Watts (W): 37.6  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332414-927

CATALOG NUMBER: S123RDIW-S560D755U927-4F0-1E-UDD-A

### Luminous Intensity Polar Plot

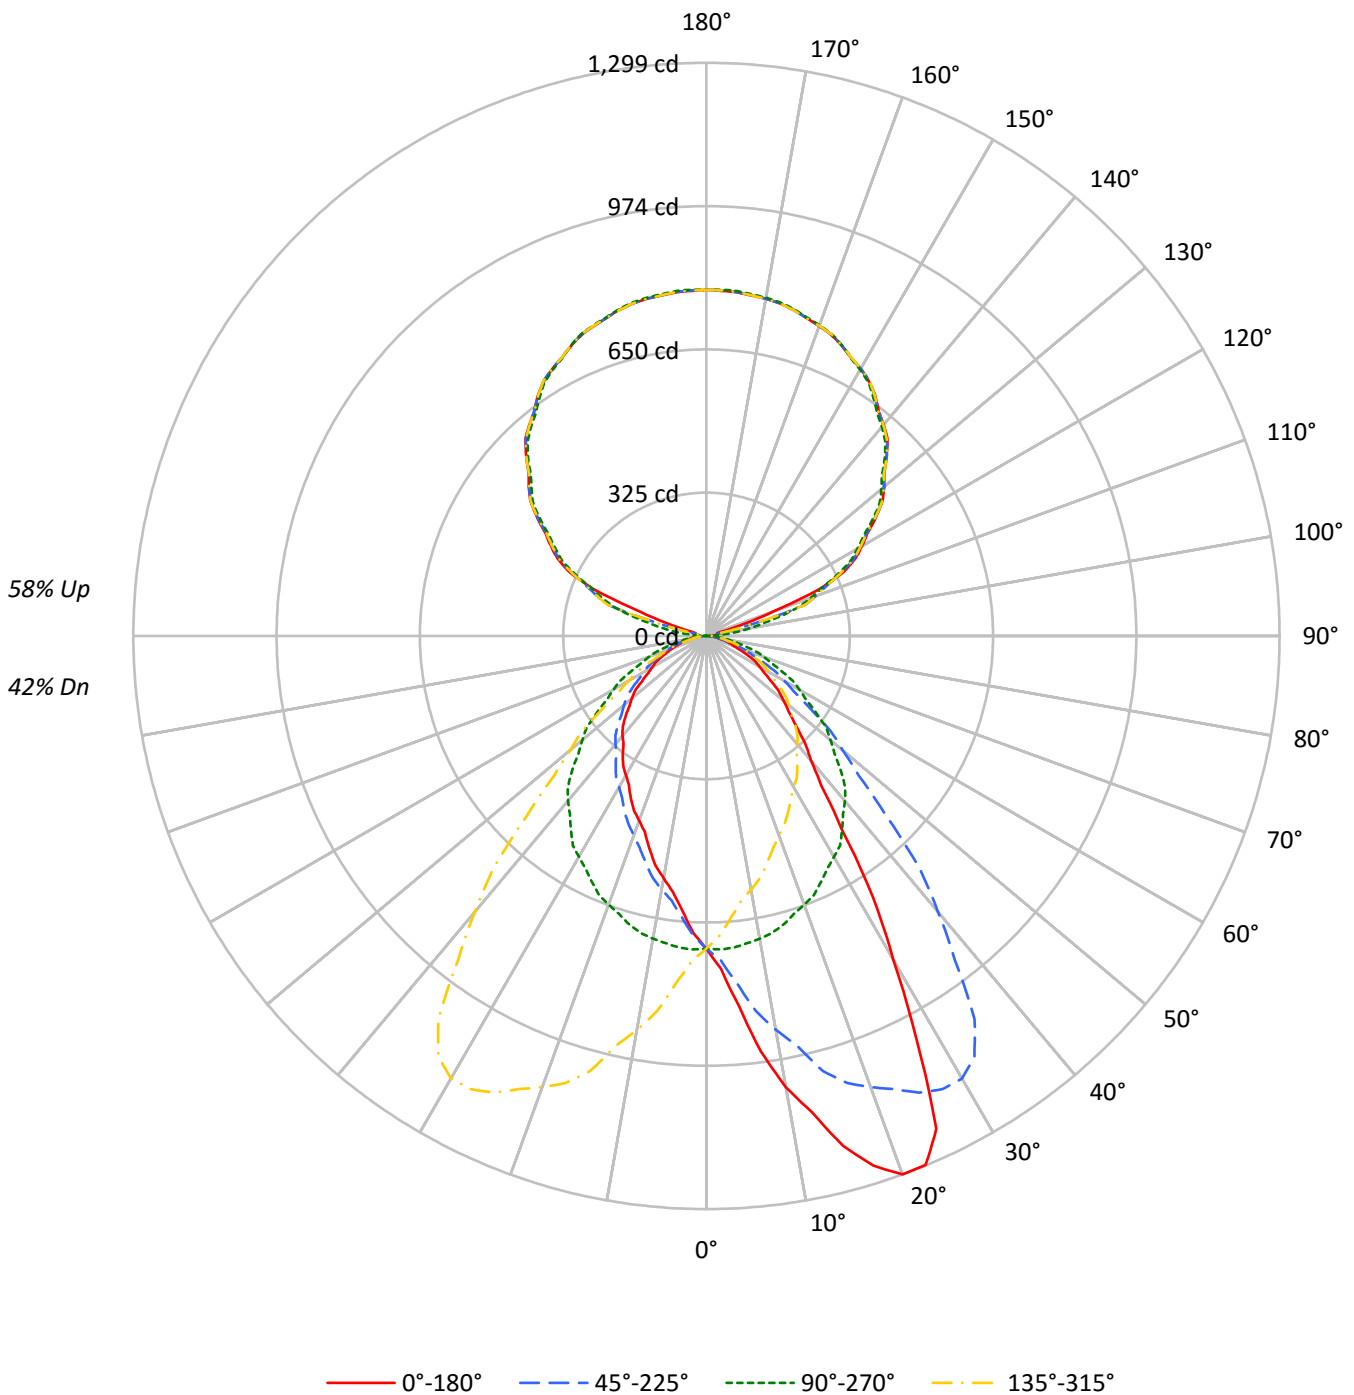



TEST NUMBER: P332414-927

CATALOG NUMBER: S123RDIW-S560D755U927-4F0-1E-UDD-A

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	49	49	49	42
1	97	93	89	86	88	85	82	79	70	68	66	57	55	54	44	43	42	37
2	88	81	76	71	81	75	70	65	62	58	55	50	48	46	40	38	37	32
3	81	72	65	59	74	66	60	55	55	51	47	45	42	39	35	33	32	27
4	74	64	56	51	68	59	52	47	49	44	40	40	37	34	32	30	28	24
5	68	57	49	44	62	53	46	41	44	39	35	36	33	30	29	26	24	21
6	63	51	44	38	57	47	41	36	40	35	31	33	29	26	26	24	22	19
7	58	46	39	33	53	43	36	31	36	31	27	30	26	23	24	22	19	17
8	54	42	35	30	49	39	32	28	33	28	24	28	24	21	22	20	17	15
9	50	39	31	26	46	36	29	25	30	25	22	25	22	19	21	18	16	14
10	47	35	28	24	43	33	27	22	28	23	20	24	20	17	19	16	14	12

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	7629	7629	7629	7629
5°	9095	7662	6748	7662
10°	11355	7618	6096	7618
15°	13329	7540	5558	7540
20°	14875	7424	5102	7424
25°	14638	7301	4822	7301
30°	10521	7188	4533	7188
35°	7025	7041	4346	7041
40°	5176	6864	4154	6864
45°	4341	6555	3962	6555
50°	3831	6149	3699	6149
55°	3359	5684	3337	5684
60°	2990	5240	3057	5240
65°	2626	4760	2845	4760
70°	2061	4337	2596	4337
75°	1817	3785	2371	3785
80°	1581	3217	2331	3217
85°	1272	2581	2470	2581



TEST NUMBER: P332414-927

CATALOG NUMBER: S123RDIW-S560D755U927-4F0-1E-UDD-A

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	69.7	1.7
10°-20°	217.8	5.2
20°-30°	342.1	8.2
30°-40°	356.9	8.6
40°-50°	305.5	7.3
50°-60°	232.8	5.6
60°-70°	149.2	3.6
70°-80°	71.8	1.7
80°-90°	21.2	0.5
90°-100°	28.5	0.7
100°-110°	136.0	3.3
110°-120°	326.6	7.9
120°-130°	415.9	10.0
130°-140°	444.3	10.7
140°-150°	415.5	10.0
150°-160°	335.2	8.1
160°-170°	216.3	5.2
170°-180°	74.5	1.8
0°-30°	629.6	15.1
0°-40°	986.5	23.7
0°-60°	1524.8	36.7
0°-90°	1767.0	42.5
90°-120°	491.1	11.8
90°-150°	1766.8	42.5
90°-180°	2393.0	57.5
0°-180°	4159.7	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	709	709	709	709	709	
5°	842	709	624	709	842	87
15°	1196	677	499	677	1196	339
25°	1232	615	406	615	1232	530
35°	535	536	331	536	535	351
45°	285	431	260	431	285	224
55°	179	303	178	303	179	162
65°	103	187	112	187	103	101
75°	44	91	57	91	44	47
85°	10	21	20	21	10	12
90°	18	1	18	1	18	8
95°	22	36	22	36	22	19
105°	26	174	26	174	26	59
115°	343	326	343	326	343	317
125°	469	459	469	459	469	419
135°	578	572	578	572	578	445
145°	666	660	666	660	666	416
155°	726	727	726	727	726	335
165°	765	767	765	767	765	216
175°	782	785	782	785	782	74
180°	785	785	785	785	785	



TEST NUMBER: P332414-927

CATALOG NUMBER: S123RDIW-S560D755U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8
2.5°	754.9	755.9	752.7	752.3	748.6	747.7	747.7	742.5	739.3	735.2	732.8
5°	841.7	846.5	844.1	838.7	829.6	827.4	821.7	812.5	802.2	789.5	783.5
7.5°	950.1	956.7	954.1	945.7	936.2	928.4	912.2	897.1	875.9	857.4	841.5
10°	1038.9	1031.9	1026.5	1018.3	1009.5	995.2	978.3	954.9	927.9	906.7	883.0
12.5°	1105.4	1104.3	1097.3	1088.9	1076.5	1063.0	1042.0	1013.6	982.2	951.5	924.5
15°	1196.1	1197.9	1193.3	1184.6	1167.0	1143.0	1111.4	1099.6	1054.7	1021.3	987.9
17.5°	1258.9	1258.5	1257.8	1245.6	1227.7	1210.6	1181.4	1150.2	1109.6	1062.6	1017.6
20°	1298.6	1295.6	1296.2	1282.5	1269.2	1249.5	1221.0	1175.8	1142.4	1088.1	1041.6
22.5°	1297.7	1297.0	1299.3	1294.7	1285.0	1269.9	1247.4	1209.3	1166.6	1111.8	1059.6
25°	1232.5	1230.1	1244.4	1248.2	1263.8	1266.5	1259.8	1238.9	1198.5	1142.1	1077.4
27.5°	1031.5	1030.2	1056.6	1089.7	1131.8	1164.4	1196.0	1211.2	1198.5	1158.1	1093.4
30°	846.5	875.0	888.4	936.4	989.8	1053.4	1109.3	1162.4	1175.4	1157.9	1104.8
32.5°	702.8	727.7	738.9	780.1	829.8	904.4	988.2	1063.3	1116.5	1130.0	1098.0
35°	534.6	535.0	560.4	578.6	624.7	701.5	782.8	883.5	983.7	1059.5	1067.5
37.5°	426.6	428.1	443.5	461.7	496.3	536.9	608.5	692.2	807.9	924.3	992.6
40°	368.4	371.1	382.6	400.5	425.4	456.1	511.9	590.7	687.2	816.8	922.7
42.5°	331.0	335.4	341.4	355.1	370.5	399.3	444.4	505.3	593.0	715.6	837.7
45°	285.2	287.6	292.2	298.6	312.5	332.6	362.9	403.9	476.7	575.3	697.6
47.5°	251.6	250.3	255.1	260.3	269.6	283.2	303.6	337.0	389.0	468.0	571.8
50°	228.8	228.5	231.8	235.8	244.5	254.6	271.2	296.4	337.7	403.2	498.2
52.5°	207.4	208.6	211.0	215.9	222.2	230.3	245.3	263.4	298.9	355.5	434.6
55°	179.0	179.9	183.2	186.0	190.5	198.8	208.2	223.3	247.6	287.0	352.3
57.5°	155.0	154.6	157.8	158.4	163.6	170.2	177.5	189.3	206.9	236.2	280.2
60°	138.9	138.1	140.8	142.9	145.6	151.1	157.2	168.7	182.7	204.2	241.9
62.5°	124.4	124.0	126.0	128.1	130.3	135.3	140.5	149.2	160.3	178.5	208.3
65°	103.1	104.1	105.0	105.9	107.1	110.1	115.0	121.0	128.7	141.4	163.0
67.5°	81.0	82.0	82.3	84.1	86.7	88.6	91.7	97.0	102.3	113.0	125.3
70°	65.5	65.2	65.5	66.5	69.8	73.1	77.1	81.0	84.4	92.0	102.3
72.5°	56.3	55.8	56.6	56.7	58.4	59.3	61.8	65.5	69.8	74.9	82.4
75°	43.7	43.7	43.7	43.7	44.9	45.6	46.4	47.4	48.9	51.3	56.7
77.5°	32.3	32.3	32.8	33.0	33.4	33.7	34.2	35.2	35.6	37.0	39.3
80°	25.5	25.8	25.5	25.8	25.8	26.4	26.7	27.6	27.9	29.5	30.3
82.5°	19.2	19.0	19.2	19.5	19.5	20.1	20.1	20.8	20.9	21.6	22.6
85°	10.3	9.7	10.3	10.0	10.6	10.0	10.3	10.9	10.9	11.2	12.4
87.5°	5.9	6.3	5.8	6.0	5.9	6.1	6.0	5.9	6.3	5.9	5.9
90°	17.5	17.2	17.0	16.7	16.5	16.1	15.5	15.1	14.5	14.0	12.3
92.5°	19.3	19.2	19.0	18.9	18.7	18.2	17.4	16.6	15.8	14.9	13.6
95°	22.2	22.2	22.2	22.2	22.2	21.7	20.8	19.9	19.0	18.1	16.6
97.5°	24.0	23.9	23.8	23.6	23.5	22.9	21.9	20.8	19.8	18.8	28.1
100°	24.5	24.3	24.2	24.1	24.0	23.4	22.3	21.3	20.3	19.3	39.5
102.5°	25.0	24.7	24.5	24.2	24.0	25.5	28.8	31.9	35.2	38.3	60.4
105°	25.7	25.4	25.1	24.9	24.6	36.0	58.9	81.8	104.7	127.7	139.3
107.5°	80.6	97.8	115.1	132.4	149.7	166.8	183.5	200.3	217.1	234.0	232.2
110°	160.3	178.8	197.3	215.9	234.4	245.8	250.1	254.4	258.6	262.9	261.5



TEST NUMBER: P332414-927

CATALOG NUMBER: S123RDIW-S560D755U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	275.0	278.9	282.9	286.8	290.7	292.6	292.6	292.5	292.4	292.3	290.9
115°	342.8	342.2	341.7	341.2	340.7	339.8	338.5	337.2	335.9	334.6	333.4
117.5°	380.8	380.6	380.6	380.5	380.3	379.8	378.7	377.7	376.7	375.7	375.0
120°	406.9	406.9	406.9	406.9	406.9	406.4	405.4	404.3	403.3	402.2	401.9
122.5°	432.5	432.5	432.3	432.2	432.1	431.7	430.9	430.2	429.5	428.8	428.3
125°	468.7	468.4	468.2	467.9	467.6	467.4	467.1	466.8	466.6	466.4	465.8
127.5°	503.4	503.7	503.9	504.2	504.5	504.4	504.0	503.6	503.1	502.7	502.1
130°	525.8	526.1	526.3	526.6	526.9	526.7	526.2	525.7	525.1	524.7	524.1
132.5°	546.3	546.7	547.1	547.4	547.8	547.7	547.2	546.7	546.1	545.7	545.2
135°	577.7	578.1	578.5	578.8	579.2	579.2	578.8	578.5	578.1	577.7	577.2
137.5°	607.2	607.4	607.7	608.0	608.2	608.1	607.4	606.8	606.2	605.5	605.3
140°	624.9	625.2	625.4	625.7	626.0	625.8	625.3	624.8	624.2	623.8	623.4
142.5°	641.2	641.6	642.0	642.3	642.7	642.6	642.2	641.8	641.4	641.0	640.6
145°	666.3	666.3	666.3	666.3	666.3	666.1	665.9	665.7	665.4	665.1	664.9
147.5°	684.9	685.6	686.1	686.7	687.3	687.5	687.2	687.0	686.7	686.4	686.2
150°	698.9	699.3	699.7	700.1	700.5	700.5	700.3	700.1	699.8	699.5	699.3
152.5°	710.1	710.7	711.3	711.9	712.5	712.6	712.1	711.6	711.1	710.7	710.6
155°	725.7	726.5	727.3	728.1	728.9	729.0	728.3	727.6	727.0	726.4	726.2
157.5°	738.9	740.0	740.9	742.0	743.0	743.1	742.3	741.6	740.8	740.0	740.1
160°	747.3	748.2	749.2	750.0	751.0	751.0	750.3	749.5	748.7	747.9	748.1
162.5°	755.3	756.1	756.9	757.6	758.4	758.4	757.6	756.7	755.8	754.9	755.0
165°	764.8	765.7	766.6	767.5	768.4	768.3	767.3	766.3	765.2	764.2	764.4
167.5°	771.7	772.7	773.7	774.8	775.9	775.9	774.8	773.7	772.7	771.7	771.7
170°	775.9	776.9	777.9	779.0	780.1	780.1	779.0	777.9	776.9	775.9	775.9
172.5°	778.2	779.3	780.5	781.6	782.8	782.8	781.8	780.8	779.7	778.7	778.6
175°	781.7	782.8	783.8	784.8	785.8	785.9	785.1	784.1	783.2	782.3	782.2
177.5°	782.8	783.8	784.8	785.8	786.9	787.0	786.2	785.4	784.5	783.7	783.6
180°	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7



TEST NUMBER: P332414-927

CATALOG NUMBER: S123RDIW-S560D755U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8
2.5°	731.8	731.1	727.7	723.8	718.7	715.3	712.6	711.2	706.9	701.5	697.8
5°	777.1	767.9	758.3	746.4	735.5	724.3	717.3	709.1	699.1	687.9	679.9
7.5°	825.5	807.6	788.4	768.6	748.9	731.3	715.8	702.5	686.6	670.5	659.2
10°	862.6	836.5	809.5	781.9	756.7	733.1	714.9	697.0	677.9	659.3	645.4
12.5°	896.4	862.1	830.9	796.9	764.8	736.5	710.3	689.2	666.2	646.5	630.6
15°	939.1	903.9	866.3	814.7	771.9	736.1	704.3	676.6	648.7	624.5	609.0
17.5°	979.0	926.1	875.5	832.4	776.9	732.1	693.2	660.2	629.6	603.9	584.8
20°	995.5	944.3	889.3	834.4	779.8	729.8	684.5	648.1	616.2	587.1	569.5
22.5°	1005.4	947.4	889.5	830.5	772.5	720.5	675.8	635.7	601.2	573.5	551.8
25°	1017.1	947.8	884.2	825.9	766.8	710.3	657.2	614.7	577.4	548.0	524.9
27.5°	1024.7	943.3	868.0	803.3	743.2	687.1	638.4	593.3	555.5	524.3	499.6
30°	1026.2	939.7	855.6	785.5	724.5	673.0	621.4	578.3	538.3	505.2	482.1
32.5°	1028.1	930.7	838.9	764.5	702.0	650.9	604.2	563.0	522.0	489.4	465.9
35°	1020.1	925.7	813.5	727.9	665.4	615.9	573.8	535.8	495.5	463.9	440.0
37.5°	985.6	906.0	787.1	686.7	621.4	575.6	541.2	508.2	471.2	437.1	414.5
40°	950.9	886.6	766.8	661.8	593.5	546.4	515.5	488.5	452.7	420.8	396.6
42.5°	899.2	860.2	747.3	635.6	561.9	516.6	490.5	465.2	433.8	401.4	378.6
45°	804.4	809.5	707.6	593.8	518.2	472.7	448.1	430.6	402.7	376.0	352.6
47.5°	685.4	733.6	660.9	549.3	472.2	429.4	408.0	392.6	373.8	347.6	326.3
50°	607.8	676.6	623.5	519.4	443.3	400.8	379.6	367.2	350.8	330.1	309.8
52.5°	536.1	610.1	578.4	486.2	412.0	373.1	352.4	342.1	329.2	309.7	291.4
55°	437.2	512.1	504.9	436.0	365.0	330.1	314.3	302.9	294.0	279.5	264.9
57.5°	353.6	424.7	428.5	380.2	323.6	289.1	275.6	266.9	261.1	250.2	236.7
60°	301.0	366.2	379.0	342.5	294.0	263.6	250.3	243.4	238.8	230.0	219.7
62.5°	257.3	312.8	327.3	301.0	265.6	237.2	226.8	220.1	217.0	209.4	200.3
65°	196.9	243.0	257.0	242.4	223.9	201.1	192.7	186.9	184.2	179.9	173.3
67.5°	148.1	181.7	197.0	186.7	180.1	165.6	160.3	157.2	154.7	151.9	146.2
70°	118.9	143.9	159.6	156.9	151.4	143.9	139.9	137.8	135.3	132.9	128.0
72.5°	95.6	112.7	127.5	129.0	124.5	122.9	119.5	118.6	117.1	114.2	111.5
75°	63.5	75.3	85.6	89.5	91.3	92.8	91.3	91.0	90.7	88.3	86.7
77.5°	41.6	47.9	54.4	61.2	64.0	66.1	66.5	67.7	66.9	65.6	64.9
80°	31.8	33.4	37.9	43.7	48.2	50.1	51.3	51.9	51.6	51.3	50.1
82.5°	23.1	24.4	26.5	30.6	34.4	37.5	38.2	38.0	38.7	38.9	37.9
85°	12.4	12.8	13.4	13.9	16.1	19.4	20.4	20.9	21.5	21.5	19.7
87.5°	6.0	5.5	5.5	5.3	5.8	5.7	6.9	7.9	8.4	7.7	7.9
90°	10.6	9.0	7.3	5.8	4.4	3.2	1.9	0.6	1.9	3.2	4.4
92.5°	12.4	11.1	9.8	9.4	9.7	10.1	10.5	10.9	10.5	10.1	9.7
95°	15.2	13.8	12.4	14.3	19.6	25.0	30.3	35.6	30.3	25.0	19.6
97.5°	37.4	46.7	56.1	61.9	64.3	66.7	69.1	71.5	69.1	66.7	64.3
100°	59.7	79.9	100.1	108.8	106.3	103.7	101.1	98.5	101.1	103.7	106.3
102.5°	82.5	104.6	126.7	136.7	134.9	133.0	131.2	129.3	131.2	133.0	134.9
105°	151.0	162.6	174.3	179.4	178.0	176.6	175.2	173.7	175.2	176.6	178.0
107.5°	230.3	228.5	226.6	225.1	224.0	222.8	221.7	220.5	221.7	222.8	224.0
110°	260.1	258.6	257.2	256.0	254.9	253.9	252.9	251.8	252.9	253.9	254.9





TEST NUMBER: P332414-927

CATALOG NUMBER: S123RDIW-S560D755U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	289.5	288.0	286.6	285.4	284.5	283.5	282.6	281.7	282.6	283.5	284.5
115°	332.2	331.1	329.9	329.0	328.2	327.4	326.6	325.8	326.6	327.4	328.2
117.5°	374.5	373.8	373.3	372.5	371.5	370.6	369.6	368.7	369.6	370.6	371.5
120°	401.5	401.1	400.7	399.9	398.7	397.6	396.4	395.2	396.4	397.6	398.7
122.5°	427.9	427.3	426.8	426.1	425.2	424.2	423.3	422.3	423.3	424.2	425.2
125°	465.3	464.8	464.3	463.5	462.5	461.4	460.4	459.4	460.4	461.4	462.5
127.5°	501.5	500.9	500.3	499.4	498.4	497.3	496.3	495.3	496.3	497.3	498.4
130°	523.6	523.1	522.6	521.8	520.8	519.8	518.7	517.6	518.7	519.8	520.8
132.5°	544.8	544.4	544.0	543.3	542.2	541.1	540.1	539.1	540.1	541.1	542.2
135°	576.6	576.2	575.6	575.0	574.2	573.4	572.7	571.9	572.7	573.4	574.2
137.5°	605.0	604.7	604.4	603.8	602.8	601.8	600.8	599.8	600.8	601.8	602.8
140°	623.0	622.6	622.2	621.6	620.8	620.0	619.2	618.5	619.2	620.0	620.8
142.5°	640.2	639.8	639.4	638.9	638.1	637.3	636.5	635.7	636.5	637.3	638.1
145°	664.6	664.3	664.1	663.5	662.6	661.7	660.8	659.9	660.8	661.7	662.6
147.5°	686.0	685.7	685.4	685.0	684.4	683.8	683.2	682.6	683.2	683.8	684.4
150°	699.0	698.8	698.5	698.2	697.8	697.4	697.0	696.6	697.0	697.4	697.8
152.5°	710.4	710.3	710.1	710.0	709.7	709.6	709.4	709.2	709.4	709.6	709.7
155°	726.1	726.0	725.8	725.9	726.1	726.4	726.7	726.9	726.7	726.4	726.1
157.5°	740.2	740.4	740.5	740.6	740.6	740.6	740.7	740.7	740.7	740.6	740.6
160°	748.1	748.3	748.5	748.5	748.7	748.8	748.9	749.1	748.9	748.8	748.7
162.5°	755.2	755.3	755.4	755.7	756.0	756.3	756.7	757.0	756.7	756.3	756.0
165°	764.5	764.6	764.8	765.0	765.4	765.8	766.2	766.6	766.2	765.8	765.4
167.5°	771.7	771.7	771.7	772.0	772.5	773.0	773.5	774.0	773.5	773.0	772.5
170°	775.9	775.9	775.9	776.2	776.7	777.2	777.7	778.2	777.7	777.2	776.7
172.5°	778.5	778.4	778.2	778.6	779.2	779.7	780.4	781.0	780.4	779.7	779.2
175°	782.0	781.9	781.8	782.0	782.7	783.3	783.9	784.7	783.9	783.3	782.7
177.5°	783.5	783.4	783.3	783.5	784.0	784.5	785.1	785.5	785.1	784.5	784.0
180°	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7



TEST NUMBER: P332414-927

CATALOG NUMBER: S123RDIW-S560D755U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8
2.5°	696.6	693.5	691.3	686.4	683.3	679.9	676.5	678.7	678.4	678.2	678.2
5°	673.3	666.3	660.0	651.7	646.6	640.2	635.3	634.8	636.0	631.7	629.3
7.5°	650.1	640.6	631.5	622.5	612.9	605.2	600.5	598.3	595.2	592.6	589.8
10°	633.8	622.7	613.8	602.6	592.3	583.2	577.4	573.5	571.3	569.2	565.3
12.5°	617.1	606.1	594.8	582.2	572.4	561.8	557.5	553.1	549.0	546.6	541.2
15°	592.6	578.3	566.5	553.1	542.2	531.9	525.9	517.1	515.8	512.8	507.3
17.5°	568.0	552.5	536.2	526.3	514.0	503.3	494.0	491.1	482.4	479.1	474.4
20°	548.6	534.3	521.9	508.8	490.9	480.9	473.6	469.7	462.7	458.4	455.4
22.5°	531.9	517.3	503.0	487.7	472.9	461.8	456.4	450.3	446.5	440.5	437.2
25°	507.9	492.2	474.8	458.4	447.8	439.3	430.9	425.4	419.9	417.2	411.1
27.5°	480.1	463.7	447.5	435.1	422.0	413.6	405.9	401.1	394.5	389.9	386.6
30°	464.9	445.4	431.5	420.3	403.5	395.7	389.9	383.8	379.0	374.1	370.7
32.5°	447.1	429.4	416.1	402.3	389.4	380.9	373.4	368.0	363.9	359.3	356.0
35°	419.3	404.5	390.8	376.8	367.4	358.6	349.8	345.3	341.4	337.1	334.1
37.5°	394.2	380.3	367.3	354.1	342.5	335.3	328.2	324.7	319.4	316.6	313.5
40°	378.7	365.0	351.1	338.3	326.1	320.8	314.3	309.2	304.4	302.2	298.9
42.5°	361.7	348.0	336.3	322.5	312.6	305.1	299.3	293.7	290.0	286.9	285.0
45°	336.5	324.3	312.8	299.2	289.8	283.4	276.7	271.6	268.2	266.1	262.8
47.5°	312.0	299.9	288.2	276.3	267.2	259.9	253.3	249.6	245.3	242.6	240.3
50°	294.3	283.4	270.9	260.0	251.0	243.7	238.2	233.6	229.7	226.3	224.8
52.5°	278.1	266.4	255.6	245.5	235.9	227.6	222.7	217.9	214.9	211.0	209.3
55°	251.2	240.0	230.9	220.9	211.5	204.5	198.4	194.2	191.2	186.9	184.5
57.5°	226.0	215.9	205.1	196.5	186.7	180.9	175.8	170.0	166.4	163.0	160.7
60°	209.1	197.5	188.1	179.9	171.4	163.8	159.3	154.7	150.8	147.4	145.4
62.5°	191.3	181.3	172.4	163.4	155.7	149.0	143.8	139.9	136.5	134.4	132.2
65°	164.1	156.3	147.2	139.9	132.6	127.8	123.5	120.2	117.7	116.2	114.4
67.5°	139.2	131.5	123.6	116.4	111.5	107.8	105.0	102.2	101.0	99.0	97.8
70°	122.9	115.0	108.1	102.6	97.7	95.0	93.2	91.0	89.8	87.4	86.2
72.5°	105.2	99.5	94.4	89.9	86.0	83.6	81.3	78.7	76.7	74.1	72.8
75°	82.9	77.7	73.8	70.7	68.3	65.0	61.6	58.9	58.0	57.0	56.7
77.5°	61.3	58.1	55.2	52.7	49.7	47.2	46.5	45.9	45.7	45.2	45.2
80°	48.2	45.2	43.1	40.1	38.3	38.3	38.3	37.6	37.9	37.9	37.9
82.5°	35.9	33.0	31.9	30.8	30.5	30.7	30.7	30.8	30.7	31.1	30.9
85°	18.5	18.8	19.4	19.1	19.4	19.4	20.0	19.7	20.0	19.4	20.0
87.5°	7.9	9.0	9.6	10.1	10.7	10.8	11.2	11.2	11.6	11.7	11.8
90°	5.8	7.3	9.0	10.6	12.3	14.0	14.5	15.1	15.5	16.1	16.5
92.5°	9.4	9.8	11.1	12.4	13.6	14.9	15.8	16.6	17.4	18.2	18.7
95°	14.3	12.4	13.8	15.2	16.6	18.1	19.0	19.9	20.8	21.7	22.2
97.5°	61.9	56.1	46.7	37.4	28.1	18.8	19.8	20.8	21.9	22.9	23.5
100°	108.8	100.1	79.9	59.7	39.5	19.3	20.3	21.3	22.3	23.4	24.0
102.5°	136.7	126.7	104.6	82.5	60.4	38.3	35.2	31.9	28.8	25.5	24.0
105°	179.4	174.3	162.6	151.0	139.3	127.7	104.7	81.8	58.9	36.0	24.6
107.5°	225.1	226.6	228.5	230.3	232.2	234.0	217.1	200.3	183.5	166.8	149.7
110°	256.0	257.2	258.6	260.1	261.5	262.9	258.6	254.4	250.1	245.8	234.4



TEST NUMBER: P332414-927

CATALOG NUMBER: S123RDIW-S560D755U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	285.4	286.6	288.0	289.5	290.9	292.3	292.4	292.5	292.6	292.6	290.7
115°	329.0	329.9	331.1	332.2	333.4	334.6	335.9	337.2	338.5	339.8	340.7
117.5°	372.5	373.3	373.8	374.5	375.0	375.7	376.7	377.7	378.7	379.8	380.3
120°	399.9	400.7	401.1	401.5	401.9	402.2	403.3	404.3	405.4	406.4	406.9
122.5°	426.1	426.8	427.3	427.9	428.3	428.8	429.5	430.2	430.9	431.7	432.1
125°	463.5	464.3	464.8	465.3	465.8	466.4	466.6	466.8	467.1	467.4	467.6
127.5°	499.4	500.3	500.9	501.5	502.1	502.7	503.1	503.6	504.0	504.4	504.5
130°	521.8	522.6	523.1	523.6	524.1	524.7	525.1	525.7	526.2	526.7	526.9
132.5°	543.3	544.0	544.4	544.8	545.2	545.7	546.1	546.7	547.2	547.7	547.8
135°	575.0	575.6	576.2	576.6	577.2	577.7	578.1	578.5	578.8	579.2	579.2
137.5°	603.8	604.4	604.7	605.0	605.3	605.5	606.2	606.8	607.4	608.1	608.2
140°	621.6	622.2	622.6	623.0	623.4	623.8	624.2	624.8	625.3	625.8	626.0
142.5°	638.9	639.4	639.8	640.2	640.6	641.0	641.4	641.8	642.2	642.6	642.7
145°	663.5	664.1	664.3	664.6	664.9	665.1	665.4	665.7	665.9	666.1	666.3
147.5°	685.0	685.4	685.7	686.0	686.2	686.4	686.7	687.0	687.2	687.5	687.3
150°	698.2	698.5	698.8	699.0	699.3	699.5	699.8	700.1	700.3	700.5	700.5
152.5°	710.0	710.1	710.3	710.4	710.6	710.7	711.1	711.6	712.1	712.6	712.5
155°	725.9	725.8	726.0	726.1	726.2	726.4	727.0	727.6	728.3	729.0	728.9
157.5°	740.6	740.5	740.4	740.2	740.1	740.0	740.8	741.6	742.3	743.1	743.0
160°	748.5	748.5	748.3	748.1	748.1	747.9	748.7	749.5	750.3	751.0	751.0
162.5°	755.7	755.4	755.3	755.2	755.0	754.9	755.8	756.7	757.6	758.4	758.4
165°	765.0	764.8	764.6	764.5	764.4	764.2	765.2	766.3	767.3	768.3	768.4
167.5°	772.0	771.7	771.7	771.7	771.7	771.7	772.7	773.7	774.8	775.9	775.9
170°	776.2	775.9	775.9	775.9	775.9	775.9	776.9	777.9	779.0	780.1	780.1
172.5°	778.6	778.2	778.4	778.5	778.6	778.7	779.7	780.8	781.8	782.8	782.8
175°	782.0	781.8	781.9	782.0	782.2	782.3	783.2	784.1	785.1	785.9	785.8
177.5°	783.5	783.3	783.4	783.5	783.6	783.7	784.5	785.4	786.2	787.0	786.9
180°	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7



TEST NUMBER: P332414-927

CATALOG NUMBER: S123RDIW-S560D755U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8
2.5°	675.3	675.0	675.3	674.3	675.3	675.0	675.3	678.2	678.2	678.4	678.7
5°	628.4	628.0	627.2	624.5	627.2	628.0	628.4	629.3	631.7	636.0	634.8
7.5°	587.4	587.0	584.3	584.4	584.3	587.0	587.4	589.8	592.6	595.2	598.3
10°	563.2	563.5	559.8	557.7	559.8	563.5	563.2	565.3	569.2	571.3	573.5
12.5°	539.6	538.2	535.3	532.9	535.3	538.2	539.6	541.2	546.6	549.0	553.1
15°	508.5	505.5	498.2	498.8	498.2	505.5	508.5	507.3	512.8	515.8	517.1
17.5°	471.9	469.7	469.6	465.3	469.6	469.7	471.9	474.4	479.1	482.4	491.1
20°	450.6	449.1	449.6	445.4	449.6	449.1	450.6	455.4	458.4	462.7	469.7
22.5°	433.8	432.3	429.8	428.4	429.8	432.3	433.8	437.2	440.5	446.5	450.3
25°	409.3	406.9	404.5	406.0	404.5	406.9	409.3	411.1	417.2	419.9	425.4
27.5°	384.8	382.9	380.6	380.2	380.6	382.9	384.8	386.6	389.9	394.5	401.1
30°	369.2	367.4	366.2	364.7	366.2	367.4	369.2	370.7	374.1	379.0	383.8
32.5°	353.5	353.2	350.9	350.6	350.9	353.2	353.5	356.0	359.3	363.9	368.0
35°	332.9	331.1	330.4	330.7	330.4	331.1	332.9	334.1	337.1	341.4	345.3
37.5°	313.2	310.9	309.7	308.6	309.7	310.9	313.2	313.5	316.6	319.4	324.7
40°	299.2	296.8	296.1	295.6	296.1	296.8	299.2	298.9	302.2	304.4	309.2
42.5°	283.4	282.4	282.1	281.0	282.1	282.4	283.4	285.0	286.9	290.0	293.7
45°	261.8	261.6	259.8	260.3	259.8	261.6	261.8	262.8	266.1	268.2	271.6
47.5°	239.2	237.8	236.5	237.4	236.5	237.8	239.2	240.3	242.6	245.3	249.6
50°	223.6	223.0	220.3	220.9	220.3	223.0	223.6	224.8	226.3	229.7	233.6
52.5°	208.1	205.8	204.8	204.4	204.8	205.8	208.1	209.3	211.0	214.9	217.9
55°	182.4	179.6	178.4	177.8	178.4	179.6	182.4	184.5	186.9	191.2	194.2
57.5°	157.1	156.4	155.4	156.1	155.4	156.4	157.1	160.7	163.0	166.4	170.0
60°	142.3	142.3	142.3	142.0	142.3	142.3	142.3	145.4	147.4	150.8	154.7
62.5°	130.9	130.2	129.9	130.3	129.9	130.2	130.9	132.2	134.4	136.5	139.9
65°	113.4	113.2	111.9	111.7	111.9	113.2	113.4	114.4	116.2	117.7	120.2
67.5°	97.0	95.9	95.6	95.1	95.6	95.9	97.0	97.8	99.0	101.0	102.2
70°	84.7	84.1	82.2	82.5	82.2	84.1	84.7	86.2	87.4	89.8	91.0
72.5°	71.3	70.7	70.3	69.9	70.3	70.7	71.3	72.8	74.1	76.7	78.7
75°	56.4	56.2	55.8	57.0	55.8	56.2	56.4	56.7	57.0	58.0	58.9
77.5°	45.2	45.2	45.4	44.9	45.4	45.2	45.2	45.2	45.2	45.7	45.9
80°	37.9	37.9	37.6	37.6	37.6	37.9	37.9	37.9	37.9	37.9	37.6
82.5°	30.4	30.7	30.8	30.3	30.8	30.7	30.4	30.9	31.1	30.7	30.8
85°	20.0	19.7	20.4	20.0	20.4	19.7	20.0	20.0	19.4	20.0	19.7
87.5°	12.4	11.9	12.0	12.2	12.0	11.9	12.4	11.8	11.7	11.6	11.2
90°	16.7	17.0	17.2	17.5	17.2	17.0	16.7	16.5	16.1	15.5	15.1
92.5°	18.9	19.0	19.2	19.3	19.2	19.0	18.9	18.7	18.2	17.4	16.6
95°	22.2	22.2	22.2	22.2	22.2	22.2	22.2	22.2	21.7	20.8	19.9
97.5°	23.6	23.8	23.9	24.0	23.9	23.8	23.6	23.5	22.9	21.9	20.8
100°	24.1	24.2	24.3	24.5	24.3	24.2	24.1	24.0	23.4	22.3	21.3
102.5°	24.2	24.5	24.7	25.0	24.7	24.5	24.2	24.0	25.5	28.8	31.9
105°	24.9	25.1	25.4	25.7	25.4	25.1	24.9	24.6	36.0	58.9	81.8
107.5°	132.4	115.1	97.8	80.6	97.8	115.1	132.4	149.7	166.8	183.5	200.3
110°	215.9	197.3	178.8	160.3	178.8	197.3	215.9	234.4	245.8	250.1	254.4



TEST NUMBER: P332414-927

CATALOG NUMBER: S123RDIW-S560D755U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	286.8	282.9	278.9	275.0	278.9	282.9	286.8	290.7	292.6	292.6	292.5
115°	341.2	341.7	342.2	342.8	342.2	341.7	341.2	340.7	339.8	338.5	337.2
117.5°	380.5	380.6	380.6	380.8	380.6	380.6	380.5	380.3	379.8	378.7	377.7
120°	406.9	406.9	406.9	406.9	406.9	406.9	406.9	406.9	406.4	405.4	404.3
122.5°	432.2	432.3	432.5	432.5	432.5	432.3	432.2	432.1	431.7	430.9	430.2
125°	467.9	468.2	468.4	468.7	468.4	468.2	467.9	467.6	467.4	467.1	466.8
127.5°	504.2	503.9	503.7	503.4	503.7	503.9	504.2	504.5	504.4	504.0	503.6
130°	526.6	526.3	526.1	525.8	526.1	526.3	526.6	526.9	526.7	526.2	525.7
132.5°	547.4	547.1	546.7	546.3	546.7	547.1	547.4	547.8	547.7	547.2	546.7
135°	578.8	578.5	578.1	577.7	578.1	578.5	578.8	579.2	579.2	578.8	578.5
137.5°	608.0	607.7	607.4	607.2	607.4	607.7	608.0	608.2	608.1	607.4	606.8
140°	625.7	625.4	625.2	624.9	625.2	625.4	625.7	626.0	625.8	625.3	624.8
142.5°	642.3	642.0	641.6	641.2	641.6	642.0	642.3	642.7	642.6	642.2	641.8
145°	666.3	666.3	666.3	666.3	666.3	666.3	666.3	666.3	666.1	665.9	665.7
147.5°	686.7	686.1	685.6	684.9	685.6	686.1	686.7	687.3	687.5	687.2	687.0
150°	700.1	699.7	699.3	698.9	699.3	699.7	700.1	700.5	700.5	700.3	700.1
152.5°	711.9	711.3	710.7	710.1	710.7	711.3	711.9	712.5	712.6	712.1	711.6
155°	728.1	727.3	726.5	725.7	726.5	727.3	728.1	728.9	729.0	728.3	727.6
157.5°	742.0	740.9	740.0	738.9	740.0	740.9	742.0	743.0	743.1	742.3	741.6
160°	750.0	749.2	748.2	747.3	748.2	749.2	750.0	751.0	751.0	750.3	749.5
162.5°	757.6	756.9	756.1	755.3	756.1	756.9	757.6	758.4	758.4	757.6	756.7
165°	767.5	766.6	765.7	764.8	765.7	766.6	767.5	768.4	768.3	767.3	766.3
167.5°	774.8	773.7	772.7	771.7	772.7	773.7	774.8	775.9	775.9	774.8	773.7
170°	779.0	777.9	776.9	775.9	776.9	777.9	779.0	780.1	780.1	779.0	777.9
172.5°	781.6	780.5	779.3	778.2	779.3	780.5	781.6	782.8	782.8	781.8	780.8
175°	784.8	783.8	782.8	781.7	782.8	783.8	784.8	785.8	785.9	785.1	784.1
177.5°	785.8	784.8	783.8	782.8	783.8	784.8	785.8	786.9	787.0	786.2	785.4
180°	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7



TEST NUMBER: P332414-927

CATALOG NUMBER: S123RDIW-S560D755U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8
2.5°	676.5	679.9	683.3	686.4	691.3	693.5	696.6	697.8	701.5	706.9	711.2
5°	635.3	640.2	646.6	651.7	660.0	666.3	673.3	679.9	687.9	699.1	709.1
7.5°	600.5	605.2	612.9	622.5	631.5	640.6	650.1	659.2	670.5	686.6	702.5
10°	577.4	583.2	592.3	602.6	613.8	622.7	633.8	645.4	659.3	677.9	697.0
12.5°	557.5	561.8	572.4	582.2	594.8	606.1	617.1	630.6	646.5	666.2	689.2
15°	525.9	531.9	542.2	553.1	566.5	578.3	592.6	609.0	624.5	648.7	676.6
17.5°	494.0	503.3	514.0	526.3	536.2	552.5	568.0	584.8	603.9	629.6	660.2
20°	473.6	480.9	490.9	508.8	521.9	534.3	548.6	569.5	587.1	616.2	648.1
22.5°	456.4	461.8	472.9	487.7	503.0	517.3	531.9	551.8	573.5	601.2	635.7
25°	430.9	439.3	447.8	458.4	474.8	492.2	507.9	524.9	548.0	577.4	614.7
27.5°	405.9	413.6	422.0	435.1	447.5	463.7	480.1	499.6	524.3	555.5	593.3
30°	389.9	395.7	403.5	420.3	431.5	445.4	464.9	482.1	505.2	538.3	578.3
32.5°	373.4	380.9	389.4	402.3	416.1	429.4	447.1	465.9	489.4	522.0	563.0
35°	349.8	358.6	367.4	376.8	390.8	404.5	419.3	440.0	463.9	495.5	535.8
37.5°	328.2	335.3	342.5	354.1	367.3	380.3	394.2	414.5	437.1	471.2	508.2
40°	314.3	320.8	326.1	338.3	351.1	365.0	378.7	396.6	420.8	452.7	488.5
42.5°	299.3	305.1	312.6	322.5	336.3	348.0	361.7	378.6	401.4	433.8	465.2
45°	276.7	283.4	289.8	299.2	312.8	324.3	336.5	352.6	376.0	402.7	430.6
47.5°	253.3	259.9	267.2	276.3	288.2	299.9	312.0	326.3	347.6	373.8	392.6
50°	238.2	243.7	251.0	260.0	270.9	283.4	294.3	309.8	330.1	350.8	367.2
52.5°	222.7	227.6	235.9	245.5	255.6	266.4	278.1	291.4	309.7	329.2	342.1
55°	198.4	204.5	211.5	220.9	230.9	240.0	251.2	264.9	279.5	294.0	302.9
57.5°	175.8	180.9	186.7	196.5	205.1	215.9	226.0	236.7	250.2	261.1	266.9
60°	159.3	163.8	171.4	179.9	188.1	197.5	209.1	219.7	230.0	238.8	243.4
62.5°	143.8	149.0	155.7	163.4	172.4	181.3	191.3	200.3	209.4	217.0	220.1
65°	123.5	127.8	132.6	139.9	147.2	156.3	164.1	173.3	179.9	184.2	186.9
67.5°	105.0	107.8	111.5	116.4	123.6	131.5	139.2	146.2	151.9	154.7	157.2
70°	93.2	95.0	97.7	102.6	108.1	115.0	122.9	128.0	132.9	135.3	137.8
72.5°	81.3	83.6	86.0	89.9	94.4	99.5	105.2	111.5	114.2	117.1	118.6
75°	61.6	65.0	68.3	70.7	73.8	77.7	82.9	86.7	88.3	90.7	91.0
77.5°	46.5	47.2	49.7	52.7	55.2	58.1	61.3	64.9	65.6	66.9	67.7
80°	38.3	38.3	38.3	40.1	43.1	45.2	48.2	50.1	51.3	51.6	51.9
82.5°	30.7	30.7	30.5	30.8	31.9	33.0	35.9	37.9	38.9	38.7	38.0
85°	20.0	19.4	19.4	19.1	19.4	18.8	18.5	19.7	21.5	21.5	20.9
87.5°	11.2	10.8	10.7	10.1	9.6	9.0	7.9	7.9	7.7	8.4	7.9
90°	14.5	14.0	12.3	10.6	9.0	7.3	5.8	4.4	3.2	1.9	0.6
92.5°	15.8	14.9	13.6	12.4	11.1	9.8	9.4	9.7	10.1	10.5	10.9
95°	19.0	18.1	16.6	15.2	13.8	12.4	14.3	19.6	25.0	30.3	35.6
97.5°	19.8	18.8	28.1	37.4	46.7	56.1	61.9	64.3	66.7	69.1	71.5
100°	20.3	19.3	39.5	59.7	79.9	100.1	108.8	106.3	103.7	101.1	98.5
102.5°	35.2	38.3	60.4	82.5	104.6	126.7	136.7	134.9	133.0	131.2	129.3
105°	104.7	127.7	139.3	151.0	162.6	174.3	179.4	178.0	176.6	175.2	173.7
107.5°	217.1	234.0	232.2	230.3	228.5	226.6	225.1	224.0	222.8	221.7	220.5
110°	258.6	262.9	261.5	260.1	258.6	257.2	256.0	254.9	253.9	252.9	251.8



TEST NUMBER: P332414-927

CATALOG NUMBER: S123RDIW-S560D755U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	292.4	292.3	290.9	289.5	288.0	286.6	285.4	284.5	283.5	282.6	281.7
115°	335.9	334.6	333.4	332.2	331.1	329.9	329.0	328.2	327.4	326.6	325.8
117.5°	376.7	375.7	375.0	374.5	373.8	373.3	372.5	371.5	370.6	369.6	368.7
120°	403.3	402.2	401.9	401.5	401.1	400.7	399.9	398.7	397.6	396.4	395.2
122.5°	429.5	428.8	428.3	427.9	427.3	426.8	426.1	425.2	424.2	423.3	422.3
125°	466.6	466.4	465.8	465.3	464.8	464.3	463.5	462.5	461.4	460.4	459.4
127.5°	503.1	502.7	502.1	501.5	500.9	500.3	499.4	498.4	497.3	496.3	495.3
130°	525.1	524.7	524.1	523.6	523.1	522.6	521.8	520.8	519.8	518.7	517.6
132.5°	546.1	545.7	545.2	544.8	544.4	544.0	543.3	542.2	541.1	540.1	539.1
135°	578.1	577.7	577.2	576.6	576.2	575.6	575.0	574.2	573.4	572.7	571.9
137.5°	606.2	605.5	605.3	605.0	604.7	604.4	603.8	602.8	601.8	600.8	599.8
140°	624.2	623.8	623.4	623.0	622.6	622.2	621.6	620.8	620.0	619.2	618.5
142.5°	641.4	641.0	640.6	640.2	639.8	639.4	638.9	638.1	637.3	636.5	635.7
145°	665.4	665.1	664.9	664.6	664.3	664.1	663.5	662.6	661.7	660.8	659.9
147.5°	686.7	686.4	686.2	686.0	685.7	685.4	685.0	684.4	683.8	683.2	682.6
150°	699.8	699.5	699.3	699.0	698.8	698.5	698.2	697.8	697.4	697.0	696.6
152.5°	711.1	710.7	710.6	710.4	710.3	710.1	710.0	709.7	709.6	709.4	709.2
155°	727.0	726.4	726.2	726.1	726.0	725.8	725.9	726.1	726.4	726.7	726.9
157.5°	740.8	740.0	740.1	740.2	740.4	740.5	740.6	740.6	740.6	740.7	740.7
160°	748.7	747.9	748.1	748.1	748.3	748.5	748.5	748.7	748.8	748.9	749.1
162.5°	755.8	754.9	755.0	755.2	755.3	755.4	755.7	756.0	756.3	756.7	757.0
165°	765.2	764.2	764.4	764.5	764.6	764.8	765.0	765.4	765.8	766.2	766.6
167.5°	772.7	771.7	771.7	771.7	771.7	771.7	772.0	772.5	773.0	773.5	774.0
170°	776.9	775.9	775.9	775.9	775.9	775.9	776.2	776.7	777.2	777.7	778.2
172.5°	779.7	778.7	778.6	778.5	778.4	778.2	778.6	779.2	779.7	780.4	781.0
175°	783.2	782.3	782.2	782.0	781.9	781.8	782.0	782.7	783.3	783.9	784.7
177.5°	784.5	783.7	783.6	783.5	783.4	783.3	783.5	784.0	784.5	785.1	785.5
180°	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7



TEST NUMBER: P332414-927

CATALOG NUMBER: S123RDIW-S560D755U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8	708.8
2.5°	712.6	715.3	718.7	723.8	727.7	731.1	731.8	732.8	735.2	739.3	742.5
5°	717.3	724.3	735.5	746.4	758.3	767.9	777.1	783.5	789.5	802.2	812.5
7.5°	715.8	731.3	748.9	768.6	788.4	807.6	825.5	841.5	857.4	875.9	897.1
10°	714.9	733.1	756.7	781.9	809.5	836.5	862.6	883.0	906.7	927.9	954.9
12.5°	710.3	736.5	764.8	796.9	830.9	862.1	896.4	924.5	951.5	982.2	1013.6
15°	704.3	736.1	771.9	814.7	866.3	903.9	939.1	987.9	1021.3	1054.7	1099.6
17.5°	693.2	732.1	776.9	832.4	875.5	926.1	979.0	1017.6	1062.6	1109.6	1150.2
20°	684.5	729.8	779.8	834.4	889.3	944.3	995.5	1041.6	1088.1	1142.4	1175.8
22.5°	675.8	720.5	772.5	830.5	889.5	947.4	1005.4	1059.6	1111.8	1166.6	1209.3
25°	657.2	710.3	766.8	825.9	884.2	947.8	1017.1	1077.4	1142.1	1198.5	1238.9
27.5°	638.4	687.1	743.2	803.3	868.0	943.3	1024.7	1093.4	1158.1	1198.5	1211.2
30°	621.4	673.0	724.5	785.5	855.6	939.7	1026.2	1104.8	1157.9	1175.4	1162.4
32.5°	604.2	650.9	702.0	764.5	838.9	930.7	1028.1	1098.0	1130.0	1116.5	1063.3
35°	573.8	615.9	665.4	727.9	813.5	925.7	1020.1	1067.5	1059.5	983.7	883.5
37.5°	541.2	575.6	621.4	686.7	787.1	906.0	985.6	992.6	924.3	807.9	692.2
40°	515.5	546.4	593.5	661.8	766.8	886.6	950.9	922.7	816.8	687.2	590.7
42.5°	490.5	516.6	561.9	635.6	747.3	860.2	899.2	837.7	715.6	593.0	505.3
45°	448.1	472.7	518.2	593.8	707.6	809.5	804.4	697.6	575.3	476.7	403.9
47.5°	408.0	429.4	472.2	549.3	660.9	733.6	685.4	571.8	468.0	389.0	337.0
50°	379.6	400.8	443.3	519.4	623.5	676.6	607.8	498.2	403.2	337.7	296.4
52.5°	352.4	373.1	412.0	486.2	578.4	610.1	536.1	434.6	355.5	298.9	263.4
55°	314.3	330.1	365.0	436.0	504.9	512.1	437.2	352.3	287.0	247.6	223.3
57.5°	275.6	289.1	323.6	380.2	428.5	424.7	353.6	280.2	236.2	206.9	189.3
60°	250.3	263.6	294.0	342.5	379.0	366.2	301.0	241.9	204.2	182.7	168.7
62.5°	226.8	237.2	265.6	301.0	327.3	312.8	257.3	208.3	178.5	160.3	149.2
65°	192.7	201.1	223.9	242.4	257.0	243.0	196.9	163.0	141.4	128.7	121.0
67.5°	160.3	165.6	180.1	186.7	197.0	181.7	148.1	125.3	113.0	102.3	97.0
70°	139.9	143.9	151.4	156.9	159.6	143.9	118.9	102.3	92.0	84.4	81.0
72.5°	119.5	122.9	124.5	129.0	127.5	112.7	95.6	82.4	74.9	69.8	65.5
75°	91.3	92.8	91.3	89.5	85.6	75.3	63.5	56.7	51.3	48.9	47.4
77.5°	66.5	66.1	64.0	61.2	54.4	47.9	41.6	39.3	37.0	35.6	35.2
80°	51.3	50.1	48.2	43.7	37.9	33.4	31.8	30.3	29.5	27.9	27.6
82.5°	38.2	37.5	34.4	30.6	26.5	24.4	23.1	22.6	21.6	20.9	20.8
85°	20.4	19.4	16.1	13.9	13.4	12.8	12.4	12.4	11.2	10.9	10.9
87.5°	6.9	5.7	5.8	5.3	5.5	5.5	6.0	5.9	5.9	6.3	5.9
90°	1.9	3.2	4.4	5.8	7.3	9.0	10.6	12.3	14.0	14.5	15.1
92.5°	10.5	10.1	9.7	9.4	9.8	11.1	12.4	13.6	14.9	15.8	16.6
95°	30.3	25.0	19.6	14.3	12.4	13.8	15.2	16.6	18.1	19.0	19.9
97.5°	69.1	66.7	64.3	61.9	56.1	46.7	37.4	28.1	18.8	19.8	20.8
100°	101.1	103.7	106.3	108.8	100.1	79.9	59.7	39.5	19.3	20.3	21.3
102.5°	131.2	133.0	134.9	136.7	126.7	104.6	82.5	60.4	38.3	35.2	31.9
105°	175.2	176.6	178.0	179.4	174.3	162.6	151.0	139.3	127.7	104.7	81.8
107.5°	221.7	222.8	224.0	225.1	226.6	228.5	230.3	232.2	234.0	217.1	200.3
110°	252.9	253.9	254.9	256.0	257.2	258.6	260.1	261.5	262.9	258.6	254.4





TEST NUMBER: P332414-927

CATALOG NUMBER: S123RDIW-S560D755U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	282.6	283.5	284.5	285.4	286.6	288.0	289.5	290.9	292.3	292.4	292.5
115°	326.6	327.4	328.2	329.0	329.9	331.1	332.2	333.4	334.6	335.9	337.2
117.5°	369.6	370.6	371.5	372.5	373.3	373.8	374.5	375.0	375.7	376.7	377.7
120°	396.4	397.6	398.7	399.9	400.7	401.1	401.5	401.9	402.2	403.3	404.3
122.5°	423.3	424.2	425.2	426.1	426.8	427.3	427.9	428.3	428.8	429.5	430.2
125°	460.4	461.4	462.5	463.5	464.3	464.8	465.3	465.8	466.4	466.6	466.8
127.5°	496.3	497.3	498.4	499.4	500.3	500.9	501.5	502.1	502.7	503.1	503.6
130°	518.7	519.8	520.8	521.8	522.6	523.1	523.6	524.1	524.7	525.1	525.7
132.5°	540.1	541.1	542.2	543.3	544.0	544.4	544.8	545.2	545.7	546.1	546.7
135°	572.7	573.4	574.2	575.0	575.6	576.2	576.6	577.2	577.7	578.1	578.5
137.5°	600.8	601.8	602.8	603.8	604.4	604.7	605.0	605.3	605.5	606.2	606.8
140°	619.2	620.0	620.8	621.6	622.2	622.6	623.0	623.4	623.8	624.2	624.8
142.5°	636.5	637.3	638.1	638.9	639.4	639.8	640.2	640.6	641.0	641.4	641.8
145°	660.8	661.7	662.6	663.5	664.1	664.3	664.6	664.9	665.1	665.4	665.7
147.5°	683.2	683.8	684.4	685.0	685.4	685.7	686.0	686.2	686.4	686.7	687.0
150°	697.0	697.4	697.8	698.2	698.5	698.8	699.0	699.3	699.5	699.8	700.1
152.5°	709.4	709.6	709.7	710.0	710.1	710.3	710.4	710.6	710.7	711.1	711.6
155°	726.7	726.4	726.1	725.9	725.8	726.0	726.1	726.2	726.4	727.0	727.6
157.5°	740.7	740.6	740.6	740.6	740.5	740.4	740.2	740.1	740.0	740.8	741.6
160°	748.9	748.8	748.7	748.5	748.5	748.3	748.1	748.1	747.9	748.7	749.5
162.5°	756.7	756.3	756.0	755.7	755.4	755.3	755.2	755.0	754.9	755.8	756.7
165°	766.2	765.8	765.4	765.0	764.8	764.6	764.5	764.4	764.2	765.2	766.3
167.5°	773.5	773.0	772.5	772.0	771.7	771.7	771.7	771.7	771.7	772.7	773.7
170°	777.7	777.2	776.7	776.2	775.9	775.9	775.9	775.9	775.9	776.9	777.9
172.5°	780.4	779.7	779.2	778.6	778.2	778.4	778.5	778.6	778.7	779.7	780.8
175°	783.9	783.3	782.7	782.0	781.8	781.9	782.0	782.2	782.3	783.2	784.1
177.5°	785.1	784.5	784.0	783.5	783.3	783.4	783.5	783.6	783.7	784.5	785.4
180°	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7	784.7



TEST NUMBER: P332414-927

CATALOG NUMBER: S123RDIW-S560D755U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	708.8	708.8	708.8	708.8	708.8	708.8	708.8
2.5°	747.7	747.7	748.6	752.3	752.7	755.9	754.9
5°	821.7	827.4	829.6	838.7	844.1	846.5	841.7
7.5°	912.2	928.4	936.2	945.7	954.1	956.7	950.1
10°	978.3	995.2	1009.5	1018.3	1026.5	1031.9	1038.9
12.5°	1042.0	1063.0	1076.5	1088.9	1097.3	1104.3	1105.4
15°	1111.4	1143.0	1167.0	1184.6	1193.3	1197.9	1196.1
17.5°	1181.4	1210.6	1227.7	1245.6	1257.8	1258.5	1258.9
20°	1221.0	1249.5	1269.2	1282.5	1296.2	1295.6	1298.6
22.5°	1247.4	1269.9	1285.0	1294.7	1299.3	1297.0	1297.7
25°	1259.8	1266.5	1263.8	1248.2	1244.4	1230.1	1232.5
27.5°	1196.0	1164.4	1131.8	1089.7	1056.6	1030.2	1031.5
30°	1109.3	1053.4	989.8	936.4	888.4	875.0	846.5
32.5°	988.2	904.4	829.8	780.1	738.9	727.7	702.8
35°	782.8	701.5	624.7	578.6	560.4	535.0	534.6
37.5°	608.5	536.9	496.3	461.7	443.5	428.1	426.6
40°	511.9	456.1	425.4	400.5	382.6	371.1	368.4
42.5°	444.4	399.3	370.5	355.1	341.4	335.4	331.0
45°	362.9	332.6	312.5	298.6	292.2	287.6	285.2
47.5°	303.6	283.2	269.6	260.3	255.1	250.3	251.6
50°	271.2	254.6	244.5	235.8	231.8	228.5	228.8
52.5°	245.3	230.3	222.2	215.9	211.0	208.6	207.4
55°	208.2	198.8	190.5	186.0	183.2	179.9	179.0
57.5°	177.5	170.2	163.6	158.4	157.8	154.6	155.0
60°	157.2	151.1	145.6	142.9	140.8	138.1	138.9
62.5°	140.5	135.3	130.3	128.1	126.0	124.0	124.4
65°	115.0	110.1	107.1	105.9	105.0	104.1	103.1
67.5°	91.7	88.6	86.7	84.1	82.3	82.0	81.0
70°	77.1	73.1	69.8	66.5	65.5	65.2	65.5
72.5°	61.8	59.3	58.4	56.7	56.6	55.8	56.3
75°	46.4	45.6	44.9	43.7	43.7	43.7	43.7
77.5°	34.2	33.7	33.4	33.0	32.8	32.3	32.3
80°	26.7	26.4	25.8	25.8	25.5	25.8	25.5
82.5°	20.1	20.1	19.5	19.5	19.2	19.0	19.2
85°	10.3	10.0	10.6	10.0	10.3	9.7	10.3
87.5°	6.0	6.1	5.9	6.0	5.8	6.3	5.9
90°	15.5	16.1	16.5	16.7	17.0	17.2	17.5
92.5°	17.4	18.2	18.7	18.9	19.0	19.2	19.3
95°	20.8	21.7	22.2	22.2	22.2	22.2	22.2
97.5°	21.9	22.9	23.5	23.6	23.8	23.9	24.0
100°	22.3	23.4	24.0	24.1	24.2	24.3	24.5
102.5°	28.8	25.5	24.0	24.2	24.5	24.7	25.0
105°	58.9	36.0	24.6	24.9	25.1	25.4	25.7
107.5°	183.5	166.8	149.7	132.4	115.1	97.8	80.6
110°	250.1	245.8	234.4	215.9	197.3	178.8	160.3



TEST NUMBER: P332414-927

CATALOG NUMBER: S123RDIW-S560D755U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	292.6	292.6	290.7	286.8	282.9	278.9	275.0
115°	338.5	339.8	340.7	341.2	341.7	342.2	342.8
117.5°	378.7	379.8	380.3	380.5	380.6	380.6	380.8
120°	405.4	406.4	406.9	406.9	406.9	406.9	406.9
122.5°	430.9	431.7	432.1	432.2	432.3	432.5	432.5
125°	467.1	467.4	467.6	467.9	468.2	468.4	468.7
127.5°	504.0	504.4	504.5	504.2	503.9	503.7	503.4
130°	526.2	526.7	526.9	526.6	526.3	526.1	525.8
132.5°	547.2	547.7	547.8	547.4	547.1	546.7	546.3
135°	578.8	579.2	579.2	578.8	578.5	578.1	577.7
137.5°	607.4	608.1	608.2	608.0	607.7	607.4	607.2
140°	625.3	625.8	626.0	625.7	625.4	625.2	624.9
142.5°	642.2	642.6	642.7	642.3	642.0	641.6	641.2
145°	665.9	666.1	666.3	666.3	666.3	666.3	666.3
147.5°	687.2	687.5	687.3	686.7	686.1	685.6	684.9
150°	700.3	700.5	700.5	700.1	699.7	699.3	698.9
152.5°	712.1	712.6	712.5	711.9	711.3	710.7	710.1
155°	728.3	729.0	728.9	728.1	727.3	726.5	725.7
157.5°	742.3	743.1	743.0	742.0	740.9	740.0	738.9
160°	750.3	751.0	751.0	750.0	749.2	748.2	747.3
162.5°	757.6	758.4	758.4	757.6	756.9	756.1	755.3
165°	767.3	768.3	768.4	767.5	766.6	765.7	764.8
167.5°	774.8	775.9	775.9	774.8	773.7	772.7	771.7
170°	779.0	780.1	780.1	779.0	777.9	776.9	775.9
172.5°	781.8	782.8	782.8	781.6	780.5	779.3	778.2
175°	785.1	785.9	785.8	784.8	783.8	782.8	781.7
177.5°	786.2	787.0	786.9	785.8	784.8	783.8	782.8
180°	784.7	784.7	784.7	784.7	784.7	784.7	784.7

(END OF REPORT)