

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332187-830

Luminaire Tested: **S123DIW-S1000D755U830-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332187-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S1000D755U830-4F0-1E-UDD-A1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 755 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6465.7 lumens
Efficiency: N/A
Efficacy: 120.6 lumens/watt
Spacing Criteria (0/90/45): 1.37 / 1.23 / 1.49
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 53.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332187-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

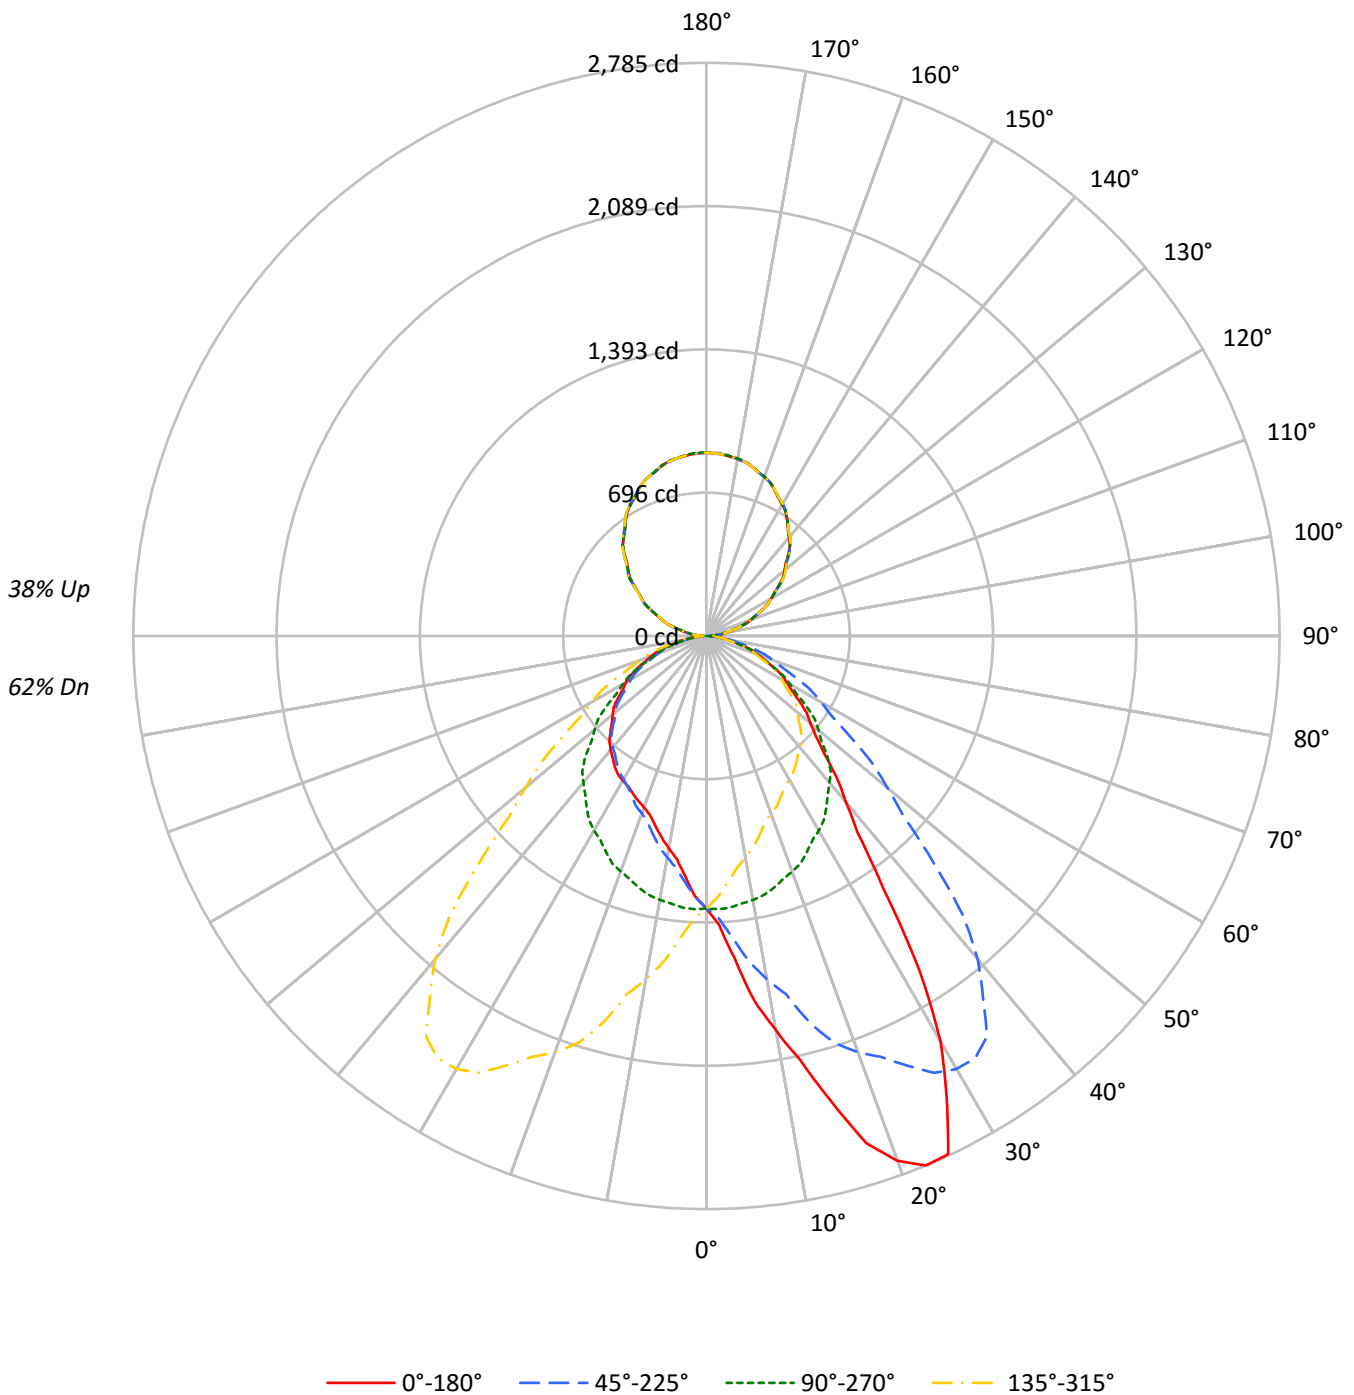



TEST NUMBER: P332187-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	67	67	67	62
1	101	97	93	89	94	91	87	84	79	77	75	69	67	66	60	58	57	53
2	92	85	79	73	86	80	74	70	70	66	62	61	58	55	53	51	49	45
3	84	75	67	62	79	70	64	59	62	57	53	54	50	47	47	44	42	38
4	77	66	58	52	72	63	55	50	55	50	45	49	44	41	42	39	36	33
5	71	59	51	45	66	56	49	43	50	44	39	44	39	35	38	35	32	29
6	65	53	45	39	61	50	43	38	45	39	34	40	35	31	35	31	28	25
7	61	48	40	35	57	46	38	33	41	35	30	36	31	28	32	28	25	23
8	56	44	36	31	53	42	34	29	37	31	27	33	28	25	29	25	22	20
9	52	40	33	27	49	38	31	26	34	28	24	30	26	22	27	23	20	18
10	49	37	30	25	46	35	28	24	31	26	22	28	23	20	25	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	14249	14249	14249	14249
5°	16993	14311	12682	14311
10°	21270	14238	11455	14238
15°	26088	14123	10664	14123
20°	31078	13945	10153	13945
25°	32999	13726	10041	13726
30°	28285	13569	10092	13569
35°	19671	13341	10198	13341
40°	14816	13078	10166	13078
45°	12301	12683	10036	12683
50°	11020	11879	9945	11879
55°	10303	11012	9822	11012
60°	9664	10107	9722	10107
65°	9085	9212	9411	9212
70°	8519	8195	8960	8195
75°	7627	7178	8218	7178
80°	6676	5883	7073	5883
85°	5224	4273	4755	4273



TEST NUMBER: P332187-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	130.4	2.0
10°-20°	418.2	6.5
20°-30°	701.8	10.9
30°-40°	794.6	12.3
40°-50°	712.6	11.0
50°-60°	575.1	8.9
60°-70°	400.7	6.2
70°-80°	210.6	3.3
80°-90°	54.1	0.8
90°-100°	58.0	0.9
100°-110°	173.6	2.7
110°-120°	295.3	4.6
120°-130°	388.5	6.0
130°-140°	436.7	6.8
140°-150°	429.2	6.6
150°-160°	361.3	5.6
160°-170°	240.5	3.7
170°-180°	84.2	1.3
0°-30°	1250.4	19.3
0°-40°	2045.0	31.6
0°-60°	3332.7	51.5
0°-90°	3998.2	61.8
90°-120°	527.0	8.2
90°-150°	1781.4	27.6
90°-180°	2468.0	38.2
0°-180°	6465.7	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1324	1324	1324	1324	1324	
5°	1573	1324	1174	1324	1573	163
15°	2341	1267	957	1267	2341	676
25°	2778	1156	845	1156	2778	1219
35°	1497	1015	776	1015	1497	973
45°	808	833	659	833	808	640
55°	549	587	523	587	549	493
65°	357	362	370	362	357	355
75°	183	173	198	173	183	196
85°	42	35	38	35	42	51
90°	21	1	21	1	21	12
95°	55	41	55	41	55	56
105°	166	157	166	157	166	177
115°	298	297	298	297	298	295
125°	430	435	430	435	430	385
135°	564	565	564	565	564	434
145°	685	685	685	685	685	427
155°	783	784	783	784	783	360
165°	851	854	851	854	851	240
175°	885	888	885	888	885	84
180°	891	891	891	891	891	



TEST NUMBER: P332187-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8
2.5°	1404.9	1403.9	1401.3	1403.4	1399.3	1393.6	1393.1	1388.0	1373.1	1372.1	1368.0
5°	1572.7	1567.5	1566.9	1566.3	1557.3	1545.1	1522.0	1520.1	1489.3	1473.9	1455.3
7.5°	1790.0	1792.7	1783.3	1775.1	1747.7	1729.6	1704.8	1673.1	1635.3	1596.9	1571.4
10°	1946.0	1967.2	1940.9	1922.9	1906.2	1874.8	1838.2	1792.7	1747.2	1693.9	1653.5
12.5°	2113.3	2123.6	2118.4	2101.5	2075.6	2027.7	1962.9	1912.8	1870.9	1782.2	1746.3
15°	2341.1	2380.2	2355.2	2297.4	2298.8	2253.2	2168.5	2075.6	2026.2	1948.5	1842.8
17.5°	2583.8	2588.7	2578.0	2529.9	2497.8	2435.2	2357.1	2267.9	2167.9	2074.0	1961.8
20°	2713.1	2709.2	2686.8	2661.7	2606.6	2557.9	2472.6	2373.1	2244.9	2152.5	2030.0
22.5°	2784.9	2778.5	2767.9	2746.9	2701.0	2648.7	2572.1	2463.4	2341.4	2214.1	2072.6
25°	2778.5	2786.8	2788.1	2782.4	2766.4	2734.9	2674.6	2588.0	2466.2	2302.6	2155.1
27.5°	2527.1	2538.9	2573.1	2603.6	2637.5	2672.2	2667.6	2624.6	2534.4	2393.1	2212.8
30°	2275.7	2250.0	2313.5	2393.7	2448.2	2544.4	2598.3	2601.5	2550.8	2429.6	2253.8
32.5°	1926.7	1954.9	1983.0	2081.7	2200.8	2308.9	2416.1	2502.5	2512.3	2431.7	2277.9
35°	1497.0	1532.3	1583.6	1634.9	1763.2	1873.5	2062.1	2226.3	2357.1	2374.5	2280.1
37.5°	1206.4	1223.8	1256.2	1307.7	1391.6	1522.4	1668.3	1875.8	2065.4	2206.4	2212.5
40°	1054.4	1059.6	1096.2	1135.3	1203.2	1311.0	1442.5	1625.9	1852.9	2049.9	2132.0
42.5°	940.6	951.8	967.3	1004.9	1059.0	1140.1	1262.3	1414.0	1622.1	1848.7	2009.3
45°	808.1	821.0	830.6	855.6	894.1	948.6	1034.0	1172.4	1330.9	1565.0	1781.1
47.5°	720.7	721.7	728.9	747.7	773.9	814.8	875.2	964.1	1109.6	1299.5	1521.4
50°	658.1	668.4	670.9	685.6	706.2	736.3	786.4	862.0	981.4	1148.1	1352.1
52.5°	614.0	617.0	624.2	634.9	652.8	676.3	719.6	778.9	872.5	1014.6	1202.2
55°	549.0	549.0	556.1	564.4	574.7	595.9	624.7	668.4	739.5	849.9	1005.0
57.5°	489.0	492.2	497.2	499.7	508.5	522.5	546.6	579.7	632.8	717.7	841.1
60°	448.9	454.8	454.1	459.2	466.9	477.9	498.3	525.3	572.8	640.7	744.7
62.5°	414.1	413.7	413.6	419.7	427.4	437.8	451.2	474.5	514.8	575.0	663.5
65°	356.7	355.3	359.9	363.6	366.3	373.9	384.2	404.7	431.7	476.5	545.2
67.5°	305.6	301.8	304.3	305.6	309.9	315.9	325.6	338.3	359.7	395.8	447.4
70°	270.7	267.5	266.8	268.1	271.9	276.4	283.5	295.7	315.6	344.4	382.3
72.5°	234.8	232.5	232.4	235.3	237.0	240.0	245.0	256.2	271.9	293.6	328.9
75°	183.4	183.4	183.4	184.1	186.0	188.6	192.4	198.2	210.4	225.7	249.5
77.5°	137.5	137.4	136.6	136.5	139.3	140.4	141.4	146.8	153.5	163.9	181.3
80°	107.7	104.5	105.8	107.7	109.1	109.7	111.6	112.9	118.7	124.4	136.6
82.5°	80.0	77.4	77.6	80.6	80.8	81.4	83.4	85.2	87.4	92.7	99.2
85°	42.3	42.3	43.0	43.0	43.6	43.0	44.9	45.5	45.5	48.7	52.6
87.5°	19.6	18.5	18.9	19.4	18.9	19.2	19.6	20.0	20.5	20.8	20.9
90°	21.0	20.6	20.4	20.1	19.7	19.3	18.7	18.0	17.4	16.8	14.8
92.5°	28.3	28.5	28.7	28.8	29.0	28.8	28.4	27.9	27.3	26.9	25.7
95°	54.6	54.6	54.6	54.6	54.6	54.3	53.6	53.0	52.4	51.7	50.5
97.5°	84.0	84.0	84.1	84.2	84.2	83.9	83.1	82.5	81.7	81.1	80.1
100°	106.3	106.0	105.8	105.4	105.1	104.7	104.2	103.8	103.3	102.8	102.1
102.5°	129.3	129.3	129.4	129.5	129.5	129.3	128.8	128.4	127.9	127.4	126.4
105°	166.5	166.2	165.9	165.6	165.2	165.1	165.1	165.1	165.1	165.1	163.7
107.5°	205.3	205.5	205.7	205.9	206.0	205.9	205.4	204.8	204.3	203.9	203.3
110°	231.6	231.9	232.1	232.5	232.8	232.6	232.1	231.4	230.8	230.2	229.9



TEST NUMBER: P332187-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	259.6	259.6	259.7	259.8	259.8	259.5	258.7	258.0	257.2	256.5	256.4
115°	298.0	298.2	298.3	298.5	298.7	298.7	298.5	298.3	298.2	298.0	298.3
117.5°	337.1	337.5	337.9	338.4	338.8	339.0	339.0	339.1	339.1	339.1	339.6
120°	364.5	364.8	365.1	365.4	365.7	366.0	366.1	366.3	366.5	366.6	367.4
122.5°	390.8	391.2	391.6	392.1	392.6	392.9	393.3	393.8	394.2	394.5	395.0
125°	430.3	430.8	431.5	432.2	432.7	433.4	433.9	434.6	435.3	435.8	436.1
127.5°	469.6	470.3	471.0	471.7	472.4	473.3	474.1	474.9	475.8	476.7	477.0
130°	495.3	496.4	497.5	498.6	499.6	500.5	501.1	501.8	502.4	503.0	503.5
132.5°	522.2	523.0	523.9	524.7	525.6	526.3	527.1	527.8	528.6	529.3	529.6
135°	563.8	564.2	564.5	564.8	565.1	565.6	566.2	566.8	567.4	568.1	568.3
137.5°	600.7	601.2	601.8	602.5	603.0	603.7	604.3	604.9	605.6	606.2	605.9
140°	624.7	625.8	626.9	628.0	629.1	629.7	629.9	630.0	630.2	630.4	630.2
142.5°	649.3	650.2	651.0	651.9	652.7	653.2	653.4	653.6	653.7	653.8	653.6
145°	684.9	685.5	686.2	686.7	687.4	687.8	688.0	688.1	688.2	688.4	688.0
147.5°	716.5	717.5	718.4	719.3	720.3	720.8	720.8	720.8	720.8	720.8	720.3
150°	736.7	737.6	738.6	739.4	740.4	740.8	740.8	740.8	740.8	740.8	740.6
152.5°	756.3	757.1	757.9	758.7	759.5	759.8	759.5	759.3	759.0	758.7	758.6
155°	782.9	783.9	785.0	786.1	787.2	787.4	786.8	786.2	785.6	784.9	784.8
157.5°	807.0	807.9	808.8	809.6	810.5	810.7	810.0	809.4	808.7	808.0	807.9
160°	822.7	823.3	824.0	824.6	825.2	825.1	824.3	823.6	822.8	822.0	822.0
162.5°	834.4	835.5	836.5	837.4	838.5	838.6	837.8	837.0	836.2	835.5	835.4
165°	851.4	852.5	853.6	854.7	855.7	855.8	854.9	853.9	853.0	852.1	852.1
167.5°	865.8	866.8	867.7	868.7	869.7	869.7	868.7	867.7	866.8	865.8	865.7
170°	873.1	874.2	875.2	876.4	877.4	877.4	876.4	875.2	874.2	873.1	873.1
172.5°	878.7	879.8	880.9	881.9	883.1	883.1	882.1	881.2	880.2	879.2	879.2
175°	885.0	886.1	887.1	888.3	889.4	889.4	888.4	887.6	886.6	885.7	885.7
177.5°	888.3	889.2	890.0	891.0	891.8	891.9	891.2	890.4	889.7	888.9	888.9
180°	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6



TEST NUMBER: P332187-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8
2.5°	1364.9	1360.7	1356.7	1349.5	1343.3	1334.6	1332.0	1329.0	1319.7	1311.5	1305.3
5°	1448.2	1432.9	1410.4	1389.9	1373.2	1350.8	1337.9	1324.5	1305.2	1287.9	1273.8
7.5°	1535.5	1505.2	1470.4	1432.6	1397.5	1363.6	1336.2	1311.9	1285.0	1259.4	1239.5
10°	1604.8	1561.1	1512.4	1459.8	1414.9	1371.3	1334.7	1302.7	1268.0	1237.8	1212.9
12.5°	1683.8	1619.1	1551.9	1488.0	1434.9	1374.4	1330.1	1289.3	1250.1	1213.8	1185.7
15°	1777.3	1695.2	1615.7	1527.8	1447.0	1371.3	1318.7	1267.4	1221.8	1184.7	1148.8
17.5°	1862.5	1769.4	1664.6	1557.8	1460.3	1370.6	1296.9	1238.9	1181.9	1136.4	1100.6
20°	1910.7	1804.9	1686.2	1575.3	1467.5	1367.4	1286.7	1217.4	1155.7	1107.7	1067.2
22.5°	1952.3	1828.4	1705.7	1587.1	1467.0	1359.2	1267.6	1196.4	1129.6	1082.5	1039.5
25°	1995.4	1847.2	1724.1	1584.9	1450.9	1339.3	1236.6	1155.7	1089.1	1034.0	989.7
27.5°	2032.3	1846.0	1699.8	1550.1	1425.4	1313.5	1204.0	1117.3	1046.5	986.6	941.7
30°	2056.9	1848.5	1674.7	1526.5	1400.8	1285.3	1178.8	1091.7	1017.3	956.3	914.0
32.5°	2072.4	1846.9	1651.6	1493.6	1361.8	1259.7	1151.7	1061.4	985.0	925.0	884.2
35°	2081.3	1835.7	1611.8	1425.8	1298.8	1199.4	1109.0	1015.3	935.2	879.4	833.2
37.5°	2063.3	1811.9	1565.7	1360.4	1221.3	1123.4	1047.4	967.6	890.9	829.4	789.7
40°	2035.1	1796.6	1529.7	1314.2	1168.0	1073.7	1008.9	930.7	855.0	796.6	759.4
42.5°	1981.2	1765.2	1490.3	1262.9	1112.6	1018.2	958.7	893.2	821.6	766.9	729.6
45°	1849.7	1697.1	1431.0	1185.9	1030.7	933.2	880.6	833.2	768.4	715.1	683.1
47.5°	1667.4	1594.6	1345.3	1104.8	945.3	851.5	796.8	758.7	711.3	668.4	637.5
50°	1540.6	1510.5	1287.2	1049.3	888.3	796.6	744.0	709.4	675.4	632.4	604.2
52.5°	1394.4	1413.0	1219.6	991.8	830.4	740.2	690.7	663.2	632.3	597.0	572.4
55°	1188.5	1255.8	1102.6	895.4	744.0	658.1	611.2	586.8	568.9	542.6	521.4
57.5°	995.7	1081.4	976.1	796.0	659.2	585.0	540.2	513.6	502.1	488.3	471.6
60°	881.3	965.9	885.8	729.2	602.3	531.7	491.9	469.5	458.0	448.4	434.2
62.5°	779.2	864.9	797.5	661.6	546.3	480.9	446.3	424.3	415.4	410.4	398.3
65°	638.9	712.6	667.7	556.1	466.3	408.6	377.1	361.7	353.5	351.5	343.7
67.5°	519.9	576.1	543.4	461.3	390.6	340.7	314.1	301.0	294.5	293.9	288.1
70°	442.0	494.6	469.5	395.1	334.1	295.0	271.9	260.4	256.6	255.9	252.7
72.5°	381.4	418.0	398.1	336.1	289.0	253.4	236.6	224.5	220.1	221.0	218.9
75°	282.2	309.8	298.2	255.2	217.4	194.4	180.2	172.6	168.7	170.6	168.1
77.5°	203.0	220.6	210.1	180.4	157.0	140.3	130.0	125.2	121.8	121.6	120.5
80°	153.3	163.5	157.8	139.8	120.6	106.5	98.1	94.9	93.0	92.4	91.7
82.5°	109.1	117.9	111.1	98.8	85.7	77.2	72.5	68.2	66.8	67.2	66.5
85°	55.1	58.3	55.8	48.1	43.0	39.1	36.6	34.6	33.4	34.0	32.7
87.5°	21.5	21.7	19.7	17.2	15.9	14.1	13.8	12.4	11.8	12.1	11.9
90°	12.7	10.7	8.7	6.9	5.4	3.8	2.3	0.7	2.3	3.8	5.4
92.5°	24.6	23.4	22.2	21.1	20.1	19.0	18.0	17.0	18.0	19.0	20.1
95°	49.3	48.1	46.8	45.6	44.6	43.5	42.3	41.3	42.3	43.5	44.6
97.5°	79.2	78.3	77.4	76.5	75.8	74.9	74.1	73.3	74.1	74.9	75.8
100°	101.3	100.5	99.7	98.9	97.9	97.0	96.0	95.1	96.0	97.0	97.9
102.5°	125.5	124.4	123.4	122.5	122.0	121.5	120.9	120.4	120.9	121.5	122.0
105°	162.3	160.9	159.5	158.6	158.3	158.1	157.7	157.4	157.7	158.1	158.3
107.5°	202.7	202.2	201.6	201.2	201.0	200.9	200.7	200.5	200.7	200.9	201.0
110°	229.5	229.2	228.9	228.6	228.3	228.0	227.7	227.3	227.7	228.0	228.3



TEST NUMBER: P332187-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	256.4	256.3	256.2	256.1	255.9	255.7	255.5	255.3	255.5	255.7	255.9
115°	298.7	299.0	299.3	299.2	298.7	298.2	297.7	297.4	297.7	298.2	298.7
117.5°	340.0	340.4	340.8	340.8	340.5	340.2	339.9	339.6	339.9	340.2	340.5
120°	368.2	368.9	369.7	369.7	368.7	367.8	366.8	365.9	366.8	367.8	368.7
122.5°	395.4	395.8	396.2	396.1	395.4	394.6	394.0	393.3	394.0	394.6	395.4
125°	436.5	436.8	437.1	437.1	436.6	436.1	435.6	435.2	435.6	436.1	436.6
127.5°	477.4	477.8	478.1	477.8	476.7	475.8	474.8	473.7	474.8	475.8	476.7
130°	504.0	504.4	504.9	504.4	503.2	502.0	500.8	499.5	500.8	502.0	503.2
132.5°	530.0	530.4	530.7	530.3	529.0	527.7	526.5	525.3	526.5	527.7	529.0
135°	568.4	568.5	568.7	568.3	567.4	566.5	565.5	564.6	565.5	566.5	567.4
137.5°	605.5	605.0	604.6	604.1	603.3	602.5	601.7	601.0	601.7	602.5	603.3
140°	630.0	629.9	629.7	629.2	628.5	627.7	626.9	626.1	626.9	627.7	628.5
142.5°	653.3	653.0	652.7	652.1	651.4	650.6	649.9	649.1	649.9	650.6	651.4
145°	687.5	687.0	686.5	686.2	685.8	685.5	685.2	684.9	685.2	685.5	685.8
147.5°	719.8	719.4	719.0	718.5	717.9	717.4	716.8	716.2	716.8	717.4	717.9
150°	740.3	739.9	739.6	739.3	739.0	738.7	738.4	738.1	738.4	738.7	739.0
152.5°	758.4	758.2	758.0	757.7	757.3	756.9	756.4	756.0	756.4	756.9	757.3
155°	784.7	784.5	784.3	784.3	784.3	784.3	784.3	784.3	784.3	784.3	784.3
157.5°	807.8	807.7	807.6	807.6	807.8	807.9	808.1	808.3	808.1	807.9	807.8
160°	822.0	822.0	822.0	822.2	822.5	822.8	823.1	823.4	823.1	822.8	822.5
162.5°	835.2	835.1	835.0	835.1	835.6	835.9	836.4	836.9	836.4	835.9	835.6
165°	852.1	852.1	852.1	852.3	852.8	853.3	853.8	854.2	853.8	853.3	852.8
167.5°	865.5	865.4	865.3	865.5	866.2	866.9	867.4	868.1	867.4	866.9	866.2
170°	873.1	873.1	873.1	873.4	874.0	874.7	875.2	875.9	875.2	874.7	874.0
172.5°	879.2	879.2	879.2	879.6	880.1	880.8	881.5	882.0	881.5	880.8	880.1
175°	885.7	885.7	885.7	886.0	886.6	887.2	887.9	888.4	887.9	887.2	886.6
177.5°	888.9	888.9	888.9	889.2	889.7	890.1	890.6	891.2	890.6	890.1	889.7
180°	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6



TEST NUMBER: P332187-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8
2.5°	1301.7	1298.2	1293.1	1285.3	1279.2	1269.4	1269.4	1271.0	1271.0	1270.5	1269.4
5°	1262.3	1252.6	1241.1	1227.7	1213.5	1199.4	1196.8	1191.8	1187.9	1185.2	1182.0
7.5°	1220.6	1203.5	1186.7	1167.8	1150.7	1136.4	1126.5	1118.3	1113.0	1107.4	1103.3
10°	1192.3	1171.2	1151.3	1131.4	1109.6	1092.3	1081.4	1073.7	1067.9	1062.8	1060.3
12.5°	1159.0	1134.7	1112.9	1093.9	1070.1	1052.3	1041.9	1038.3	1031.5	1020.7	1015.0
15°	1110.2	1087.8	1061.5	1032.6	1021.1	999.3	987.1	981.4	977.5	969.1	966.6
17.5°	1068.6	1039.2	1009.7	988.2	966.7	949.0	942.2	935.0	929.9	923.1	921.1
20°	1035.2	1008.9	981.9	958.8	936.4	917.2	911.4	906.3	901.2	898.0	895.4
22.5°	1001.4	975.1	952.7	931.1	907.2	894.6	888.3	882.7	879.1	876.9	874.3
25°	953.8	930.7	905.7	886.4	867.1	858.8	855.0	851.8	849.2	846.0	845.4
27.5°	911.2	886.0	865.7	847.8	834.0	827.0	823.3	821.7	822.3	823.4	824.2
30°	879.4	856.3	839.6	824.2	811.3	804.9	804.3	804.3	806.9	807.5	808.8
32.5°	850.1	831.1	814.5	799.6	789.9	785.4	787.9	787.9	789.9	791.6	793.9
35°	807.5	790.8	778.0	765.2	756.9	758.7	760.1	761.3	764.5	768.4	771.0
37.5°	766.9	752.3	739.0	729.0	725.2	728.6	731.7	734.4	738.1	741.0	743.7
40°	737.6	726.7	713.9	704.9	706.2	708.1	710.7	713.9	717.1	719.0	721.6
42.5°	710.4	699.0	689.3	681.8	683.6	686.1	687.6	689.3	693.0	696.4	698.0
45°	669.0	660.0	651.0	646.5	647.8	649.1	650.4	652.3	655.5	658.1	658.7
47.5°	622.4	616.1	610.1	605.8	607.8	607.3	609.0	613.0	614.1	615.6	619.2
50°	592.7	586.8	579.9	578.5	578.5	578.5	579.2	584.3	584.3	586.8	589.5
52.5°	559.8	556.1	551.6	549.3	548.3	548.3	550.9	553.6	554.6	558.2	560.7
55°	511.2	507.4	503.5	501.5	500.3	501.5	506.7	507.9	511.2	513.1	515.0
57.5°	460.5	457.6	454.5	453.5	453.2	454.9	457.7	461.6	462.3	468.3	471.2
60°	427.2	422.6	420.1	420.1	418.9	424.6	423.3	429.7	431.0	434.9	439.3
62.5°	392.8	386.7	385.7	385.7	387.6	389.2	391.0	393.8	397.2	402.0	405.5
65°	337.3	334.1	338.7	338.0	336.8	340.5	340.5	343.7	347.6	352.1	359.2
67.5°	284.9	283.2	283.6	283.6	285.6	287.8	289.5	292.4	297.0	301.7	306.3
70°	249.5	251.5	248.3	250.8	252.7	253.4	254.7	258.4	263.6	266.8	271.9
72.5°	215.1	215.0	215.4	216.4	218.3	219.5	220.7	225.2	230.7	233.5	237.6
75°	165.5	164.9	166.7	166.7	169.9	171.3	172.6	174.5	179.6	183.4	186.6
77.5°	120.8	121.6	121.2	123.4	122.5	122.7	126.8	128.7	129.2	136.8	138.5
80°	91.0	92.4	93.0	93.7	94.3	93.0	97.5	99.4	99.4	103.9	107.1
82.5°	65.4	66.2	67.9	68.5	68.6	69.9	70.3	71.7	73.2	75.2	79.4
85°	32.7	34.6	35.3	34.6	35.3	34.0	35.9	36.6	37.2	37.2	37.2
87.5°	11.7	12.5	12.4	13.3	13.2	14.1	14.2	13.4	13.5	15.2	13.2
90°	6.9	8.7	10.7	12.7	14.8	16.8	17.4	18.0	18.7	19.3	19.7
92.5°	21.1	22.2	23.4	24.6	25.7	26.9	27.3	27.9	28.4	28.8	29.0
95°	45.6	46.8	48.1	49.3	50.5	51.7	52.4	53.0	53.6	54.3	54.6
97.5°	76.5	77.4	78.3	79.2	80.1	81.1	81.7	82.5	83.1	83.9	84.2
100°	98.9	99.7	100.5	101.3	102.1	102.8	103.3	103.8	104.2	104.7	105.1
102.5°	122.5	123.4	124.4	125.5	126.4	127.4	127.9	128.4	128.8	129.3	129.5
105°	158.6	159.5	160.9	162.3	163.7	165.1	165.1	165.1	165.1	165.1	165.2
107.5°	201.2	201.6	202.2	202.7	203.3	203.9	204.3	204.8	205.4	205.9	206.0
110°	228.6	228.9	229.2	229.5	229.9	230.2	230.8	231.4	232.1	232.6	232.8



TEST NUMBER: P332187-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	256.1	256.2	256.3	256.4	256.4	256.5	257.2	258.0	258.7	259.5	259.8
115°	299.2	299.3	299.0	298.7	298.3	298.0	298.2	298.3	298.5	298.7	298.7
117.5°	340.8	340.8	340.4	340.0	339.6	339.1	339.1	339.1	339.0	339.0	338.8
120°	369.7	369.7	368.9	368.2	367.4	366.6	366.5	366.3	366.1	366.0	365.7
122.5°	396.1	396.2	395.8	395.4	395.0	394.5	394.2	393.8	393.3	392.9	392.6
125°	437.1	437.1	436.8	436.5	436.1	435.8	435.3	434.6	433.9	433.4	432.7
127.5°	477.8	478.1	477.8	477.4	477.0	476.7	475.8	474.9	474.1	473.3	472.4
130°	504.4	504.9	504.4	504.0	503.5	503.0	502.4	501.8	501.1	500.5	499.6
132.5°	530.3	530.7	530.4	530.0	529.6	529.3	528.6	527.8	527.1	526.3	525.6
135°	568.3	568.7	568.5	568.4	568.3	568.1	567.4	566.8	566.2	565.6	565.1
137.5°	604.1	604.6	605.0	605.5	605.9	606.2	605.6	604.9	604.3	603.7	603.0
140°	629.2	629.7	629.9	630.0	630.2	630.4	630.2	630.0	629.9	629.7	629.1
142.5°	652.1	652.7	653.0	653.3	653.6	653.8	653.7	653.6	653.4	653.2	652.7
145°	686.2	686.5	687.0	687.5	688.0	688.4	688.2	688.1	688.0	687.8	687.4
147.5°	718.5	719.0	719.4	719.8	720.3	720.8	720.8	720.8	720.8	720.8	720.3
150°	739.3	739.6	739.9	740.3	740.6	740.8	740.8	740.8	740.8	740.8	740.4
152.5°	757.7	758.0	758.2	758.4	758.6	758.7	759.0	759.3	759.5	759.8	759.5
155°	784.3	784.3	784.5	784.7	784.8	784.9	785.6	786.2	786.8	787.4	787.2
157.5°	807.6	807.6	807.7	807.8	807.9	808.0	808.7	809.4	810.0	810.7	810.5
160°	822.2	822.0	822.0	822.0	822.0	822.0	822.8	823.6	824.3	825.1	825.2
162.5°	835.1	835.0	835.1	835.2	835.4	835.5	836.2	837.0	837.8	838.6	838.5
165°	852.3	852.1	852.1	852.1	852.1	852.1	853.0	853.9	854.9	855.8	855.7
167.5°	865.5	865.3	865.4	865.5	865.7	865.8	866.8	867.7	868.7	869.7	869.7
170°	873.4	873.1	873.1	873.1	873.1	873.1	874.2	875.2	876.4	877.4	877.4
172.5°	879.6	879.2	879.2	879.2	879.2	879.2	880.2	881.2	882.1	883.1	883.1
175°	886.0	885.7	885.7	885.7	885.7	885.7	886.6	887.6	888.4	889.4	889.4
177.5°	889.2	888.9	888.9	888.9	888.9	888.9	889.7	890.4	891.2	891.9	891.8
180°	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6



TEST NUMBER: P332187-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8
2.5°	1265.8	1265.4	1268.9	1266.4	1268.9	1265.4	1265.8	1269.4	1270.5	1271.0	1271.0
5°	1178.3	1180.2	1173.7	1173.7	1173.7	1180.2	1178.3	1182.0	1185.2	1187.9	1191.8
7.5°	1100.2	1097.4	1097.7	1094.2	1097.7	1097.4	1100.2	1103.3	1107.4	1113.0	1118.3
10°	1052.5	1048.7	1047.4	1048.0	1047.4	1048.7	1052.5	1060.3	1062.8	1067.9	1073.7
12.5°	1013.0	1012.3	1003.8	1003.9	1003.8	1012.3	1013.0	1015.0	1020.7	1031.5	1038.3
15°	966.6	954.4	953.1	957.0	953.1	954.4	966.6	966.6	969.1	977.5	981.4
17.5°	920.0	913.6	914.0	912.1	914.0	913.6	920.0	921.1	923.1	929.9	935.0
20°	895.4	891.6	890.9	886.4	890.9	891.6	895.4	895.4	898.0	901.2	906.3
22.5°	872.8	871.6	871.9	867.0	871.9	871.6	872.8	874.3	876.9	879.1	882.7
25°	844.7	847.9	845.4	845.4	845.4	847.9	844.7	845.4	846.0	849.2	851.8
27.5°	825.8	825.6	824.3	824.3	824.3	825.6	825.8	824.2	823.4	822.3	821.7
30°	811.3	810.7	812.0	812.0	812.0	810.7	811.3	808.8	807.5	806.9	804.3
32.5°	797.0	797.9	798.1	798.6	798.1	797.9	797.0	793.9	791.6	789.9	787.9
35°	774.8	775.4	777.4	776.1	777.4	775.4	774.8	771.0	768.4	764.5	761.3
37.5°	744.8	747.7	747.1	748.1	747.1	747.7	744.8	743.7	741.0	738.1	734.4
40°	722.2	724.2	723.5	723.5	723.5	724.2	722.2	721.6	719.0	717.1	713.9
42.5°	699.1	700.5	698.9	697.9	698.9	700.5	699.1	698.0	696.4	693.0	689.3
45°	661.3	660.0	661.9	659.3	661.9	660.0	661.3	658.7	658.1	655.5	652.3
47.5°	619.0	620.2	620.8	622.6	620.8	620.2	619.0	619.2	615.6	614.1	613.0
50°	590.7	594.6	594.6	593.9	594.6	594.6	590.7	589.5	586.8	584.3	584.3
52.5°	563.0	564.8	567.4	567.2	567.4	564.8	563.0	560.7	558.2	554.6	553.6
55°	520.2	521.4	522.7	523.4	522.7	521.4	520.2	515.0	513.1	511.2	507.9
57.5°	475.8	475.2	478.3	479.3	478.3	475.2	475.8	471.2	468.3	462.3	461.6
60°	444.5	444.5	449.6	451.6	449.6	444.5	444.5	439.3	434.9	431.0	429.7
62.5°	411.1	413.2	418.3	415.7	418.3	413.2	411.1	405.5	402.0	397.2	393.8
65°	362.4	367.5	366.8	369.5	366.8	367.5	362.4	359.2	352.1	347.6	343.7
67.5°	311.4	314.6	319.2	319.7	319.2	314.6	311.4	306.3	301.7	297.0	292.4
70°	277.1	280.3	282.9	284.7	282.9	280.3	277.1	271.9	266.8	263.6	258.4
72.5°	243.7	245.4	251.6	248.8	251.6	245.4	243.7	237.6	233.5	230.7	225.2
75°	191.1	195.6	199.4	197.6	199.4	195.6	191.1	186.6	183.4	179.6	174.5
77.5°	141.4	145.8	147.6	146.0	147.6	145.8	141.4	138.5	136.8	129.2	128.7
80°	111.6	110.9	114.8	114.1	114.8	110.9	111.6	107.1	103.9	99.4	99.4
82.5°	81.8	81.2	83.0	83.4	83.0	81.2	81.8	79.4	75.2	73.2	71.7
85°	39.8	41.7	39.1	38.5	39.1	41.7	39.8	37.2	37.2	37.2	36.6
87.5°	13.3	13.3	12.8	12.4	12.8	13.3	13.3	13.2	15.2	13.5	13.4
90°	20.1	20.4	20.6	21.0	20.6	20.4	20.1	19.7	19.3	18.7	18.0
92.5°	28.8	28.7	28.5	28.3	28.5	28.7	28.8	29.0	28.8	28.4	27.9
95°	54.6	54.6	54.6	54.6	54.6	54.6	54.6	54.6	54.3	53.6	53.0
97.5°	84.2	84.1	84.0	84.0	84.0	84.1	84.2	84.2	83.9	83.1	82.5
100°	105.4	105.8	106.0	106.3	106.0	105.8	105.4	105.1	104.7	104.2	103.8
102.5°	129.5	129.4	129.3	129.3	129.3	129.4	129.5	129.5	129.3	128.8	128.4
105°	165.6	165.9	166.2	166.5	166.2	165.9	165.6	165.2	165.1	165.1	165.1
107.5°	205.9	205.7	205.5	205.3	205.5	205.7	205.9	206.0	205.9	205.4	204.8
110°	232.5	232.1	231.9	231.6	231.9	232.1	232.5	232.8	232.6	232.1	231.4



TEST NUMBER: P332187-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	259.8	259.7	259.6	259.6	259.6	259.7	259.8	259.8	259.5	258.7	258.0
115°	298.5	298.3	298.2	298.0	298.2	298.3	298.5	298.7	298.7	298.5	298.3
117.5°	338.4	337.9	337.5	337.1	337.5	337.9	338.4	338.8	339.0	339.0	339.1
120°	365.4	365.1	364.8	364.5	364.8	365.1	365.4	365.7	366.0	366.1	366.3
122.5°	392.1	391.6	391.2	390.8	391.2	391.6	392.1	392.6	392.9	393.3	393.8
125°	432.2	431.5	430.8	430.3	430.8	431.5	432.2	432.7	433.4	433.9	434.6
127.5°	471.7	471.0	470.3	469.6	470.3	471.0	471.7	472.4	473.3	474.1	474.9
130°	498.6	497.5	496.4	495.3	496.4	497.5	498.6	499.6	500.5	501.1	501.8
132.5°	524.7	523.9	523.0	522.2	523.0	523.9	524.7	525.6	526.3	527.1	527.8
135°	564.8	564.5	564.2	563.8	564.2	564.5	564.8	565.1	565.6	566.2	566.8
137.5°	602.5	601.8	601.2	600.7	601.2	601.8	602.5	603.0	603.7	604.3	604.9
140°	628.0	626.9	625.8	624.7	625.8	626.9	628.0	629.1	629.7	629.9	630.0
142.5°	651.9	651.0	650.2	649.3	650.2	651.0	651.9	652.7	653.2	653.4	653.6
145°	686.7	686.2	685.5	684.9	685.5	686.2	686.7	687.4	687.8	688.0	688.1
147.5°	719.3	718.4	717.5	716.5	717.5	718.4	719.3	720.3	720.8	720.8	720.8
150°	739.4	738.6	737.6	736.7	737.6	738.6	739.4	740.4	740.8	740.8	740.8
152.5°	758.7	757.9	757.1	756.3	757.1	757.9	758.7	759.5	759.8	759.5	759.3
155°	786.1	785.0	783.9	782.9	783.9	785.0	786.1	787.2	787.4	786.8	786.2
157.5°	809.6	808.8	807.9	807.0	807.9	808.8	809.6	810.5	810.7	810.0	809.4
160°	824.6	824.0	823.3	822.7	823.3	824.0	824.6	825.2	825.1	824.3	823.6
162.5°	837.4	836.5	835.5	834.4	835.5	836.5	837.4	838.5	838.6	837.8	837.0
165°	854.7	853.6	852.5	851.4	852.5	853.6	854.7	855.7	855.8	854.9	853.9
167.5°	868.7	867.7	866.8	865.8	866.8	867.7	868.7	869.7	869.7	868.7	867.7
170°	876.4	875.2	874.2	873.1	874.2	875.2	876.4	877.4	877.4	876.4	875.2
172.5°	881.9	880.9	879.8	878.7	879.8	880.9	881.9	883.1	883.1	882.1	881.2
175°	888.3	887.1	886.1	885.0	886.1	887.1	888.3	889.4	889.4	888.4	887.6
177.5°	891.0	890.0	889.2	888.3	889.2	890.0	891.0	891.8	891.9	891.2	890.4
180°	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6



TEST NUMBER: P332187-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8
2.5°	1269.4	1269.4	1279.2	1285.3	1293.1	1298.2	1301.7	1305.3	1311.5	1319.7	1329.0
5°	1196.8	1199.4	1213.5	1227.7	1241.1	1252.6	1262.3	1273.8	1287.9	1305.2	1324.5
7.5°	1126.5	1136.4	1150.7	1167.8	1186.7	1203.5	1220.6	1239.5	1259.4	1285.0	1311.9
10°	1081.4	1092.3	1109.6	1131.4	1151.3	1171.2	1192.3	1212.9	1237.8	1268.0	1302.7
12.5°	1041.9	1052.3	1070.1	1093.9	1112.9	1134.7	1159.0	1185.7	1213.8	1250.1	1289.3
15°	987.1	999.3	1021.1	1032.6	1061.5	1087.8	1110.2	1148.8	1184.7	1221.8	1267.4
17.5°	942.2	949.0	966.7	988.2	1009.7	1039.2	1068.6	1100.6	1136.4	1181.9	1238.9
20°	911.4	917.2	936.4	958.8	981.9	1008.9	1035.2	1067.2	1107.7	1155.7	1217.4
22.5°	888.3	894.6	907.2	931.1	952.7	975.1	1001.4	1039.5	1082.5	1129.6	1196.4
25°	855.0	858.8	867.1	886.4	905.7	930.7	953.8	989.7	1034.0	1089.1	1155.7
27.5°	823.3	827.0	834.0	847.8	865.7	886.0	911.2	941.7	986.6	1046.5	1117.3
30°	804.3	804.9	811.3	824.2	839.6	856.3	879.4	914.0	956.3	1017.3	1091.7
32.5°	787.9	785.4	789.9	799.6	814.5	831.1	850.1	884.2	925.0	985.0	1061.4
35°	760.1	758.7	756.9	765.2	778.0	790.8	807.5	833.2	879.4	935.2	1015.3
37.5°	731.7	728.6	725.2	729.0	739.0	752.3	766.9	789.7	829.4	890.9	967.6
40°	710.7	708.1	706.2	704.9	713.9	726.7	737.6	759.4	796.6	855.0	930.7
42.5°	687.6	686.1	683.6	681.8	689.3	699.0	710.4	729.6	766.9	821.6	893.2
45°	650.4	649.1	647.8	646.5	651.0	660.0	669.0	683.1	715.1	768.4	833.2
47.5°	609.0	607.3	607.8	605.8	610.1	616.1	622.4	637.5	668.4	711.3	758.7
50°	579.2	578.5	578.5	578.5	579.9	586.8	592.7	604.2	632.4	675.4	709.4
52.5°	550.9	548.3	548.3	549.3	551.6	556.1	559.8	572.4	597.0	632.3	663.2
55°	506.7	501.5	500.3	501.5	503.5	507.4	511.2	521.4	542.6	568.9	586.8
57.5°	457.7	454.9	453.2	453.5	454.5	457.6	460.5	471.6	488.3	502.1	513.6
60°	423.3	424.6	418.9	420.1	420.1	422.6	427.2	434.2	448.4	458.0	469.5
62.5°	391.0	389.2	387.6	385.7	385.7	386.7	392.8	398.3	410.4	415.4	424.3
65°	340.5	340.5	336.8	338.0	338.7	334.1	337.3	343.7	351.5	353.5	361.7
67.5°	289.5	287.8	285.6	283.6	283.6	283.2	284.9	288.1	293.9	294.5	301.0
70°	254.7	253.4	252.7	250.8	248.3	251.5	249.5	252.7	255.9	256.6	260.4
72.5°	220.7	219.5	218.3	216.4	215.4	215.0	215.1	218.9	221.0	220.1	224.5
75°	172.6	171.3	169.9	166.7	166.7	164.9	165.5	168.1	170.6	168.7	172.6
77.5°	126.8	122.7	122.5	123.4	121.2	121.6	120.8	120.5	121.6	121.8	125.2
80°	97.5	93.0	94.3	93.7	93.0	92.4	91.0	91.7	92.4	93.0	94.9
82.5°	70.3	69.9	68.6	68.5	67.9	66.2	65.4	66.5	67.2	66.8	68.2
85°	35.9	34.0	35.3	34.6	35.3	34.6	32.7	32.7	34.0	33.4	34.6
87.5°	14.2	14.1	13.2	13.3	12.4	12.5	11.7	11.9	12.1	11.8	12.4
90°	17.4	16.8	14.8	12.7	10.7	8.7	6.9	5.4	3.8	2.3	0.7
92.5°	27.3	26.9	25.7	24.6	23.4	22.2	21.1	20.1	19.0	18.0	17.0
95°	52.4	51.7	50.5	49.3	48.1	46.8	45.6	44.6	43.5	42.3	41.3
97.5°	81.7	81.1	80.1	79.2	78.3	77.4	76.5	75.8	74.9	74.1	73.3
100°	103.3	102.8	102.1	101.3	100.5	99.7	98.9	97.9	97.0	96.0	95.1
102.5°	127.9	127.4	126.4	125.5	124.4	123.4	122.5	122.0	121.5	120.9	120.4
105°	165.1	165.1	163.7	162.3	160.9	159.5	158.6	158.3	158.1	157.7	157.4
107.5°	204.3	203.9	203.3	202.7	202.2	201.6	201.2	201.0	200.9	200.7	200.5
110°	230.8	230.2	229.9	229.5	229.2	228.9	228.6	228.3	228.0	227.7	227.3



TEST NUMBER: P332187-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	257.2	256.5	256.4	256.4	256.3	256.2	256.1	255.9	255.7	255.5	255.3
115°	298.2	298.0	298.3	298.7	299.0	299.3	299.2	298.7	298.2	297.7	297.4
117.5°	339.1	339.1	339.6	340.0	340.4	340.8	340.8	340.5	340.2	339.9	339.6
120°	366.5	366.6	367.4	368.2	368.9	369.7	369.7	368.7	367.8	366.8	365.9
122.5°	394.2	394.5	395.0	395.4	395.8	396.2	396.1	395.4	394.6	394.0	393.3
125°	435.3	435.8	436.1	436.5	436.8	437.1	437.1	436.6	436.1	435.6	435.2
127.5°	475.8	476.7	477.0	477.4	477.8	478.1	477.8	476.7	475.8	474.8	473.7
130°	502.4	503.0	503.5	504.0	504.4	504.9	504.4	503.2	502.0	500.8	499.5
132.5°	528.6	529.3	529.6	530.0	530.4	530.7	530.3	529.0	527.7	526.5	525.3
135°	567.4	568.1	568.3	568.4	568.5	568.7	568.3	567.4	566.5	565.5	564.6
137.5°	605.6	606.2	605.9	605.5	605.0	604.6	604.1	603.3	602.5	601.7	601.0
140°	630.2	630.4	630.2	630.0	629.9	629.7	629.2	628.5	627.7	626.9	626.1
142.5°	653.7	653.8	653.6	653.3	653.0	652.7	652.1	651.4	650.6	649.9	649.1
145°	688.2	688.4	688.0	687.5	687.0	686.5	686.2	685.8	685.5	685.2	684.9
147.5°	720.8	720.8	720.3	719.8	719.4	719.0	718.5	717.9	717.4	716.8	716.2
150°	740.8	740.8	740.6	740.3	739.9	739.6	739.3	739.0	738.7	738.4	738.1
152.5°	759.0	758.7	758.6	758.4	758.2	758.0	757.7	757.3	756.9	756.4	756.0
155°	785.6	784.9	784.8	784.7	784.5	784.3	784.3	784.3	784.3	784.3	784.3
157.5°	808.7	808.0	807.9	807.8	807.7	807.6	807.6	807.8	807.9	808.1	808.3
160°	822.8	822.0	822.0	822.0	822.0	822.0	822.2	822.5	822.8	823.1	823.4
162.5°	836.2	835.5	835.4	835.2	835.1	835.0	835.1	835.6	835.9	836.4	836.9
165°	853.0	852.1	852.1	852.1	852.1	852.1	852.3	852.8	853.3	853.8	854.2
167.5°	866.8	865.8	865.7	865.5	865.4	865.3	865.5	866.2	866.9	867.4	868.1
170°	874.2	873.1	873.1	873.1	873.1	873.1	873.4	874.0	874.7	875.2	875.9
172.5°	880.2	879.2	879.2	879.2	879.2	879.2	879.6	880.1	880.8	881.5	882.0
175°	886.6	885.7	885.7	885.7	885.7	885.7	886.0	886.6	887.2	887.9	888.4
177.5°	889.7	888.9	888.9	888.9	888.9	888.9	889.2	889.7	890.1	890.6	891.2
180°	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6



TEST NUMBER: P332187-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8
2.5°	1332.0	1334.6	1343.3	1349.5	1356.7	1360.7	1364.9	1368.0	1372.1	1373.1	1388.0
5°	1337.9	1350.8	1373.2	1389.9	1410.4	1432.9	1448.2	1455.3	1473.9	1489.3	1520.1
7.5°	1336.2	1363.6	1397.5	1432.6	1470.4	1505.2	1535.5	1571.4	1596.9	1635.3	1673.1
10°	1334.7	1371.3	1414.9	1459.8	1512.4	1561.1	1604.8	1653.5	1693.9	1747.2	1792.7
12.5°	1330.1	1374.4	1434.9	1488.0	1551.9	1619.1	1683.8	1746.3	1782.2	1870.9	1912.8
15°	1318.7	1371.3	1447.0	1527.8	1615.7	1695.2	1777.3	1842.8	1948.5	2026.2	2075.6
17.5°	1296.9	1370.6	1460.3	1557.8	1664.6	1769.4	1862.5	1961.8	2074.0	2167.9	2267.9
20°	1286.7	1367.4	1467.5	1575.3	1686.2	1804.9	1910.7	2030.0	2152.5	2244.9	2373.1
22.5°	1267.6	1359.2	1467.0	1587.1	1705.7	1828.4	1952.3	2072.6	2214.1	2341.4	2463.4
25°	1236.6	1339.3	1450.9	1584.9	1724.1	1847.2	1995.4	2155.1	2302.6	2466.2	2588.0
27.5°	1204.0	1313.5	1425.4	1550.1	1699.8	1846.0	2032.3	2212.8	2393.1	2534.4	2624.6
30°	1178.8	1285.3	1400.8	1526.5	1674.7	1848.5	2056.9	2253.8	2429.6	2550.8	2601.5
32.5°	1151.7	1259.7	1361.8	1493.6	1651.6	1846.9	2072.4	2277.9	2431.7	2512.3	2502.5
35°	1109.0	1199.4	1298.8	1425.8	1611.8	1835.7	2081.3	2280.1	2374.5	2357.1	2226.3
37.5°	1047.4	1123.4	1221.3	1360.4	1565.7	1811.9	2063.3	2212.5	2206.4	2065.4	1875.8
40°	1008.9	1073.7	1168.0	1314.2	1529.7	1796.6	2035.1	2132.0	2049.9	1852.9	1625.9
42.5°	958.7	1018.2	1112.6	1262.9	1490.3	1765.2	1981.2	2009.3	1848.7	1622.1	1414.0
45°	880.6	933.2	1030.7	1185.9	1431.0	1697.1	1849.7	1781.1	1565.0	1330.9	1172.4
47.5°	796.8	851.5	945.3	1104.8	1345.3	1594.6	1667.4	1521.4	1299.5	1109.6	964.1
50°	744.0	796.6	888.3	1049.3	1287.2	1510.5	1540.6	1352.1	1148.1	981.4	862.0
52.5°	690.7	740.2	830.4	991.8	1219.6	1413.0	1394.4	1202.2	1014.6	872.5	778.9
55°	611.2	658.1	744.0	895.4	1102.6	1255.8	1188.5	1005.0	849.9	739.5	668.4
57.5°	540.2	585.0	659.2	796.0	976.1	1081.4	995.7	841.1	717.7	632.8	579.7
60°	491.9	531.7	602.3	729.2	885.8	965.9	881.3	744.7	640.7	572.8	525.3
62.5°	446.3	480.9	546.3	661.6	797.5	864.9	779.2	663.5	575.0	514.8	474.5
65°	377.1	408.6	466.3	556.1	667.7	712.6	638.9	545.2	476.5	431.7	404.7
67.5°	314.1	340.7	390.6	461.3	543.4	576.1	519.9	447.4	395.8	359.7	338.3
70°	271.9	295.0	334.1	395.1	469.5	494.6	442.0	382.3	344.4	315.6	295.7
72.5°	236.6	253.4	289.0	336.1	398.1	418.0	381.4	328.9	293.6	271.9	256.2
75°	180.2	194.4	217.4	255.2	298.2	309.8	282.2	249.5	225.7	210.4	198.2
77.5°	130.0	140.3	157.0	180.4	210.1	220.6	203.0	181.3	163.9	153.5	146.8
80°	98.1	106.5	120.6	139.8	157.8	163.5	153.3	136.6	124.4	118.7	112.9
82.5°	72.5	77.2	85.7	98.8	111.1	117.9	109.1	99.2	92.7	87.4	85.2
85°	36.6	39.1	43.0	48.1	55.8	58.3	55.1	52.6	48.7	45.5	45.5
87.5°	13.8	14.1	15.9	17.2	19.7	21.7	21.5	20.9	20.8	20.5	20.0
90°	2.3	3.8	5.4	6.9	8.7	10.7	12.7	14.8	16.8	17.4	18.0
92.5°	18.0	19.0	20.1	21.1	22.2	23.4	24.6	25.7	26.9	27.3	27.9
95°	42.3	43.5	44.6	45.6	46.8	48.1	49.3	50.5	51.7	52.4	53.0
97.5°	74.1	74.9	75.8	76.5	77.4	78.3	79.2	80.1	81.1	81.7	82.5
100°	96.0	97.0	97.9	98.9	99.7	100.5	101.3	102.1	102.8	103.3	103.8
102.5°	120.9	121.5	122.0	122.5	123.4	124.4	125.5	126.4	127.4	127.9	128.4
105°	157.7	158.1	158.3	158.6	159.5	160.9	162.3	163.7	165.1	165.1	165.1
107.5°	200.7	200.9	201.0	201.2	201.6	202.2	202.7	203.3	203.9	204.3	204.8
110°	227.7	228.0	228.3	228.6	228.9	229.2	229.5	229.9	230.2	230.8	231.4



TEST NUMBER: P332187-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	255.5	255.7	255.9	256.1	256.2	256.3	256.4	256.4	256.5	257.2	258.0
115°	297.7	298.2	298.7	299.2	299.3	299.0	298.7	298.3	298.0	298.2	298.3
117.5°	339.9	340.2	340.5	340.8	340.8	340.4	340.0	339.6	339.1	339.1	339.1
120°	366.8	367.8	368.7	369.7	369.7	368.9	368.2	367.4	366.6	366.5	366.3
122.5°	394.0	394.6	395.4	396.1	396.2	395.8	395.4	395.0	394.5	394.2	393.8
125°	435.6	436.1	436.6	437.1	437.1	436.8	436.5	436.1	435.8	435.3	434.6
127.5°	474.8	475.8	476.7	477.8	478.1	477.8	477.4	477.0	476.7	475.8	474.9
130°	500.8	502.0	503.2	504.4	504.9	504.4	504.0	503.5	503.0	502.4	501.8
132.5°	526.5	527.7	529.0	530.3	530.7	530.4	530.0	529.6	529.3	528.6	527.8
135°	565.5	566.5	567.4	568.3	568.7	568.5	568.4	568.3	568.1	567.4	566.8
137.5°	601.7	602.5	603.3	604.1	604.6	605.0	605.5	605.9	606.2	605.6	604.9
140°	626.9	627.7	628.5	629.2	629.7	629.9	630.0	630.2	630.4	630.2	630.0
142.5°	649.9	650.6	651.4	652.1	652.7	653.0	653.3	653.6	653.8	653.7	653.6
145°	685.2	685.5	685.8	686.2	686.5	687.0	687.5	688.0	688.4	688.2	688.1
147.5°	716.8	717.4	717.9	718.5	719.0	719.4	719.8	720.3	720.8	720.8	720.8
150°	738.4	738.7	739.0	739.3	739.6	739.9	740.3	740.6	740.8	740.8	740.8
152.5°	756.4	756.9	757.3	757.7	758.0	758.2	758.4	758.6	758.7	759.0	759.3
155°	784.3	784.3	784.3	784.3	784.3	784.5	784.7	784.8	784.9	785.6	786.2
157.5°	808.1	807.9	807.8	807.6	807.6	807.7	807.8	807.9	808.0	808.7	809.4
160°	823.1	822.8	822.5	822.2	822.0	822.0	822.0	822.0	822.0	822.8	823.6
162.5°	836.4	835.9	835.6	835.1	835.0	835.1	835.2	835.4	835.5	836.2	837.0
165°	853.8	853.3	852.8	852.3	852.1	852.1	852.1	852.1	852.1	853.0	853.9
167.5°	867.4	866.9	866.2	865.5	865.3	865.4	865.5	865.7	865.8	866.8	867.7
170°	875.2	874.7	874.0	873.4	873.1	873.1	873.1	873.1	873.1	874.2	875.2
172.5°	881.5	880.8	880.1	879.6	879.2	879.2	879.2	879.2	879.2	880.2	881.2
175°	887.9	887.2	886.6	886.0	885.7	885.7	885.7	885.7	885.7	886.6	887.6
177.5°	890.6	890.1	889.7	889.2	888.9	888.9	888.9	888.9	888.9	889.7	890.4
180°	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6



TEST NUMBER: P332187-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8	1323.8
2.5°	1393.1	1393.6	1399.3	1403.4	1401.3	1403.9	1404.9
5°	1522.0	1545.1	1557.3	1566.3	1566.9	1567.5	1572.7
7.5°	1704.8	1729.6	1747.7	1775.1	1783.3	1792.7	1790.0
10°	1838.2	1874.8	1906.2	1922.9	1940.9	1967.2	1946.0
12.5°	1962.9	2027.7	2075.6	2101.5	2118.4	2123.6	2113.3
15°	2168.5	2253.2	2298.8	2297.4	2355.2	2380.2	2341.1
17.5°	2357.1	2435.2	2497.8	2529.9	2578.0	2588.7	2583.8
20°	2472.6	2557.9	2606.6	2661.7	2686.8	2709.2	2713.1
22.5°	2572.1	2648.7	2701.0	2746.9	2767.9	2778.5	2784.9
25°	2674.6	2734.9	2766.4	2782.4	2788.1	2786.8	2778.5
27.5°	2667.6	2672.2	2637.5	2603.6	2573.1	2538.9	2527.1
30°	2598.3	2544.4	2448.2	2393.7	2313.5	2250.0	2275.7
32.5°	2416.1	2308.9	2200.8	2081.7	1983.0	1954.9	1926.7
35°	2062.1	1873.5	1763.2	1634.9	1583.6	1532.3	1497.0
37.5°	1668.3	1522.4	1391.6	1307.7	1256.2	1223.8	1206.4
40°	1442.5	1311.0	1203.2	1135.3	1096.2	1059.6	1054.4
42.5°	1262.3	1140.1	1059.0	1004.9	967.3	951.8	940.6
45°	1034.0	948.6	894.1	855.6	830.6	821.0	808.1
47.5°	875.2	814.8	773.9	747.7	728.9	721.7	720.7
50°	786.4	736.3	706.2	685.6	670.9	668.4	658.1
52.5°	719.6	676.3	652.8	634.9	624.2	617.0	614.0
55°	624.7	595.9	574.7	564.4	556.1	549.0	549.0
57.5°	546.6	522.5	508.5	499.7	497.2	492.2	489.0
60°	498.3	477.9	466.9	459.2	454.1	454.8	448.9
62.5°	451.2	437.8	427.4	419.7	413.6	413.7	414.1
65°	384.2	373.9	366.3	363.6	359.9	355.3	356.7
67.5°	325.6	315.9	309.9	305.6	304.3	301.8	305.6
70°	283.5	276.4	271.9	268.1	266.8	267.5	270.7
72.5°	245.0	240.0	237.0	235.3	232.4	232.5	234.8
75°	192.4	188.6	186.0	184.1	183.4	183.4	183.4
77.5°	141.4	140.4	139.3	136.5	136.6	137.4	137.5
80°	111.6	109.7	109.1	107.7	105.8	104.5	107.7
82.5°	83.4	81.4	80.8	80.6	77.6	77.4	80.0
85°	44.9	43.0	43.6	43.0	43.0	42.3	42.3
87.5°	19.6	19.2	18.9	19.4	18.9	18.5	19.6
90°	18.7	19.3	19.7	20.1	20.4	20.6	21.0
92.5°	28.4	28.8	29.0	28.8	28.7	28.5	28.3
95°	53.6	54.3	54.6	54.6	54.6	54.6	54.6
97.5°	83.1	83.9	84.2	84.2	84.1	84.0	84.0
100°	104.2	104.7	105.1	105.4	105.8	106.0	106.3
102.5°	128.8	129.3	129.5	129.5	129.4	129.3	129.3
105°	165.1	165.1	165.2	165.6	165.9	166.2	166.5
107.5°	205.4	205.9	206.0	205.9	205.7	205.5	205.3
110°	232.1	232.6	232.8	232.5	232.1	231.9	231.6



TEST NUMBER: P332187-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	258.7	259.5	259.8	259.8	259.7	259.6	259.6
115°	298.5	298.7	298.7	298.5	298.3	298.2	298.0
117.5°	339.0	339.0	338.8	338.4	337.9	337.5	337.1
120°	366.1	366.0	365.7	365.4	365.1	364.8	364.5
122.5°	393.3	392.9	392.6	392.1	391.6	391.2	390.8
125°	433.9	433.4	432.7	432.2	431.5	430.8	430.3
127.5°	474.1	473.3	472.4	471.7	471.0	470.3	469.6
130°	501.1	500.5	499.6	498.6	497.5	496.4	495.3
132.5°	527.1	526.3	525.6	524.7	523.9	523.0	522.2
135°	566.2	565.6	565.1	564.8	564.5	564.2	563.8
137.5°	604.3	603.7	603.0	602.5	601.8	601.2	600.7
140°	629.9	629.7	629.1	628.0	626.9	625.8	624.7
142.5°	653.4	653.2	652.7	651.9	651.0	650.2	649.3
145°	688.0	687.8	687.4	686.7	686.2	685.5	684.9
147.5°	720.8	720.8	720.3	719.3	718.4	717.5	716.5
150°	740.8	740.8	740.4	739.4	738.6	737.6	736.7
152.5°	759.5	759.8	759.5	758.7	757.9	757.1	756.3
155°	786.8	787.4	787.2	786.1	785.0	783.9	782.9
157.5°	810.0	810.7	810.5	809.6	808.8	807.9	807.0
160°	824.3	825.1	825.2	824.6	824.0	823.3	822.7
162.5°	837.8	838.6	838.5	837.4	836.5	835.5	834.4
165°	854.9	855.8	855.7	854.7	853.6	852.5	851.4
167.5°	868.7	869.7	869.7	868.7	867.7	866.8	865.8
170°	876.4	877.4	877.4	876.4	875.2	874.2	873.1
172.5°	882.1	883.1	883.1	881.9	880.9	879.8	878.7
175°	888.4	889.4	889.4	888.3	887.1	886.1	885.0
177.5°	891.2	891.9	891.8	891.0	890.0	889.2	888.3
180°	890.6	890.6	890.6	890.6	890.6	890.6	890.6

(END OF REPORT)