

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332191-830

Luminaire Tested: **S123DIW-S1000D755U830-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332191-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIW-S1000D755U830-4F0-1E-UDD-F1  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 755 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6352.3 lumens  
Efficiency: N/A  
Efficacy: 118.5 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 53.6  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332191-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

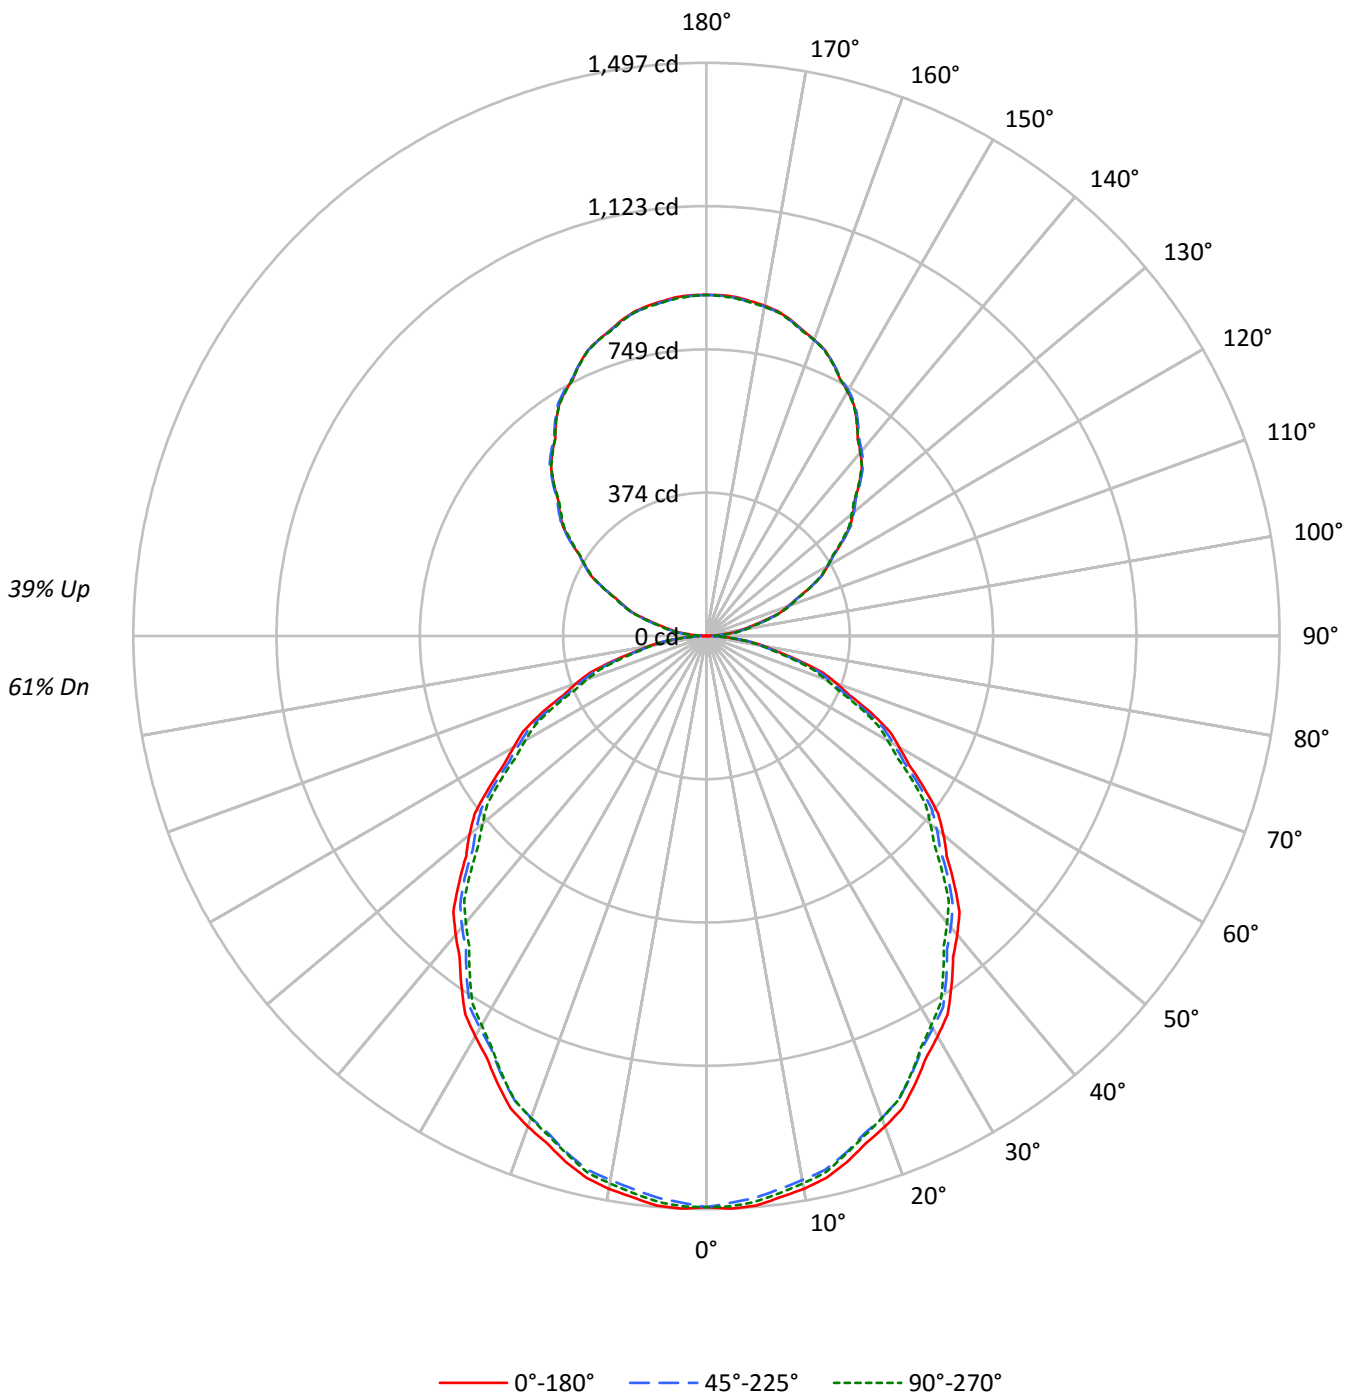



TEST NUMBER: P332191-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	77	77	77	66	66	66	61
1	100	96	92	88	94	90	86	83	78	76	73	68	66	64	59	57	56	51
2	91	84	77	72	85	78	73	68	69	64	61	60	57	54	51	49	47	43
3	83	73	66	60	78	69	62	57	61	55	51	53	49	45	46	43	40	36
4	76	65	57	51	71	61	54	48	54	48	44	47	43	39	41	37	34	31
5	70	58	50	44	65	55	47	42	48	42	38	42	38	34	37	33	30	27
6	64	52	44	38	60	49	42	36	44	37	33	38	33	30	33	29	26	24
7	60	47	39	33	56	44	37	32	39	33	29	35	30	26	30	27	24	21
8	55	43	35	29	52	41	33	28	36	30	26	32	27	23	28	24	21	19
9	52	39	32	26	48	37	30	25	33	27	23	29	25	21	26	22	19	17
10	48	36	29	24	45	34	27	23	31	25	21	27	22	19	24	20	17	15

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	16060	16060	16060
5°	16134	15913	16024
10°	16027	15774	15872
15°	15840	15597	15624
20°	15621	15341	15356
25°	15327	15037	15007
30°	15003	14701	14588
35°	14666	14345	14160
40°	14313	13952	13735
45°	13922	13592	13259
50°	13534	13147	12782
55°	13024	12688	12301
60°	12510	12152	11765
65°	12055	11566	11207
70°	11383	10902	10414
75°	10405	10031	9603
80°	9385	8988	8901
85°	8238	7929	7595



TEST NUMBER: P332191-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	140.5	2.2
10°-20°	396.8	6.2
20°-30°	586.2	9.2
30°-40°	684.7	10.8
40°-50°	688.4	10.8
50°-60°	604.7	9.5
60°-70°	450.5	7.1
70°-80°	256.7	4.0
80°-90°	76.3	1.2
90°-100°	58.0	0.9
100°-110°	173.6	2.7
110°-120°	295.3	4.6
120°-130°	388.5	6.1
130°-140°	436.7	6.9
140°-150°	429.2	6.8
150°-160°	361.3	5.7
160°-170°	240.5	3.8
170°-180°	84.2	1.3
0°-30°	1123.5	17.7
0°-40°	1808.2	28.5
0°-60°	3101.3	48.8
0°-90°	3884.8	61.2
90°-120°	527.0	8.3
90°-150°	1781.4	28.0
90°-180°	2468.0	38.9
0°-180°	6352.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1492	1492	1492	1492	1492	
5°	1493	1486	1473	1485	1483	141
15°	1421	1416	1400	1409	1402	401
25°	1290	1282	1266	1267	1264	594
35°	1116	1108	1092	1084	1078	698
45°	915	909	893	878	871	706
55°	694	692	676	662	656	621
65°	473	467	454	444	440	467
75°	250	245	241	235	231	267
85°	67	64	64	62	62	73
90°	1	8	17	20	21	6
95°	41	46	52	54	55	46
105°	157	159	165	165	166	169
115°	297	299	298	299	298	294
125°	435	437	436	433	430	388
135°	565	568	568	565	564	435
145°	685	686	688	688	685	428
155°	784	784	785	787	783	361
165°	854	852	852	856	851	241
175°	888	886	886	889	885	84
180°	891	891	891	891	891	



TEST NUMBER: P332191-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0
2.5°	1497.0	1496.2	1495.2	1494.3	1493.5	1491.7	1489.2	1486.7	1484.2	1481.7	1483.9
5°	1493.2	1491.8	1490.3	1488.9	1487.5	1485.3	1482.1	1478.9	1475.8	1472.7	1475.6
7.5°	1478.6	1477.2	1475.7	1474.3	1472.9	1470.6	1467.4	1464.1	1460.8	1457.5	1460.1
10°	1466.3	1464.9	1463.4	1462.0	1460.6	1458.0	1454.3	1450.6	1446.9	1443.2	1445.8
12.5°	1449.8	1448.7	1447.5	1446.2	1445.1	1442.7	1439.3	1435.8	1432.3	1428.8	1430.7
15°	1421.4	1420.2	1419.1	1418.0	1416.8	1414.4	1410.7	1407.0	1403.3	1399.6	1401.8
17.5°	1388.3	1386.8	1385.3	1383.8	1382.3	1379.8	1376.0	1372.3	1368.7	1364.9	1366.5
20°	1363.7	1362.0	1360.3	1358.5	1356.8	1354.1	1350.4	1346.7	1343.0	1339.3	1340.4
22.5°	1336.0	1334.3	1332.6	1330.8	1329.1	1326.4	1322.7	1319.0	1315.3	1311.5	1312.5
25°	1290.5	1288.8	1287.1	1285.4	1283.6	1281.0	1277.2	1273.6	1269.9	1266.1	1266.4
27.5°	1242.1	1240.4	1238.7	1237.1	1235.4	1232.6	1228.6	1224.6	1220.6	1216.6	1216.8
30°	1207.1	1205.7	1204.3	1202.9	1201.5	1198.7	1194.8	1190.7	1186.8	1182.8	1182.8
32.5°	1172.2	1170.4	1168.5	1166.6	1164.7	1162.2	1159.1	1156.1	1153.0	1149.9	1148.3
35°	1116.1	1114.4	1112.7	1111.0	1109.2	1106.5	1102.8	1099.1	1095.4	1091.7	1090.0
37.5°	1058.6	1056.4	1054.2	1052.1	1049.9	1047.0	1043.2	1039.4	1035.7	1031.9	1029.8
40°	1018.6	1016.8	1015.1	1013.4	1011.7	1008.9	1004.8	1000.9	996.9	992.9	990.6
42.5°	978.5	976.6	974.7	972.7	970.8	967.8	963.8	959.9	955.8	951.9	949.6
45°	914.6	913.5	912.4	911.3	910.1	907.7	904.0	900.2	896.5	892.9	889.5
47.5°	851.3	849.6	848.0	846.3	844.7	842.1	838.7	835.2	831.7	828.2	824.8
50°	808.2	806.7	805.3	803.9	802.5	799.9	796.2	792.5	788.8	785.1	781.9
52.5°	763.0	762.0	761.1	760.2	759.1	756.7	752.8	748.9	744.9	740.9	738.3
55°	694.0	693.7	693.4	693.1	692.9	690.9	687.2	683.4	679.8	676.1	672.9
57.5°	628.3	627.4	626.4	625.5	624.4	622.5	619.5	616.5	613.6	610.7	607.8
60°	581.1	580.8	580.5	580.2	579.9	578.2	574.7	571.3	567.9	564.5	561.8
62.5°	539.0	538.3	537.5	536.8	536.1	534.0	530.6	527.2	523.8	520.3	517.7
65°	473.3	471.9	470.5	469.1	467.7	465.5	462.7	459.9	456.9	454.1	451.9
67.5°	403.9	402.6	401.3	400.1	398.8	397.1	394.9	392.8	390.6	388.4	386.4
70°	361.7	360.1	358.4	356.7	355.0	353.2	351.5	349.8	348.1	346.4	344.4
72.5°	317.6	316.4	315.1	313.9	312.6	311.0	309.1	307.2	305.2	303.2	301.5
75°	250.2	249.0	247.9	246.8	245.6	244.6	243.7	242.9	242.0	241.2	239.8
77.5°	190.4	189.7	189.1	188.5	187.8	187.0	186.1	185.0	184.0	182.9	182.0
80°	151.4	150.5	149.7	148.8	148.0	147.2	146.7	146.1	145.5	145.0	144.7
82.5°	113.4	113.2	113.1	112.9	112.7	112.5	112.4	112.4	112.3	112.2	111.6
85°	66.7	66.2	65.6	65.0	64.5	64.2	64.2	64.2	64.2	64.2	63.5
87.5°	26.9	26.5	26.1	25.7	25.4	25.3	25.4	25.5	25.7	25.9	25.8
90°	0.7	2.3	3.8	5.4	6.9	8.7	10.7	12.7	14.8	16.8	17.4
92.5°	17.0	18.0	19.0	20.1	21.1	22.2	23.4	24.6	25.7	26.9	27.3
95°	41.3	42.3	43.5	44.6	45.6	46.8	48.1	49.3	50.5	51.7	52.4
97.5°	73.3	74.1	74.9	75.8	76.5	77.4	78.3	79.2	80.1	81.1	81.7
100°	95.1	96.0	97.0	97.9	98.9	99.7	100.5	101.3	102.1	102.8	103.3
102.5°	120.4	120.9	121.5	122.0	122.5	123.4	124.4	125.5	126.4	127.4	127.9
105°	157.4	157.7	158.1	158.3	158.6	159.5	160.9	162.3	163.7	165.1	165.1
107.5°	200.5	200.7	200.9	201.0	201.2	201.6	202.2	202.7	203.3	203.9	204.3
110°	227.3	227.7	228.0	228.3	228.6	228.9	229.2	229.5	229.9	230.2	230.8



TEST NUMBER: P332191-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	255.3	255.5	255.7	255.9	256.1	256.2	256.3	256.4	256.4	256.5	257.2
115°	297.4	297.7	298.2	298.7	299.2	299.3	299.0	298.7	298.3	298.0	298.2
117.5°	339.6	339.9	340.2	340.5	340.8	340.8	340.4	340.0	339.6	339.1	339.1
120°	365.9	366.8	367.8	368.7	369.7	369.7	368.9	368.2	367.4	366.6	366.5
122.5°	393.3	394.0	394.6	395.4	396.1	396.2	395.8	395.4	395.0	394.5	394.2
125°	435.2	435.6	436.1	436.6	437.1	437.1	436.8	436.5	436.1	435.8	435.3
127.5°	473.7	474.8	475.8	476.7	477.8	478.1	477.8	477.4	477.0	476.7	475.8
130°	499.5	500.8	502.0	503.2	504.4	504.9	504.4	504.0	503.5	503.0	502.4
132.5°	525.3	526.5	527.7	529.0	530.3	530.7	530.4	530.0	529.6	529.3	528.6
135°	564.6	565.5	566.5	567.4	568.3	568.7	568.5	568.4	568.3	568.1	567.4
137.5°	601.0	601.7	602.5	603.3	604.1	604.6	605.0	605.5	605.9	606.2	605.6
140°	626.1	626.9	627.7	628.5	629.2	629.7	629.9	630.0	630.2	630.4	630.2
142.5°	649.1	649.9	650.6	651.4	652.1	652.7	653.0	653.3	653.6	653.8	653.7
145°	684.9	685.2	685.5	685.8	686.2	686.5	687.0	687.5	688.0	688.4	688.2
147.5°	716.2	716.8	717.4	717.9	718.5	719.0	719.4	719.8	720.3	720.8	720.8
150°	738.1	738.4	738.7	739.0	739.3	739.6	739.9	740.3	740.6	740.8	740.8
152.5°	756.0	756.4	756.9	757.3	757.7	758.0	758.2	758.4	758.6	758.7	759.0
155°	784.3	784.3	784.3	784.3	784.3	784.3	784.5	784.7	784.8	784.9	785.6
157.5°	808.3	808.1	807.9	807.8	807.6	807.6	807.7	807.8	807.9	808.0	808.7
160°	823.4	823.1	822.8	822.5	822.2	822.0	822.0	822.0	822.0	822.0	822.8
162.5°	836.9	836.4	835.9	835.6	835.1	835.0	835.1	835.2	835.4	835.5	836.2
165°	854.2	853.8	853.3	852.8	852.3	852.1	852.1	852.1	852.1	852.1	853.0
167.5°	868.1	867.4	866.9	866.2	865.5	865.3	865.4	865.5	865.7	865.8	866.8
170°	875.9	875.2	874.7	874.0	873.4	873.1	873.1	873.1	873.1	873.1	874.2
172.5°	882.0	881.5	880.8	880.1	879.6	879.2	879.2	879.2	879.2	879.2	880.2
175°	888.4	887.9	887.2	886.6	886.0	885.7	885.7	885.7	885.7	885.7	886.6
177.5°	891.2	890.6	890.1	889.7	889.2	888.9	888.9	888.9	888.9	888.9	889.7
180°	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6



TEST NUMBER: P332191-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0
2.5°	1486.2	1488.6	1490.8	1491.9	1491.6	1491.4	1491.1	1490.9
5°	1478.4	1481.2	1484.1	1485.3	1484.7	1484.1	1483.6	1483.0
7.5°	1462.7	1465.3	1467.8	1469.0	1468.6	1468.3	1467.9	1467.5
10°	1448.3	1450.9	1453.5	1454.4	1453.9	1453.3	1452.7	1452.2
12.5°	1432.6	1434.5	1436.3	1437.1	1436.8	1436.4	1436.1	1435.8
15°	1404.1	1406.4	1408.7	1409.0	1407.3	1405.5	1403.8	1402.1
17.5°	1368.1	1369.7	1371.3	1371.8	1371.2	1370.6	1369.9	1369.3
20°	1341.5	1342.7	1343.9	1344.0	1343.1	1342.3	1341.4	1340.6
22.5°	1313.4	1314.3	1315.2	1315.1	1314.1	1313.0	1311.9	1310.8
25°	1266.7	1267.1	1267.3	1267.1	1266.1	1265.3	1264.4	1263.6
27.5°	1217.1	1217.3	1217.6	1217.1	1216.1	1214.9	1213.9	1212.8
30°	1182.8	1182.8	1182.8	1181.8	1179.8	1177.8	1175.8	1173.7
32.5°	1146.7	1145.2	1143.6	1142.2	1141.1	1140.0	1139.0	1137.8
35°	1088.3	1086.6	1084.9	1083.3	1081.9	1080.4	1079.0	1077.6
37.5°	1027.8	1025.8	1023.7	1022.2	1021.3	1020.4	1019.5	1018.6
40°	988.4	986.1	983.8	982.0	980.9	979.8	978.6	977.5
42.5°	947.3	945.0	942.7	941.0	939.9	938.8	937.6	936.5
45°	886.0	882.6	879.2	876.8	875.3	873.9	872.5	871.0
47.5°	821.4	818.1	814.7	812.5	811.2	809.9	808.7	807.4
50°	778.8	775.7	772.5	770.2	768.5	766.7	765.0	763.3
52.5°	735.6	732.9	730.3	728.0	726.3	724.6	722.9	721.2
55°	669.8	666.7	663.5	661.2	659.8	658.4	657.0	655.5
57.5°	605.0	602.3	599.5	597.2	595.6	593.9	592.3	590.6
60°	559.3	556.8	554.2	552.2	550.7	549.3	547.9	546.5
62.5°	515.2	512.6	510.0	508.3	507.3	506.3	505.4	504.4
65°	449.6	447.2	445.0	443.5	442.6	441.8	440.8	440.0
67.5°	384.5	382.5	380.5	378.9	377.7	376.5	375.2	374.1
70°	342.3	340.4	338.4	336.7	335.3	333.8	332.4	330.9
72.5°	299.7	297.9	296.1	294.9	294.2	293.4	292.8	292.0
75°	238.4	236.9	235.4	234.3	233.5	232.6	231.8	230.9
77.5°	181.0	180.0	179.1	178.6	178.6	178.6	178.6	178.6
80°	144.4	144.1	143.8	143.6	143.6	143.6	143.6	143.6
82.5°	111.1	110.6	110.1	109.7	109.4	109.2	109.1	108.8
85°	63.0	62.4	61.8	61.5	61.5	61.5	61.5	61.5
87.5°	25.7	25.6	25.5	25.5	25.5	25.6	25.7	25.7
90°	18.0	18.7	19.3	19.7	20.1	20.4	20.6	21.0
92.5°	27.9	28.4	28.8	29.0	28.8	28.7	28.5	28.3
95°	53.0	53.6	54.3	54.6	54.6	54.6	54.6	54.6
97.5°	82.5	83.1	83.9	84.2	84.2	84.1	84.0	84.0
100°	103.8	104.2	104.7	105.1	105.4	105.8	106.0	106.3
102.5°	128.4	128.8	129.3	129.5	129.5	129.4	129.3	129.3
105°	165.1	165.1	165.1	165.2	165.6	165.9	166.2	166.5
107.5°	204.8	205.4	205.9	206.0	205.9	205.7	205.5	205.3
110°	231.4	232.1	232.6	232.8	232.5	232.1	231.9	231.6





TEST NUMBER: P332191-830

CATALOG NUMBER: S123DIW-S1000D755U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	258.0	258.7	259.5	259.8	259.8	259.7	259.6	259.6
115°	298.3	298.5	298.7	298.7	298.5	298.3	298.2	298.0
117.5°	339.1	339.0	339.0	338.8	338.4	337.9	337.5	337.1
120°	366.3	366.1	366.0	365.7	365.4	365.1	364.8	364.5
122.5°	393.8	393.3	392.9	392.6	392.1	391.6	391.2	390.8
125°	434.6	433.9	433.4	432.7	432.2	431.5	430.8	430.3
127.5°	474.9	474.1	473.3	472.4	471.7	471.0	470.3	469.6
130°	501.8	501.1	500.5	499.6	498.6	497.5	496.4	495.3
132.5°	527.8	527.1	526.3	525.6	524.7	523.9	523.0	522.2
135°	566.8	566.2	565.6	565.1	564.8	564.5	564.2	563.8
137.5°	604.9	604.3	603.7	603.0	602.5	601.8	601.2	600.7
140°	630.0	629.9	629.7	629.1	628.0	626.9	625.8	624.7
142.5°	653.6	653.4	653.2	652.7	651.9	651.0	650.2	649.3
145°	688.1	688.0	687.8	687.4	686.7	686.2	685.5	684.9
147.5°	720.8	720.8	720.8	720.3	719.3	718.4	717.5	716.5
150°	740.8	740.8	740.8	740.4	739.4	738.6	737.6	736.7
152.5°	759.3	759.5	759.8	759.5	758.7	757.9	757.1	756.3
155°	786.2	786.8	787.4	787.2	786.1	785.0	783.9	782.9
157.5°	809.4	810.0	810.7	810.5	809.6	808.8	807.9	807.0
160°	823.6	824.3	825.1	825.2	824.6	824.0	823.3	822.7
162.5°	837.0	837.8	838.6	838.5	837.4	836.5	835.5	834.4
165°	853.9	854.9	855.8	855.7	854.7	853.6	852.5	851.4
167.5°	867.7	868.7	869.7	869.7	868.7	867.7	866.8	865.8
170°	875.2	876.4	877.4	877.4	876.4	875.2	874.2	873.1
172.5°	881.2	882.1	883.1	883.1	881.9	880.9	879.8	878.7
175°	887.6	888.4	889.4	889.4	888.3	887.1	886.1	885.0
177.5°	890.4	891.2	891.9	891.8	891.0	890.0	889.2	888.3
180°	890.6	890.6	890.6	890.6	890.6	890.6	890.6	890.6

(END OF REPORT)