

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332214-830

Luminaire Tested: **S123DIW-S1165D460U830-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332214-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIW-S1165D460U830-4F0-1E-UDD-F  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1165 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 460 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6223.4 lumens  
Efficiency: N/A  
Efficacy: 118.8 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 52.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332214-830

CATALOG NUMBER: S123DIW-S1165D460U830-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

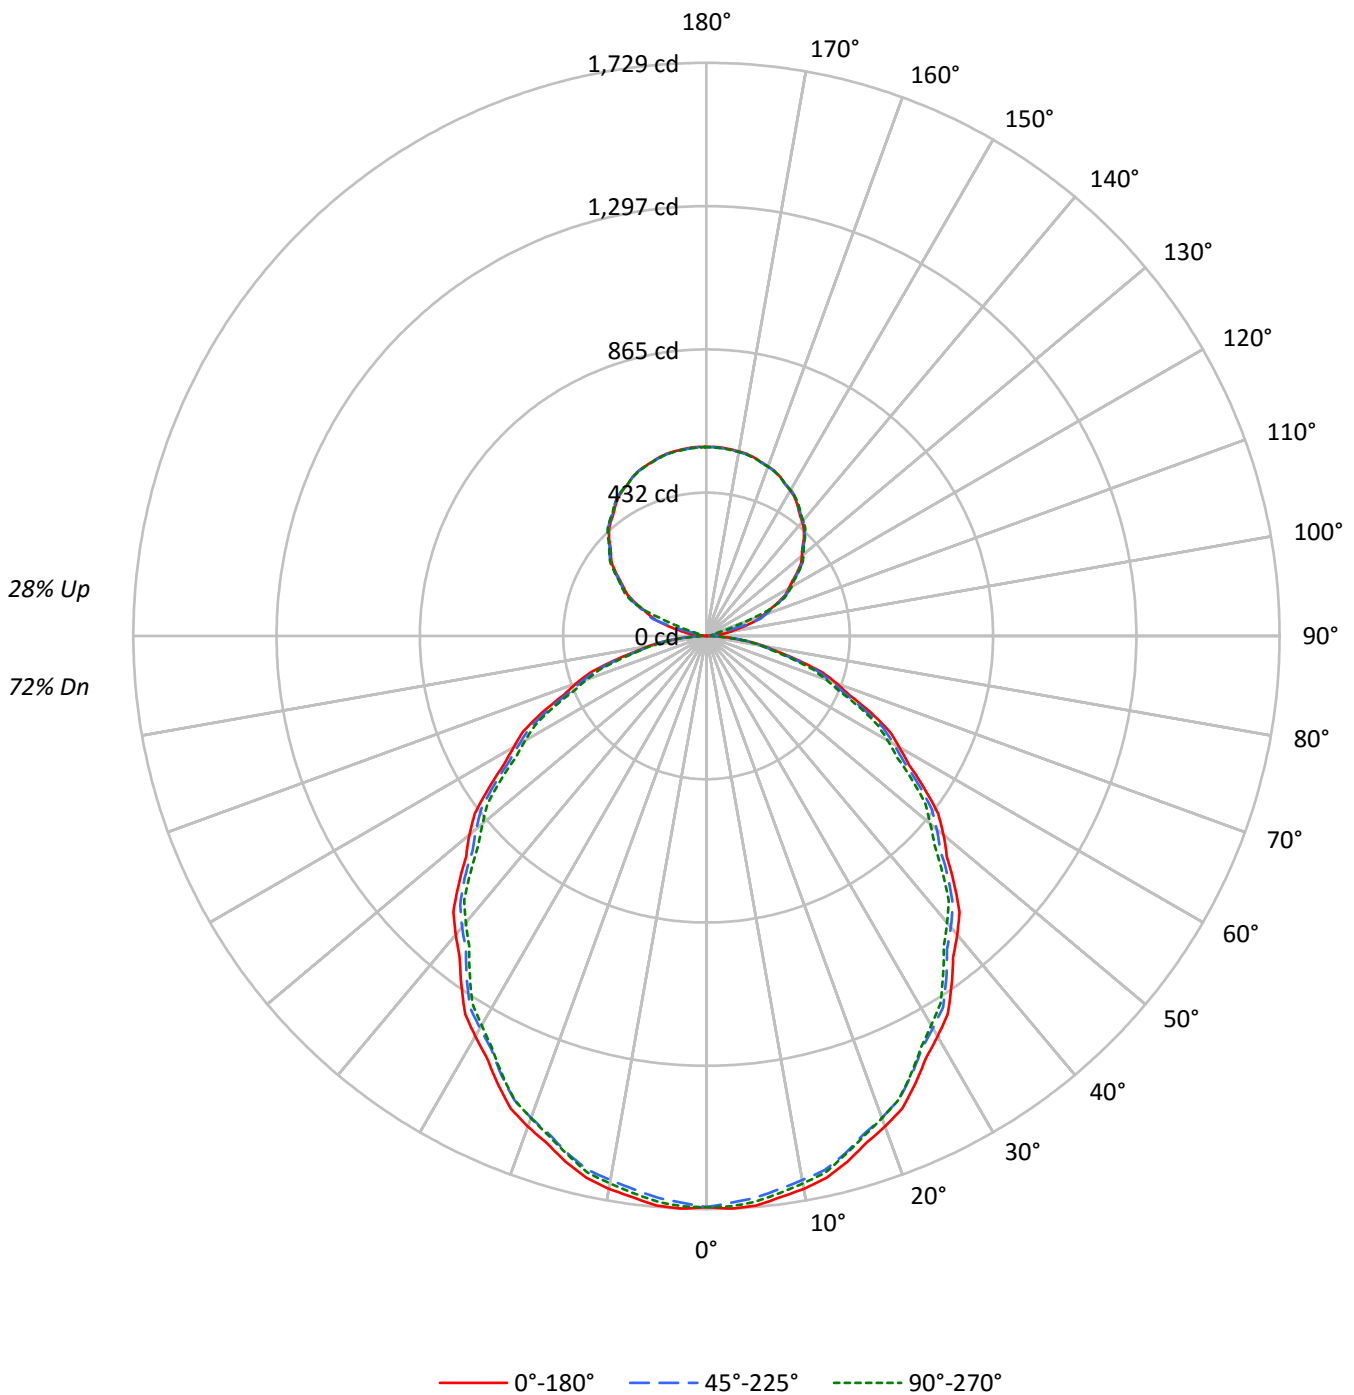



TEST NUMBER: P332214-830

CATALOG NUMBER: S123DIW-S1165D460U830-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	107	107	107	107	96	96	96	86	86	86	76	76	76	72
1	103	98	94	90	97	93	90	86	84	81	79	75	73	71	67	66	64	61
2	93	86	79	74	88	81	76	71	73	69	65	66	63	59	59	57	54	51
3	85	75	68	62	80	72	65	59	65	59	55	58	54	50	53	49	46	43
4	78	67	58	52	74	64	56	50	58	52	47	52	47	43	47	43	40	37
5	72	60	51	45	68	57	49	43	52	45	40	47	42	37	42	38	35	32
6	66	54	45	39	63	51	43	38	47	40	35	42	37	33	38	34	30	28
7	61	49	40	34	58	46	39	33	42	36	31	39	33	29	35	31	27	25
8	57	44	36	31	54	42	35	30	39	32	28	35	30	26	32	28	24	22
9	53	40	33	27	50	39	32	27	36	29	25	33	27	24	30	25	22	20
10	50	37	30	25	47	36	29	24	33	27	23	30	25	21	28	23	20	18

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	18547	18547	18547
5°	18634	18377	18506
10°	18510	18218	18332
15°	18293	18013	18046
20°	18040	17718	17734
25°	17701	17368	17332
30°	17329	16978	16850
35°	16938	16567	16353
40°	16530	16114	15864
45°	16081	15696	15314
50°	15630	15183	14763
55°	15041	14653	14208
60°	14449	14034	13586
65°	13924	13359	12944
70°	13149	12589	12032
75°	12015	11582	11088
80°	10835	10377	10290
85°	9510	9152	8793



TEST NUMBER: P332214-830

CATALOG NUMBER: S123DIW-S1165D460U830-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	162.3	2.6
10°-20°	458.3	7.4
20°-30°	677.0	10.9
30°-40°	790.8	12.7
40°-50°	795.1	12.8
50°-60°	698.4	11.2
60°-70°	520.3	8.4
70°-80°	296.4	4.8
80°-90°	86.7	1.4
90°-100°	20.7	0.3
100°-110°	98.8	1.6
110°-120°	237.2	3.8
120°-130°	302.1	4.9
130°-140°	322.8	5.2
140°-150°	301.8	4.8
150°-160°	243.5	3.9
160°-170°	157.1	2.5
170°-180°	54.2	0.9
0°-30°	1297.6	20.9
0°-40°	2088.4	33.6
0°-60°	3581.8	57.6
0°-90°	4485.2	72.1
90°-120°	356.7	5.7
90°-150°	1283.4	20.6
90°-180°	1738.0	27.9
0°-180°	6223.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1723	1723	1723	1723	1723	
5°	1725	1717	1701	1715	1713	163
15°	1642	1635	1616	1627	1619	463
25°	1490	1481	1462	1464	1459	686
35°	1289	1280	1261	1252	1244	806
45°	1056	1050	1031	1014	1006	815
55°	802	799	781	765	757	718
65°	547	539	524	513	508	539
75°	289	283	278	271	267	309
85°	77	74	74	71	71	85
90°	0	5	10	12	13	5
95°	26	10	13	16	16	32
105°	126	128	93	22	19	134
115°	237	239	243	247	249	234
125°	334	337	339	340	340	298
135°	415	418	420	421	420	320
145°	479	482	483	484	484	300
155°	528	527	528	529	527	243
165°	557	556	555	558	556	157
175°	570	568	568	571	568	54
180°	570	570	570	570	570	



TEST NUMBER: P332214-830

CATALOG NUMBER: S123DIW-S1165D460U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1723.1	1723.1	1723.1	1723.1	1723.1	1723.1	1723.1	1723.1	1723.1	1723.1	1723.1
2.5°	1729.0	1728.0	1726.9	1725.9	1724.8	1722.8	1720.0	1717.0	1714.1	1711.2	1713.8
5°	1724.6	1723.0	1721.3	1719.7	1718.0	1715.3	1711.8	1708.1	1704.5	1700.8	1704.1
7.5°	1707.7	1706.0	1704.4	1702.7	1701.1	1698.4	1694.6	1690.9	1687.2	1683.4	1686.3
10°	1693.5	1691.8	1690.2	1688.5	1686.9	1683.9	1679.6	1675.4	1671.0	1666.8	1669.7
12.5°	1674.5	1673.1	1671.7	1670.4	1669.0	1666.2	1662.3	1658.2	1654.2	1650.2	1652.4
15°	1641.6	1640.3	1639.0	1637.7	1636.3	1633.5	1629.3	1624.9	1620.7	1616.4	1619.0
17.5°	1603.4	1601.7	1600.0	1598.3	1596.5	1593.6	1589.2	1585.0	1580.6	1576.4	1578.3
20°	1574.9	1572.9	1570.9	1569.0	1567.1	1563.9	1559.6	1555.4	1551.0	1546.8	1548.1
22.5°	1542.9	1541.0	1539.0	1537.0	1535.0	1531.9	1527.6	1523.3	1519.1	1514.8	1515.8
25°	1490.4	1488.5	1486.5	1484.5	1482.6	1479.4	1475.2	1470.9	1466.6	1462.4	1462.6
27.5°	1434.5	1432.6	1430.7	1428.7	1426.8	1423.6	1419.0	1414.4	1409.8	1405.1	1405.4
30°	1394.2	1392.5	1390.9	1389.2	1387.6	1384.5	1379.9	1375.3	1370.6	1366.0	1366.0
32.5°	1353.9	1351.7	1349.5	1347.4	1345.2	1342.3	1338.8	1335.2	1331.6	1328.1	1326.3
35°	1289.0	1287.0	1285.1	1283.1	1281.1	1278.0	1273.7	1269.4	1265.1	1260.8	1258.9
37.5°	1222.6	1220.1	1217.6	1215.1	1212.6	1209.2	1204.9	1200.5	1196.2	1191.8	1189.4
40°	1176.4	1174.4	1172.4	1170.4	1168.5	1165.2	1160.6	1155.9	1151.3	1146.8	1144.2
42.5°	1130.1	1127.9	1125.7	1123.4	1121.2	1117.8	1113.1	1108.5	1103.9	1099.4	1096.7
45°	1056.4	1055.1	1053.8	1052.4	1051.1	1048.3	1044.1	1039.7	1035.5	1031.1	1027.3
47.5°	983.2	981.3	979.4	977.4	975.5	972.6	968.6	964.5	960.5	956.5	952.6
50°	933.4	931.8	930.1	928.5	926.8	923.9	919.5	915.3	911.0	906.7	903.1
52.5°	881.3	880.1	879.0	877.9	876.8	873.9	869.4	864.9	860.4	855.7	852.6
55°	801.5	801.3	800.9	800.6	800.2	798.0	793.6	789.4	785.0	780.8	777.2
57.5°	725.7	724.5	723.4	722.4	721.2	719.0	715.5	712.1	708.7	705.2	702.0
60°	671.2	670.8	670.5	670.1	669.9	667.7	663.7	659.8	655.8	651.9	648.9
62.5°	622.5	621.7	620.9	620.0	619.2	616.7	612.7	608.8	604.9	601.0	597.9
65°	546.7	545.1	543.4	541.8	540.1	537.6	534.3	531.0	527.7	524.5	521.9
67.5°	466.4	465.0	463.5	462.0	460.6	458.6	456.1	453.6	451.1	448.7	446.3
70°	417.8	415.8	413.9	411.9	409.9	407.9	406.0	404.0	402.0	400.0	397.8
72.5°	366.8	365.4	363.9	362.5	361.1	359.2	356.9	354.7	352.5	350.2	348.2
75°	288.9	287.6	286.3	284.9	283.6	282.5	281.5	280.5	279.6	278.5	276.9
77.5°	219.9	219.1	218.4	217.7	217.0	216.0	214.8	213.7	212.4	211.3	210.2
80°	174.8	173.8	172.9	171.8	170.9	170.0	169.4	168.7	168.1	167.4	167.1
82.5°	131.0	130.7	130.5	130.4	130.2	130.0	129.9	129.8	129.6	129.5	128.9
85°	77.0	76.3	75.7	75.0	74.4	74.1	74.1	74.1	74.1	74.1	73.4
87.5°	30.9	30.3	29.7	29.1	28.5	28.2	28.2	28.2	28.1	28.1	27.9
90°	0.4	1.3	2.3	3.2	4.1	5.3	6.5	7.7	9.0	10.2	10.6
92.5°	7.9	7.6	7.4	7.1	6.8	7.2	8.1	9.0	9.9	10.8	11.4
95°	25.8	22.0	18.1	14.2	10.4	9.0	10.0	11.0	12.1	13.1	13.8
97.5°	51.9	50.1	48.4	46.8	45.0	40.7	33.9	27.1	20.5	13.7	14.4
100°	71.5	73.4	75.3	77.2	79.1	72.7	58.1	43.4	28.7	13.9	14.7
102.5°	93.9	95.3	96.6	98.0	99.3	92.0	76.0	59.9	43.9	27.9	25.5
105°	126.2	127.2	128.3	129.3	130.4	126.6	118.1	109.7	101.2	92.7	76.1
107.5°	160.2	161.1	161.9	162.7	163.5	164.7	166.0	167.3	168.6	169.9	157.8
110°	182.9	183.7	184.5	185.2	186.0	186.8	187.8	188.9	189.9	191.0	187.8



TEST NUMBER: P332214-830

CATALOG NUMBER: S123DIW-S1165D460U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	204.6	205.3	205.9	206.6	207.4	208.2	209.2	210.3	211.3	212.4	212.4
115°	236.7	237.2	237.8	238.4	238.9	239.7	240.5	241.4	242.2	243.1	244.0
117.5°	267.8	268.5	269.2	269.8	270.6	271.2	271.5	272.0	272.5	272.9	273.6
120°	287.1	287.9	288.8	289.6	290.5	291.1	291.3	291.6	291.9	292.2	292.9
122.5°	306.8	307.5	308.1	308.9	309.5	310.1	310.5	310.8	311.1	311.5	312.0
125°	333.7	334.4	335.2	335.9	336.7	337.2	337.6	338.0	338.4	338.7	338.9
127.5°	359.8	360.5	361.3	362.0	362.8	363.4	363.8	364.3	364.8	365.2	365.5
130°	376.1	376.8	377.6	378.3	379.1	379.7	380.0	380.4	380.8	381.1	381.4
132.5°	391.6	392.4	393.1	393.9	394.6	395.1	395.5	395.8	396.1	396.3	396.7
135°	415.4	415.9	416.5	417.1	417.6	418.1	418.5	418.9	419.2	419.6	419.9
137.5°	435.7	436.5	437.2	437.9	438.6	439.0	439.3	439.5	439.7	439.9	440.4
140°	449.3	449.9	450.4	451.0	451.6	451.9	452.2	452.5	452.8	453.1	453.5
142.5°	461.8	462.4	463.0	463.5	464.1	464.5	464.8	465.1	465.3	465.6	465.9
145°	479.4	480.0	480.7	481.4	482.0	482.4	482.6	482.8	483.0	483.1	483.3
147.5°	495.9	496.3	496.7	497.2	497.6	497.9	498.1	498.3	498.5	498.7	498.9
150°	506.1	506.3	506.6	506.9	507.2	507.4	507.6	507.7	507.9	508.1	508.3
152.5°	515.2	515.3	515.5	515.6	515.8	515.9	515.9	516.0	516.1	516.3	516.6
155°	528.0	527.8	527.6	527.5	527.4	527.3	527.4	527.4	527.5	527.6	528.1
157.5°	538.1	538.0	538.0	538.0	538.0	537.9	537.8	537.7	537.6	537.5	538.1
160°	544.1	544.0	543.9	543.8	543.8	543.7	543.6	543.5	543.4	543.3	543.8
162.5°	549.9	549.7	549.4	549.2	548.9	548.7	548.7	548.6	548.5	548.4	549.0
165°	556.9	556.6	556.3	556.0	555.7	555.5	555.4	555.3	555.3	555.2	555.9
167.5°	562.3	561.9	561.6	561.2	560.8	560.6	560.6	560.6	560.6	560.6	561.4
170°	565.3	565.0	564.6	564.2	563.8	563.6	563.6	563.6	563.6	563.6	564.4
172.5°	567.3	566.9	566.5	566.0	565.5	565.3	565.4	565.5	565.6	565.6	566.4
175°	570.0	569.5	569.0	568.5	568.1	567.9	568.0	568.1	568.2	568.3	568.9
177.5°	570.6	570.2	569.9	569.5	569.1	569.0	569.1	569.1	569.2	569.3	569.9
180°	570.0	570.0	570.0	570.0	570.0	570.0	570.0	570.0	570.0	570.0	570.0



TEST NUMBER: P332214-830

CATALOG NUMBER: S123DIW-S1165D460U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1723.1	1723.1	1723.1	1723.1	1723.1	1723.1	1723.1	1723.1
2.5°	1716.5	1719.1	1721.7	1723.0	1722.7	1722.4	1722.1	1721.9
5°	1707.4	1710.7	1714.0	1715.3	1714.7	1714.0	1713.4	1712.7
7.5°	1689.3	1692.2	1695.3	1696.5	1696.1	1695.7	1695.4	1695.0
10°	1672.7	1675.7	1678.7	1679.8	1679.1	1678.5	1677.8	1677.2
12.5°	1654.5	1656.7	1658.9	1659.8	1659.3	1659.0	1658.6	1658.2
15°	1621.6	1624.3	1626.9	1627.3	1625.3	1623.3	1621.4	1619.4
17.5°	1580.1	1582.0	1583.8	1584.3	1583.7	1582.9	1582.2	1581.5
20°	1549.4	1550.8	1552.1	1552.2	1551.2	1550.2	1549.3	1548.2
22.5°	1516.9	1518.0	1519.0	1518.9	1517.7	1516.4	1515.1	1513.9
25°	1463.0	1463.3	1463.7	1463.3	1462.4	1461.3	1460.4	1459.3
27.5°	1405.7	1405.9	1406.2	1405.7	1404.5	1403.2	1401.9	1400.7
30°	1366.0	1366.0	1366.0	1364.9	1362.5	1360.3	1357.9	1355.7
32.5°	1324.4	1322.6	1320.7	1319.2	1318.0	1316.6	1315.4	1314.2
35°	1256.9	1254.9	1252.9	1251.1	1249.4	1247.8	1246.1	1244.5
37.5°	1187.0	1184.7	1182.3	1180.6	1179.5	1178.5	1177.4	1176.4
40°	1141.5	1138.9	1136.2	1134.3	1132.9	1131.6	1130.3	1129.0
42.5°	1094.1	1091.5	1088.8	1086.8	1085.5	1084.2	1082.9	1081.6
45°	1023.3	1019.4	1015.4	1012.6	1011.0	1009.3	1007.7	1006.0
47.5°	948.8	944.9	940.9	938.3	936.9	935.4	934.0	932.6
50°	899.5	895.9	892.2	889.5	887.5	885.5	883.5	881.6
52.5°	849.6	846.5	843.4	840.8	838.9	836.9	834.9	832.9
55°	773.5	770.0	766.3	763.6	762.0	760.3	758.7	757.1
57.5°	698.8	695.6	692.3	689.8	687.9	686.0	684.0	682.1
60°	646.0	643.0	640.1	637.7	636.1	634.4	632.8	631.1
62.5°	595.0	592.0	589.1	587.0	585.9	584.8	583.7	582.6
65°	519.2	516.6	514.0	512.2	511.1	510.2	509.2	508.2
67.5°	444.0	441.7	439.4	437.5	436.2	434.8	433.4	432.1
70°	395.4	393.1	390.8	388.8	387.2	385.5	383.9	382.3
72.5°	346.2	344.1	342.0	340.6	339.8	338.9	338.1	337.2
75°	275.2	273.6	271.9	270.6	269.7	268.6	267.7	266.6
77.5°	209.1	207.9	206.8	206.2	206.2	206.2	206.2	206.2
80°	166.7	166.5	166.1	166.0	166.0	166.0	166.0	166.0
82.5°	128.3	127.7	127.1	126.7	126.4	126.2	125.9	125.6
85°	72.8	72.1	71.4	71.2	71.2	71.2	71.2	71.2
87.5°	27.7	27.5	27.3	27.2	27.3	27.3	27.4	27.4
90°	10.9	11.3	11.7	12.0	12.2	12.3	12.5	12.7
92.5°	12.1	12.6	13.3	13.6	13.8	13.9	13.9	14.0
95°	14.4	15.1	15.7	16.1	16.1	16.1	16.1	16.1
97.5°	15.2	15.9	16.7	17.1	17.2	17.2	17.3	17.4
100°	15.5	16.2	17.0	17.4	17.5	17.6	17.7	17.8
102.5°	23.2	20.8	18.6	17.4	17.6	17.8	17.9	18.1
105°	59.4	42.8	26.1	17.9	18.1	18.3	18.5	18.7
107.5°	145.5	133.4	121.1	108.8	96.1	83.6	71.1	58.5
110°	184.7	181.6	178.5	170.3	156.8	143.4	129.9	116.5





TEST NUMBER: P332214-830

CATALOG NUMBER: S123DIW-S1165D460U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	212.4	212.4	212.5	211.1	208.3	205.5	202.6	199.8
115°	245.0	245.9	246.9	247.5	247.9	248.3	248.6	249.0
117.5°	274.4	275.1	275.9	276.3	276.4	276.4	276.5	276.6
120°	293.7	294.5	295.2	295.6	295.6	295.6	295.6	295.6
122.5°	312.5	313.1	313.6	313.9	314.0	314.1	314.1	314.2
125°	339.1	339.3	339.5	339.7	339.9	340.1	340.3	340.4
127.5°	365.8	366.1	366.4	366.5	366.3	366.1	365.9	365.7
130°	381.8	382.2	382.6	382.7	382.5	382.3	382.1	381.9
132.5°	397.1	397.5	397.8	397.9	397.7	397.4	397.1	396.9
135°	420.2	420.5	420.8	420.8	420.5	420.2	419.9	419.6
137.5°	440.8	441.2	441.7	441.9	441.7	441.5	441.3	441.1
140°	453.8	454.2	454.6	454.7	454.5	454.3	454.1	453.9
142.5°	466.3	466.6	466.8	466.8	466.6	466.4	466.1	465.8
145°	483.5	483.7	483.9	484.0	484.0	484.0	484.0	484.0
147.5°	499.1	499.3	499.5	499.3	498.9	498.4	498.0	497.6
150°	508.5	508.7	508.9	508.9	508.6	508.3	508.0	507.7
152.5°	517.0	517.3	517.6	517.6	517.2	516.7	516.3	515.9
155°	528.6	529.0	529.5	529.4	528.9	528.3	527.7	527.3
157.5°	538.7	539.2	539.8	539.7	538.9	538.3	537.5	536.8
160°	544.4	545.0	545.5	545.5	544.9	544.2	543.6	542.9
162.5°	549.7	550.4	550.9	551.0	550.4	549.8	549.2	548.7
165°	556.7	557.4	558.2	558.2	557.5	556.9	556.3	555.6
167.5°	562.1	562.8	563.5	563.5	562.8	562.1	561.4	560.6
170°	565.1	565.9	566.7	566.7	565.9	565.1	564.4	563.6
172.5°	567.1	567.9	568.6	568.6	567.8	566.9	566.2	565.3
175°	569.6	570.2	570.9	570.9	570.1	569.4	568.6	567.9
177.5°	570.5	571.1	571.7	571.7	570.9	570.1	569.4	568.6
180°	570.0	570.0	570.0	570.0	570.0	570.0	570.0	570.0

(END OF REPORT)