

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332148-830

Luminaire Tested: **S123DIW-S560D1535U830-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332148-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S560D1535U830-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1535 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7974.1 lumens
Efficiency: N/A
Efficacy: 131.6 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 60.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332148-830

CATALOG NUMBER: S123DIW-S560D1535U830-4F0-1E-UDD-F

Luminous Intensity Polar Plot

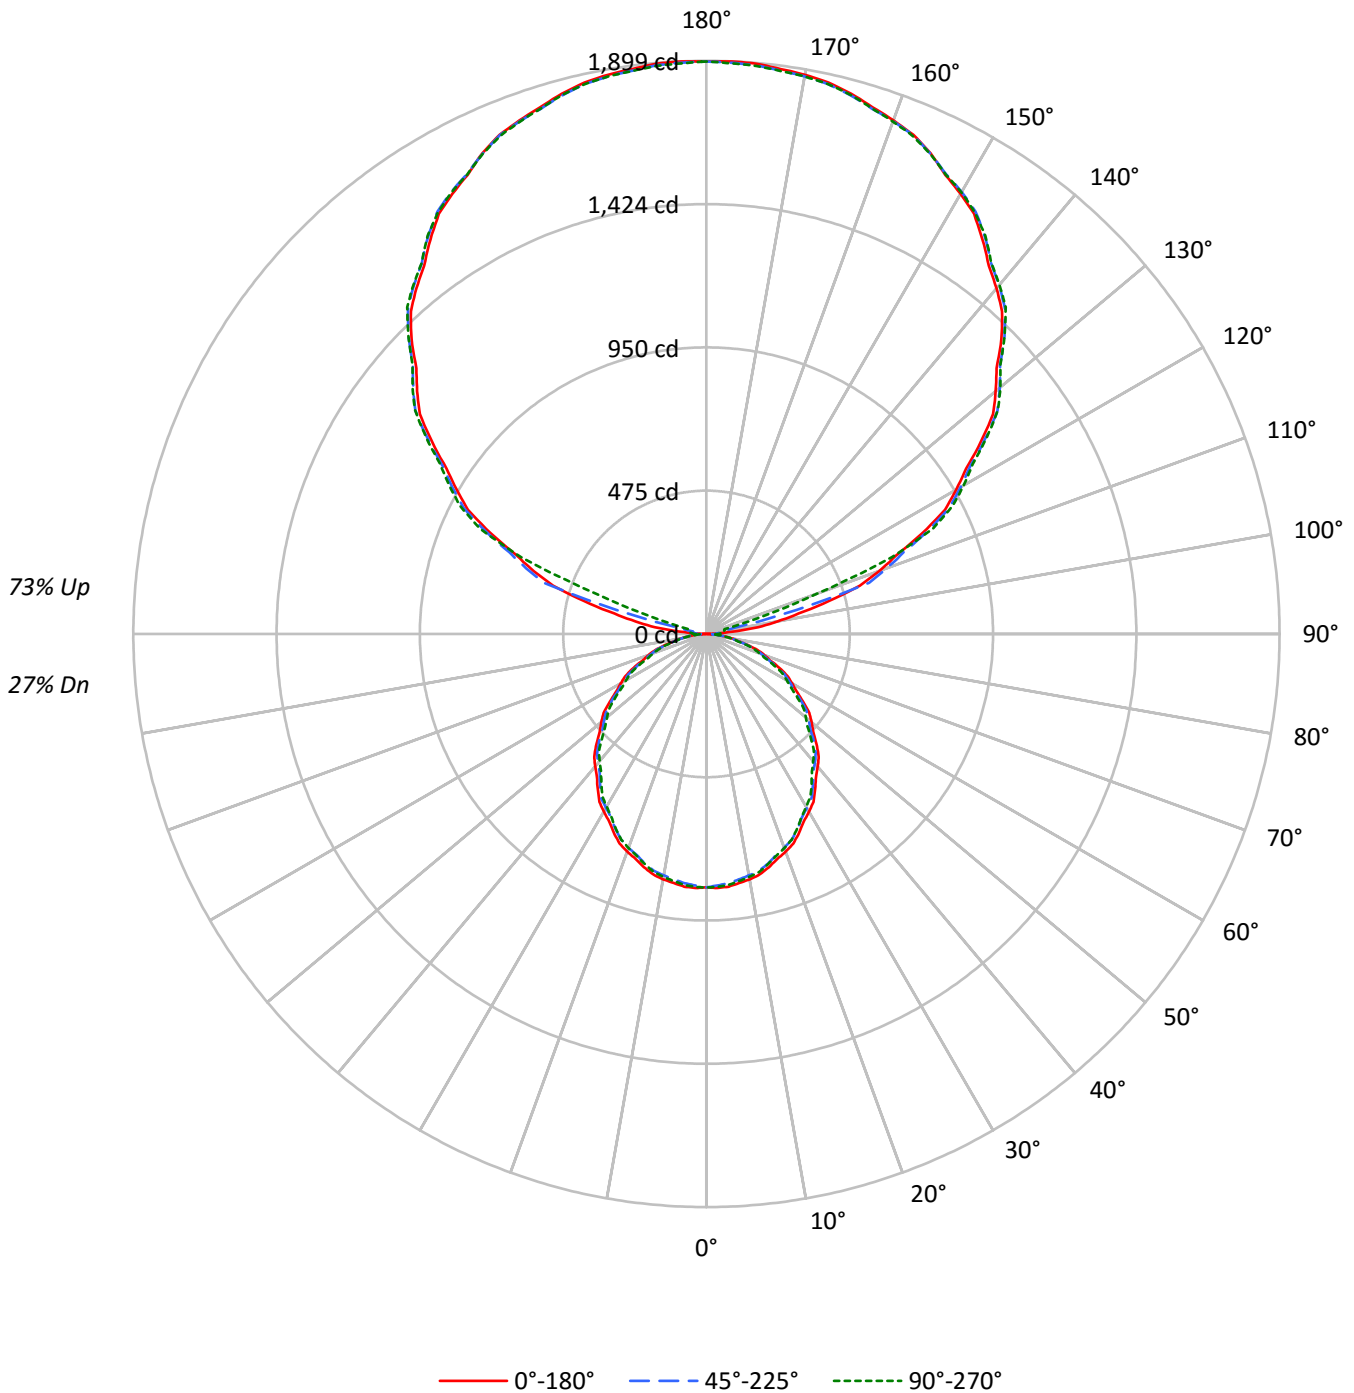



TEST NUMBER: P332148-830

CATALOG NUMBER: S123DIW-S560D1535U830-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	71	71	71	52	52	52	35	35	35	27
1	93	88	85	81	83	79	76	73	62	60	58	46	45	43	31	30	30	23
2	84	77	71	66	75	69	64	60	54	51	48	40	38	36	27	26	25	19
3	77	68	61	55	68	61	55	50	48	44	40	36	33	30	24	23	21	16
4	70	60	52	46	62	54	47	42	42	38	34	32	29	26	22	20	18	14
5	64	53	45	40	57	48	41	36	38	33	29	28	25	22	19	17	16	12
6	59	48	40	34	53	43	36	31	34	29	25	25	22	20	18	16	14	11
7	55	43	35	30	49	39	32	27	31	26	22	23	20	17	16	14	12	9
8	51	39	31	26	45	35	28	24	28	23	20	21	18	15	15	13	11	8
9	47	35	28	23	42	32	25	21	25	21	17	19	16	14	14	11	10	8
10	44	32	25	21	39	29	23	19	23	19	16	18	15	12	13	10	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	9038	9038	9038
5°	9081	8956	9018
10°	9021	8878	8933
15°	8914	8778	8795
20°	8791	8635	8643
25°	8626	8464	8445
30°	8444	8274	8211
35°	8253	8073	7970
40°	8056	7852	7731
45°	7837	7649	7462
50°	7618	7400	7194
55°	7330	7141	6923
60°	7042	6837	6622
65°	6788	6510	6306
70°	6408	6134	5860
75°	5856	5644	5407
80°	5281	5058	5015
85°	4631	4458	4286



TEST NUMBER: P332148-830

CATALOG NUMBER: S123DIW-S560D1535U830-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.1	1.0
10°-20°	223.3	2.8
20°-30°	329.9	4.1
30°-40°	385.4	4.8
40°-50°	387.4	4.9
50°-60°	340.3	4.3
60°-70°	253.5	3.2
70°-80°	144.5	1.8
80°-90°	46.8	0.6
90°-100°	69.0	0.9
100°-110°	328.6	4.1
110°-120°	789.4	9.9
120°-130°	1005.2	12.6
130°-140°	1074.1	13.5
140°-150°	1004.4	12.6
150°-160°	810.1	10.2
160°-170°	522.9	6.6
170°-180°	180.2	2.3
0°-30°	632.3	7.9
0°-40°	1017.7	12.8
0°-60°	1745.5	21.9
0°-90°	2190.3	27.5
90°-120°	1187.0	14.9
90°-150°	4270.6	53.6
90°-180°	5784.0	72.5
0°-180°	7974.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	840	840	840	840	840	
5°	840	837	829	836	835	80
15°	800	797	788	793	789	225
25°	726	722	713	713	711	334
35°	628	624	614	610	606	393
45°	515	512	502	494	490	397
55°	391	389	380	373	369	350
65°	266	263	256	250	248	263
75°	141	138	136	132	130	151
85°	38	36	36	35	35	41
90°	1	16	34	39	42	6
95°	86	32	44	53	54	106
105°	420	428	309	73	62	445
115°	788	796	809	822	829	777
125°	1110	1121	1127	1130	1133	991
135°	1382	1391	1396	1400	1396	1064
145°	1595	1604	1608	1610	1611	998
155°	1757	1754	1756	1762	1754	809
165°	1853	1849	1847	1857	1849	523
175°	1897	1890	1891	1900	1890	180
180°	1897	1897	1897	1897	1897	



TEST NUMBER: P332148-830

CATALOG NUMBER: S123DIW-S560D1535U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	839.7	839.7	839.7	839.7	839.7	839.7	839.7	839.7	839.7	839.7	839.7
2.5°	842.5	842.1	841.6	841.0	840.6	839.5	838.1	836.7	835.4	834.0	835.2
5°	840.4	839.6	838.8	838.0	837.2	835.9	834.2	832.4	830.7	828.9	830.5
7.5°	832.2	831.4	830.6	829.8	829.0	827.6	825.9	824.0	822.2	820.4	821.8
10°	825.3	824.4	823.7	822.8	822.1	820.6	818.5	816.4	814.4	812.3	813.7
12.5°	816.1	815.3	814.6	814.0	813.3	812.0	810.0	808.0	806.2	804.2	805.2
15°	799.9	799.4	798.7	798.1	797.4	796.1	794.0	791.9	789.8	787.7	789.0
17.5°	781.4	780.5	779.7	778.8	778.0	776.6	774.5	772.4	770.3	768.2	769.1
20°	767.5	766.6	765.5	764.6	763.6	762.1	760.1	758.0	755.8	753.8	754.4
22.5°	751.9	750.9	750.0	749.0	748.0	746.5	744.4	742.3	740.3	738.2	738.7
25°	726.3	725.4	724.4	723.5	722.5	721.0	718.9	716.8	714.7	712.7	712.8
27.5°	699.1	698.1	697.2	696.3	695.3	693.7	691.4	689.3	687.0	684.8	684.9
30°	679.4	678.6	677.8	677.0	676.2	674.7	672.4	670.1	668.0	665.7	665.7
32.5°	659.8	658.7	657.6	656.6	655.5	654.1	652.4	650.6	648.9	647.2	646.3
35°	628.1	627.2	626.2	625.3	624.3	622.7	620.7	618.6	616.5	614.4	613.5
37.5°	595.8	594.6	593.3	592.1	590.9	589.3	587.1	585.0	582.9	580.8	579.7
40°	573.3	572.3	571.4	570.4	569.4	567.8	565.5	563.4	561.1	558.8	557.5
42.5°	550.7	549.7	548.6	547.4	546.4	544.7	542.4	540.3	538.0	535.7	534.4
45°	514.8	514.2	513.5	512.8	512.2	510.9	508.8	506.7	504.6	502.5	500.6
47.5°	479.1	478.2	477.3	476.4	475.4	473.9	472.0	470.0	468.1	466.1	464.2
50°	454.9	454.0	453.3	452.4	451.7	450.3	448.1	446.0	443.9	441.9	440.1
52.5°	429.4	428.9	428.4	427.8	427.3	425.8	423.7	421.5	419.2	417.1	415.6
55°	390.6	390.4	390.3	390.1	389.9	388.8	386.7	384.7	382.6	380.5	378.7
57.5°	353.6	353.1	352.5	352.0	351.5	350.3	348.6	347.0	345.3	343.7	342.1
60°	327.1	326.9	326.8	326.6	326.4	325.4	323.5	321.5	319.6	317.6	316.2
62.5°	303.4	302.9	302.6	302.2	301.7	300.6	298.6	296.7	294.7	292.8	291.4
65°	266.5	265.6	264.9	264.0	263.3	262.0	260.4	258.8	257.2	255.6	254.3
67.5°	227.2	226.6	225.8	225.2	224.4	223.5	222.3	221.0	219.8	218.7	217.5
70°	203.6	202.6	201.7	200.8	199.7	198.8	197.8	196.9	195.9	194.9	193.8
72.5°	178.8	178.0	177.4	176.6	176.0	175.0	174.0	172.9	171.7	170.7	169.7
75°	140.8	140.2	139.5	138.8	138.3	137.7	137.1	136.7	136.2	135.7	135.0
77.5°	107.2	106.8	106.4	106.1	105.8	105.3	104.7	104.2	103.5	102.9	102.5
80°	85.2	84.7	84.3	83.8	83.2	82.8	82.6	82.2	81.9	81.6	81.4
82.5°	63.8	63.7	63.6	63.5	63.4	63.3	63.3	63.2	63.2	63.2	62.8
85°	37.5	37.2	36.9	36.6	36.3	36.1	36.1	36.1	36.1	36.1	35.8
87.5°	15.3	15.6	15.7	16.0	16.3	16.7	17.4	18.1	18.8	19.5	19.6
90°	1.4	4.5	7.6	10.8	13.9	17.5	21.6	25.6	29.8	33.8	35.1
92.5°	26.2	25.4	24.4	23.6	22.7	23.8	26.9	30.0	33.0	36.1	38.1
95°	86.0	73.1	60.3	47.4	34.6	29.9	33.4	36.8	40.2	43.6	45.9
97.5°	172.8	167.0	161.3	155.4	149.7	135.5	113.0	90.5	68.0	45.3	47.9
100°	238.2	244.4	250.6	256.9	263.2	241.9	193.0	144.2	95.4	46.5	49.0
102.5°	312.5	317.1	321.6	326.0	330.5	306.1	252.8	199.4	146.1	92.7	84.9
105°	419.9	423.4	426.8	430.3	433.7	421.3	393.1	365.0	336.8	308.6	253.2
107.5°	533.2	535.9	538.7	541.5	544.2	547.8	552.2	556.8	561.2	565.6	525.0
110°	608.7	611.2	613.7	616.2	618.8	621.7	625.2	628.6	632.1	635.5	625.2



TEST NUMBER: P332148-830

CATALOG NUMBER: S123DIW-S560D1535U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	680.9	683.2	685.4	687.7	689.8	692.8	696.2	699.6	703.0	706.5	706.7
115°	787.7	789.6	791.5	793.3	795.2	797.6	800.4	803.1	806.0	808.8	811.9
117.5°	891.1	893.4	895.7	898.1	900.4	902.3	903.7	905.1	906.5	908.0	910.5
120°	955.4	958.2	961.0	963.8	966.7	968.6	969.4	970.3	971.3	972.2	974.8
122.5°	1020.8	1023.0	1025.4	1027.7	1030.0	1031.8	1032.9	1034.2	1035.3	1036.5	1038.3
125°	1110.3	1112.9	1115.4	1117.9	1120.4	1122.3	1123.5	1124.7	1126.1	1127.3	1127.9
127.5°	1197.1	1199.7	1202.2	1204.7	1207.2	1209.2	1210.7	1212.2	1213.7	1215.2	1216.2
130°	1251.2	1253.8	1256.3	1258.8	1261.3	1263.2	1264.4	1265.6	1267.0	1268.2	1269.4
132.5°	1303.2	1305.6	1308.2	1310.6	1313.2	1314.9	1315.9	1316.9	1317.9	1318.9	1320.1
135°	1382.3	1384.2	1386.1	1388.0	1389.9	1391.4	1392.6	1393.9	1395.2	1396.4	1397.3
137.5°	1449.9	1452.4	1454.7	1457.1	1459.4	1461.0	1461.7	1462.4	1463.1	1463.8	1465.3
140°	1495.1	1496.9	1498.8	1500.7	1502.6	1503.9	1504.9	1505.8	1506.7	1507.7	1509.0
142.5°	1536.7	1538.6	1540.5	1542.4	1544.3	1545.7	1546.6	1547.6	1548.5	1549.4	1550.4
145°	1595.1	1597.2	1599.5	1601.7	1603.8	1605.2	1605.9	1606.5	1607.1	1607.8	1608.4
147.5°	1650.0	1651.5	1652.9	1654.4	1655.8	1656.8	1657.5	1658.1	1658.7	1659.3	1660.0
150°	1683.9	1684.8	1685.7	1686.7	1687.6	1688.4	1689.0	1689.7	1690.3	1690.9	1691.5
152.5°	1714.3	1714.8	1715.1	1715.6	1716.1	1716.5	1716.8	1717.2	1717.6	1718.0	1719.1
155°	1757.1	1756.5	1755.9	1755.3	1754.6	1754.4	1754.8	1755.1	1755.4	1755.7	1757.3
157.5°	1790.4	1790.4	1790.3	1790.2	1790.2	1790.0	1789.6	1789.3	1789.0	1788.7	1790.5
160°	1810.7	1810.3	1810.1	1809.8	1809.4	1809.1	1808.8	1808.5	1808.2	1807.9	1809.8
162.5°	1829.9	1829.0	1828.2	1827.4	1826.6	1826.0	1825.7	1825.4	1825.0	1824.8	1826.9
165°	1852.9	1852.0	1851.1	1850.1	1849.2	1848.6	1848.2	1847.9	1847.7	1847.3	1849.8
167.5°	1870.9	1869.7	1868.5	1867.3	1866.0	1865.4	1865.4	1865.4	1865.4	1865.4	1867.8
170°	1881.1	1879.9	1878.6	1877.4	1876.1	1875.5	1875.5	1875.5	1875.5	1875.5	1878.0
172.5°	1887.9	1886.4	1884.9	1883.4	1881.9	1881.2	1881.5	1881.8	1882.0	1882.3	1884.8
175°	1896.6	1895.1	1893.5	1892.0	1890.4	1889.7	1890.1	1890.4	1890.6	1891.0	1893.2
177.5°	1898.8	1897.6	1896.4	1895.2	1893.9	1893.4	1893.7	1893.9	1894.1	1894.4	1896.4
180°	1896.6	1896.6	1896.6	1896.6	1896.6	1896.6	1896.6	1896.6	1896.6	1896.6	1896.6



TEST NUMBER: P332148-830

CATALOG NUMBER: S123DIW-S560D1535U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	839.7	839.7	839.7	839.7	839.7	839.7	839.7	839.7
2.5°	836.5	837.7	839.1	839.6	839.5	839.3	839.2	839.1
5°	832.1	833.7	835.3	835.9	835.6	835.3	835.0	834.6
7.5°	823.2	824.6	826.1	826.7	826.5	826.3	826.1	826.0
10°	815.1	816.6	818.0	818.6	818.3	817.9	817.7	817.3
12.5°	806.3	807.4	808.4	808.8	808.6	808.4	808.2	808.0
15°	790.3	791.5	792.9	793.0	792.0	791.1	790.1	789.2
17.5°	770.1	770.9	771.8	772.0	771.8	771.4	771.0	770.6
20°	755.1	755.7	756.3	756.4	755.9	755.4	755.0	754.5
22.5°	739.2	739.7	740.3	740.2	739.6	739.0	738.4	737.7
25°	712.9	713.1	713.2	713.1	712.7	712.2	711.6	711.1
27.5°	685.0	685.1	685.2	685.0	684.4	683.8	683.2	682.6
30°	665.7	665.7	665.7	665.2	664.0	662.9	661.8	660.6
32.5°	645.5	644.5	643.6	642.8	642.2	641.7	641.0	640.5
35°	612.5	611.5	610.6	609.7	608.9	608.1	607.3	606.5
37.5°	578.4	577.3	576.2	575.3	574.9	574.3	573.8	573.3
40°	556.3	555.0	553.7	552.7	552.0	551.5	550.8	550.2
42.5°	533.2	531.9	530.6	529.6	529.0	528.4	527.7	527.1
45°	498.7	496.7	494.8	493.4	492.7	491.8	491.1	490.2
47.5°	462.3	460.4	458.5	457.2	456.6	455.8	455.2	454.4
50°	438.4	436.6	434.8	433.5	432.4	431.5	430.6	429.6
52.5°	414.1	412.6	411.0	409.7	408.8	407.8	406.9	406.0
55°	376.9	375.2	373.4	372.1	371.4	370.5	369.8	368.9
57.5°	340.5	338.9	337.4	336.1	335.2	334.3	333.4	332.4
60°	314.8	313.4	311.9	310.8	310.0	309.2	308.4	307.6
62.5°	289.9	288.5	287.1	286.1	285.5	285.0	284.5	283.9
65°	253.0	251.8	250.4	249.6	249.1	248.6	248.2	247.6
67.5°	216.4	215.3	214.1	213.2	212.5	211.9	211.2	210.6
70°	192.7	191.6	190.5	189.5	188.7	187.8	187.1	186.2
72.5°	168.7	167.7	166.7	166.0	165.6	165.1	164.8	164.3
75°	134.1	133.4	132.5	131.9	131.4	130.9	130.4	130.0
77.5°	101.9	101.3	100.8	100.5	100.5	100.5	100.5	100.5
80°	81.2	81.1	81.0	80.9	80.9	80.9	80.9	80.9
82.5°	62.5	62.2	61.9	61.7	61.6	61.5	61.4	61.3
85°	35.4	35.2	34.8	34.7	34.7	34.7	34.7	34.7
87.5°	19.7	19.8	20.0	20.1	20.2	20.4	20.5	20.5
90°	36.3	37.6	38.8	39.8	40.4	41.0	41.7	42.2
92.5°	40.1	42.1	44.1	45.2	45.6	46.0	46.4	46.8
95°	48.1	50.2	52.4	53.5	53.5	53.5	53.5	53.5
97.5°	50.4	52.9	55.4	56.8	57.1	57.4	57.8	58.1
100°	51.5	54.0	56.6	58.0	58.2	58.5	58.9	59.2
102.5°	77.2	69.5	61.6	58.1	58.6	59.2	59.8	60.3
105°	197.7	142.3	86.9	59.5	60.1	60.8	61.4	62.0
107.5°	484.3	443.7	403.0	361.8	320.1	278.2	236.5	194.7
110°	614.8	604.5	594.2	566.6	521.8	477.0	432.3	387.5



TEST NUMBER: P332148-830

CATALOG NUMBER: S123DIW-S560D1535U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	706.9	707.1	707.3	702.7	693.1	683.7	674.3	664.8
115°	815.1	818.2	821.3	823.5	824.8	826.0	827.3	828.6
117.5°	913.0	915.5	918.0	919.5	919.6	919.9	920.2	920.4
120°	977.3	979.8	982.3	983.5	983.5	983.5	983.5	983.5
122.5°	1040.0	1041.8	1043.6	1044.5	1044.8	1045.0	1045.3	1045.6
125°	1128.5	1129.2	1129.7	1130.4	1131.1	1131.6	1132.3	1132.9
127.5°	1217.2	1218.2	1219.2	1219.4	1218.8	1218.1	1217.5	1216.9
130°	1270.6	1272.0	1273.2	1273.5	1272.9	1272.2	1271.6	1271.0
132.5°	1321.4	1322.7	1323.9	1324.1	1323.2	1322.4	1321.4	1320.6
135°	1398.3	1399.2	1400.1	1400.1	1399.2	1398.3	1397.3	1396.4
137.5°	1466.8	1468.3	1469.8	1470.2	1469.6	1469.0	1468.3	1467.7
140°	1510.2	1511.5	1512.7	1513.1	1512.4	1511.8	1511.2	1510.5
142.5°	1551.4	1552.5	1553.4	1553.5	1552.7	1551.7	1550.9	1550.0
145°	1609.0	1609.7	1610.2	1610.6	1610.6	1610.6	1610.6	1610.6
147.5°	1660.6	1661.2	1661.9	1661.4	1660.0	1658.6	1657.1	1655.7
150°	1692.1	1692.8	1693.4	1693.3	1692.3	1691.4	1690.5	1689.5
152.5°	1720.2	1721.4	1722.5	1722.3	1720.9	1719.4	1718.0	1716.6
155°	1758.9	1760.4	1762.0	1761.8	1759.9	1758.0	1756.1	1754.4
157.5°	1792.4	1794.3	1796.2	1795.9	1793.5	1791.0	1788.6	1786.1
160°	1811.7	1813.5	1815.3	1815.2	1813.0	1810.8	1808.6	1806.5
162.5°	1829.0	1831.2	1833.2	1833.3	1831.5	1829.5	1827.6	1825.6
165°	1852.3	1854.8	1857.4	1857.5	1855.3	1853.1	1850.9	1848.7
167.5°	1870.4	1872.8	1875.4	1875.4	1872.8	1870.4	1867.8	1865.4
170°	1880.5	1883.0	1885.6	1885.6	1883.0	1880.5	1878.0	1875.5
172.5°	1887.3	1889.8	1892.2	1892.2	1889.4	1886.7	1883.9	1881.1
175°	1895.4	1897.5	1899.8	1899.6	1897.1	1894.6	1892.1	1889.6
177.5°	1898.4	1900.4	1902.4	1902.1	1899.6	1897.1	1894.6	1892.2
180°	1896.6	1896.6	1896.6	1896.6	1896.6	1896.6	1896.6	1896.6

(END OF REPORT)