

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332130-830

Luminaire Tested: **S123DIW-S560D755U830-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332130-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIW-S560D755U830-4F0-1E-UDD-F  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 755 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5034.5 lumens  
Efficiency: N/A  
Efficacy: 133.9 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 37.6  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332130-830

CATALOG NUMBER: S123DIW-S560D755U830-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

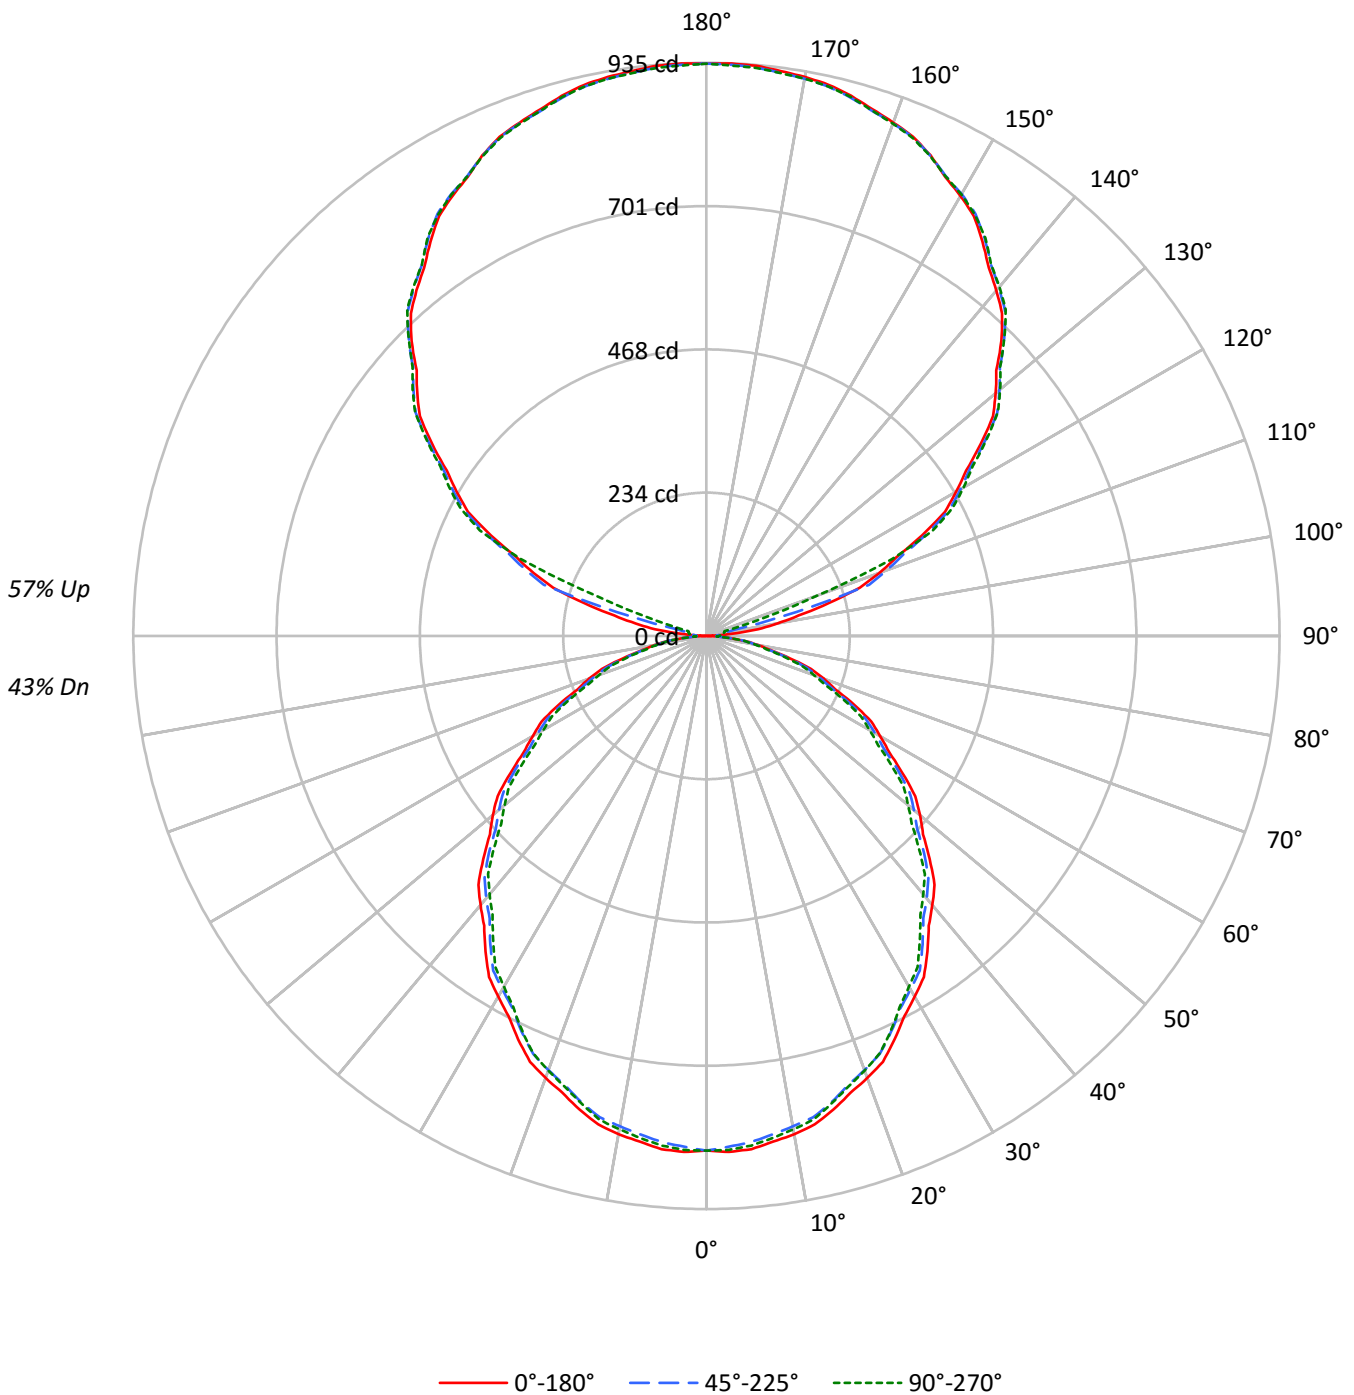



TEST NUMBER: P332130-830

CATALOG NUMBER: S123DIW-S560D755U830-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	106	106	106	106	97	97	97	97	80	80	80		64	64	64		50	50	50	43
1	96	92	88	85	88	84	81	78	70	67	65		56	55	53		44	43	42	36
2	88	80	74	69	80	74	68	64	61	57	54		50	47	44		39	37	35	31
3	80	70	63	57	73	65	58	53	54	49	45		44	40	38		34	32	30	26
4	73	62	54	48	66	57	50	45	48	43	39		39	35	32		31	28	26	22
5	67	55	47	41	61	51	44	39	43	37	33		35	31	28		28	25	23	19
6	62	50	42	36	56	46	39	34	38	33	29		32	27	24		25	22	20	17
7	57	45	37	31	52	41	34	29	35	29	25		29	25	21		23	20	18	15
8	53	41	33	28	48	38	31	26	32	26	23		26	22	19		21	18	16	13
9	49	37	30	25	45	34	28	23	29	24	20		24	20	17		19	16	14	12
10	46	34	27	22	42	31	25	21	27	22	18		22	18	15		18	15	13	11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	9038	9038	9038
5°	9081	8956	9018
10°	9021	8878	8933
15°	8914	8778	8795
20°	8791	8635	8643
25°	8626	8464	8445
30°	8444	8274	8211
35°	8253	8073	7970
40°	8056	7852	7731
45°	7837	7649	7462
50°	7618	7400	7194
55°	7330	7141	6923
60°	7042	6837	6622
65°	6788	6510	6306
70°	6408	6134	5860
75°	5856	5644	5407
80°	5281	5058	5015
85°	4631	4458	4286



TEST NUMBER: P332130-830

CATALOG NUMBER: S123DIW-S560D755U830-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	79.1	1.6
10°-20°	223.3	4.4
20°-30°	329.9	6.6
30°-40°	385.4	7.7
40°-50°	387.4	7.7
50°-60°	340.3	6.8
60°-70°	253.5	5.0
70°-80°	144.5	2.9
80°-90°	44.1	0.9
90°-100°	33.9	0.7
100°-110°	161.8	3.2
110°-120°	388.6	7.7
120°-130°	494.8	9.8
130°-140°	528.7	10.5
140°-150°	494.4	9.8
150°-160°	398.8	7.9
160°-170°	257.4	5.1
170°-180°	88.7	1.8
0°-30°	632.3	12.6
0°-40°	1017.7	20.2
0°-60°	1745.5	34.7
0°-90°	2187.6	43.5
90°-120°	584.3	11.6
90°-150°	2102.1	41.8
90°-180°	2847.0	56.5
0°-180°	5034.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	840	840	840	840	840	
5°	840	837	829	836	835	80
15°	800	797	788	793	789	225
25°	726	722	713	713	711	334
35°	628	624	614	610	606	393
45°	515	512	502	494	490	397
55°	391	389	380	373	369	350
65°	266	263	256	250	248	263
75°	141	138	136	132	130	151
85°	38	36	36	35	35	41
90°	1	8	17	19	21	4
95°	42	16	22	26	26	52
105°	207	210	152	36	30	219
115°	388	392	398	405	408	383
125°	547	552	555	556	558	488
135°	680	684	687	689	687	524
145°	785	790	791	793	793	491
155°	865	864	864	867	864	398
165°	912	910	909	914	910	258
175°	934	930	931	935	930	89
180°	934	934	934	934	934	



TEST NUMBER: P332130-830

CATALOG NUMBER: S123DIW-S560D755U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	839.7	839.7	839.7	839.7	839.7	839.7	839.7	839.7	839.7	839.7	839.7
2.5°	842.5	842.1	841.6	841.0	840.6	839.5	838.1	836.7	835.4	834.0	835.2
5°	840.4	839.6	838.8	838.0	837.2	835.9	834.2	832.4	830.7	828.9	830.5
7.5°	832.2	831.4	830.6	829.8	829.0	827.6	825.9	824.0	822.2	820.4	821.8
10°	825.3	824.4	823.7	822.8	822.1	820.6	818.5	816.4	814.4	812.3	813.7
12.5°	816.1	815.3	814.6	814.0	813.3	812.0	810.0	808.0	806.2	804.2	805.2
15°	799.9	799.4	798.7	798.1	797.4	796.1	794.0	791.9	789.8	787.7	789.0
17.5°	781.4	780.5	779.7	778.8	778.0	776.6	774.5	772.4	770.3	768.2	769.1
20°	767.5	766.6	765.5	764.6	763.6	762.1	760.1	758.0	755.8	753.8	754.4
22.5°	751.9	750.9	750.0	749.0	748.0	746.5	744.4	742.3	740.3	738.2	738.7
25°	726.3	725.4	724.4	723.5	722.5	721.0	718.9	716.8	714.7	712.7	712.8
27.5°	699.1	698.1	697.2	696.3	695.3	693.7	691.4	689.3	687.0	684.8	684.9
30°	679.4	678.6	677.8	677.0	676.2	674.7	672.4	670.1	668.0	665.7	665.7
32.5°	659.8	658.7	657.6	656.6	655.5	654.1	652.4	650.6	648.9	647.2	646.3
35°	628.1	627.2	626.2	625.3	624.3	622.7	620.7	618.6	616.5	614.4	613.5
37.5°	595.8	594.6	593.3	592.1	590.9	589.3	587.1	585.0	582.9	580.8	579.7
40°	573.3	572.3	571.4	570.4	569.4	567.8	565.5	563.4	561.1	558.8	557.5
42.5°	550.7	549.7	548.6	547.4	546.4	544.7	542.4	540.3	538.0	535.7	534.4
45°	514.8	514.2	513.5	512.8	512.2	510.9	508.8	506.7	504.6	502.5	500.6
47.5°	479.1	478.2	477.3	476.4	475.4	473.9	472.0	470.0	468.1	466.1	464.2
50°	454.9	454.0	453.3	452.4	451.7	450.3	448.1	446.0	443.9	441.9	440.1
52.5°	429.4	428.9	428.4	427.8	427.3	425.8	423.7	421.5	419.2	417.1	415.6
55°	390.6	390.4	390.3	390.1	389.9	388.8	386.7	384.7	382.6	380.5	378.7
57.5°	353.6	353.1	352.5	352.0	351.5	350.3	348.6	347.0	345.3	343.7	342.1
60°	327.1	326.9	326.8	326.6	326.4	325.4	323.5	321.5	319.6	317.6	316.2
62.5°	303.4	302.9	302.6	302.2	301.7	300.6	298.6	296.7	294.7	292.8	291.4
65°	266.5	265.6	264.9	264.0	263.3	262.0	260.4	258.8	257.2	255.6	254.3
67.5°	227.2	226.6	225.8	225.2	224.4	223.5	222.3	221.0	219.8	218.7	217.5
70°	203.6	202.6	201.7	200.8	199.7	198.8	197.8	196.9	195.9	194.9	193.8
72.5°	178.8	178.0	177.4	176.6	176.0	175.0	174.0	172.9	171.7	170.7	169.7
75°	140.8	140.2	139.5	138.8	138.3	137.7	137.1	136.7	136.2	135.7	135.0
77.5°	107.2	106.8	106.4	106.1	105.8	105.3	104.7	104.2	103.5	102.9	102.5
80°	85.2	84.7	84.3	83.8	83.2	82.8	82.6	82.2	81.9	81.6	81.4
82.5°	63.8	63.7	63.6	63.5	63.4	63.3	63.3	63.2	63.2	63.2	62.8
85°	37.5	37.2	36.9	36.6	36.3	36.1	36.1	36.1	36.1	36.1	35.8
87.5°	15.2	15.1	15.0	14.9	14.9	15.0	15.2	15.5	15.7	16.0	16.0
90°	0.7	2.3	3.8	5.3	6.9	8.7	10.7	12.6	14.6	16.7	17.2
92.5°	12.9	12.4	12.1	11.6	11.2	11.7	13.2	14.7	16.2	17.7	18.8
95°	42.3	36.0	29.7	23.4	17.1	14.7	16.4	18.1	19.8	21.5	22.6
97.5°	85.0	82.2	79.4	76.5	73.7	66.7	55.6	44.5	33.5	22.3	23.6
100°	117.3	120.3	123.4	126.5	129.5	119.0	95.0	71.0	46.9	22.9	24.1
102.5°	153.8	156.1	158.3	160.5	162.7	150.7	124.4	98.1	71.9	45.6	41.8
105°	206.7	208.4	210.1	211.8	213.5	207.4	193.5	179.6	165.8	151.9	124.6
107.5°	262.4	263.8	265.1	266.6	267.9	269.7	271.8	274.0	276.3	278.4	258.4
110°	299.6	300.9	302.1	303.3	304.5	306.0	307.7	309.4	311.1	312.8	307.7



TEST NUMBER: P332130-830

CATALOG NUMBER: S123DIW-S560D755U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	335.2	336.2	337.3	338.5	339.6	341.0	342.7	344.4	346.1	347.8	347.9
115°	387.7	388.6	389.6	390.5	391.4	392.6	394.0	395.3	396.7	398.1	399.6
117.5°	438.7	439.8	440.9	442.1	443.2	444.1	444.8	445.5	446.2	447.0	448.2
120°	470.2	471.6	473.1	474.4	475.8	476.7	477.2	477.7	478.2	478.5	479.8
122.5°	502.5	503.6	504.7	505.9	507.0	507.8	508.4	509.1	509.6	510.2	511.0
125°	546.6	547.8	549.0	550.3	551.5	552.4	553.0	553.6	554.2	554.9	555.2
127.5°	589.3	590.5	591.7	593.0	594.2	595.2	596.0	596.6	597.4	598.1	598.6
130°	615.9	617.2	618.4	619.6	620.9	621.8	622.4	623.0	623.6	624.2	624.8
132.5°	641.4	642.6	643.9	645.1	646.4	647.2	647.7	648.2	648.7	649.2	649.8
135°	680.4	681.4	682.2	683.2	684.1	684.9	685.5	686.1	686.7	687.3	687.8
137.5°	713.7	714.8	716.0	717.2	718.4	719.2	719.4	719.8	720.2	720.5	721.2
140°	735.8	736.8	737.7	738.7	739.6	740.3	740.7	741.2	741.7	742.2	742.7
142.5°	756.4	757.3	758.3	759.2	760.2	760.8	761.3	761.8	762.2	762.7	763.2
145°	785.1	786.2	787.3	788.3	789.5	790.1	790.4	790.8	791.1	791.4	791.6
147.5°	812.2	812.8	813.6	814.3	815.0	815.5	815.9	816.1	816.4	816.7	817.1
150°	828.9	829.2	829.7	830.2	830.7	831.0	831.4	831.7	832.0	832.3	832.6
152.5°	843.8	844.0	844.2	844.4	844.7	844.9	845.1	845.3	845.5	845.6	846.1
155°	864.9	864.6	864.3	863.9	863.7	863.6	863.7	863.9	864.0	864.2	865.0
157.5°	881.3	881.3	881.2	881.2	881.2	881.1	880.9	880.7	880.6	880.4	881.4
160°	891.3	891.1	891.0	890.8	890.6	890.5	890.3	890.1	890.0	889.9	890.8
162.5°	900.7	900.3	899.8	899.5	899.1	898.8	898.6	898.5	898.3	898.1	899.3
165°	912.1	911.6	911.2	910.7	910.2	909.9	909.7	909.6	909.5	909.3	910.5
167.5°	921.0	920.3	919.7	919.1	918.5	918.1	918.1	918.1	918.1	918.1	919.4
170°	926.0	925.3	924.7	924.1	923.5	923.1	923.1	923.1	923.1	923.1	924.4
172.5°	929.3	928.5	927.7	927.1	926.3	926.0	926.1	926.2	926.3	926.5	927.7
175°	933.6	932.7	932.0	931.2	930.5	930.2	930.3	930.5	930.7	930.8	931.9
177.5°	934.6	934.1	933.4	932.8	932.2	932.0	932.1	932.2	932.4	932.5	933.4
180°	933.6	933.6	933.6	933.6	933.6	933.6	933.6	933.6	933.6	933.6	933.6



TEST NUMBER: P332130-830

CATALOG NUMBER: S123DIW-S560D755U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	839.7	839.7	839.7	839.7	839.7	839.7	839.7	839.7
2.5°	836.5	837.7	839.1	839.6	839.5	839.3	839.2	839.1
5°	832.1	833.7	835.3	835.9	835.6	835.3	835.0	834.6
7.5°	823.2	824.6	826.1	826.7	826.5	826.3	826.1	826.0
10°	815.1	816.6	818.0	818.6	818.3	817.9	817.7	817.3
12.5°	806.3	807.4	808.4	808.8	808.6	808.4	808.2	808.0
15°	790.3	791.5	792.9	793.0	792.0	791.1	790.1	789.2
17.5°	770.1	770.9	771.8	772.0	771.8	771.4	771.0	770.6
20°	755.1	755.7	756.3	756.4	755.9	755.4	755.0	754.5
22.5°	739.2	739.7	740.3	740.2	739.6	739.0	738.4	737.7
25°	712.9	713.1	713.2	713.1	712.7	712.2	711.6	711.1
27.5°	685.0	685.1	685.2	685.0	684.4	683.8	683.2	682.6
30°	665.7	665.7	665.7	665.2	664.0	662.9	661.8	660.6
32.5°	645.5	644.5	643.6	642.8	642.2	641.7	641.0	640.5
35°	612.5	611.5	610.6	609.7	608.9	608.1	607.3	606.5
37.5°	578.4	577.3	576.2	575.3	574.9	574.3	573.8	573.3
40°	556.3	555.0	553.7	552.7	552.0	551.5	550.8	550.2
42.5°	533.2	531.9	530.6	529.6	529.0	528.4	527.7	527.1
45°	498.7	496.7	494.8	493.4	492.7	491.8	491.1	490.2
47.5°	462.3	460.4	458.5	457.2	456.6	455.8	455.2	454.4
50°	438.4	436.6	434.8	433.5	432.4	431.5	430.6	429.6
52.5°	414.1	412.6	411.0	409.7	408.8	407.8	406.9	406.0
55°	376.9	375.2	373.4	372.1	371.4	370.5	369.8	368.9
57.5°	340.5	338.9	337.4	336.1	335.2	334.3	333.4	332.4
60°	314.8	313.4	311.9	310.8	310.0	309.2	308.4	307.6
62.5°	289.9	288.5	287.1	286.1	285.5	285.0	284.5	283.9
65°	253.0	251.8	250.4	249.6	249.1	248.6	248.2	247.6
67.5°	216.4	215.3	214.1	213.2	212.5	211.9	211.2	210.6
70°	192.7	191.6	190.5	189.5	188.7	187.8	187.1	186.2
72.5°	168.7	167.7	166.7	166.0	165.6	165.1	164.8	164.3
75°	134.1	133.4	132.5	131.9	131.4	130.9	130.4	130.0
77.5°	101.9	101.3	100.8	100.5	100.5	100.5	100.5	100.5
80°	81.2	81.1	81.0	80.9	80.9	80.9	80.9	80.9
82.5°	62.5	62.2	61.9	61.7	61.6	61.5	61.4	61.3
85°	35.4	35.2	34.8	34.7	34.7	34.7	34.7	34.7
87.5°	16.0	16.0	16.0	16.0	16.1	16.2	16.2	16.3
90°	17.9	18.5	19.1	19.6	19.9	20.2	20.5	20.8
92.5°	19.7	20.7	21.7	22.2	22.4	22.6	22.8	23.0
95°	23.7	24.7	25.8	26.4	26.4	26.4	26.4	26.4
97.5°	24.8	26.0	27.2	28.0	28.1	28.3	28.5	28.6
100°	25.4	26.6	27.8	28.6	28.7	28.8	28.9	29.1
102.5°	38.0	34.2	30.3	28.6	28.8	29.1	29.4	29.7
105°	97.4	70.0	42.8	29.3	29.6	29.9	30.3	30.5
107.5°	238.4	218.4	198.4	178.1	157.5	137.0	116.4	95.9
110°	302.7	297.6	292.5	278.9	256.8	234.8	212.7	190.8





TEST NUMBER: P332130-830

CATALOG NUMBER: S123DIW-S560D755U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	348.0	348.1	348.2	345.8	341.2	336.6	331.9	327.3
115°	401.2	402.7	404.3	405.4	406.0	406.6	407.2	407.8
117.5°	449.4	450.6	451.9	452.5	452.7	452.8	452.9	453.1
120°	481.1	482.3	483.5	484.1	484.1	484.1	484.1	484.1
122.5°	511.9	512.7	513.7	514.2	514.3	514.3	514.5	514.6
125°	555.4	555.8	556.1	556.4	556.8	557.0	557.3	557.6
127.5°	599.2	599.6	600.1	600.2	599.9	599.6	599.3	599.0
130°	625.5	626.0	626.7	626.9	626.5	626.2	625.9	625.6
132.5°	650.4	651.0	651.7	651.8	651.3	650.9	650.4	650.0
135°	688.2	688.7	689.2	689.2	688.7	688.2	687.8	687.3
137.5°	722.0	722.7	723.5	723.7	723.4	723.0	722.7	722.5
140°	743.4	743.9	744.6	744.8	744.4	744.1	743.9	743.5
142.5°	763.6	764.1	764.6	764.7	764.2	763.8	763.4	762.9
145°	792.0	792.3	792.6	792.8	792.8	792.8	792.8	792.8
147.5°	817.4	817.7	818.0	817.7	817.1	816.3	815.7	814.9
150°	832.9	833.2	833.5	833.5	833.0	832.5	832.1	831.6
152.5°	846.7	847.3	847.8	847.7	847.1	846.3	845.6	844.9
155°	865.7	866.5	867.3	867.2	866.3	865.3	864.4	863.5
157.5°	882.3	883.2	884.1	884.0	882.8	881.6	880.4	879.2
160°	891.7	892.7	893.5	893.5	892.4	891.4	890.2	889.2
162.5°	900.3	901.4	902.4	902.4	901.4	900.5	899.6	898.6
165°	911.7	912.9	914.2	914.3	913.2	912.1	911.1	909.9
167.5°	920.6	921.9	923.1	923.1	921.9	920.6	919.4	918.1
170°	925.6	926.9	928.1	928.1	926.9	925.6	924.4	923.1
172.5°	929.0	930.2	931.4	931.3	930.0	928.7	927.3	926.0
175°	932.9	934.1	935.1	935.0	933.8	932.6	931.3	930.1
177.5°	934.4	935.4	936.4	936.2	935.0	933.8	932.6	931.3
180°	933.6	933.6	933.6	933.6	933.6	933.6	933.6	933.6

(END OF REPORT)