

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332469-830

Luminaire Tested: **S123RDIW-S1000D1535U830-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332469-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S1000D1535U830-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1535 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8591.6 lumens
Efficiency: N/A
Efficacy: 112.2 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 76.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332469-830

CATALOG NUMBER: S123RDIW-S1000D1535U830-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

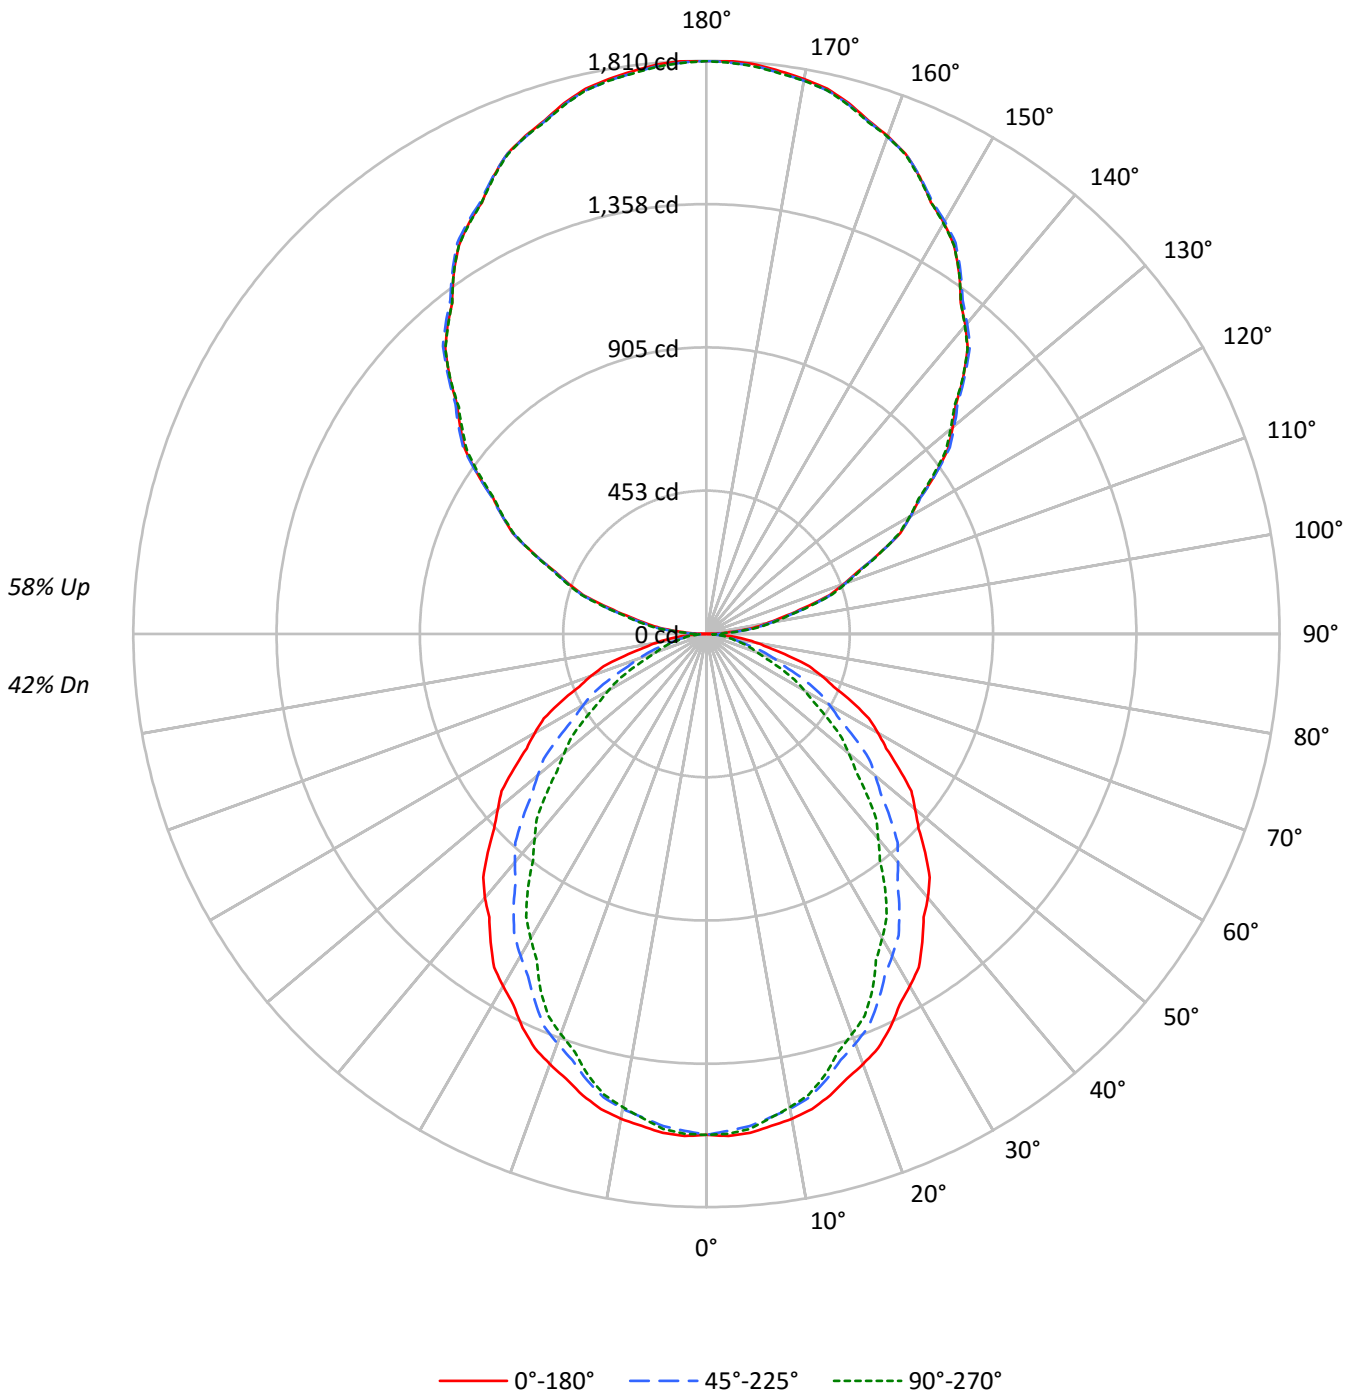



TEST NUMBER: P332469-830

CATALOG NUMBER: S123RDIW-S1000D1535U830-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	105	105	105	105	96	96	96	96	79	79	79		63	63	63		48	48	48	42
1	96	92	88	85	88	84	81	78	69	67	65		56	54	53		43	42	41	36
2	88	81	75	70	80	74	69	64	61	57	54		49	47	45		38	37	35	30
3	80	71	64	58	73	65	59	54	54	50	46		44	41	38		34	32	30	26
4	73	63	55	50	67	58	51	46	48	43	39		39	36	33		31	28	26	22
5	67	56	48	42	61	52	45	40	43	38	34		35	31	28		28	25	23	20
6	62	50	43	37	57	46	40	34	39	34	30		32	28	25		25	23	20	17
7	57	46	38	32	52	42	35	30	35	30	26		29	25	22		23	20	18	15
8	53	41	34	29	49	38	31	27	32	27	23		27	23	20		21	18	16	14
9	50	38	30	26	45	35	28	24	30	24	21		24	21	18		20	17	15	13
10	46	35	28	23	42	32	26	22	27	22	19		23	19	16		18	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17026	17026	17026
5°	17091	16855	16953
10°	16994	16644	16587
15°	16811	16254	16082
20°	16561	15767	15400
25°	16302	15221	14733
30°	15960	14589	13793
35°	15609	13958	12929
40°	15286	13212	11861
45°	14862	12478	10898
50°	14393	11643	9818
55°	13915	10689	8811
60°	13476	9666	7705
65°	12905	8560	6599
70°	12192	7188	5331
75°	11154	5656	5016
80°	9937	5009	4612
85°	8398	4434	4125



TEST NUMBER: P332469-830

CATALOG NUMBER: S123RDIW-S1000D1535U830-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	148.5	1.7
10°-20°	413.3	4.8
20°-30°	595.1	6.9
30°-40°	670.3	7.8
40°-50°	641.3	7.5
50°-60°	525.1	6.1
60°-70°	354.3	4.1
70°-80°	178.2	2.1
80°-90°	52.5	0.6
90°-100°	117.9	1.4
100°-110°	352.8	4.1
110°-120°	600.0	7.0
120°-130°	789.3	9.2
130°-140°	887.1	10.3
140°-150°	872.0	10.1
150°-160°	734.1	8.5
160°-170°	488.7	5.7
170°-180°	171.1	2.0
0°-30°	1156.9	13.5
0°-40°	1827.2	21.3
0°-60°	2993.6	34.8
0°-90°	3578.6	41.7
90°-120°	1070.7	12.5
90°-150°	3619.1	42.1
90°-180°	5013.0	58.3
0°-180°	8591.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1582	1582	1582	1582	1582	
5°	1582	1575	1560	1571	1569	150
15°	1509	1493	1459	1452	1443	425
25°	1373	1339	1282	1255	1240	631
35°	1188	1140	1062	1009	984	743
45°	976	916	820	749	716	753
55°	742	676	570	498	470	665
65°	507	435	336	276	259	501
75°	268	206	136	124	121	286
85°	68	41	36	34	33	76
90°	1	16	34	40	43	9
95°	84	94	105	110	111	94
105°	320	323	336	336	338	343
115°	604	608	606	607	606	597
125°	884	888	886	880	874	788
135°	1147	1155	1154	1149	1146	884
145°	1392	1394	1398	1397	1392	869
155°	1593	1593	1595	1600	1590	733
165°	1735	1731	1731	1739	1730	489
175°	1805	1800	1799	1807	1798	171
180°	1809	1809	1809	1809	1809	



TEST NUMBER: P332469-830

CATALOG NUMBER: S123RDIW-S1000D1535U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8
2.5°	1586.9	1585.9	1585.1	1584.1	1583.2	1581.4	1578.7	1575.9	1573.2	1570.5	1572.9
5°	1581.8	1580.3	1578.9	1577.4	1576.0	1573.6	1570.2	1566.8	1563.4	1559.9	1562.5
7.5°	1567.1	1565.6	1564.1	1562.5	1560.9	1557.9	1553.5	1549.1	1544.6	1540.2	1541.6
10°	1554.8	1552.8	1550.8	1548.8	1546.8	1543.2	1538.1	1533.0	1527.9	1522.8	1523.1
12.5°	1537.4	1535.1	1533.0	1530.7	1528.4	1524.2	1518.0	1511.6	1505.4	1499.1	1498.9
15°	1508.6	1505.5	1502.3	1499.2	1496.1	1490.5	1482.5	1474.5	1466.6	1458.6	1457.2
17.5°	1472.4	1468.8	1465.2	1461.5	1457.8	1451.0	1440.8	1430.7	1420.5	1410.3	1407.3
20°	1445.8	1441.2	1436.6	1432.1	1427.5	1419.8	1409.0	1398.2	1387.3	1376.5	1372.8
22.5°	1416.0	1410.8	1405.5	1400.2	1395.1	1386.7	1375.1	1363.6	1352.1	1340.6	1336.0
25°	1372.6	1365.6	1358.4	1351.2	1344.2	1334.0	1320.9	1307.8	1294.7	1281.6	1275.5
27.5°	1320.0	1312.2	1304.3	1296.5	1288.5	1277.3	1262.7	1248.1	1233.5	1219.0	1210.6
30°	1284.1	1275.5	1267.1	1258.5	1249.9	1237.7	1221.7	1205.7	1189.8	1173.8	1164.1
32.5°	1248.2	1238.5	1228.8	1219.1	1209.5	1196.2	1179.3	1162.4	1145.5	1128.6	1118.0
35°	1187.9	1177.6	1167.3	1157.2	1146.9	1132.8	1115.2	1097.5	1079.9	1062.2	1049.9
37.5°	1126.8	1115.4	1104.0	1092.6	1081.2	1066.1	1047.3	1028.3	1009.5	990.6	976.7
40°	1087.9	1075.3	1062.7	1050.2	1037.6	1021.2	1001.1	980.8	960.5	940.3	925.5
42.5°	1043.7	1031.1	1018.6	1006.1	993.5	976.9	955.9	935.0	914.1	893.2	876.9
45°	976.3	963.4	950.6	937.7	924.9	907.6	885.6	863.7	841.7	819.7	803.5
47.5°	908.8	894.7	880.6	866.5	852.4	834.4	812.5	790.5	768.5	746.6	729.0
50°	859.5	846.1	832.7	819.4	805.9	787.7	764.6	741.5	718.4	695.3	677.6
52.5°	815.4	800.9	786.3	771.8	757.2	738.5	715.7	692.8	670.0	647.1	628.7
55°	741.5	727.5	713.5	699.6	685.6	666.5	642.2	618.0	593.8	569.6	553.1
57.5°	673.3	658.0	642.8	627.5	612.4	592.6	568.2	543.8	519.5	495.2	479.6
60°	626.0	610.4	594.7	579.0	563.3	543.7	520.0	496.3	472.7	449.0	433.6
62.5°	578.8	563.2	547.4	531.8	516.1	496.4	472.8	449.1	425.5	401.8	387.3
65°	506.7	491.1	475.3	459.7	444.0	425.1	402.8	380.6	358.4	336.1	322.2
67.5°	434.6	418.8	402.9	387.1	371.3	352.6	331.3	310.0	288.7	267.3	256.9
70°	387.4	372.0	356.7	341.2	325.8	308.2	288.2	268.2	248.3	228.4	218.4
72.5°	340.2	325.1	309.9	294.7	279.6	262.9	244.8	226.7	208.5	190.4	182.2
75°	268.2	254.4	240.7	227.1	213.4	198.7	183.0	167.3	151.7	136.0	133.1
77.5°	202.5	190.0	177.7	165.3	153.0	141.7	131.6	121.5	111.4	101.3	99.8
80°	160.3	148.6	137.0	125.3	113.6	104.8	98.8	92.7	86.8	80.8	79.9
82.5°	120.4	110.3	100.2	90.0	79.9	73.5	70.7	68.0	65.1	62.3	61.5
85°	68.0	61.7	55.4	49.2	42.9	39.3	38.5	37.6	36.8	35.9	35.3
87.5°	24.9	23.0	21.2	19.3	17.4	16.9	17.7	18.6	19.3	20.2	20.2
90°	1.4	4.6	7.7	10.9	14.0	17.7	21.8	25.9	30.0	34.1	35.3
92.5°	34.4	36.6	38.6	40.8	43.0	45.2	47.6	49.9	52.2	54.6	55.6
95°	83.9	86.1	88.3	90.5	92.7	95.1	97.6	100.1	102.6	105.2	106.4
97.5°	148.9	150.6	152.2	153.9	155.5	157.2	159.1	160.9	162.8	164.6	166.1
100°	193.3	195.2	197.1	199.0	200.9	202.6	204.2	205.8	207.4	209.0	209.9
102.5°	244.5	245.6	246.8	247.9	249.0	250.6	252.7	254.8	256.8	258.9	260.0
105°	319.8	320.5	321.0	321.7	322.3	324.0	326.9	329.7	332.6	335.5	335.5
107.5°	407.4	407.7	408.1	408.5	408.9	409.6	410.8	411.9	413.0	414.2	415.2
110°	461.9	462.6	463.2	463.8	464.5	465.1	465.7	466.4	466.9	467.6	468.9



TEST NUMBER: P332469-830

CATALOG NUMBER: S123RDIW-S1000D1535U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	518.8	519.2	519.5	519.9	520.3	520.6	520.7	520.8	520.9	521.0	522.5
115°	604.1	605.0	606.0	606.9	607.8	608.0	607.4	606.7	606.1	605.5	605.8
117.5°	689.9	690.5	691.2	691.8	692.4	692.3	691.5	690.7	689.8	689.1	689.0
120°	743.4	745.3	747.2	749.0	750.9	751.1	749.5	747.9	746.3	744.8	744.4
122.5°	799.1	800.4	801.8	803.2	804.6	804.9	804.1	803.2	802.5	801.6	800.8
125°	884.0	885.0	886.0	886.9	887.9	888.0	887.4	886.7	886.1	885.5	884.2
127.5°	962.5	964.5	966.6	968.6	970.6	971.3	970.5	969.9	969.2	968.5	966.7
130°	1014.8	1017.4	1019.8	1022.4	1024.9	1025.7	1024.7	1023.8	1022.8	1021.9	1020.7
132.5°	1067.1	1069.6	1072.1	1074.7	1077.2	1078.2	1077.4	1076.8	1076.0	1075.3	1073.8
135°	1147.0	1148.9	1150.8	1152.6	1154.6	1155.4	1155.1	1154.7	1154.4	1154.1	1152.8
137.5°	1220.9	1222.5	1224.1	1225.7	1227.2	1228.4	1229.3	1230.0	1230.9	1231.7	1230.4
140°	1272.1	1273.7	1275.3	1276.8	1278.4	1279.3	1279.7	1280.0	1280.3	1280.6	1280.3
142.5°	1318.7	1320.2	1321.8	1323.4	1325.0	1326.1	1326.6	1327.2	1327.8	1328.3	1328.0
145°	1391.5	1392.1	1392.7	1393.4	1394.0	1394.8	1395.7	1396.7	1397.6	1398.5	1398.3
147.5°	1455.1	1456.2	1457.4	1458.6	1459.7	1460.7	1461.6	1462.4	1463.3	1464.2	1464.2
150°	1499.5	1500.2	1500.7	1501.4	1502.0	1502.6	1503.3	1503.9	1504.5	1505.1	1505.1
152.5°	1535.9	1536.7	1537.7	1538.5	1539.4	1540.0	1540.4	1540.8	1541.2	1541.5	1542.1
155°	1593.3	1593.3	1593.3	1593.3	1593.3	1593.5	1593.7	1594.0	1594.4	1594.7	1596.0
157.5°	1642.2	1641.8	1641.4	1641.1	1640.7	1640.6	1640.9	1641.1	1641.3	1641.6	1642.9
160°	1672.9	1672.3	1671.6	1670.9	1670.4	1670.0	1670.0	1670.0	1670.0	1670.0	1671.6
162.5°	1700.2	1699.3	1698.4	1697.5	1696.7	1696.3	1696.6	1696.9	1697.0	1697.3	1698.9
165°	1735.4	1734.5	1733.5	1732.6	1731.6	1731.2	1731.2	1731.2	1731.2	1731.2	1733.1
167.5°	1763.6	1762.3	1761.0	1759.7	1758.5	1758.0	1758.2	1758.5	1758.8	1759.0	1761.0
170°	1779.4	1778.2	1777.0	1775.7	1774.4	1773.8	1773.8	1773.8	1773.8	1773.8	1776.0
172.5°	1792.0	1790.7	1789.4	1788.2	1787.0	1786.3	1786.3	1786.3	1786.3	1786.3	1788.3
175°	1805.1	1803.8	1802.5	1801.3	1800.0	1799.4	1799.4	1799.4	1799.4	1799.4	1801.3
177.5°	1810.4	1809.5	1808.5	1807.4	1806.4	1805.9	1805.9	1805.9	1805.9	1805.9	1807.4
180°	1809.3	1809.3	1809.3	1809.3	1809.3	1809.3	1809.3	1809.3	1809.3	1809.3	1809.3



TEST NUMBER: P332469-830

CATALOG NUMBER: S123RDIW-S1000D1535U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8
2.5°	1575.5	1578.0	1580.5	1581.5	1581.0	1580.6	1580.2	1579.7
5°	1565.1	1567.6	1570.2	1571.2	1570.7	1570.1	1569.5	1569.0
7.5°	1543.0	1544.5	1545.9	1546.1	1545.1	1544.2	1543.2	1542.2
10°	1523.3	1523.6	1523.9	1523.3	1521.8	1520.4	1519.0	1517.6
12.5°	1498.7	1498.6	1498.5	1497.5	1495.9	1494.2	1492.6	1490.9
15°	1455.8	1454.3	1452.9	1451.1	1449.2	1447.2	1445.2	1443.2
17.5°	1404.3	1401.3	1398.3	1395.2	1392.3	1389.3	1386.4	1383.4
20°	1369.0	1365.4	1361.7	1358.1	1354.7	1351.2	1347.8	1344.4
22.5°	1331.3	1326.7	1322.1	1318.1	1315.0	1311.8	1308.6	1305.4
25°	1269.6	1263.6	1257.6	1253.0	1249.9	1246.8	1243.7	1240.5
27.5°	1202.3	1194.0	1185.6	1179.1	1174.3	1169.5	1164.7	1160.0
30°	1154.4	1144.7	1135.0	1127.9	1123.3	1118.8	1114.2	1109.7
32.5°	1107.4	1096.8	1086.2	1078.6	1073.7	1068.9	1064.1	1059.3
35°	1037.6	1025.4	1013.1	1004.5	999.4	994.2	989.1	983.9
37.5°	962.8	948.9	935.0	924.8	918.5	912.2	905.9	899.6
40°	910.7	895.9	881.0	870.3	863.7	857.2	850.6	844.1
42.5°	860.7	844.5	828.3	817.3	811.4	805.6	799.7	793.8
45°	787.2	771.0	754.7	743.2	736.3	729.5	722.6	715.9
47.5°	711.2	693.6	675.9	664.0	657.9	651.9	645.7	639.6
50°	660.0	642.2	624.6	612.5	606.0	599.4	592.9	586.3
52.5°	610.4	592.0	573.6	561.5	555.6	549.8	543.9	538.0
55°	536.5	520.0	503.4	492.3	486.6	480.9	475.2	469.5
57.5°	463.9	448.3	432.7	422.4	417.6	412.7	407.9	403.0
60°	418.2	402.8	387.4	377.3	372.5	367.6	362.8	357.9
62.5°	372.8	358.4	343.8	334.0	329.0	324.0	318.9	313.8
65°	308.2	294.2	280.2	271.6	268.5	265.4	262.3	259.1
67.5°	246.5	236.0	225.6	218.7	215.4	212.0	208.6	205.3
70°	208.4	198.4	188.4	181.9	178.7	175.6	172.5	169.4
72.5°	174.1	165.9	157.8	153.1	151.7	150.4	149.1	147.8
75°	130.3	127.4	124.6	122.9	122.3	121.7	121.1	120.6
77.5°	98.3	96.7	95.2	94.2	93.6	93.0	92.5	91.9
80°	79.1	78.2	77.4	76.7	76.2	75.6	74.9	74.4
82.5°	60.6	59.8	58.9	58.4	58.3	58.2	58.1	58.0
85°	34.8	34.2	33.6	33.4	33.4	33.4	33.4	33.4
87.5°	20.2	20.3	20.3	20.3	20.1	20.0	19.9	19.8
90°	36.7	37.9	39.2	40.2	40.7	41.4	42.0	42.6
92.5°	56.6	57.6	58.6	58.9	58.5	58.2	57.8	57.4
95°	107.7	109.0	110.2	110.8	110.8	110.8	110.8	110.8
97.5°	167.5	168.9	170.4	171.1	171.0	170.8	170.7	170.6
100°	210.8	211.8	212.7	213.5	214.1	214.8	215.4	216.0
102.5°	260.9	261.8	262.8	263.2	263.1	262.9	262.8	262.7
105°	335.5	335.5	335.5	335.7	336.4	337.1	337.6	338.3
107.5°	416.2	417.2	418.2	418.5	418.1	417.7	417.4	417.0
110°	470.1	471.4	472.7	473.0	472.3	471.7	471.1	470.4



TEST NUMBER: P332469-830

CATALOG NUMBER: S123RDIW-S1000D1535U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	524.1	525.6	527.1	527.8	527.7	527.5	527.4	527.3
115°	606.1	606.4	606.7	606.7	606.4	606.1	605.8	605.5
117.5°	688.9	688.9	688.8	688.3	687.4	686.5	685.7	684.8
120°	744.1	743.9	743.5	743.0	742.4	741.8	741.1	740.5
122.5°	799.9	799.2	798.3	797.5	796.6	795.7	794.8	793.9
125°	883.0	881.7	880.4	879.1	877.9	876.7	875.3	874.1
127.5°	965.0	963.2	961.4	959.8	958.4	956.9	955.5	953.9
130°	1019.4	1018.1	1016.9	1015.1	1013.0	1010.7	1008.5	1006.3
132.5°	1072.3	1070.8	1069.3	1067.7	1066.0	1064.3	1062.5	1060.8
135°	1151.6	1150.3	1149.1	1148.1	1147.5	1146.8	1146.2	1145.6
137.5°	1229.1	1227.8	1226.4	1225.1	1223.9	1222.8	1221.5	1220.3
140°	1280.0	1279.7	1279.3	1278.1	1275.8	1273.7	1271.4	1269.2
142.5°	1327.8	1327.4	1327.1	1326.1	1324.4	1322.7	1321.0	1319.3
145°	1397.9	1397.6	1397.3	1396.5	1395.2	1394.0	1392.7	1391.5
147.5°	1464.2	1464.2	1464.2	1463.3	1461.4	1459.5	1457.5	1455.7
150°	1505.1	1505.1	1505.1	1504.2	1502.3	1500.4	1498.5	1496.7
152.5°	1542.6	1543.0	1543.6	1543.0	1541.3	1539.7	1538.0	1536.4
155°	1597.2	1598.5	1599.8	1599.3	1597.0	1594.9	1592.6	1590.4
157.5°	1644.3	1645.6	1646.9	1646.7	1644.9	1643.1	1641.3	1639.6
160°	1673.2	1674.8	1676.3	1676.5	1675.3	1674.0	1672.7	1671.4
162.5°	1700.4	1702.0	1703.6	1703.5	1701.4	1699.4	1697.3	1695.4
165°	1734.9	1736.8	1738.7	1738.6	1736.4	1734.2	1731.9	1729.8
167.5°	1762.9	1764.9	1766.8	1766.8	1764.9	1762.9	1761.0	1759.0
170°	1778.2	1780.5	1782.6	1782.6	1780.5	1778.2	1776.0	1773.8
172.5°	1790.2	1792.2	1794.1	1794.0	1791.8	1789.6	1787.3	1785.2
175°	1803.2	1805.1	1806.9	1806.8	1804.6	1802.3	1800.2	1798.0
177.5°	1808.9	1810.4	1811.9	1811.8	1810.1	1808.3	1806.6	1804.8
180°	1809.3	1809.3	1809.3	1809.3	1809.3	1809.3	1809.3	1809.3

(END OF REPORT)