

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332424-830

Luminaire Tested: **S123RDIW-S560D1320U830-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332424-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIW-S560D1320U830-4F0-1E-UDD-F  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1320 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6990.3 lumens  
Efficiency: N/A  
Efficacy: 129.9 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 53.8  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332424-830

CATALOG NUMBER: S123RDIW-S560D1320U830-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

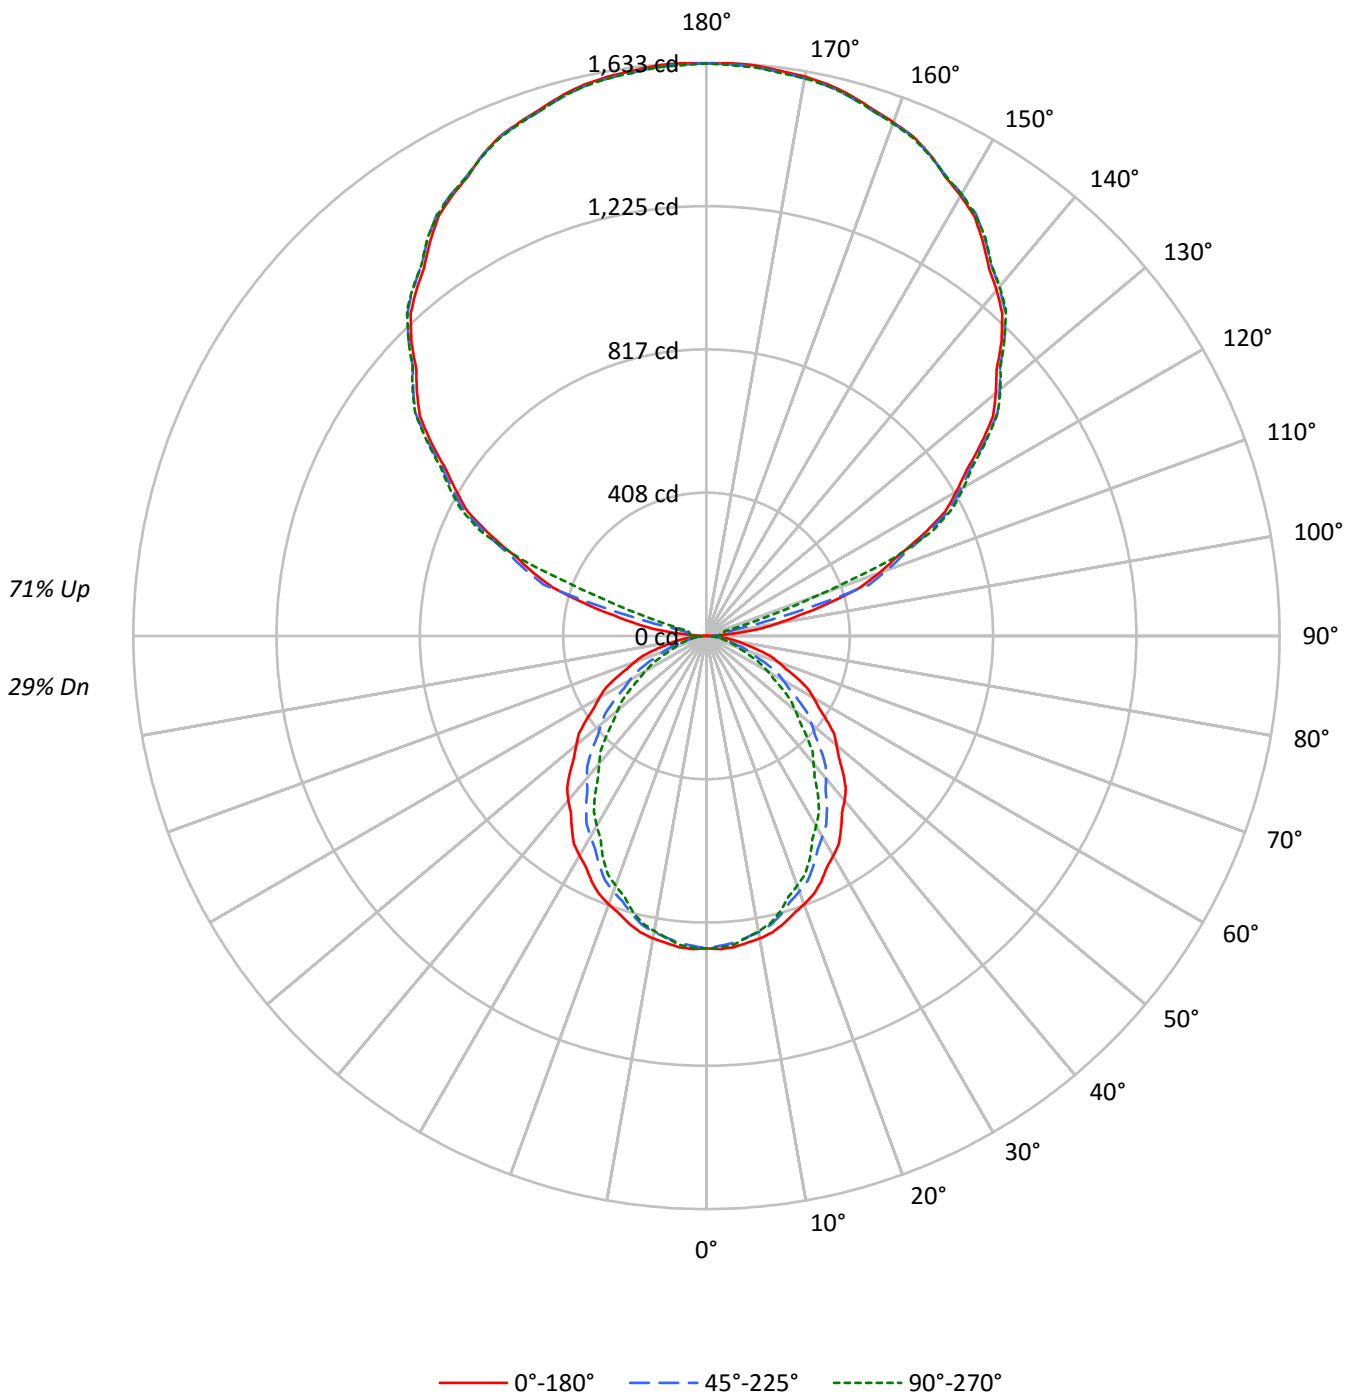



TEST NUMBER: P332424-830

CATALOG NUMBER: S123RDIW-S560D1320U830-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	72	72	72	53	53	53	37	37	37	29
1	93	89	85	82	83	80	77	74	63	61	59	47	46	45	33	32	31	25
2	85	78	72	67	76	70	65	61	55	52	49	42	39	38	29	28	27	21
3	78	69	62	56	69	62	56	51	49	45	41	37	34	32	26	24	23	18
4	71	61	53	47	63	55	48	43	43	39	35	33	30	27	23	21	20	16
5	65	54	46	41	58	49	42	37	39	34	30	30	26	24	21	19	17	14
6	60	48	41	35	54	44	37	32	35	30	26	27	23	21	19	17	15	12
7	55	44	36	31	49	39	33	28	32	27	23	24	21	18	17	15	14	11
8	51	39	32	27	46	36	29	25	29	24	21	22	19	16	16	14	12	10
9	48	36	29	24	43	33	26	22	26	22	18	20	17	15	15	13	11	9
10	44	33	26	21	40	30	24	20	24	20	16	19	15	13	14	12	10	8

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	9582	9582	9582
5°	9619	9487	9541
10°	9565	9368	9335
15°	9461	9149	9052
20°	9321	8874	8668
25°	9175	8567	8291
30°	8983	8211	7762
35°	8784	7857	7276
40°	8604	7436	6674
45°	8363	7024	6132
50°	8100	6553	5526
55°	7833	6016	4960
60°	7584	5440	4336
65°	7264	4819	3713
70°	6861	4047	2999
75°	6276	3182	2824
80°	5597	2820	2591
85°	4730	2495	2322



TEST NUMBER: P332424-830

CATALOG NUMBER: S123RDIW-S560D1320U830-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	83.6	1.2
10°-20°	232.6	3.3
20°-30°	334.9	4.8
30°-40°	377.3	5.4
40°-50°	360.9	5.2
50°-60°	295.6	4.2
60°-70°	199.4	2.9
70°-80°	100.3	1.4
80°-90°	31.1	0.4
90°-100°	59.3	0.8
100°-110°	282.7	4.0
110°-120°	679.0	9.7
120°-130°	864.6	12.4
130°-140°	923.8	13.2
140°-150°	863.8	12.4
150°-160°	696.8	10.0
160°-170°	449.7	6.4
170°-180°	155.0	2.2
0°-30°	651.1	9.3
0°-40°	1028.4	14.7
0°-60°	1684.8	24.1
0°-90°	2015.7	28.8
90°-120°	1020.9	14.6
90°-150°	3673.1	52.5
90°-180°	4975.0	71.2
0°-180°	6990.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	890	890	890	890	890	
5°	890	886	878	884	883	84
15°	849	840	821	817	812	239
25°	772	754	721	706	698	355
35°	668	642	598	568	554	418
45°	549	516	461	422	403	424
55°	417	380	321	280	264	374
65°	285	245	189	155	146	282
75°	151	116	76	70	68	161
85°	38	23	20	19	19	43
90°	1	14	29	34	36	5
95°	74	28	38	46	46	91
105°	361	368	265	63	53	383
115°	678	685	696	707	713	669
125°	955	964	970	972	974	853
135°	1189	1196	1201	1204	1201	915
145°	1372	1380	1383	1385	1385	858
155°	1511	1509	1510	1515	1509	696
165°	1594	1590	1589	1598	1590	450
175°	1631	1626	1626	1634	1625	155
180°	1631	1631	1631	1631	1631	



TEST NUMBER: P332424-830

CATALOG NUMBER: S123RDIW-S560D1320U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	890.2	890.2	890.2	890.2	890.2	890.2	890.2	890.2	890.2	890.2	890.2
2.5°	893.2	892.6	892.1	891.6	891.1	890.0	888.5	886.9	885.4	883.9	885.3
5°	890.2	889.5	888.6	887.9	887.0	885.7	883.7	881.8	879.9	878.0	879.4
7.5°	882.0	881.2	880.2	879.4	878.5	876.8	874.4	871.9	869.3	866.9	867.6
10°	875.1	873.9	872.8	871.7	870.6	868.6	865.7	862.8	859.9	857.1	857.1
12.5°	865.3	864.0	862.7	861.5	860.3	857.9	854.3	850.8	847.3	843.8	843.7
15°	849.0	847.3	845.6	843.8	842.1	838.9	834.4	829.9	825.4	821.0	820.1
17.5°	828.7	826.7	824.6	822.6	820.5	816.6	810.9	805.2	799.5	793.8	792.1
20°	813.7	811.2	808.6	806.0	803.4	799.1	793.0	786.9	780.8	774.7	772.6
22.5°	796.9	794.0	791.1	788.1	785.1	780.4	773.9	767.4	761.0	754.5	751.9
25°	772.5	768.5	764.5	760.5	756.5	750.8	743.4	736.0	728.7	721.3	717.9
27.5°	742.9	738.5	734.1	729.6	725.2	718.9	710.7	702.5	694.3	686.1	681.4
30°	722.7	717.9	713.1	708.3	703.5	696.5	687.6	678.6	669.6	660.6	655.2
32.5°	702.5	697.1	691.6	686.2	680.7	673.3	663.7	654.2	644.7	635.2	629.2
35°	668.5	662.8	657.0	651.3	645.5	637.6	627.6	617.7	607.8	597.9	590.9
37.5°	634.2	627.8	621.4	614.9	608.5	600.0	589.4	578.8	568.2	557.5	549.7
40°	612.3	605.2	598.1	591.1	584.0	574.8	563.5	552.0	540.6	529.2	520.8
42.5°	587.4	580.3	573.3	566.3	559.2	549.8	538.0	526.2	514.4	502.7	493.5
45°	549.4	542.2	535.0	527.8	520.6	510.8	498.4	486.1	473.7	461.4	452.2
47.5°	511.4	503.5	495.6	487.7	479.8	469.7	457.2	444.9	432.5	420.2	410.3
50°	483.7	476.2	468.6	461.1	453.6	443.3	430.3	417.4	404.4	391.3	381.4
52.5°	458.9	450.7	442.5	434.3	426.2	415.7	402.7	389.9	377.0	364.2	353.8
55°	417.4	409.4	401.6	393.7	385.9	375.1	361.5	347.9	334.2	320.6	311.2
57.5°	378.9	370.3	361.7	353.2	344.6	333.5	319.8	306.1	292.4	278.7	269.9
60°	352.3	343.6	334.7	325.8	317.1	305.9	292.7	279.4	266.0	252.7	244.0
62.5°	325.7	317.0	308.1	299.3	290.5	279.4	266.1	252.8	239.4	226.1	218.0
65°	285.2	276.4	267.6	258.7	249.9	239.2	226.7	214.2	201.7	189.2	181.3
67.5°	244.6	235.7	226.8	217.8	209.0	198.5	186.4	174.5	162.5	150.4	144.6
70°	218.0	209.3	200.8	192.1	183.4	173.4	162.2	151.0	139.8	128.6	122.9
72.5°	191.4	182.9	174.4	165.9	157.3	148.0	137.8	127.5	117.3	107.2	102.5
75°	150.9	143.2	135.5	127.8	120.1	111.8	103.0	94.2	85.4	76.5	74.9
77.5°	114.0	107.0	100.0	93.0	86.1	79.7	74.1	68.4	62.7	57.0	56.2
80°	90.3	83.7	77.1	70.5	63.9	59.0	55.6	52.2	48.8	45.5	45.0
82.5°	67.8	62.0	56.4	50.7	45.0	41.4	39.8	38.3	36.7	35.1	34.6
85°	38.3	34.8	31.2	27.7	24.1	22.1	21.7	21.2	20.7	20.2	19.9
87.5°	14.1	13.2	12.3	11.5	10.7	10.6	11.2	12.0	12.6	13.3	13.4
90°	1.2	3.9	6.6	9.3	12.0	15.1	18.6	22.1	25.5	29.1	30.2
92.5°	22.5	21.8	21.0	20.3	19.5	20.5	23.1	25.7	28.4	31.0	32.7
95°	73.9	62.9	51.8	40.8	29.8	25.7	28.7	31.7	34.6	37.6	39.5
97.5°	148.5	143.6	138.6	133.7	128.8	116.6	97.2	77.9	58.4	39.0	41.2
100°	204.8	210.2	215.6	220.9	226.4	208.0	166.1	124.0	82.0	40.0	42.1
102.5°	268.8	272.7	276.5	280.4	284.4	263.3	217.4	171.5	125.6	79.7	73.0
105°	361.2	364.1	367.1	370.0	373.0	362.4	338.1	313.9	289.6	265.4	217.7
107.5°	458.6	461.0	463.4	465.7	468.1	471.2	475.0	478.8	482.7	486.4	451.5
110°	523.6	525.8	527.8	530.0	532.2	534.7	537.7	540.6	543.7	546.6	537.7



TEST NUMBER: P332424-830

CATALOG NUMBER: S123RDIW-S560D1320U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	585.6	587.6	589.5	591.4	593.3	595.8	598.8	601.7	604.7	607.7	607.8
115°	677.5	679.1	680.7	682.3	683.9	686.0	688.3	690.8	693.2	695.7	698.3
117.5°	766.5	768.5	770.4	772.4	774.4	776.0	777.2	778.5	779.8	781.0	783.2
120°	821.7	824.2	826.5	829.0	831.4	833.0	833.8	834.6	835.5	836.2	838.4
122.5°	878.0	880.0	881.9	883.9	885.9	887.4	888.4	889.5	890.5	891.6	893.1
125°	955.0	957.2	959.3	961.5	963.7	965.3	966.3	967.4	968.5	969.6	970.1
127.5°	1029.6	1031.8	1034.0	1036.1	1038.3	1040.0	1041.3	1042.6	1043.9	1045.2	1046.0
130°	1076.2	1078.4	1080.5	1082.7	1084.9	1086.5	1087.5	1088.6	1089.7	1090.7	1091.8
132.5°	1120.8	1122.9	1125.1	1127.3	1129.4	1131.0	1131.8	1132.7	1133.5	1134.3	1135.5
135°	1188.9	1190.5	1192.1	1193.7	1195.4	1196.7	1197.8	1198.9	1200.0	1201.1	1201.8
137.5°	1247.1	1249.2	1251.2	1253.2	1255.3	1256.6	1257.2	1257.8	1258.4	1259.0	1260.3
140°	1285.9	1287.5	1289.1	1290.7	1292.3	1293.5	1294.4	1295.1	1296.0	1296.8	1297.9
142.5°	1321.7	1323.3	1325.0	1326.6	1328.2	1329.5	1330.2	1331.1	1331.8	1332.7	1333.5
145°	1372.0	1373.9	1375.7	1377.6	1379.5	1380.6	1381.2	1381.8	1382.3	1382.8	1383.4
147.5°	1419.2	1420.4	1421.6	1422.9	1424.2	1425.0	1425.6	1426.1	1426.6	1427.2	1427.8
150°	1448.3	1449.1	1449.9	1450.7	1451.5	1452.2	1452.7	1453.2	1453.8	1454.3	1454.9
152.5°	1474.4	1474.8	1475.2	1475.6	1475.9	1476.3	1476.7	1477.0	1477.2	1477.6	1478.6
155°	1511.3	1510.8	1510.2	1509.7	1509.1	1509.0	1509.3	1509.6	1509.9	1510.0	1511.5
157.5°	1539.9	1539.8	1539.8	1539.7	1539.6	1539.5	1539.3	1539.0	1538.7	1538.4	1540.0
160°	1557.4	1557.1	1556.8	1556.5	1556.2	1556.0	1555.8	1555.5	1555.2	1554.9	1556.5
162.5°	1573.9	1573.1	1572.4	1571.7	1571.0	1570.6	1570.3	1570.0	1569.7	1569.4	1571.3
165°	1593.7	1592.9	1592.0	1591.3	1590.4	1590.0	1589.7	1589.4	1589.1	1588.8	1591.0
167.5°	1609.2	1608.2	1607.0	1606.0	1604.9	1604.4	1604.4	1604.4	1604.4	1604.4	1606.6
170°	1618.0	1616.8	1615.8	1614.8	1613.6	1613.1	1613.1	1613.1	1613.1	1613.1	1615.2
172.5°	1623.8	1622.5	1621.2	1619.9	1618.6	1618.1	1618.3	1618.5	1618.7	1618.9	1621.1
175°	1631.3	1629.9	1628.6	1627.2	1625.9	1625.3	1625.6	1625.9	1626.2	1626.5	1628.3
177.5°	1633.2	1632.1	1631.1	1630.0	1628.9	1628.5	1628.7	1628.9	1629.1	1629.4	1631.1
180°	1631.3	1631.3	1631.3	1631.3	1631.3	1631.3	1631.3	1631.3	1631.3	1631.3	1631.3



TEST NUMBER: P332424-830

CATALOG NUMBER: S123RDIW-S560D1320U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	890.2	890.2	890.2	890.2	890.2	890.2	890.2	890.2
2.5°	886.7	888.2	889.6	890.1	889.9	889.6	889.4	889.1
5°	880.8	882.3	883.7	884.3	884.0	883.6	883.4	883.0
7.5°	868.5	869.2	870.1	870.2	869.6	869.1	868.6	868.0
10°	857.3	857.5	857.6	857.3	856.6	855.7	855.0	854.1
12.5°	843.6	843.5	843.4	842.8	841.9	840.9	840.1	839.1
15°	819.4	818.5	817.7	816.7	815.6	814.5	813.4	812.3
17.5°	790.4	788.7	786.9	785.3	783.6	781.9	780.2	778.6
20°	770.5	768.5	766.4	764.4	762.4	760.5	758.6	756.7
22.5°	749.3	746.7	744.1	741.9	740.1	738.3	736.5	734.7
25°	714.5	711.1	707.8	705.2	703.5	701.7	699.9	698.1
27.5°	676.7	672.0	667.3	663.6	660.9	658.3	655.5	652.8
30°	649.7	644.2	638.9	634.8	632.3	629.7	627.1	624.5
32.5°	623.3	617.3	611.3	607.0	604.4	601.6	598.9	596.3
35°	584.0	577.1	570.2	565.3	562.4	559.6	556.7	553.7
37.5°	541.9	534.0	526.2	520.6	517.0	513.4	509.8	506.2
40°	512.6	504.2	495.9	489.8	486.2	482.5	478.8	475.0
42.5°	484.5	475.3	466.2	460.0	456.7	453.4	450.1	446.8
45°	443.1	433.9	424.8	418.3	414.4	410.6	406.7	402.8
47.5°	400.3	390.4	380.4	373.7	370.3	366.8	363.4	360.0
50°	371.5	361.5	351.6	344.7	341.0	337.3	333.7	330.0
52.5°	343.6	333.2	322.8	316.0	312.7	309.4	306.1	302.8
55°	302.0	292.7	283.3	277.1	273.9	270.7	267.5	264.3
57.5°	261.1	252.3	243.6	237.8	235.1	232.3	229.6	226.9
60°	235.4	226.7	218.0	212.4	209.6	206.9	204.2	201.4
62.5°	209.8	201.7	193.5	188.0	185.2	182.3	179.5	176.6
65°	173.4	165.6	157.7	152.9	151.2	149.4	147.6	145.8
67.5°	138.7	132.8	127.0	123.1	121.2	119.3	117.4	115.6
70°	117.3	111.7	106.0	102.4	100.6	98.9	97.1	95.3
72.5°	97.9	93.4	88.8	86.1	85.4	84.6	83.9	83.1
75°	73.3	71.7	70.1	69.2	68.8	68.5	68.1	67.9
77.5°	55.3	54.5	53.5	53.0	52.7	52.3	52.0	51.7
80°	44.5	44.0	43.5	43.2	42.9	42.5	42.2	41.8
82.5°	34.1	33.6	33.2	32.9	32.8	32.8	32.7	32.6
85°	19.6	19.2	18.9	18.8	18.8	18.8	18.8	18.8
87.5°	13.5	13.6	13.7	13.7	13.7	13.7	13.7	13.7
90°	31.2	32.3	33.4	34.2	34.8	35.3	35.8	36.4
92.5°	34.5	36.2	37.9	38.9	39.3	39.6	39.9	40.2
95°	41.4	43.3	45.1	46.1	46.1	46.1	46.1	46.1
97.5°	43.4	45.5	47.6	48.8	49.1	49.4	49.7	50.0
100°	44.3	46.5	48.6	49.9	50.0	50.3	50.6	50.9
102.5°	66.4	59.7	53.1	50.0	50.4	50.9	51.4	51.8
105°	170.0	122.4	74.7	51.2	51.7	52.2	52.8	53.3
107.5°	416.6	381.6	346.7	311.2	275.3	239.3	203.4	167.5
110°	528.8	519.9	511.0	487.3	448.8	410.3	371.8	333.3





TEST NUMBER: P332424-830

CATALOG NUMBER: S123RDIW-S560D1320U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	608.0	608.1	608.3	604.4	596.2	588.1	579.9	571.8
115°	701.1	703.7	706.4	708.3	709.4	710.5	711.5	712.7
117.5°	785.3	787.4	789.6	790.8	791.0	791.2	791.5	791.6
120°	840.6	842.7	844.9	845.9	845.9	845.9	845.9	845.9
122.5°	894.6	896.1	897.6	898.4	898.6	898.8	899.1	899.3
125°	970.6	971.2	971.7	972.2	972.8	973.4	973.8	974.4
127.5°	1046.9	1047.7	1048.7	1048.8	1048.3	1047.7	1047.2	1046.6
130°	1092.9	1094.0	1095.0	1095.3	1094.8	1094.3	1093.7	1093.2
132.5°	1136.5	1137.6	1138.7	1138.9	1138.1	1137.4	1136.6	1135.9
135°	1202.7	1203.4	1204.3	1204.3	1203.4	1202.7	1201.8	1201.1
137.5°	1261.6	1262.8	1264.1	1264.5	1263.9	1263.5	1262.9	1262.3
140°	1298.9	1300.0	1301.1	1301.4	1300.8	1300.2	1299.8	1299.2
142.5°	1334.4	1335.2	1336.1	1336.1	1335.4	1334.6	1333.9	1333.1
145°	1383.9	1384.4	1385.0	1385.3	1385.3	1385.3	1385.3	1385.3
147.5°	1428.2	1428.8	1429.4	1429.0	1427.8	1426.5	1425.3	1424.0
150°	1455.4	1455.9	1456.5	1456.3	1455.6	1454.7	1454.0	1453.1
152.5°	1479.5	1480.5	1481.5	1481.4	1480.1	1478.8	1477.6	1476.4
155°	1512.8	1514.1	1515.5	1515.3	1513.7	1512.1	1510.5	1508.9
157.5°	1541.7	1543.3	1544.9	1544.6	1542.6	1540.5	1538.3	1536.3
160°	1558.1	1559.8	1561.4	1561.2	1559.3	1557.5	1555.6	1553.7
162.5°	1573.1	1575.0	1576.8	1576.9	1575.2	1573.6	1571.9	1570.2
165°	1593.2	1595.3	1597.5	1597.6	1595.7	1593.8	1592.0	1590.1
167.5°	1608.7	1610.8	1613.0	1613.0	1610.8	1608.7	1606.6	1604.4
170°	1617.4	1619.6	1621.7	1621.7	1619.6	1617.4	1615.2	1613.1
172.5°	1623.2	1625.4	1627.6	1627.4	1625.0	1622.7	1620.3	1618.0
175°	1630.2	1632.1	1634.0	1633.8	1631.7	1629.6	1627.4	1625.2
177.5°	1632.8	1634.6	1636.3	1636.1	1633.9	1631.7	1629.6	1627.4
180°	1631.3	1631.3	1631.3	1631.3	1631.3	1631.3	1631.3	1631.3

(END OF REPORT)