

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332192-930

Luminaire Tested: **S123DIW-S1000D1030U930-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332192-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S1000D1030U930-4F0-1E-UDD-A
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1030 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6820.6 lumens
Efficiency: N/A
Efficacy: 111.4 lumens/watt
Spacing Criteria (0/90/45): 1.37 / 1.23 / 1.49
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 61.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332192-930

CATALOG NUMBER: S123DIW-S1000D1030U930-4F0-1E-UDD-A

Luminous Intensity Polar Plot

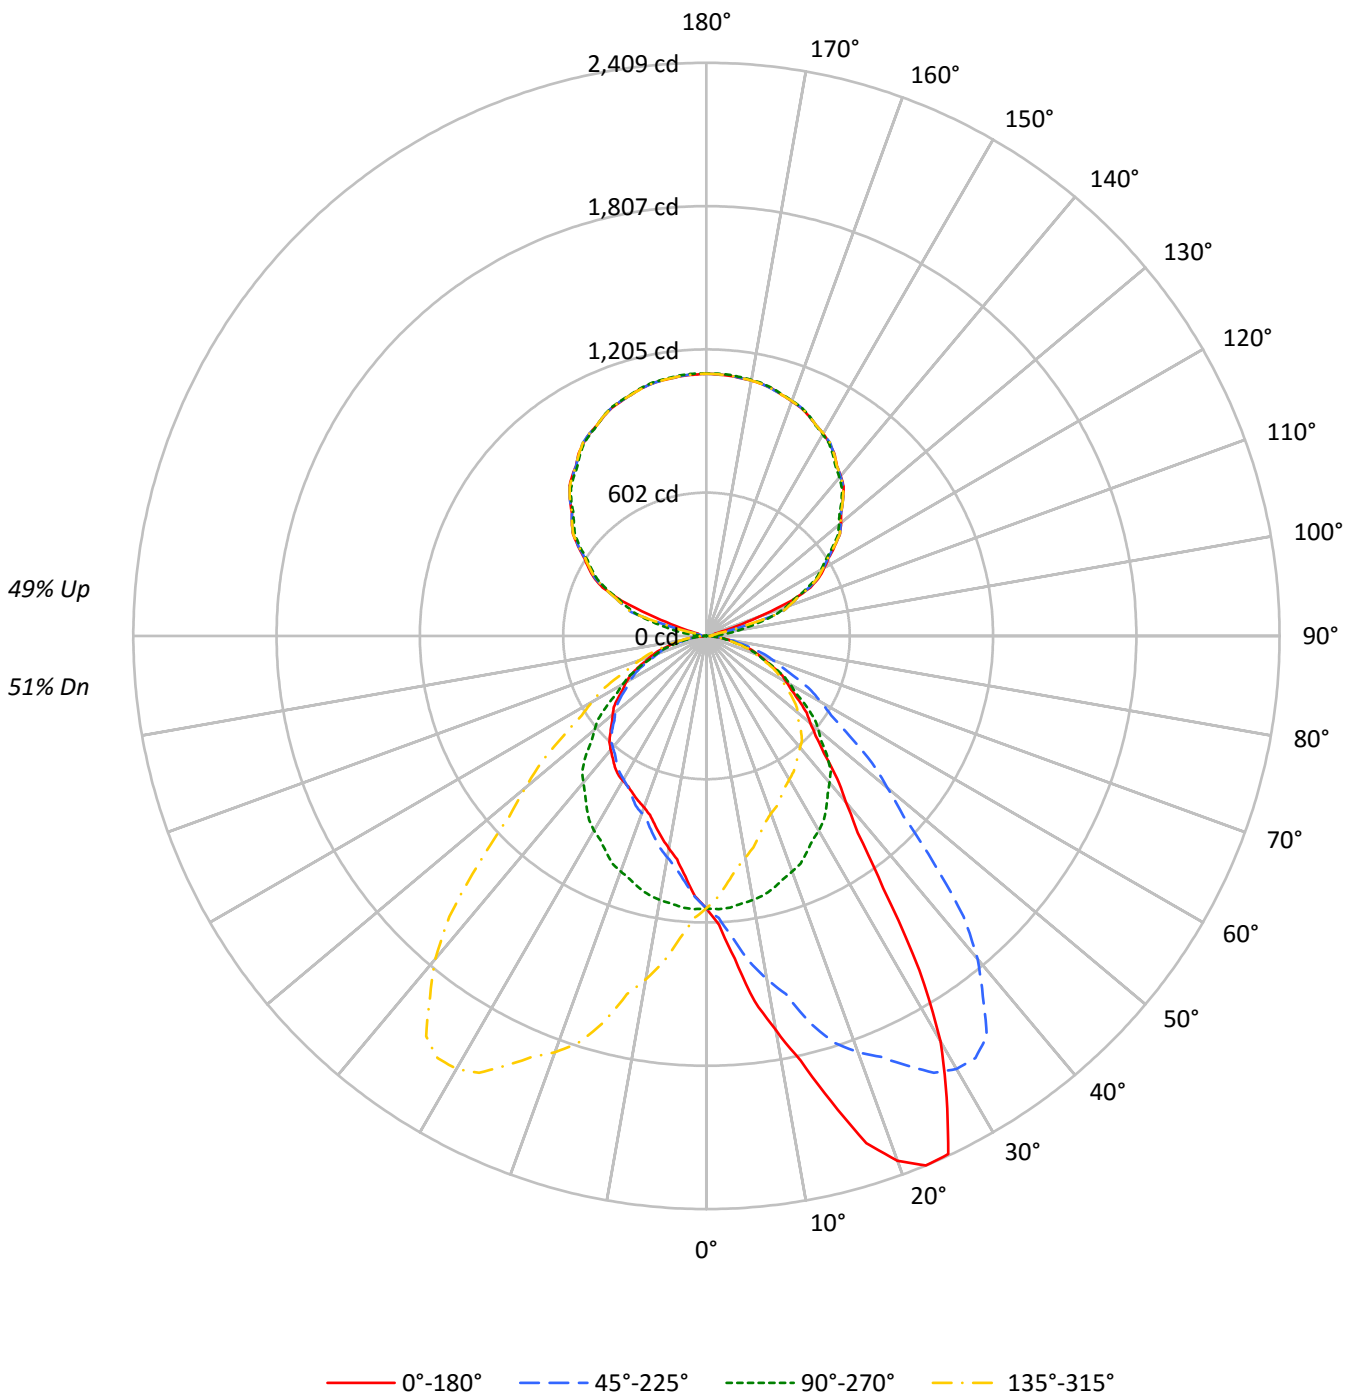



TEST NUMBER: P332192-930

CATALOG NUMBER: S123DIW-S1000D1030U930-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	51
1	98	94	90	87	91	87	84	81	74	71	69	62	60	59	51	50	49	43
2	90	82	76	71	83	76	71	67	65	61	58	55	52	49	45	43	41	37
3	82	73	65	60	75	67	61	56	58	53	49	48	45	42	40	37	35	31
4	75	64	57	51	69	60	53	48	51	46	42	43	39	36	36	33	31	27
5	69	57	49	44	63	53	46	41	46	40	36	39	35	31	32	29	27	24
6	64	52	44	38	59	48	41	36	41	36	32	35	31	28	29	26	24	21
7	59	47	39	33	54	43	36	31	38	32	28	32	28	24	27	24	21	18
8	55	42	35	29	50	40	33	28	34	29	25	29	25	22	25	21	19	17
9	51	39	31	26	47	36	29	25	31	26	22	27	23	20	23	19	17	15
10	47	35	28	23	44	33	27	22	29	24	20	25	21	18	21	18	15	14

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	12326	12326	12326	12326
5°	14699	12379	10970	12379
10°	18398	12316	9908	12316
15°	22566	12217	9225	12217
20°	26882	12062	8782	12062
25°	28544	11873	8684	11873
30°	24467	11737	8730	11737
35°	17015	11540	8821	11540
40°	12816	11311	8793	11311
45°	10641	10971	8681	10971
50°	9532	10275	8602	10275
55°	8912	9526	8496	9526
60°	8359	8742	8409	8742
65°	7857	7969	8140	7969
70°	7371	7091	7751	7091
75°	6600	6209	7107	6209
80°	5777	5089	6118	5089
85°	4520	3693	4113	3693



TEST NUMBER: P332192-930

CATALOG NUMBER: S123DIW-S1000D1030U930-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	112.8	1.7
10°-20°	361.7	5.3
20°-30°	607.1	8.9
30°-40°	687.4	10.1
40°-50°	616.4	9.0
50°-60°	497.4	7.3
60°-70°	346.6	5.1
70°-80°	182.2	2.7
80°-90°	47.6	0.7
90°-100°	40.1	0.6
100°-110°	191.0	2.8
110°-120°	458.8	6.7
120°-130°	584.2	8.6
130°-140°	624.2	9.2
140°-150°	583.7	8.6
150°-160°	470.8	6.9
160°-170°	303.9	4.5
170°-180°	104.7	1.5
0°-30°	1081.6	15.9
0°-40°	1768.9	25.9
0°-60°	2882.8	42.3
0°-90°	3459.3	50.7
90°-120°	689.8	10.1
90°-150°	2481.9	36.4
90°-180°	3361.0	49.3
0°-180°	6820.6	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1145	1145	1145	1145	1145	
5°	1360	1146	1015	1146	1360	141
15°	2025	1096	828	1096	2025	585
25°	2403	1000	731	1000	2403	1054
35°	1295	878	671	878	1295	841
45°	699	721	570	721	699	553
55°	475	508	453	508	475	426
65°	308	313	320	313	308	307
75°	159	149	171	149	159	170
85°	37	30	33	30	37	44
90°	24	1	24	1	24	13
95°	31	50	31	50	31	26
105°	36	244	36	244	36	82
115°	482	458	482	458	482	445
125°	658	645	658	645	658	588
135°	812	803	812	803	812	626
145°	936	927	936	927	936	584
155°	1020	1021	1020	1021	1020	470
165°	1074	1077	1074	1077	1074	303
175°	1098	1102	1098	1102	1098	105
180°	1102	1102	1102	1102	1102	



TEST NUMBER: P332192-930

CATALOG NUMBER: S123DIW-S1000D1030U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1
2.5°	1215.2	1214.4	1212.1	1213.9	1210.4	1205.5	1205.0	1200.6	1187.7	1186.8	1183.3
5°	1360.4	1355.9	1355.4	1354.9	1347.0	1336.5	1316.5	1314.9	1288.3	1275.0	1258.8
7.5°	1548.3	1550.7	1542.5	1535.5	1511.7	1496.1	1474.6	1447.2	1414.5	1381.4	1359.3
10°	1683.3	1701.6	1678.9	1663.3	1648.9	1621.7	1590.1	1550.7	1511.3	1465.3	1430.3
12.5°	1828.0	1837.0	1832.4	1817.8	1795.4	1754.0	1697.9	1654.6	1618.3	1541.6	1510.6
15°	2025.0	2058.9	2037.3	1987.3	1988.4	1949.1	1875.8	1795.4	1752.6	1685.5	1594.0
17.5°	2235.0	2239.2	2230.0	2188.3	2160.6	2106.5	2038.9	1961.8	1875.3	1794.0	1697.0
20°	2346.8	2343.5	2324.1	2302.4	2254.7	2212.6	2138.8	2052.8	1941.8	1861.9	1756.0
22.5°	2409.0	2403.4	2394.2	2376.1	2336.4	2291.2	2224.9	2130.9	2025.3	1915.2	1792.8
25°	2403.4	2410.6	2411.7	2406.8	2392.9	2365.7	2313.5	2238.6	2133.2	1991.8	1864.2
27.5°	2185.9	2196.2	2225.8	2252.1	2281.5	2311.5	2307.5	2270.3	2192.3	2070.0	1914.1
30°	1968.5	1946.3	2001.2	2070.5	2117.7	2200.9	2247.5	2250.3	2206.4	2101.6	1949.5
32.5°	1666.6	1691.0	1715.3	1800.7	1903.7	1997.2	2089.9	2164.6	2173.2	2103.4	1970.4
35°	1294.9	1325.4	1369.8	1414.2	1525.2	1620.6	1783.7	1925.7	2038.9	2053.9	1972.3
37.5°	1043.5	1058.6	1086.6	1131.1	1203.7	1316.9	1443.1	1622.6	1786.6	1908.5	1913.8
40°	912.1	916.6	948.2	982.0	1040.8	1134.0	1247.7	1406.4	1602.8	1773.2	1844.2
42.5°	813.6	823.3	836.7	869.3	916.1	986.2	1091.9	1223.1	1403.1	1599.1	1738.1
45°	699.0	710.1	718.4	740.1	773.4	820.5	894.4	1014.2	1151.2	1353.7	1540.7
47.5°	623.4	624.3	630.5	646.8	669.4	704.8	757.0	834.0	959.8	1124.1	1316.0
50°	569.2	578.1	580.3	593.0	610.8	636.9	680.2	745.7	848.9	993.1	1169.5
52.5°	531.1	533.7	540.0	549.2	564.7	585.0	622.5	673.8	754.7	877.7	1039.9
55°	474.9	474.9	481.0	488.2	497.1	515.4	540.4	578.1	639.7	735.2	869.4
57.5°	423.0	425.7	430.1	432.3	439.9	451.9	472.8	501.4	547.4	620.9	727.6
60°	388.3	393.4	392.8	397.2	403.9	413.4	431.0	454.4	495.5	554.2	644.2
62.5°	358.2	357.8	357.8	363.1	369.7	378.7	390.3	410.4	445.3	497.4	574.0
65°	308.5	307.4	311.3	314.5	316.8	323.4	332.3	350.1	373.4	412.2	471.6
67.5°	264.3	261.1	263.2	264.3	268.1	273.3	281.6	292.6	311.1	342.3	387.0
70°	234.2	231.4	230.8	231.9	235.2	239.1	245.2	255.8	273.0	297.9	330.7
72.5°	203.1	201.1	201.1	203.5	205.0	207.6	211.9	221.6	235.2	254.0	284.5
75°	158.7	158.7	158.7	159.2	160.9	163.1	166.4	171.5	182.0	195.3	215.8
77.5°	119.0	118.9	118.1	118.1	120.5	121.5	122.3	126.9	132.8	141.8	156.8
80°	93.2	90.4	91.6	93.2	94.3	94.9	96.5	97.7	102.6	107.6	118.1
82.5°	69.2	66.9	67.1	69.7	69.9	70.4	72.2	73.7	75.6	80.1	85.8
85°	36.6	36.6	37.2	37.2	37.7	37.2	38.8	39.4	39.4	42.2	45.5
87.5°	18.3	17.3	17.6	18.0	17.5	17.9	18.1	18.4	18.8	19.0	19.0
90°	24.5	24.2	23.8	23.5	23.1	22.6	21.9	21.1	20.4	19.6	17.3
92.5°	27.1	27.0	26.7	26.5	26.3	25.6	24.5	23.3	22.1	21.0	19.2
95°	31.1	31.1	31.1	31.1	31.1	30.5	29.2	28.0	26.7	25.4	23.4
97.5°	33.8	33.6	33.3	33.2	33.0	32.2	30.7	29.3	27.8	26.3	23.9
100°	34.4	34.2	34.0	33.8	33.7	32.9	31.4	29.9	28.5	27.0	25.4
102.5°	35.1	34.7	34.4	34.1	33.8	33.8	32.9	31.4	29.9	28.5	27.0
105°	36.0	35.6	35.3	35.0	34.6	34.6	33.8	32.9	31.4	29.9	28.5
107.5°	113.2	137.5	161.8	186.0	210.3	234.2	257.9	281.4	305.1	328.7	326.1
110°	225.2	251.2	277.2	303.3	329.3	345.3	351.3	357.3	363.3	369.3	367.3



TEST NUMBER: P332192-930

CATALOG NUMBER: S123DIW-S1000D1030U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	386.4	391.8	397.4	402.8	408.3	411.0	410.9	410.8	410.7	410.6	408.6
115°	481.5	480.8	480.0	479.3	478.6	477.4	475.5	473.7	471.9	470.0	468.4
117.5°	534.9	534.8	534.6	534.4	534.3	533.5	532.1	530.6	529.1	527.7	526.8
120°	571.6	571.6	571.6	571.6	571.6	570.9	569.4	567.9	566.5	565.0	564.5
122.5°	607.6	607.5	607.3	607.2	607.1	606.4	605.4	604.4	603.4	602.3	601.7
125°	658.4	658.0	657.6	657.3	657.0	656.6	656.2	655.8	655.5	655.1	654.4
127.5°	707.2	707.6	707.9	708.3	708.7	708.6	707.9	707.4	706.8	706.2	705.3
130°	738.7	739.0	739.4	739.7	740.1	739.9	739.2	738.5	737.8	737.0	736.3
132.5°	767.4	768.0	768.5	769.0	769.5	769.4	768.7	767.9	767.2	766.5	765.9
135°	811.5	812.0	812.6	813.2	813.7	813.7	813.2	812.6	812.0	811.5	810.8
137.5°	853.0	853.3	853.7	854.0	854.4	854.2	853.3	852.4	851.5	850.7	850.3
140°	877.8	878.2	878.6	879.0	879.3	879.1	878.4	877.7	876.9	876.2	875.6
142.5°	900.7	901.3	901.8	902.3	902.8	902.8	902.2	901.6	901.1	900.4	899.9
145°	936.0	936.0	936.0	936.0	936.0	935.8	935.5	935.1	934.7	934.3	934.0
147.5°	962.2	963.0	963.8	964.7	965.6	965.8	965.4	965.1	964.7	964.3	963.9
150°	981.9	982.4	982.9	983.5	984.1	984.1	983.7	983.4	983.0	982.7	982.3
152.5°	997.6	998.4	999.2	1000.0	1000.9	1001.0	1000.4	999.7	999.1	998.4	998.2
155°	1019.5	1020.6	1021.7	1022.8	1023.9	1024.0	1023.0	1022.1	1021.2	1020.3	1020.2
157.5°	1038.0	1039.4	1040.9	1042.3	1043.7	1043.8	1042.8	1041.7	1040.6	1039.5	1039.7
160°	1049.8	1051.1	1052.4	1053.6	1054.9	1055.0	1053.9	1052.8	1051.7	1050.7	1050.8
162.5°	1060.9	1062.1	1063.2	1064.4	1065.4	1065.4	1064.2	1062.9	1061.7	1060.5	1060.6
165°	1074.4	1075.6	1076.9	1078.2	1079.5	1079.4	1077.9	1076.4	1075.1	1073.6	1073.7
167.5°	1084.0	1085.5	1087.0	1088.4	1089.9	1089.9	1088.4	1087.0	1085.5	1084.0	1084.0
170°	1090.0	1091.4	1092.8	1094.3	1095.8	1095.8	1094.3	1092.8	1091.4	1090.0	1090.0
172.5°	1093.2	1094.8	1096.4	1098.0	1099.6	1099.7	1098.2	1096.8	1095.4	1093.9	1093.7
175°	1098.1	1099.6	1101.1	1102.5	1104.0	1104.1	1102.8	1101.5	1100.2	1098.9	1098.8
177.5°	1099.6	1101.1	1102.5	1104.0	1105.5	1105.5	1104.4	1103.3	1102.1	1100.9	1100.7
180°	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2



TEST NUMBER: P332192-930

CATALOG NUMBER: S123DIW-S1000D1030U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1
2.5°	1180.6	1177.0	1173.5	1167.3	1162.0	1154.5	1152.2	1149.6	1141.6	1134.5	1129.1
5°	1252.7	1239.4	1220.0	1202.2	1187.8	1168.4	1157.3	1145.7	1129.0	1114.0	1101.9
7.5°	1328.2	1302.0	1271.9	1239.2	1208.8	1179.5	1155.8	1134.8	1111.5	1089.4	1072.2
10°	1388.1	1350.4	1308.2	1262.7	1223.9	1186.2	1154.5	1126.8	1096.8	1070.7	1049.1
12.5°	1456.5	1400.5	1342.4	1287.1	1241.2	1188.9	1150.6	1115.2	1081.3	1049.9	1025.6
15°	1537.3	1466.3	1397.6	1321.5	1251.6	1186.2	1140.7	1096.3	1056.9	1024.7	993.7
17.5°	1611.0	1530.6	1439.9	1347.5	1263.1	1185.5	1121.9	1071.6	1022.4	983.0	952.0
20°	1652.8	1561.2	1458.6	1362.6	1269.4	1182.8	1113.0	1053.0	999.7	958.1	923.2
22.5°	1688.7	1581.6	1475.4	1372.8	1268.9	1175.7	1096.5	1034.9	977.1	936.4	899.2
25°	1726.0	1597.8	1491.3	1370.9	1255.0	1158.5	1069.7	999.7	942.1	894.4	856.1
27.5°	1757.9	1596.8	1470.3	1340.8	1233.0	1136.2	1041.5	966.5	905.2	853.4	814.6
30°	1779.2	1599.0	1448.6	1320.5	1211.7	1111.8	1019.7	944.3	880.0	827.2	790.6
32.5°	1792.6	1597.6	1428.6	1292.0	1177.9	1089.6	996.2	918.1	852.0	800.1	764.8
35°	1800.3	1587.9	1394.2	1233.3	1123.5	1037.5	959.3	878.2	808.9	760.7	720.7
37.5°	1784.8	1567.3	1354.3	1176.7	1056.5	971.8	906.0	837.0	770.6	717.5	683.1
40°	1760.4	1554.0	1323.2	1136.8	1010.3	928.7	872.7	805.0	739.6	689.1	656.9
42.5°	1713.8	1526.9	1289.1	1092.4	962.4	880.8	829.2	772.7	710.7	663.3	631.1
45°	1600.0	1468.0	1237.8	1025.8	891.5	807.2	761.7	720.7	664.6	618.6	590.8
47.5°	1442.3	1379.3	1163.7	955.6	817.7	736.5	689.3	656.2	615.3	578.1	551.5
50°	1332.6	1306.6	1113.5	907.7	768.4	689.1	643.6	613.6	584.2	547.1	522.6
52.5°	1206.2	1222.2	1054.9	857.9	718.3	640.3	597.5	573.6	546.9	516.4	495.1
55°	1028.1	1086.3	953.7	774.5	643.6	569.2	528.7	507.6	492.1	469.4	451.0
57.5°	861.3	935.4	844.3	688.5	570.2	506.1	467.2	444.3	434.3	422.4	408.0
60°	762.3	835.5	766.2	630.8	521.0	459.9	425.5	406.1	396.2	387.8	375.6
62.5°	674.0	748.1	689.8	572.3	472.5	416.0	386.0	367.0	359.3	355.0	344.5
65°	552.6	616.4	577.6	481.0	403.3	353.4	326.2	312.9	305.7	304.0	297.3
67.5°	449.7	498.3	470.0	399.0	337.9	294.7	271.7	260.3	254.8	254.2	249.2
70°	382.3	427.8	406.1	341.8	289.0	255.2	235.2	225.3	221.9	221.4	218.6
72.5°	329.9	361.6	344.4	290.7	250.0	219.2	204.6	194.2	190.4	191.2	189.3
75°	244.1	268.0	258.0	220.8	188.1	168.1	155.9	149.3	145.9	147.6	145.4
77.5°	175.6	190.8	181.7	156.0	135.8	121.4	112.4	108.3	105.3	105.2	104.2
80°	132.6	141.5	136.5	120.9	104.3	92.1	84.9	82.1	80.5	79.9	79.3
82.5°	94.4	102.0	96.1	85.4	74.1	66.8	62.7	59.0	57.8	58.1	57.6
85°	47.7	50.5	48.3	41.6	37.2	33.8	31.6	29.9	28.9	29.4	28.3
87.5°	19.4	19.4	17.6	15.4	14.1	12.4	12.1	10.8	10.3	10.7	10.6
90°	14.9	12.6	10.2	8.1	6.3	4.5	2.6	0.8	2.6	4.5	6.3
92.5°	17.4	15.7	13.9	13.2	13.7	14.2	14.8	15.2	14.8	14.2	13.7
95°	21.4	19.4	17.4	20.1	27.6	35.1	42.5	50.0	42.5	35.1	27.6
97.5°	52.6	65.7	78.8	87.0	90.3	93.7	97.0	100.4	97.0	93.7	90.3
100°	83.8	112.2	140.6	153.0	149.3	145.7	142.0	138.4	142.0	145.7	149.3
102.5°	115.9	146.9	177.9	192.1	189.5	186.9	184.3	181.6	184.3	186.9	189.5
105°	212.1	228.4	244.8	252.0	250.1	248.0	246.1	244.0	246.1	248.0	250.1
107.5°	323.5	321.0	318.4	316.3	314.7	313.1	311.4	309.9	311.4	313.1	314.7
110°	365.3	363.3	361.3	359.5	358.2	356.7	355.2	353.8	355.2	356.7	358.2



TEST NUMBER: P332192-930

CATALOG NUMBER: S123DIW-S1000D1030U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	406.6	404.6	402.6	401.0	399.7	398.3	397.0	395.7	397.0	398.3	399.7
115°	466.8	465.1	463.5	462.1	461.1	459.9	458.9	457.8	458.9	459.9	461.1
117.5°	526.0	525.2	524.3	523.3	521.9	520.6	519.2	517.9	519.2	520.6	521.9
120°	563.9	563.4	562.9	561.7	560.1	558.5	556.8	555.2	556.8	558.5	560.1
122.5°	601.0	600.3	599.6	598.6	597.2	595.9	594.5	593.2	594.5	595.9	597.2
125°	653.6	652.9	652.2	651.1	649.6	648.2	646.8	645.3	646.8	648.2	649.6
127.5°	704.5	703.6	702.7	701.6	700.1	698.6	697.2	695.7	697.2	698.6	700.1
130°	735.6	734.8	734.1	733.0	731.6	730.1	728.6	727.2	728.6	730.1	731.6
132.5°	765.3	764.8	764.2	763.1	761.7	760.2	758.8	757.3	758.8	760.2	761.7
135°	810.1	809.3	808.6	807.7	806.6	805.5	804.5	803.3	804.5	805.5	806.6
137.5°	849.9	849.5	849.1	848.2	846.8	845.4	844.0	842.6	844.0	845.4	846.8
140°	875.1	874.6	874.0	873.2	872.1	871.1	869.9	868.9	869.9	871.1	872.1
142.5°	899.4	898.8	898.3	897.5	896.3	895.3	894.1	893.1	894.1	895.3	896.3
145°	933.6	933.3	932.9	932.1	930.8	929.5	928.2	927.0	928.2	929.5	930.8
147.5°	963.6	963.2	962.9	962.3	961.4	960.6	959.8	959.0	959.8	960.6	961.4
150°	981.9	981.5	981.2	980.7	980.2	979.7	979.1	978.6	979.1	979.7	980.2
152.5°	997.9	997.8	997.5	997.3	997.0	996.8	996.5	996.3	996.5	996.8	997.0
155°	1019.9	1019.8	1019.6	1019.7	1020.1	1020.4	1020.8	1021.2	1020.8	1020.4	1020.1
157.5°	1039.8	1040.1	1040.2	1040.3	1040.4	1040.4	1040.5	1040.5	1040.5	1040.4	1040.4
160°	1051.0	1051.2	1051.3	1051.6	1051.7	1051.9	1052.1	1052.3	1052.1	1051.9	1051.7
162.5°	1060.9	1061.0	1061.2	1061.5	1062.0	1062.5	1062.9	1063.4	1062.9	1062.5	1062.0
165°	1073.9	1074.1	1074.3	1074.6	1075.2	1075.8	1076.3	1076.8	1076.3	1075.8	1075.2
167.5°	1084.0	1084.0	1084.0	1084.4	1085.2	1085.9	1086.6	1087.3	1086.6	1085.9	1085.2
170°	1090.0	1090.0	1090.0	1090.3	1091.0	1091.8	1092.5	1093.2	1092.5	1091.8	1091.0
172.5°	1093.6	1093.4	1093.3	1093.6	1094.5	1095.4	1096.3	1097.1	1096.3	1095.4	1094.5
175°	1098.6	1098.4	1098.2	1098.6	1099.5	1100.4	1101.3	1102.2	1101.3	1100.4	1099.5
177.5°	1100.7	1100.5	1100.3	1100.7	1101.4	1102.1	1102.8	1103.5	1102.8	1102.1	1101.4
180°	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2



TEST NUMBER: P332192-930

CATALOG NUMBER: S123DIW-S1000D1030U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1
2.5°	1126.0	1122.9	1118.5	1111.8	1106.5	1098.0	1098.0	1099.4	1099.4	1098.9	1098.0
5°	1091.8	1083.5	1073.6	1061.9	1049.7	1037.5	1035.3	1030.9	1027.5	1025.2	1022.5
7.5°	1055.8	1041.1	1026.5	1010.2	995.3	983.0	974.4	967.4	962.8	957.9	954.4
10°	1031.4	1013.1	995.9	978.7	959.8	944.9	935.4	928.7	923.7	919.3	917.1
12.5°	1002.5	981.5	962.6	946.2	925.6	910.2	901.2	898.1	892.3	882.9	878.0
15°	960.3	940.9	918.2	893.2	883.2	864.4	853.9	848.9	845.5	838.3	836.1
17.5°	924.3	898.9	873.3	854.8	836.2	820.9	815.0	808.8	804.4	798.5	796.7
20°	895.4	872.7	849.4	829.4	810.0	793.4	788.4	783.9	779.5	776.7	774.5
22.5°	866.2	843.4	824.1	805.4	784.7	773.8	768.4	763.5	760.4	758.6	756.3
25°	825.0	805.0	783.4	766.7	750.1	742.9	739.6	736.8	734.6	731.8	731.2
27.5°	788.1	766.4	748.9	733.4	721.4	715.3	712.2	710.8	711.3	712.2	712.9
30°	760.7	740.7	726.3	712.9	701.8	696.3	695.7	695.7	698.0	698.5	699.6
32.5°	735.3	718.9	704.5	691.6	683.2	679.4	681.5	681.5	683.3	684.8	686.7
35°	698.5	684.0	672.9	661.9	654.7	656.3	657.5	658.5	661.3	664.6	666.9
37.5°	663.3	650.8	639.3	630.6	627.3	630.2	632.9	635.3	638.5	641.0	643.3
40°	638.1	628.6	617.5	609.8	610.8	612.5	614.7	617.5	620.3	621.9	624.2
42.5°	614.5	604.6	596.2	589.8	591.3	593.5	594.8	596.2	599.4	602.4	603.7
45°	578.7	570.9	563.1	559.2	560.4	561.5	562.6	564.3	567.0	569.2	569.8
47.5°	538.3	533.0	527.7	524.0	525.7	525.3	526.8	530.3	531.2	532.5	535.6
50°	512.7	507.6	501.6	500.4	500.4	500.4	501.0	505.4	505.4	507.6	509.9
52.5°	484.2	481.0	477.1	475.2	474.3	474.3	476.5	478.8	479.7	482.8	485.0
55°	442.2	438.9	435.5	433.8	432.8	433.8	438.3	439.4	442.2	443.8	445.5
57.5°	398.4	395.8	393.1	392.2	392.0	393.5	395.9	399.3	399.9	405.0	407.6
60°	369.5	365.6	363.4	363.4	362.3	367.3	366.2	371.7	372.8	376.2	380.0
62.5°	339.7	334.5	333.6	333.6	335.3	336.6	338.2	340.6	343.6	347.7	350.7
65°	291.8	289.0	292.9	292.4	291.3	294.6	294.6	297.3	300.7	304.6	310.7
67.5°	246.5	245.0	245.3	245.3	247.0	248.9	250.5	252.9	256.9	261.0	265.0
70°	215.8	217.5	214.7	217.0	218.6	219.2	220.3	223.6	228.0	230.8	235.2
72.5°	186.1	186.0	186.3	187.2	188.8	189.9	190.9	194.8	199.6	201.9	205.5
75°	143.2	142.6	144.2	144.2	147.0	148.1	149.3	150.9	155.3	158.7	161.4
77.5°	104.5	105.2	104.8	106.7	106.0	106.2	109.7	111.3	111.8	118.3	119.8
80°	78.8	79.9	80.5	81.0	81.5	80.5	84.3	86.0	86.0	89.8	92.6
82.5°	56.6	57.2	58.7	59.3	59.4	60.5	60.8	62.0	63.3	65.1	68.6
85°	28.3	29.9	30.5	29.9	30.5	29.4	31.1	31.6	32.2	32.2	32.2
87.5°	10.5	11.3	11.4	12.3	12.3	13.3	13.4	12.6	12.8	14.3	12.6
90°	8.1	10.2	12.6	14.9	17.3	19.6	20.4	21.1	21.9	22.6	23.1
92.5°	13.2	13.9	15.7	17.4	19.2	21.0	22.1	23.3	24.5	25.6	26.3
95°	20.1	17.4	19.4	21.4	23.4	25.4	26.7	28.0	29.2	30.5	31.1
97.5°	87.0	78.8	65.7	52.6	39.5	26.3	27.8	29.3	30.7	32.2	33.0
100°	153.0	140.6	112.2	83.8	55.4	27.0	28.5	29.9	31.4	32.9	33.7
102.5°	192.1	177.9	146.9	115.9	84.9	53.9	49.4	44.8	40.4	35.8	33.8
105°	252.0	244.8	228.4	212.1	195.8	179.4	147.2	115.0	82.7	50.5	34.6
107.5°	316.3	318.4	321.0	323.5	326.1	328.7	305.1	281.4	257.9	234.2	210.3
110°	359.5	361.3	363.3	365.3	367.3	369.3	363.3	357.3	351.3	345.3	329.3



TEST NUMBER: P332192-930

CATALOG NUMBER: S123DIW-S1000D1030U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	401.0	402.6	404.6	406.6	408.6	410.6	410.7	410.8	410.9	411.0	408.3
115°	462.1	463.5	465.1	466.8	468.4	470.0	471.9	473.7	475.5	477.4	478.6
117.5°	523.3	524.3	525.2	526.0	526.8	527.7	529.1	530.6	532.1	533.5	534.3
120°	561.7	562.9	563.4	563.9	564.5	565.0	566.5	567.9	569.4	570.9	571.6
122.5°	598.6	599.6	600.3	601.0	601.7	602.3	603.4	604.4	605.4	606.4	607.1
125°	651.1	652.2	652.9	653.6	654.4	655.1	655.5	655.8	656.2	656.6	657.0
127.5°	701.6	702.7	703.6	704.5	705.3	706.2	706.8	707.4	707.9	708.6	708.7
130°	733.0	734.1	734.8	735.6	736.3	737.0	737.8	738.5	739.2	739.9	740.1
132.5°	763.1	764.2	764.8	765.3	765.9	766.5	767.2	767.9	768.7	769.4	769.5
135°	807.7	808.6	809.3	810.1	810.8	811.5	812.0	812.6	813.2	813.7	813.7
137.5°	848.2	849.1	849.5	849.9	850.3	850.7	851.5	852.4	853.3	854.2	854.4
140°	873.2	874.0	874.6	875.1	875.6	876.2	876.9	877.7	878.4	879.1	879.3
142.5°	897.5	898.3	898.8	899.4	899.9	900.4	901.1	901.6	902.2	902.8	902.8
145°	932.1	932.9	933.3	933.6	934.0	934.3	934.7	935.1	935.5	935.8	936.0
147.5°	962.3	962.9	963.2	963.6	963.9	964.3	964.7	965.1	965.4	965.8	965.6
150°	980.7	981.2	981.5	981.9	982.3	982.7	983.0	983.4	983.7	984.1	984.1
152.5°	997.3	997.5	997.8	997.9	998.2	998.4	999.1	999.7	1000.4	1001.0	1000.9
155°	1019.7	1019.6	1019.8	1019.9	1020.2	1020.3	1021.2	1022.1	1023.0	1024.0	1023.9
157.5°	1040.3	1040.2	1040.1	1039.8	1039.7	1039.5	1040.6	1041.7	1042.8	1043.8	1043.7
160°	1051.6	1051.3	1051.2	1051.0	1050.8	1050.7	1051.7	1052.8	1053.9	1055.0	1054.9
162.5°	1061.5	1061.2	1061.0	1060.9	1060.6	1060.5	1061.7	1062.9	1064.2	1065.4	1065.4
165°	1074.6	1074.3	1074.1	1073.9	1073.7	1073.6	1075.1	1076.4	1077.9	1079.4	1079.5
167.5°	1084.4	1084.0	1084.0	1084.0	1084.0	1084.0	1085.5	1087.0	1088.4	1089.9	1089.9
170°	1090.3	1090.0	1090.0	1090.0	1090.0	1090.0	1091.4	1092.8	1094.3	1095.8	1095.8
172.5°	1093.6	1093.3	1093.4	1093.6	1093.7	1093.9	1095.4	1096.8	1098.2	1099.7	1099.6
175°	1098.6	1098.2	1098.4	1098.6	1098.8	1098.9	1100.2	1101.5	1102.8	1104.1	1104.0
177.5°	1100.7	1100.3	1100.5	1100.7	1100.7	1100.9	1102.1	1103.3	1104.4	1105.5	1105.5
180°	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2



TEST NUMBER: P332192-930

CATALOG NUMBER: S123DIW-S1000D1030U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1
2.5°	1094.9	1094.5	1097.6	1095.4	1097.6	1094.5	1094.9	1098.0	1098.9	1099.4	1099.4
5°	1019.2	1020.8	1015.3	1015.3	1015.3	1020.8	1019.2	1022.5	1025.2	1027.5	1030.9
7.5°	951.7	949.3	949.5	946.5	949.5	949.3	951.7	954.4	957.9	962.8	967.4
10°	910.4	907.1	906.0	906.5	906.0	907.1	910.4	917.1	919.3	923.7	928.7
12.5°	876.3	875.6	868.3	868.4	868.3	875.6	876.3	878.0	882.9	892.3	898.1
15°	836.1	825.6	824.4	827.8	824.4	825.6	836.1	836.1	838.3	845.5	848.9
17.5°	795.8	790.3	790.6	789.0	790.6	790.3	795.8	796.7	798.5	804.4	808.8
20°	774.5	771.2	770.6	766.7	770.6	771.2	774.5	774.5	776.7	779.5	783.9
22.5°	755.0	753.9	754.2	749.9	754.2	753.9	755.0	756.3	758.6	760.4	763.5
25°	730.7	733.4	731.2	731.2	731.2	733.4	730.7	731.2	731.8	734.6	736.8
27.5°	714.3	714.1	713.1	713.1	713.1	714.1	714.3	712.9	712.2	711.3	710.8
30°	701.8	701.2	702.4	702.4	702.4	701.2	701.8	699.6	698.5	698.0	695.7
32.5°	689.4	690.2	690.4	690.8	690.4	690.2	689.4	686.7	684.8	683.3	681.5
35°	670.2	670.7	672.5	671.3	672.5	670.7	670.2	666.9	664.6	661.3	658.5
37.5°	644.2	646.8	646.2	647.1	646.2	646.8	644.2	643.3	641.0	638.5	635.3
40°	624.7	626.4	625.8	625.8	625.8	626.4	624.7	624.2	621.9	620.3	617.5
42.5°	604.7	605.9	604.5	603.6	604.5	605.9	604.7	603.7	602.4	599.4	596.2
45°	572.0	570.9	572.6	570.3	572.6	570.9	572.0	569.8	569.2	567.0	564.3
47.5°	535.4	536.5	537.0	538.6	537.0	536.5	535.4	535.6	532.5	531.2	530.3
50°	510.9	514.3	514.3	513.7	514.3	514.3	510.9	509.9	507.6	505.4	505.4
52.5°	487.0	488.5	490.8	490.6	490.8	488.5	487.0	485.0	482.8	479.7	478.8
55°	450.0	451.0	452.2	452.7	452.2	451.0	450.0	445.5	443.8	442.2	439.4
57.5°	411.6	411.1	413.8	414.6	413.8	411.1	411.6	407.6	405.0	399.9	399.3
60°	384.5	384.5	388.9	390.6	388.9	384.5	384.5	380.0	376.2	372.8	371.7
62.5°	355.6	357.4	361.8	359.5	361.8	357.4	355.6	350.7	347.7	343.6	340.6
65°	313.5	317.9	317.3	319.6	317.3	317.9	313.5	310.7	304.6	300.7	297.3
67.5°	269.4	272.1	276.1	276.5	276.1	272.1	269.4	265.0	261.0	256.9	252.9
70°	239.7	242.5	244.7	246.3	244.7	242.5	239.7	235.2	230.8	228.0	223.6
72.5°	210.8	212.3	217.6	215.2	217.6	212.3	210.8	205.5	201.9	199.6	194.8
75°	165.3	169.2	172.5	170.9	172.5	169.2	165.3	161.4	158.7	155.3	150.9
77.5°	122.3	126.1	127.7	126.3	127.7	126.1	122.3	119.8	118.3	111.8	111.3
80°	96.5	96.0	99.3	98.7	99.3	96.0	96.5	92.6	89.8	86.0	86.0
82.5°	70.8	70.3	71.8	72.2	71.8	70.3	70.8	68.6	65.1	63.3	62.0
85°	34.4	36.0	33.8	33.3	33.8	36.0	34.4	32.2	32.2	32.2	31.6
87.5°	12.7	12.7	12.4	12.0	12.4	12.7	12.7	12.6	14.3	12.8	12.6
90°	23.5	23.8	24.2	24.5	24.2	23.8	23.5	23.1	22.6	21.9	21.1
92.5°	26.5	26.7	27.0	27.1	27.0	26.7	26.5	26.3	25.6	24.5	23.3
95°	31.1	31.1	31.1	31.1	31.1	31.1	31.1	31.1	30.5	29.2	28.0
97.5°	33.2	33.3	33.6	33.8	33.6	33.3	33.2	33.0	32.2	30.7	29.3
100°	33.8	34.0	34.2	34.4	34.2	34.0	33.8	33.7	32.9	31.4	29.9
102.5°	34.1	34.4	34.7	35.1	34.7	34.4	34.1	33.8	35.8	40.4	44.8
105°	35.0	35.3	35.6	36.0	35.6	35.3	35.0	34.6	50.5	82.7	115.0
107.5°	186.0	161.8	137.5	113.2	137.5	161.8	186.0	210.3	234.2	257.9	281.4
110°	303.3	277.2	251.2	225.2	251.2	277.2	303.3	329.3	345.3	351.3	357.3



TEST NUMBER: P332192-930

CATALOG NUMBER: S123DIW-S1000D1030U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	402.8	397.4	391.8	386.4	391.8	397.4	402.8	408.3	411.0	410.9	410.8
115°	479.3	480.0	480.8	481.5	480.8	480.0	479.3	478.6	477.4	475.5	473.7
117.5°	534.4	534.6	534.8	534.9	534.8	534.6	534.4	534.3	533.5	532.1	530.6
120°	571.6	571.6	571.6	571.6	571.6	571.6	571.6	571.6	570.9	569.4	567.9
122.5°	607.2	607.3	607.5	607.6	607.5	607.3	607.2	607.1	606.4	605.4	604.4
125°	657.3	657.6	658.0	658.4	658.0	657.6	657.3	657.0	656.6	656.2	655.8
127.5°	708.3	707.9	707.6	707.2	707.6	707.9	708.3	708.7	708.6	707.9	707.4
130°	739.7	739.4	739.0	738.7	739.0	739.4	739.7	740.1	739.9	739.2	738.5
132.5°	769.0	768.5	768.0	767.4	768.0	768.5	769.0	769.5	769.4	768.7	767.9
135°	813.2	812.6	812.0	811.5	812.0	812.6	813.2	813.7	813.7	813.2	812.6
137.5°	854.0	853.7	853.3	853.0	853.3	853.7	854.0	854.4	854.2	853.3	852.4
140°	879.0	878.6	878.2	877.8	878.2	878.6	879.0	879.3	879.1	878.4	877.7
142.5°	902.3	901.8	901.3	900.7	901.3	901.8	902.3	902.8	902.8	902.2	901.6
145°	936.0	936.0	936.0	936.0	936.0	936.0	936.0	936.0	935.8	935.5	935.1
147.5°	964.7	963.8	963.0	962.2	963.0	963.8	964.7	965.6	965.8	965.4	965.1
150°	983.5	982.9	982.4	981.9	982.4	982.9	983.5	984.1	984.1	983.7	983.4
152.5°	1000.0	999.2	998.4	997.6	998.4	999.2	1000.0	1000.9	1001.0	1000.4	999.7
155°	1022.8	1021.7	1020.6	1019.5	1020.6	1021.7	1022.8	1023.9	1024.0	1023.0	1022.1
157.5°	1042.3	1040.9	1039.4	1038.0	1039.4	1040.9	1042.3	1043.7	1043.8	1042.8	1041.7
160°	1053.6	1052.4	1051.1	1049.8	1051.1	1052.4	1053.6	1054.9	1055.0	1053.9	1052.8
162.5°	1064.4	1063.2	1062.1	1060.9	1062.1	1063.2	1064.4	1065.4	1065.4	1064.2	1062.9
165°	1078.2	1076.9	1075.6	1074.4	1075.6	1076.9	1078.2	1079.5	1079.4	1077.9	1076.4
167.5°	1088.4	1087.0	1085.5	1084.0	1085.5	1087.0	1088.4	1089.9	1089.9	1088.4	1087.0
170°	1094.3	1092.8	1091.4	1090.0	1091.4	1092.8	1094.3	1095.8	1095.8	1094.3	1092.8
172.5°	1098.0	1096.4	1094.8	1093.2	1094.8	1096.4	1098.0	1099.6	1099.7	1098.2	1096.8
175°	1102.5	1101.1	1099.6	1098.1	1099.6	1101.1	1102.5	1104.0	1104.1	1102.8	1101.5
177.5°	1104.0	1102.5	1101.1	1099.6	1101.1	1102.5	1104.0	1105.5	1105.5	1104.4	1103.3
180°	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2



TEST NUMBER: P332192-930

CATALOG NUMBER: S123DIW-S1000D1030U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1
2.5°	1098.0	1098.0	1106.5	1111.8	1118.5	1122.9	1126.0	1129.1	1134.5	1141.6	1149.6
5°	1035.3	1037.5	1049.7	1061.9	1073.6	1083.5	1091.8	1101.9	1114.0	1129.0	1145.7
7.5°	974.4	983.0	995.3	1010.2	1026.5	1041.1	1055.8	1072.2	1089.4	1111.5	1134.8
10°	935.4	944.9	959.8	978.7	995.9	1013.1	1031.4	1049.1	1070.7	1096.8	1126.8
12.5°	901.2	910.2	925.6	946.2	962.6	981.5	1002.5	1025.6	1049.9	1081.3	1115.2
15°	853.9	864.4	883.2	893.2	918.2	940.9	960.3	993.7	1024.7	1056.9	1096.3
17.5°	815.0	820.9	836.2	854.8	873.3	898.9	924.3	952.0	983.0	1022.4	1071.6
20°	788.4	793.4	810.0	829.4	849.4	872.7	895.4	923.2	958.1	999.7	1053.0
22.5°	768.4	773.8	784.7	805.4	824.1	843.4	866.2	899.2	936.4	977.1	1034.9
25°	739.6	742.9	750.1	766.7	783.4	805.0	825.0	856.1	894.4	942.1	999.7
27.5°	712.2	715.3	721.4	733.4	748.9	766.4	788.1	814.6	853.4	905.2	966.5
30°	695.7	696.3	701.8	712.9	726.3	740.7	760.7	790.6	827.2	880.0	944.3
32.5°	681.5	679.4	683.2	691.6	704.5	718.9	735.3	764.8	800.1	852.0	918.1
35°	657.5	656.3	654.7	661.9	672.9	684.0	698.5	720.7	760.7	808.9	878.2
37.5°	632.9	630.2	627.3	630.6	639.3	650.8	663.3	683.1	717.5	770.6	837.0
40°	614.7	612.5	610.8	609.8	617.5	628.6	638.1	656.9	689.1	739.6	805.0
42.5°	594.8	593.5	591.3	589.8	596.2	604.6	614.5	631.1	663.3	710.7	772.7
45°	562.6	561.5	560.4	559.2	563.1	570.9	578.7	590.8	618.6	664.6	720.7
47.5°	526.8	525.3	525.7	524.0	527.7	533.0	538.3	551.5	578.1	615.3	656.2
50°	501.0	500.4	500.4	500.4	501.6	507.6	512.7	522.6	547.1	584.2	613.6
52.5°	476.5	474.3	474.3	475.2	477.1	481.0	484.2	495.1	516.4	546.9	573.6
55°	438.3	433.8	432.8	433.8	435.5	438.9	442.2	451.0	469.4	492.1	507.6
57.5°	395.9	393.5	392.0	392.2	393.1	395.8	398.4	408.0	422.4	434.3	444.3
60°	366.2	367.3	362.3	363.4	363.4	365.6	369.5	375.6	387.8	396.2	406.1
62.5°	338.2	336.6	335.3	333.6	333.6	334.5	339.7	344.5	355.0	359.3	367.0
65°	294.6	294.6	291.3	292.4	292.9	289.0	291.8	297.3	304.0	305.7	312.9
67.5°	250.5	248.9	247.0	245.3	245.3	245.0	246.5	249.2	254.2	254.8	260.3
70°	220.3	219.2	218.6	217.0	214.7	217.5	215.8	218.6	221.4	221.9	225.3
72.5°	190.9	189.9	188.8	187.2	186.3	186.0	186.1	189.3	191.2	190.4	194.2
75°	149.3	148.1	147.0	144.2	144.2	142.6	143.2	145.4	147.6	145.9	149.3
77.5°	109.7	106.2	106.0	106.7	104.8	105.2	104.5	104.2	105.2	105.3	108.3
80°	84.3	80.5	81.5	81.0	80.5	79.9	78.8	79.3	79.9	80.5	82.1
82.5°	60.8	60.5	59.4	59.3	58.7	57.2	56.6	57.6	58.1	57.8	59.0
85°	31.1	29.4	30.5	29.9	30.5	29.9	28.3	28.3	29.4	28.9	29.9
87.5°	13.4	13.3	12.3	12.3	11.4	11.3	10.5	10.6	10.7	10.3	10.8
90°	20.4	19.6	17.3	14.9	12.6	10.2	8.1	6.3	4.5	2.6	0.8
92.5°	22.1	21.0	19.2	17.4	15.7	13.9	13.2	13.7	14.2	14.8	15.2
95°	26.7	25.4	23.4	21.4	19.4	17.4	20.1	27.6	35.1	42.5	50.0
97.5°	27.8	26.3	39.5	52.6	65.7	78.8	87.0	90.3	93.7	97.0	100.4
100°	28.5	27.0	55.4	83.8	112.2	140.6	153.0	149.3	145.7	142.0	138.4
102.5°	49.4	53.9	84.9	115.9	146.9	177.9	192.1	189.5	186.9	184.3	181.6
105°	147.2	179.4	195.8	212.1	228.4	244.8	252.0	250.1	248.0	246.1	244.0
107.5°	305.1	328.7	326.1	323.5	321.0	318.4	316.3	314.7	313.1	311.4	309.9
110°	363.3	369.3	367.3	365.3	363.3	361.3	359.5	358.2	356.7	355.2	353.8



TEST NUMBER: P332192-930

CATALOG NUMBER: S123DIW-S1000D1030U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	410.7	410.6	408.6	406.6	404.6	402.6	401.0	399.7	398.3	397.0	395.7
115°	471.9	470.0	468.4	466.8	465.1	463.5	462.1	461.1	459.9	458.9	457.8
117.5°	529.1	527.7	526.8	526.0	525.2	524.3	523.3	521.9	520.6	519.2	517.9
120°	566.5	565.0	564.5	563.9	563.4	562.9	561.7	560.1	558.5	556.8	555.2
122.5°	603.4	602.3	601.7	601.0	600.3	599.6	598.6	597.2	595.9	594.5	593.2
125°	655.5	655.1	654.4	653.6	652.9	652.2	651.1	649.6	648.2	646.8	645.3
127.5°	706.8	706.2	705.3	704.5	703.6	702.7	701.6	700.1	698.6	697.2	695.7
130°	737.8	737.0	736.3	735.6	734.8	734.1	733.0	731.6	730.1	728.6	727.2
132.5°	767.2	766.5	765.9	765.3	764.8	764.2	763.1	761.7	760.2	758.8	757.3
135°	812.0	811.5	810.8	810.1	809.3	808.6	807.7	806.6	805.5	804.5	803.3
137.5°	851.5	850.7	850.3	849.9	849.5	849.1	848.2	846.8	845.4	844.0	842.6
140°	876.9	876.2	875.6	875.1	874.6	874.0	873.2	872.1	871.1	869.9	868.9
142.5°	901.1	900.4	899.9	899.4	898.8	898.3	897.5	896.3	895.3	894.1	893.1
145°	934.7	934.3	934.0	933.6	933.3	932.9	932.1	930.8	929.5	928.2	927.0
147.5°	964.7	964.3	963.9	963.6	963.2	962.9	962.3	961.4	960.6	959.8	959.0
150°	983.0	982.7	982.3	981.9	981.5	981.2	980.7	980.2	979.7	979.1	978.6
152.5°	999.1	998.4	998.2	997.9	997.8	997.5	997.3	997.0	996.8	996.5	996.3
155°	1021.2	1020.3	1020.2	1019.9	1019.8	1019.6	1019.7	1020.1	1020.4	1020.8	1021.2
157.5°	1040.6	1039.5	1039.7	1039.8	1040.1	1040.2	1040.3	1040.4	1040.4	1040.5	1040.5
160°	1051.7	1050.7	1050.8	1051.0	1051.2	1051.3	1051.6	1051.7	1051.9	1052.1	1052.3
162.5°	1061.7	1060.5	1060.6	1060.9	1061.0	1061.2	1061.5	1062.0	1062.5	1062.9	1063.4
165°	1075.1	1073.6	1073.7	1073.9	1074.1	1074.3	1074.6	1075.2	1075.8	1076.3	1076.8
167.5°	1085.5	1084.0	1084.0	1084.0	1084.0	1084.0	1084.4	1085.2	1085.9	1086.6	1087.3
170°	1091.4	1090.0	1090.0	1090.0	1090.0	1090.0	1090.3	1091.0	1091.8	1092.5	1093.2
172.5°	1095.4	1093.9	1093.7	1093.6	1093.4	1093.3	1093.6	1094.5	1095.4	1096.3	1097.1
175°	1100.2	1098.9	1098.8	1098.6	1098.4	1098.2	1098.6	1099.5	1100.4	1101.3	1102.2
177.5°	1102.1	1100.9	1100.7	1100.7	1100.5	1100.3	1100.7	1101.4	1102.1	1102.8	1103.5
180°	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2



TEST NUMBER: P332192-930

CATALOG NUMBER: S123DIW-S1000D1030U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1
2.5°	1152.2	1154.5	1162.0	1167.3	1173.5	1177.0	1180.6	1183.3	1186.8	1187.7	1200.6
5°	1157.3	1168.4	1187.8	1202.2	1220.0	1239.4	1252.7	1258.8	1275.0	1288.3	1314.9
7.5°	1155.8	1179.5	1208.8	1239.2	1271.9	1302.0	1328.2	1359.3	1381.4	1414.5	1447.2
10°	1154.5	1186.2	1223.9	1262.7	1308.2	1350.4	1388.1	1430.3	1465.3	1511.3	1550.7
12.5°	1150.6	1188.9	1241.2	1287.1	1342.4	1400.5	1456.5	1510.6	1541.6	1618.3	1654.6
15°	1140.7	1186.2	1251.6	1321.5	1397.6	1466.3	1537.3	1594.0	1685.5	1752.6	1795.4
17.5°	1121.9	1185.5	1263.1	1347.5	1439.9	1530.6	1611.0	1697.0	1794.0	1875.3	1961.8
20°	1113.0	1182.8	1269.4	1362.6	1458.6	1561.2	1652.8	1756.0	1861.9	1941.8	2052.8
22.5°	1096.5	1175.7	1268.9	1372.8	1475.4	1581.6	1688.7	1792.8	1915.2	2025.3	2130.9
25°	1069.7	1158.5	1255.0	1370.9	1491.3	1597.8	1726.0	1864.2	1991.8	2133.2	2238.6
27.5°	1041.5	1136.2	1233.0	1340.8	1470.3	1596.8	1757.9	1914.1	2070.0	2192.3	2270.3
30°	1019.7	1111.8	1211.7	1320.5	1448.6	1599.0	1779.2	1949.5	2101.6	2206.4	2250.3
32.5°	996.2	1089.6	1177.9	1292.0	1428.6	1597.6	1792.6	1970.4	2103.4	2173.2	2164.6
35°	959.3	1037.5	1123.5	1233.3	1394.2	1587.9	1800.3	1972.3	2053.9	2038.9	1925.7
37.5°	906.0	971.8	1056.5	1176.7	1354.3	1567.3	1784.8	1913.8	1908.5	1786.6	1622.6
40°	872.7	928.7	1010.3	1136.8	1323.2	1554.0	1760.4	1844.2	1773.2	1602.8	1406.4
42.5°	829.2	880.8	962.4	1092.4	1289.1	1526.9	1713.8	1738.1	1599.1	1403.1	1223.1
45°	761.7	807.2	891.5	1025.8	1237.8	1468.0	1600.0	1540.7	1353.7	1151.2	1014.2
47.5°	689.3	736.5	817.7	955.6	1163.7	1379.3	1442.3	1316.0	1124.1	959.8	834.0
50°	643.6	689.1	768.4	907.7	1113.5	1306.6	1332.6	1169.5	993.1	848.9	745.7
52.5°	597.5	640.3	718.3	857.9	1054.9	1222.2	1206.2	1039.9	877.7	754.7	673.8
55°	528.7	569.2	643.6	774.5	953.7	1086.3	1028.1	869.4	735.2	639.7	578.1
57.5°	467.2	506.1	570.2	688.5	844.3	935.4	861.3	727.6	620.9	547.4	501.4
60°	425.5	459.9	521.0	630.8	766.2	835.5	762.3	644.2	554.2	495.5	454.4
62.5°	386.0	416.0	472.5	572.3	689.8	748.1	674.0	574.0	497.4	445.3	410.4
65°	326.2	353.4	403.3	481.0	577.6	616.4	552.6	471.6	412.2	373.4	350.1
67.5°	271.7	294.7	337.9	399.0	470.0	498.3	449.7	387.0	342.3	311.1	292.6
70°	235.2	255.2	289.0	341.8	406.1	427.8	382.3	330.7	297.9	273.0	255.8
72.5°	204.6	219.2	250.0	290.7	344.4	361.6	329.9	284.5	254.0	235.2	221.6
75°	155.9	168.1	188.1	220.8	258.0	268.0	244.1	215.8	195.3	182.0	171.5
77.5°	112.4	121.4	135.8	156.0	181.7	190.8	175.6	156.8	141.8	132.8	126.9
80°	84.9	92.1	104.3	120.9	136.5	141.5	132.6	118.1	107.6	102.6	97.7
82.5°	62.7	66.8	74.1	85.4	96.1	102.0	94.4	85.8	80.1	75.6	73.7
85°	31.6	33.8	37.2	41.6	48.3	50.5	47.7	45.5	42.2	39.4	39.4
87.5°	12.1	12.4	14.1	15.4	17.6	19.4	19.4	19.0	19.0	18.8	18.4
90°	2.6	4.5	6.3	8.1	10.2	12.6	14.9	17.3	19.6	20.4	21.1
92.5°	14.8	14.2	13.7	13.2	13.9	15.7	17.4	19.2	21.0	22.1	23.3
95°	42.5	35.1	27.6	20.1	17.4	19.4	21.4	23.4	25.4	26.7	28.0
97.5°	97.0	93.7	90.3	87.0	78.8	65.7	52.6	39.5	26.3	27.8	29.3
100°	142.0	145.7	149.3	153.0	140.6	112.2	83.8	55.4	27.0	28.5	29.9
102.5°	184.3	186.9	189.5	192.1	177.9	146.9	115.9	84.9	53.9	49.4	44.8
105°	246.1	248.0	250.1	252.0	244.8	228.4	212.1	195.8	179.4	147.2	115.0
107.5°	311.4	313.1	314.7	316.3	318.4	321.0	323.5	326.1	328.7	305.1	281.4
110°	355.2	356.7	358.2	359.5	361.3	363.3	365.3	367.3	369.3	363.3	357.3



TEST NUMBER: P332192-930

CATALOG NUMBER: S123DIW-S1000D1030U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	397.0	398.3	399.7	401.0	402.6	404.6	406.6	408.6	410.6	410.7	410.8
115°	458.9	459.9	461.1	462.1	463.5	465.1	466.8	468.4	470.0	471.9	473.7
117.5°	519.2	520.6	521.9	523.3	524.3	525.2	526.0	526.8	527.7	529.1	530.6
120°	556.8	558.5	560.1	561.7	562.9	563.4	563.9	564.5	565.0	566.5	567.9
122.5°	594.5	595.9	597.2	598.6	599.6	600.3	601.0	601.7	602.3	603.4	604.4
125°	646.8	648.2	649.6	651.1	652.2	652.9	653.6	654.4	655.1	655.5	655.8
127.5°	697.2	698.6	700.1	701.6	702.7	703.6	704.5	705.3	706.2	706.8	707.4
130°	728.6	730.1	731.6	733.0	734.1	734.8	735.6	736.3	737.0	737.8	738.5
132.5°	758.8	760.2	761.7	763.1	764.2	764.8	765.3	765.9	766.5	767.2	767.9
135°	804.5	805.5	806.6	807.7	808.6	809.3	810.1	810.8	811.5	812.0	812.6
137.5°	844.0	845.4	846.8	848.2	849.1	849.5	849.9	850.3	850.7	851.5	852.4
140°	869.9	871.1	872.1	873.2	874.0	874.6	875.1	875.6	876.2	876.9	877.7
142.5°	894.1	895.3	896.3	897.5	898.3	898.8	899.4	899.9	900.4	901.1	901.6
145°	928.2	929.5	930.8	932.1	932.9	933.3	933.6	934.0	934.3	934.7	935.1
147.5°	959.8	960.6	961.4	962.3	962.9	963.2	963.6	963.9	964.3	964.7	965.1
150°	979.1	979.7	980.2	980.7	981.2	981.5	981.9	982.3	982.7	983.0	983.4
152.5°	996.5	996.8	997.0	997.3	997.5	997.8	997.9	998.2	998.4	999.1	999.7
155°	1020.8	1020.4	1020.1	1019.7	1019.6	1019.8	1019.9	1020.2	1020.3	1021.2	1022.1
157.5°	1040.5	1040.4	1040.4	1040.3	1040.2	1040.1	1039.8	1039.7	1039.5	1040.6	1041.7
160°	1052.1	1051.9	1051.7	1051.6	1051.3	1051.2	1051.0	1050.8	1050.7	1051.7	1052.8
162.5°	1062.9	1062.5	1062.0	1061.5	1061.2	1061.0	1060.9	1060.6	1060.5	1061.7	1062.9
165°	1076.3	1075.8	1075.2	1074.6	1074.3	1074.1	1073.9	1073.7	1073.6	1075.1	1076.4
167.5°	1086.6	1085.9	1085.2	1084.4	1084.0	1084.0	1084.0	1084.0	1084.0	1085.5	1087.0
170°	1092.5	1091.8	1091.0	1090.3	1090.0	1090.0	1090.0	1090.0	1090.0	1091.4	1092.8
172.5°	1096.3	1095.4	1094.5	1093.6	1093.3	1093.4	1093.6	1093.7	1093.9	1095.4	1096.8
175°	1101.3	1100.4	1099.5	1098.6	1098.2	1098.4	1098.6	1098.8	1098.9	1100.2	1101.5
177.5°	1102.8	1102.1	1101.4	1100.7	1100.3	1100.5	1100.7	1100.7	1100.9	1102.1	1103.3
180°	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2



TEST NUMBER: P332192-930

CATALOG NUMBER: S123DIW-S1000D1030U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1	1145.1
2.5°	1205.0	1205.5	1210.4	1213.9	1212.1	1214.4	1215.2
5°	1316.5	1336.5	1347.0	1354.9	1355.4	1355.9	1360.4
7.5°	1474.6	1496.1	1511.7	1535.5	1542.5	1550.7	1548.3
10°	1590.1	1621.7	1648.9	1663.3	1678.9	1701.6	1683.3
12.5°	1697.9	1754.0	1795.4	1817.8	1832.4	1837.0	1828.0
15°	1875.8	1949.1	1988.4	1987.3	2037.3	2058.9	2025.0
17.5°	2038.9	2106.5	2160.6	2188.3	2230.0	2239.2	2235.0
20°	2138.8	2212.6	2254.7	2302.4	2324.1	2343.5	2346.8
22.5°	2224.9	2291.2	2336.4	2376.1	2394.2	2403.4	2409.0
25°	2313.5	2365.7	2392.9	2406.8	2411.7	2410.6	2403.4
27.5°	2307.5	2311.5	2281.5	2252.1	2225.8	2196.2	2185.9
30°	2247.5	2200.9	2117.7	2070.5	2001.2	1946.3	1968.5
32.5°	2089.9	1997.2	1903.7	1800.7	1715.3	1691.0	1666.6
35°	1783.7	1620.6	1525.2	1414.2	1369.8	1325.4	1294.9
37.5°	1443.1	1316.9	1203.7	1131.1	1086.6	1058.6	1043.5
40°	1247.7	1134.0	1040.8	982.0	948.2	916.6	912.1
42.5°	1091.9	986.2	916.1	869.3	836.7	823.3	813.6
45°	894.4	820.5	773.4	740.1	718.4	710.1	699.0
47.5°	757.0	704.8	669.4	646.8	630.5	624.3	623.4
50°	680.2	636.9	610.8	593.0	580.3	578.1	569.2
52.5°	622.5	585.0	564.7	549.2	540.0	533.7	531.1
55°	540.4	515.4	497.1	488.2	481.0	474.9	474.9
57.5°	472.8	451.9	439.9	432.3	430.1	425.7	423.0
60°	431.0	413.4	403.9	397.2	392.8	393.4	388.3
62.5°	390.3	378.7	369.7	363.1	357.8	357.8	358.2
65°	332.3	323.4	316.8	314.5	311.3	307.4	308.5
67.5°	281.6	273.3	268.1	264.3	263.2	261.1	264.3
70°	245.2	239.1	235.2	231.9	230.8	231.4	234.2
72.5°	211.9	207.6	205.0	203.5	201.1	201.1	203.1
75°	166.4	163.1	160.9	159.2	158.7	158.7	158.7
77.5°	122.3	121.5	120.5	118.1	118.1	118.9	119.0
80°	96.5	94.9	94.3	93.2	91.6	90.4	93.2
82.5°	72.2	70.4	69.9	69.7	67.1	66.9	69.2
85°	38.8	37.2	37.7	37.2	37.2	36.6	36.6
87.5°	18.1	17.9	17.5	18.0	17.6	17.3	18.3
90°	21.9	22.6	23.1	23.5	23.8	24.2	24.5
92.5°	24.5	25.6	26.3	26.5	26.7	27.0	27.1
95°	29.2	30.5	31.1	31.1	31.1	31.1	31.1
97.5°	30.7	32.2	33.0	33.2	33.3	33.6	33.8
100°	31.4	32.9	33.7	33.8	34.0	34.2	34.4
102.5°	40.4	35.8	33.8	34.1	34.4	34.7	35.1
105°	82.7	50.5	34.6	35.0	35.3	35.6	36.0
107.5°	257.9	234.2	210.3	186.0	161.8	137.5	113.2
110°	351.3	345.3	329.3	303.3	277.2	251.2	225.2



TEST NUMBER: P332192-930

CATALOG NUMBER: S123DIW-S1000D1030U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	410.9	411.0	408.3	402.8	397.4	391.8	386.4
115°	475.5	477.4	478.6	479.3	480.0	480.8	481.5
117.5°	532.1	533.5	534.3	534.4	534.6	534.8	534.9
120°	569.4	570.9	571.6	571.6	571.6	571.6	571.6
122.5°	605.4	606.4	607.1	607.2	607.3	607.5	607.6
125°	656.2	656.6	657.0	657.3	657.6	658.0	658.4
127.5°	707.9	708.6	708.7	708.3	707.9	707.6	707.2
130°	739.2	739.9	740.1	739.7	739.4	739.0	738.7
132.5°	768.7	769.4	769.5	769.0	768.5	768.0	767.4
135°	813.2	813.7	813.7	813.2	812.6	812.0	811.5
137.5°	853.3	854.2	854.4	854.0	853.7	853.3	853.0
140°	878.4	879.1	879.3	879.0	878.6	878.2	877.8
142.5°	902.2	902.8	902.8	902.3	901.8	901.3	900.7
145°	935.5	935.8	936.0	936.0	936.0	936.0	936.0
147.5°	965.4	965.8	965.6	964.7	963.8	963.0	962.2
150°	983.7	984.1	984.1	983.5	982.9	982.4	981.9
152.5°	1000.4	1001.0	1000.9	1000.0	999.2	998.4	997.6
155°	1023.0	1024.0	1023.9	1022.8	1021.7	1020.6	1019.5
157.5°	1042.8	1043.8	1043.7	1042.3	1040.9	1039.4	1038.0
160°	1053.9	1055.0	1054.9	1053.6	1052.4	1051.1	1049.8
162.5°	1064.2	1065.4	1065.4	1064.4	1063.2	1062.1	1060.9
165°	1077.9	1079.4	1079.5	1078.2	1076.9	1075.6	1074.4
167.5°	1088.4	1089.9	1089.9	1088.4	1087.0	1085.5	1084.0
170°	1094.3	1095.8	1095.8	1094.3	1092.8	1091.4	1090.0
172.5°	1098.2	1099.7	1099.6	1098.0	1096.4	1094.8	1093.2
175°	1102.8	1104.1	1104.0	1102.5	1101.1	1099.6	1098.1
177.5°	1104.4	1105.5	1105.5	1104.0	1102.5	1101.1	1099.6
180°	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2	1102.2

(END OF REPORT)