

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332233-930

Luminaire Tested: **S123DIW-S1165D1320U930-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332233-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S1165D1320U930-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1320 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7611.9 lumens
Efficiency: N/A
Efficacy: 99.9 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 76.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332233-930

CATALOG NUMBER: S123DIW-S1165D1320U930-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

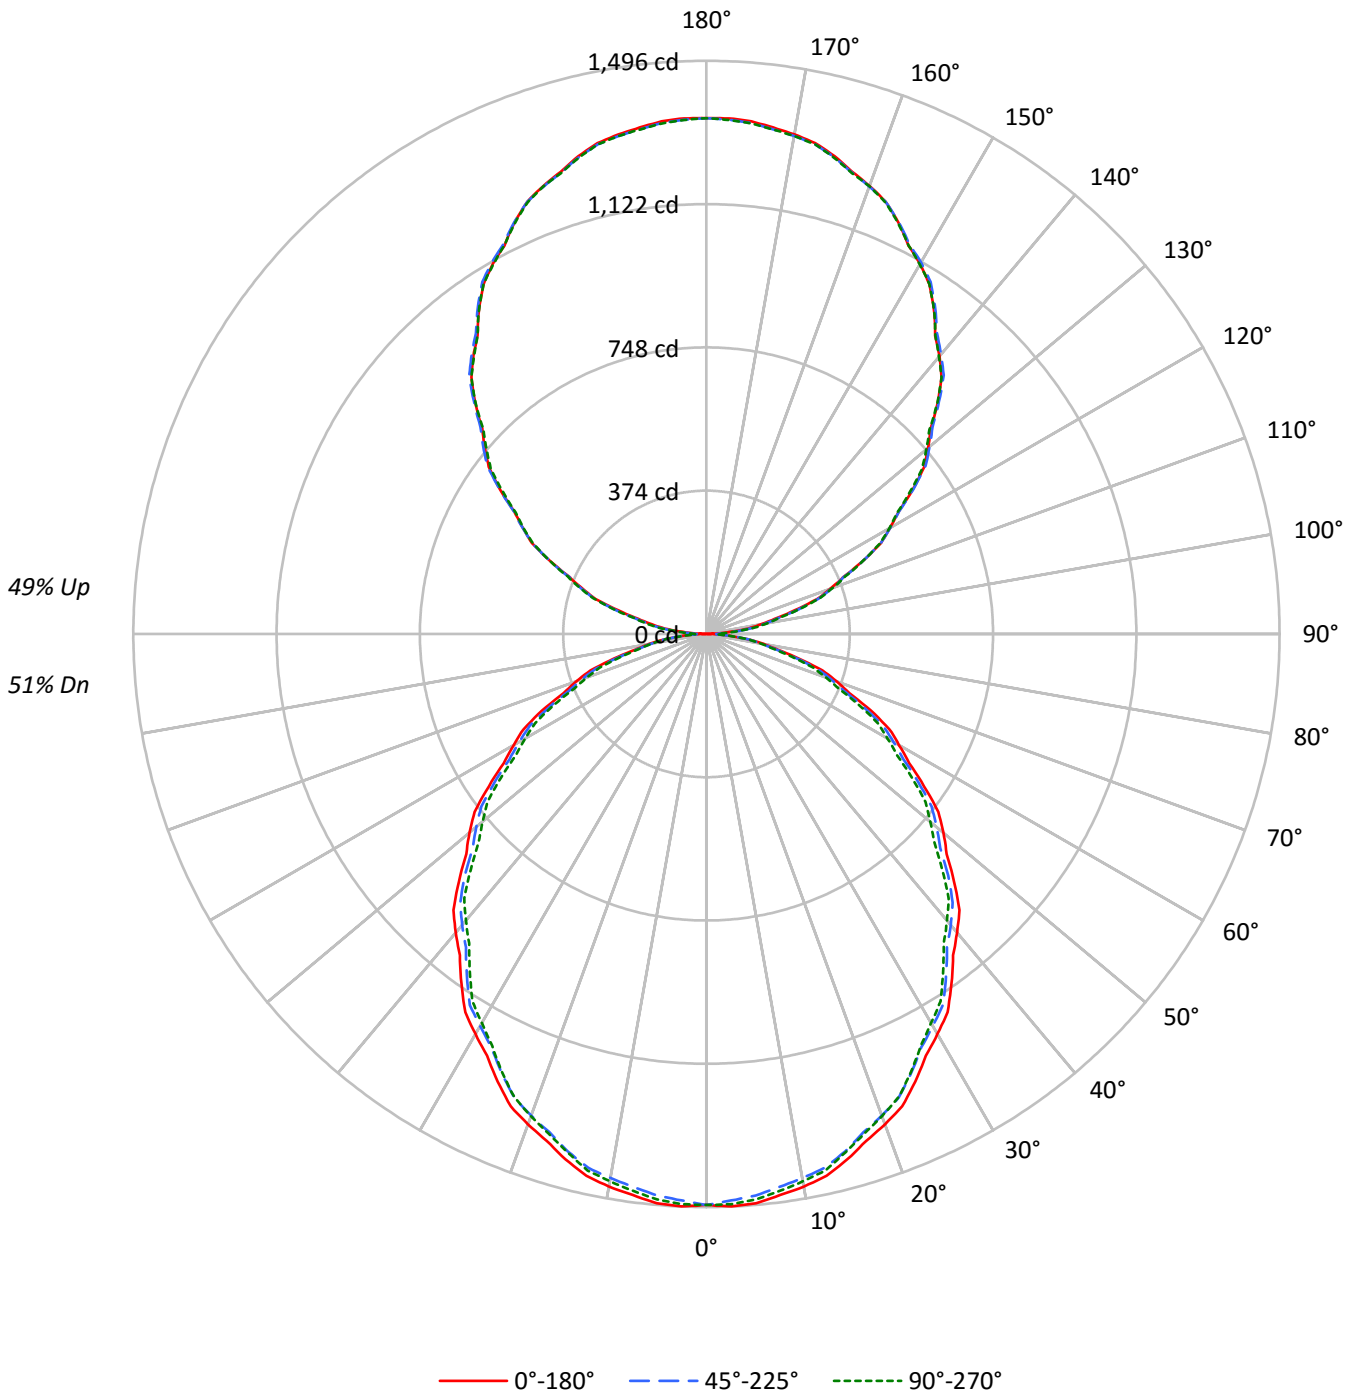



TEST NUMBER: P332233-930

CATALOG NUMBER: S123DIW-S1165D1320U930-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	51
1	98	94	90	86	90	87	83	80	73	71	69	61	60	58	50	49	48	43
2	89	82	75	70	82	76	70	66	64	60	57	54	51	48	44	42	40	36
3	81	72	64	59	75	67	60	55	57	52	48	48	44	41	39	37	34	30
4	74	63	56	49	68	59	52	46	50	45	41	42	38	35	35	32	30	26
5	68	57	48	42	63	53	45	40	45	39	35	38	34	30	32	28	26	23
6	63	51	43	37	58	47	40	35	41	35	31	34	30	27	29	25	23	20
7	58	46	38	32	54	43	36	30	37	31	27	31	27	24	26	23	20	18
8	54	42	34	28	50	39	32	27	34	28	24	29	24	21	24	21	18	16
9	50	38	30	25	46	35	29	24	31	25	21	26	22	19	22	19	16	14
10	47	35	28	23	43	33	26	22	28	23	19	24	20	17	21	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	16043	16043	16043
5°	16119	15896	16008
10°	16010	15759	15856
15°	15824	15581	15610
20°	15605	15326	15340
25°	15311	15023	14992
30°	14989	14686	14574
35°	14651	14331	14146
40°	14299	13939	13722
45°	13910	13577	13247
50°	13520	13134	12769
55°	13011	12675	12288
60°	12499	12140	11752
65°	12045	11556	11196
70°	11374	10889	10408
75°	10393	10019	9590
80°	9372	8976	8901
85°	8225	7916	7608



TEST NUMBER: P332233-930

CATALOG NUMBER: S123DIW-S1165D1320U930-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	140.4	1.8
10°-20°	396.4	5.2
20°-30°	585.6	7.7
30°-40°	684.0	9.0
40°-50°	687.7	9.0
50°-60°	604.1	7.9
60°-70°	450.0	5.9
70°-80°	256.4	3.4
80°-90°	77.6	1.0
90°-100°	87.7	1.2
100°-110°	262.5	3.4
110°-120°	446.4	5.9
120°-130°	587.2	7.7
130°-140°	660.0	8.7
140°-150°	648.8	8.5
150°-160°	546.2	7.2
160°-170°	363.6	4.8
170°-180°	127.3	1.7
0°-30°	1122.4	14.7
0°-40°	1806.5	23.7
0°-60°	3098.3	40.7
0°-90°	3882.3	51.0
90°-120°	796.6	10.5
90°-150°	2692.5	35.4
90°-180°	3730.0	49.0
0°-180°	7611.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1490	1490	1490	1490	1490	
5°	1492	1485	1471	1483	1482	141
15°	1420	1414	1398	1407	1401	400
25°	1289	1281	1265	1266	1262	594
35°	1115	1107	1091	1083	1076	697
45°	914	908	892	877	870	705
55°	693	691	675	662	655	621
65°	473	466	454	444	440	466
75°	250	245	241	235	231	267
85°	67	64	64	62	62	73
90°	1	12	25	29	32	7
95°	62	70	78	82	82	70
105°	238	240	250	250	252	255
115°	449	452	450	451	450	444
125°	658	661	659	655	650	586
135°	853	859	859	854	852	657
145°	1035	1037	1040	1039	1035	646
155°	1185	1185	1186	1190	1183	545
165°	1291	1288	1288	1294	1287	364
175°	1343	1339	1339	1344	1338	128
180°	1346	1346	1346	1346	1346	



TEST NUMBER: P332233-930

CATALOG NUMBER: S123DIW-S1165D1320U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1490.4	1490.4	1490.4	1490.4	1490.4	1490.4	1490.4	1490.4	1490.4	1490.4	1490.4
2.5°	1495.6	1494.7	1493.8	1492.9	1491.9	1490.2	1487.8	1485.2	1482.7	1480.2	1482.5
5°	1491.8	1490.4	1488.9	1487.5	1486.0	1483.8	1480.7	1477.5	1474.4	1471.2	1474.1
7.5°	1477.2	1475.7	1474.3	1472.8	1471.5	1469.1	1465.8	1462.6	1459.4	1456.1	1458.7
10°	1464.8	1463.4	1462.0	1460.5	1459.1	1456.6	1452.9	1449.2	1445.4	1441.8	1444.3
12.5°	1448.5	1447.2	1446.0	1444.9	1443.7	1441.3	1437.9	1434.4	1430.9	1427.4	1429.3
15°	1420.0	1418.9	1417.7	1416.6	1415.4	1413.0	1409.3	1405.6	1401.9	1398.2	1400.4
17.5°	1386.9	1385.4	1384.0	1382.5	1381.0	1378.4	1374.7	1371.0	1367.3	1363.6	1365.2
20°	1362.3	1360.6	1358.9	1357.1	1355.5	1352.7	1349.1	1345.4	1341.7	1338.0	1339.1
22.5°	1334.6	1332.9	1331.2	1329.5	1327.8	1325.1	1321.4	1317.7	1314.0	1310.3	1311.2
25°	1289.2	1287.5	1285.8	1284.1	1282.5	1279.7	1276.0	1272.4	1268.6	1264.9	1265.2
27.5°	1240.8	1239.2	1237.5	1235.8	1234.2	1231.4	1227.4	1223.4	1219.4	1215.4	1215.7
30°	1206.0	1204.5	1203.1	1201.7	1200.3	1197.6	1193.6	1189.6	1185.6	1181.6	1181.6
32.5°	1171.1	1169.2	1167.3	1165.5	1163.6	1161.1	1158.1	1155.0	1151.9	1148.8	1147.2
35°	1115.0	1113.3	1111.6	1109.9	1108.2	1105.5	1101.7	1098.0	1094.3	1090.6	1088.9
37.5°	1057.5	1055.4	1053.2	1051.1	1048.9	1045.9	1042.2	1038.4	1034.7	1030.9	1028.8
40°	1017.6	1015.9	1014.2	1012.4	1010.7	1007.9	1003.9	999.9	995.9	992.0	989.7
42.5°	977.5	975.7	973.7	971.8	969.8	966.9	962.9	958.9	954.9	951.0	948.7
45°	913.8	912.6	911.5	910.4	909.2	906.8	903.1	899.4	895.7	891.9	888.6
47.5°	850.4	848.8	847.2	845.5	843.8	841.3	837.8	834.3	830.9	827.4	824.0
50°	807.4	806.0	804.5	803.2	801.7	799.2	795.4	791.7	788.0	784.3	781.2
52.5°	762.3	761.3	760.3	759.4	758.4	755.9	752.0	748.1	744.2	740.2	737.5
55°	693.3	693.1	692.8	692.5	692.2	690.2	686.5	682.8	679.1	675.4	672.3
57.5°	627.7	626.7	625.7	624.8	623.9	621.9	618.9	616.0	613.0	610.0	607.2
60°	580.6	580.2	580.0	579.7	579.4	577.6	574.1	570.7	567.3	563.9	561.3
62.5°	538.5	537.8	537.0	536.3	535.6	533.5	530.0	526.6	523.3	519.8	517.2
65°	472.9	471.5	470.0	468.6	467.2	465.0	462.2	459.3	456.5	453.7	451.4
67.5°	403.4	402.2	401.0	399.7	398.4	396.7	394.5	392.4	390.2	388.1	386.0
70°	361.4	359.7	358.0	356.3	354.6	352.9	351.1	349.4	347.7	346.0	344.1
72.5°	317.3	316.1	314.8	313.6	312.3	310.7	308.8	306.8	304.9	303.0	301.2
75°	249.9	248.7	247.6	246.5	245.3	244.3	243.5	242.6	241.8	240.9	239.5
77.5°	190.2	189.6	188.9	188.3	187.7	186.9	185.8	184.8	183.8	182.8	181.8
80°	151.2	150.3	149.5	148.6	147.8	147.1	146.5	145.9	145.4	144.8	144.6
82.5°	113.3	113.1	112.9	112.8	112.6	112.4	112.3	112.3	112.1	112.0	111.5
85°	66.6	66.0	65.5	64.9	64.3	64.1	64.1	64.1	64.1	64.1	63.5
87.5°	26.9	26.7	26.4	26.3	26.0	26.1	26.5	26.9	27.2	27.6	27.6
90°	1.1	3.4	5.8	8.1	10.4	13.1	16.2	19.2	22.3	25.4	26.3
92.5°	25.6	27.1	28.8	30.4	32.0	33.7	35.4	37.1	38.9	40.6	41.3
95°	62.4	64.0	65.7	67.3	69.0	70.8	72.6	74.5	76.4	78.3	79.2
97.5°	110.8	112.0	113.2	114.5	115.7	117.0	118.4	119.7	121.1	122.5	123.5
100°	143.8	145.2	146.6	148.1	149.4	150.7	151.9	153.1	154.3	155.5	156.1
102.5°	181.9	182.7	183.6	184.4	185.2	186.5	188.0	189.6	191.1	192.7	193.4
105°	237.9	238.4	238.9	239.3	239.8	241.1	243.2	245.3	247.4	249.6	249.6
107.5°	303.0	303.4	303.6	303.9	304.2	304.8	305.6	306.5	307.3	308.1	308.9
110°	343.6	344.1	344.6	345.0	345.5	346.0	346.5	347.0	347.4	347.9	348.9



TEST NUMBER: P332233-930

CATALOG NUMBER: S123DIW-S1165D1320U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	386.0	386.2	386.5	386.8	387.1	387.3	387.3	387.4	387.6	387.7	388.8
115°	449.4	450.1	450.8	451.5	452.2	452.3	451.8	451.4	450.9	450.5	450.7
117.5°	513.3	513.7	514.2	514.7	515.2	515.1	514.5	513.9	513.2	512.7	512.6
120°	553.0	554.4	555.9	557.3	558.6	558.8	557.6	556.4	555.3	554.1	553.8
122.5°	594.5	595.5	596.6	597.6	598.6	598.8	598.2	597.6	597.0	596.4	595.7
125°	657.7	658.4	659.1	659.8	660.6	660.6	660.1	659.7	659.3	658.8	657.9
127.5°	716.1	717.6	719.1	720.6	722.1	722.6	722.1	721.5	721.1	720.6	719.2
130°	755.0	756.8	758.8	760.7	762.5	763.1	762.4	761.7	761.0	760.3	759.4
132.5°	793.9	795.8	797.7	799.6	801.4	802.1	801.6	801.1	800.5	800.1	798.9
135°	853.4	854.8	856.1	857.5	859.0	859.6	859.3	859.1	858.8	858.6	857.7
137.5°	908.3	909.5	910.7	911.8	913.1	914.0	914.5	915.2	915.7	916.4	915.3
140°	946.4	947.5	948.8	949.9	951.1	951.8	952.0	952.3	952.5	952.8	952.5
142.5°	981.0	982.3	983.4	984.6	985.8	986.6	987.0	987.4	987.8	988.3	988.1
145°	1035.2	1035.7	1036.2	1036.7	1037.1	1037.7	1038.4	1039.1	1039.8	1040.5	1040.2
147.5°	1082.6	1083.5	1084.3	1085.2	1086.0	1086.7	1087.4	1088.0	1088.7	1089.3	1089.3
150°	1115.6	1116.1	1116.6	1117.0	1117.4	1117.9	1118.4	1118.8	1119.3	1119.8	1119.8
152.5°	1142.6	1143.3	1143.9	1144.6	1145.3	1145.7	1146.1	1146.3	1146.6	1146.9	1147.3
155°	1185.4	1185.4	1185.4	1185.4	1185.4	1185.5	1185.7	1185.9	1186.2	1186.4	1187.4
157.5°	1221.7	1221.5	1221.2	1220.9	1220.6	1220.6	1220.7	1220.9	1221.2	1221.3	1222.3
160°	1244.6	1244.1	1243.7	1243.2	1242.7	1242.4	1242.4	1242.4	1242.4	1242.4	1243.7
162.5°	1264.9	1264.2	1263.6	1262.9	1262.2	1262.0	1262.2	1262.4	1262.6	1262.7	1264.0
165°	1291.1	1290.4	1289.7	1289.0	1288.3	1287.9	1287.9	1287.9	1287.9	1287.9	1289.3
167.5°	1312.1	1311.1	1310.2	1309.2	1308.3	1307.9	1308.1	1308.3	1308.5	1308.6	1310.1
170°	1323.9	1323.0	1322.0	1321.1	1320.1	1319.6	1319.6	1319.6	1319.6	1319.6	1321.3
172.5°	1333.2	1332.3	1331.3	1330.4	1329.4	1328.9	1328.9	1328.9	1328.9	1328.9	1330.4
175°	1343.0	1342.0	1341.1	1340.1	1339.1	1338.7	1338.7	1338.7	1338.7	1338.7	1340.1
177.5°	1347.0	1346.2	1345.4	1344.7	1343.9	1343.5	1343.5	1343.5	1343.5	1343.5	1344.7
180°	1346.1	1346.1	1346.1	1346.1	1346.1	1346.1	1346.1	1346.1	1346.1	1346.1	1346.1



TEST NUMBER: P332233-930

CATALOG NUMBER: S123DIW-S1165D1320U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1490.4	1490.4	1490.4	1490.4	1490.4	1490.4	1490.4	1490.4
2.5°	1484.7	1487.0	1489.3	1490.4	1490.1	1489.9	1489.6	1489.5
5°	1476.9	1479.8	1482.6	1483.8	1483.2	1482.6	1482.1	1481.5
7.5°	1461.3	1463.8	1466.4	1467.5	1467.1	1466.8	1466.5	1466.2
10°	1446.9	1449.4	1452.0	1453.0	1452.5	1451.9	1451.3	1450.7
12.5°	1431.2	1433.1	1434.9	1435.7	1435.3	1435.0	1434.7	1434.4
15°	1402.7	1405.0	1407.3	1407.6	1405.9	1404.2	1402.5	1400.8
17.5°	1366.8	1368.4	1369.9	1370.4	1369.9	1369.2	1368.6	1368.0
20°	1340.3	1341.4	1342.6	1342.6	1341.8	1340.9	1340.1	1339.2
22.5°	1312.1	1313.0	1313.9	1313.9	1312.8	1311.7	1310.6	1309.5
25°	1265.5	1265.8	1266.1	1265.8	1264.9	1264.0	1263.2	1262.3
27.5°	1215.9	1216.1	1216.3	1215.9	1214.9	1213.7	1212.7	1211.6
30°	1181.6	1181.6	1181.6	1180.6	1178.6	1176.6	1174.6	1172.6
32.5°	1145.6	1144.0	1142.4	1141.1	1140.0	1138.9	1137.8	1136.8
35°	1087.2	1085.5	1083.8	1082.2	1080.8	1079.4	1077.9	1076.5
37.5°	1026.8	1024.7	1022.7	1021.2	1020.3	1019.4	1018.5	1017.6
40°	987.4	985.1	982.8	981.1	980.0	978.8	977.7	976.6
42.5°	946.4	944.1	941.8	940.1	939.0	937.8	936.7	935.6
45°	885.2	881.7	878.3	875.9	874.5	873.0	871.6	870.2
47.5°	820.7	817.3	813.9	811.6	810.4	809.1	807.9	806.7
50°	778.0	774.9	771.8	769.4	767.7	766.0	764.3	762.5
52.5°	734.9	732.2	729.5	727.3	725.6	723.9	722.2	720.5
55°	669.1	666.0	662.8	660.6	659.2	657.7	656.3	654.8
57.5°	604.5	601.7	598.8	596.6	595.0	593.4	591.7	590.0
60°	558.8	556.2	553.7	551.6	550.2	548.8	547.4	545.9
62.5°	514.7	512.1	509.6	507.8	506.8	505.8	504.9	503.9
65°	449.1	446.9	444.6	443.0	442.1	441.3	440.4	439.6
67.5°	384.1	382.0	380.1	378.5	377.3	376.1	374.9	373.7
70°	342.0	340.1	338.0	336.3	334.9	333.5	332.1	330.7
72.5°	299.5	297.7	295.9	294.6	293.9	293.2	292.4	291.7
75°	238.1	236.7	235.2	234.1	233.3	232.4	231.5	230.6
77.5°	180.8	179.9	178.9	178.4	178.4	178.4	178.4	178.4
80°	144.2	144.0	143.7	143.6	143.6	143.6	143.6	143.6
82.5°	111.0	110.5	110.0	109.6	109.3	109.2	108.9	108.7
85°	62.9	62.4	61.8	61.6	61.6	61.6	61.6	61.6
87.5°	27.6	27.5	27.5	27.5	27.6	27.7	27.8	27.9
90°	27.2	28.2	29.1	29.8	30.3	30.8	31.2	31.7
92.5°	42.1	42.9	43.6	43.9	43.5	43.3	43.0	42.7
95°	80.1	81.0	82.0	82.5	82.5	82.5	82.5	82.5
97.5°	124.6	125.7	126.8	127.3	127.2	127.1	127.0	126.9
100°	156.9	157.5	158.2	158.8	159.3	159.8	160.3	160.7
102.5°	194.0	194.8	195.5	195.8	195.7	195.6	195.5	195.4
105°	249.6	249.6	249.6	249.8	250.3	250.7	251.2	251.7
107.5°	309.7	310.4	311.1	311.4	311.1	310.8	310.5	310.2
110°	349.8	350.7	351.6	351.9	351.4	351.0	350.5	350.0



TEST NUMBER: P332233-930

CATALOG NUMBER: S123DIW-S1165D1320U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	389.9	391.0	392.2	392.6	392.6	392.5	392.4	392.3
115°	450.9	451.2	451.4	451.4	451.2	450.9	450.7	450.5
117.5°	512.6	512.5	512.4	512.1	511.4	510.8	510.1	509.5
120°	553.6	553.4	553.2	552.8	552.4	551.9	551.4	550.9
122.5°	595.2	594.5	593.9	593.3	592.6	592.0	591.3	590.7
125°	656.9	656.0	655.0	654.1	653.1	652.2	651.3	650.3
127.5°	717.9	716.6	715.3	714.0	713.0	711.9	710.9	709.7
130°	758.4	757.5	756.5	755.2	753.6	752.0	750.3	748.7
132.5°	797.8	796.6	795.6	794.3	793.0	791.8	790.5	789.3
135°	856.7	855.8	854.8	854.2	853.7	853.2	852.7	852.3
137.5°	914.4	913.4	912.4	911.5	910.6	909.7	908.8	907.9
140°	952.3	952.0	951.8	950.9	949.3	947.5	945.9	944.3
142.5°	987.8	987.6	987.3	986.6	985.3	984.1	982.8	981.5
145°	1040.0	1039.8	1039.6	1039.0	1038.0	1037.1	1036.2	1035.2
147.5°	1089.3	1089.3	1089.3	1088.7	1087.3	1085.8	1084.4	1083.0
150°	1119.8	1119.8	1119.8	1119.1	1117.7	1116.3	1114.8	1113.5
152.5°	1147.6	1148.0	1148.3	1147.9	1146.7	1145.5	1144.3	1143.0
155°	1188.3	1189.3	1190.2	1189.8	1188.2	1186.6	1184.9	1183.2
157.5°	1223.3	1224.3	1225.3	1225.1	1223.8	1222.5	1221.2	1219.9
160°	1244.8	1246.0	1247.2	1247.3	1246.3	1245.5	1244.5	1243.5
162.5°	1265.1	1266.3	1267.5	1267.3	1265.8	1264.3	1262.8	1261.3
165°	1290.8	1292.2	1293.6	1293.5	1291.8	1290.2	1288.5	1286.9
167.5°	1311.6	1313.0	1314.5	1314.5	1313.0	1311.6	1310.1	1308.6
170°	1323.0	1324.6	1326.2	1326.2	1324.6	1323.0	1321.3	1319.6
172.5°	1331.9	1333.3	1334.8	1334.7	1333.1	1331.4	1329.8	1328.1
175°	1341.5	1343.0	1344.3	1344.2	1342.6	1340.9	1339.3	1337.7
177.5°	1345.8	1347.0	1348.1	1348.0	1346.6	1345.3	1344.0	1342.7
180°	1346.1	1346.1	1346.1	1346.1	1346.1	1346.1	1346.1	1346.1

(END OF REPORT)