

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332143-930

Luminaire Tested: **S123DIW-S560D1320U930-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332143-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S560D1320U930-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1320 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5623.5 lumens
Efficiency: N/A
Efficacy: 104.5 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 53.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332143-930

CATALOG NUMBER: S123DIW-S560D1320U930-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

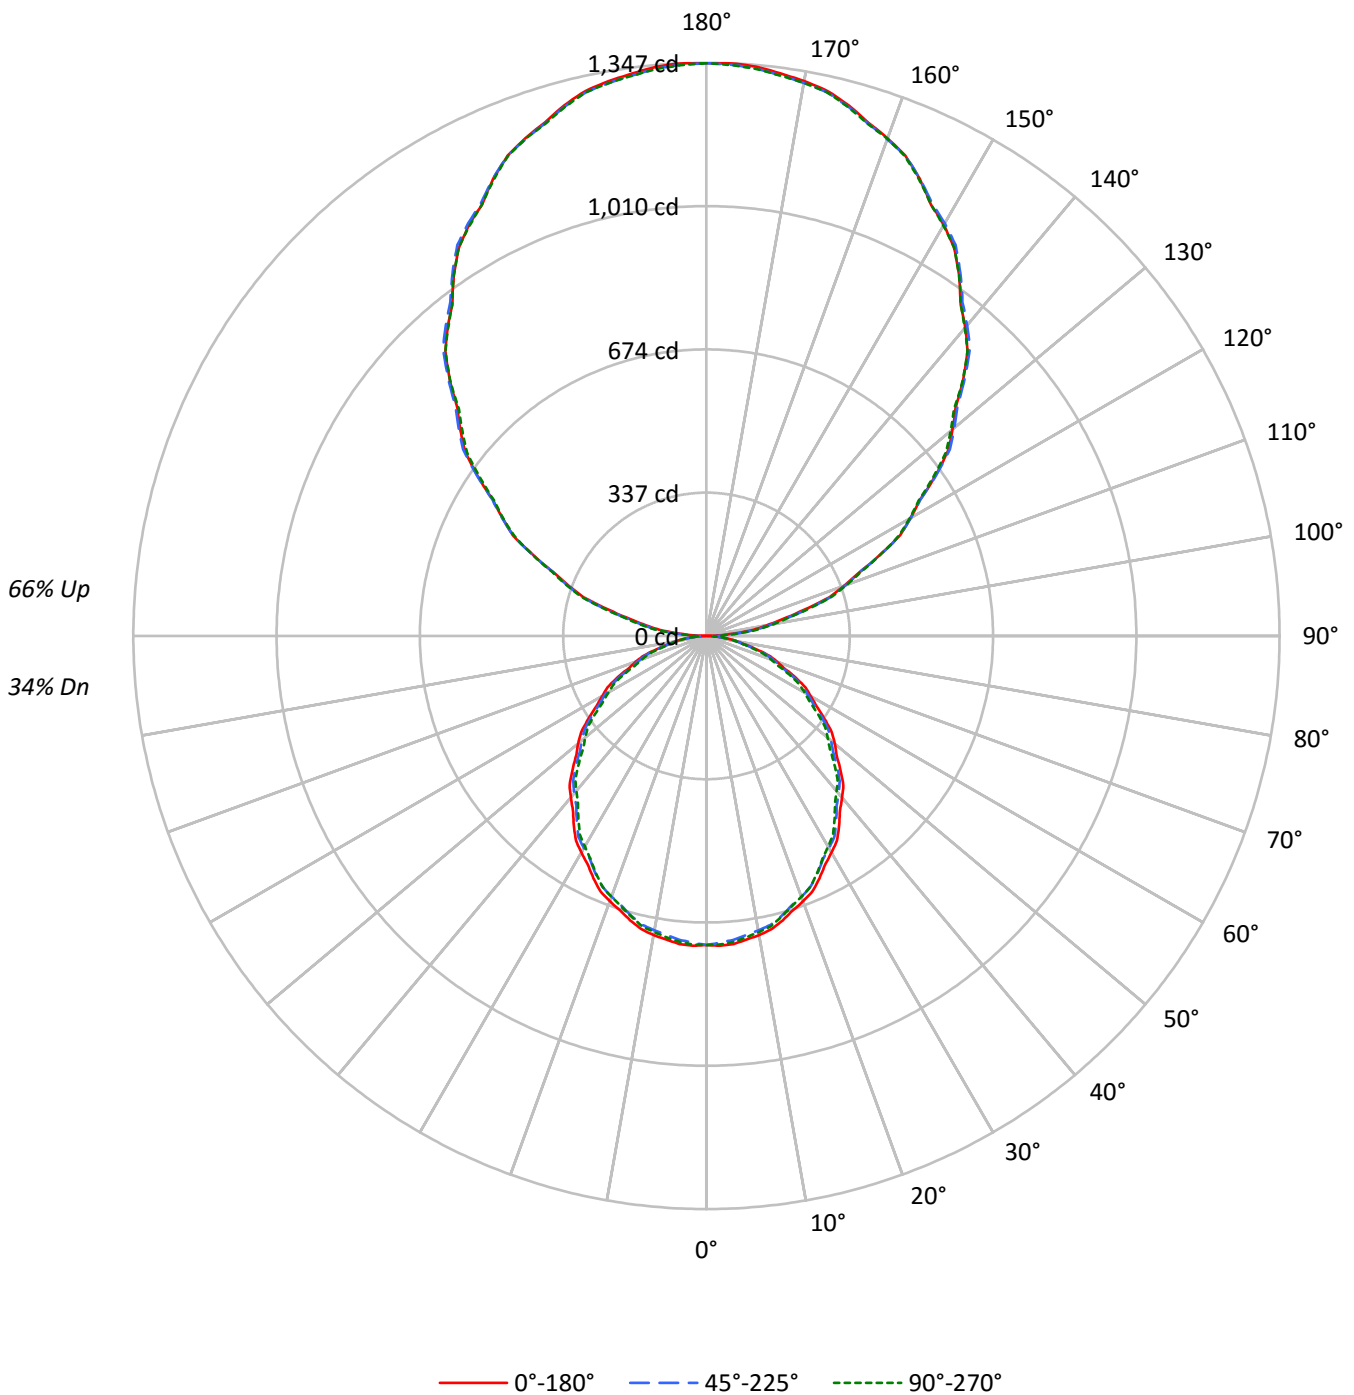



TEST NUMBER: P332143-930

CATALOG NUMBER: S123DIW-S560D1320U930-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41	34
1	94	90	86	83	85	81	78	75	65	63	61	50	49	47	36	35	35	28
2	86	78	72	67	77	71	66	61	57	53	50	44	41	39	32	30	29	24
3	78	69	62	56	70	62	56	51	50	46	42	39	36	33	28	26	25	20
4	71	61	53	47	64	55	48	43	44	40	36	34	31	28	25	23	21	17
5	65	54	46	40	59	49	42	37	40	35	31	31	27	25	23	20	18	15
6	60	48	40	35	54	44	37	32	36	31	27	28	24	21	21	18	16	13
7	56	44	36	30	50	40	33	28	32	27	23	25	22	19	19	16	14	12
8	51	39	32	27	46	36	29	25	29	24	21	23	19	17	17	15	13	10
9	48	36	29	24	43	33	26	22	27	22	18	21	18	15	16	13	12	9
10	45	33	26	21	40	30	24	20	25	20	17	19	16	13	15	12	11	8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7819	7819	7819
5°	7854	7747	7800
10°	7803	7679	7726
15°	7710	7592	7608
20°	7605	7468	7475
25°	7462	7321	7305
30°	7305	7157	7102
35°	7139	6984	6893
40°	6968	6792	6687
45°	6779	6616	6454
50°	6589	6400	6223
55°	6341	6176	5988
60°	6090	5916	5726
65°	5871	5631	5456
70°	5542	5306	5070
75°	5065	4882	4675
80°	4568	4376	4339
85°	4001	3853	3705



TEST NUMBER: P332143-930

CATALOG NUMBER: S123DIW-S560D1320U930-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	68.4	1.2
10°-20°	193.2	3.4
20°-30°	285.4	5.1
30°-40°	333.3	5.9
40°-50°	335.1	6.0
50°-60°	294.4	5.2
60°-70°	219.3	3.9
70°-80°	124.9	2.2
80°-90°	39.9	0.7
90°-100°	87.7	1.6
100°-110°	262.5	4.7
110°-120°	446.4	7.9
120°-130°	587.2	10.4
130°-140°	660.0	11.7
140°-150°	648.8	11.5
150°-160°	546.2	9.7
160°-170°	363.6	6.5
170°-180°	127.3	2.3
0°-30°	547.0	9.7
0°-40°	880.3	15.7
0°-60°	1509.9	26.8
0°-90°	1894.0	33.7
90°-120°	796.6	14.2
90°-150°	2692.5	47.9
90°-180°	3730.0	66.3
0°-180°	5623.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	726	726	726	726	726	
5°	727	724	717	723	722	69
15°	692	689	681	686	683	195
25°	628	624	616	617	615	289
35°	543	539	532	528	525	340
45°	445	442	435	427	424	344
55°	338	337	329	322	319	303
65°	230	227	221	216	214	227
75°	122	119	117	114	112	130
85°	32	31	31	30	30	36
90°	1	12	25	29	32	6
95°	62	70	78	82	82	70
105°	238	240	250	250	252	255
115°	449	452	450	451	450	444
125°	658	661	659	655	650	586
135°	853	859	859	854	852	657
145°	1035	1037	1040	1039	1035	646
155°	1185	1185	1186	1190	1183	545
165°	1291	1288	1288	1294	1287	364
175°	1343	1339	1339	1344	1338	128
180°	1346	1346	1346	1346	1346	



TEST NUMBER: P332143-930

CATALOG NUMBER: S123DIW-S560D1320U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	726.4	726.4	726.4	726.4	726.4	726.4	726.4	726.4	726.4	726.4	726.4
2.5°	728.8	728.4	728.0	727.5	727.1	726.2	725.0	723.7	722.6	721.4	722.4
5°	726.9	726.3	725.5	724.9	724.1	723.1	721.5	720.0	718.5	717.0	718.4
7.5°	719.8	719.2	718.4	717.8	717.1	715.9	714.4	712.7	711.2	709.6	710.9
10°	713.9	713.1	712.5	711.8	711.1	709.8	708.0	706.2	704.4	702.6	703.8
12.5°	705.9	705.2	704.7	704.1	703.5	702.4	700.7	699.0	697.3	695.6	696.5
15°	691.9	691.5	690.9	690.3	689.7	688.6	686.8	685.0	683.1	681.3	682.5
17.5°	675.9	675.1	674.4	673.7	672.9	671.7	669.9	668.1	666.3	664.5	665.3
20°	663.9	663.1	662.2	661.4	660.6	659.3	657.5	655.7	653.8	652.0	652.6
22.5°	650.4	649.5	648.7	647.9	647.0	645.7	643.9	642.1	640.3	638.5	639.0
25°	628.3	627.5	626.6	625.8	624.9	623.6	621.8	620.0	618.2	616.4	616.5
27.5°	604.7	603.9	603.1	602.3	601.4	600.1	598.1	596.2	594.3	592.3	592.4
30°	587.7	587.0	586.3	585.6	584.9	583.6	581.6	579.7	577.8	575.8	575.8
32.5°	570.7	569.8	568.8	567.9	567.0	565.8	564.4	562.8	561.3	559.9	559.1
35°	543.3	542.5	541.7	540.9	540.1	538.7	536.9	535.1	533.3	531.5	530.7
37.5°	515.4	514.3	513.2	512.2	511.1	509.7	507.8	506.1	504.2	502.4	501.4
40°	495.9	495.0	494.2	493.4	492.5	491.1	489.2	487.3	485.3	483.4	482.2
42.5°	476.4	475.5	474.5	473.5	472.6	471.2	469.2	467.3	465.4	463.4	462.3
45°	445.3	444.7	444.2	443.6	443.0	441.9	440.1	438.3	436.5	434.6	433.0
47.5°	414.4	413.6	412.9	412.1	411.2	409.9	408.3	406.6	404.9	403.2	401.5
50°	393.5	392.7	392.1	391.3	390.7	389.5	387.6	385.8	384.0	382.2	380.7
52.5°	371.5	371.0	370.6	370.1	369.6	368.4	366.5	364.6	362.6	360.8	359.5
55°	337.9	337.7	337.6	337.5	337.3	336.3	334.5	332.7	330.9	329.1	327.6
57.5°	305.9	305.4	304.9	304.5	304.0	303.0	301.6	300.2	298.7	297.3	296.0
60°	282.9	282.7	282.7	282.5	282.3	281.4	279.8	278.1	276.5	274.8	273.5
62.5°	262.4	262.0	261.7	261.4	261.0	260.0	258.3	256.7	254.9	253.3	252.1
65°	230.5	229.8	229.1	228.4	227.7	226.7	225.3	223.9	222.5	221.1	220.0
67.5°	196.6	196.0	195.3	194.8	194.1	193.3	192.2	191.2	190.1	189.1	188.2
70°	176.1	175.3	174.5	173.7	172.8	171.9	171.1	170.3	169.4	168.6	167.6
72.5°	154.7	154.0	153.4	152.8	152.2	151.4	150.5	149.5	148.5	147.7	146.8
75°	121.8	121.2	120.7	120.1	119.6	119.1	118.6	118.2	117.8	117.4	116.8
77.5°	92.7	92.4	92.0	91.8	91.5	91.1	90.6	90.1	89.5	89.0	88.6
80°	73.7	73.3	72.9	72.5	72.0	71.7	71.4	71.1	70.8	70.6	70.4
82.5°	55.2	55.1	55.0	55.0	54.9	54.8	54.8	54.7	54.6	54.6	54.3
85°	32.4	32.2	32.0	31.6	31.4	31.2	31.2	31.2	31.2	31.2	31.0
87.5°	13.2	13.4	13.5	13.6	13.8	14.1	14.6	15.1	15.6	16.1	16.1
90°	1.1	3.4	5.8	8.1	10.4	13.1	16.2	19.2	22.3	25.4	26.3
92.5°	25.6	27.1	28.8	30.4	32.0	33.7	35.4	37.1	38.9	40.6	41.3
95°	62.4	64.0	65.7	67.3	69.0	70.8	72.6	74.5	76.4	78.3	79.2
97.5°	110.8	112.0	113.2	114.5	115.7	117.0	118.4	119.7	121.1	122.5	123.5
100°	143.8	145.2	146.6	148.1	149.4	150.7	151.9	153.1	154.3	155.5	156.1
102.5°	181.9	182.7	183.6	184.4	185.2	186.5	188.0	189.6	191.1	192.7	193.4
105°	237.9	238.4	238.9	239.3	239.8	241.1	243.2	245.3	247.4	249.6	249.6
107.5°	303.0	303.4	303.6	303.9	304.2	304.8	305.6	306.5	307.3	308.1	308.9
110°	343.6	344.1	344.6	345.0	345.5	346.0	346.5	347.0	347.4	347.9	348.9



TEST NUMBER: P332143-930

CATALOG NUMBER: S123DIW-S560D1320U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	386.0	386.2	386.5	386.8	387.1	387.3	387.3	387.4	387.6	387.7	388.8
115°	449.4	450.1	450.8	451.5	452.2	452.3	451.8	451.4	450.9	450.5	450.7
117.5°	513.3	513.7	514.2	514.7	515.2	515.1	514.5	513.9	513.2	512.7	512.6
120°	553.0	554.4	555.9	557.3	558.6	558.8	557.6	556.4	555.3	554.1	553.8
122.5°	594.5	595.5	596.6	597.6	598.6	598.8	598.2	597.6	597.0	596.4	595.7
125°	657.7	658.4	659.1	659.8	660.6	660.6	660.1	659.7	659.3	658.8	657.9
127.5°	716.1	717.6	719.1	720.6	722.1	722.6	722.1	721.5	721.1	720.6	719.2
130°	755.0	756.8	758.8	760.7	762.5	763.1	762.4	761.7	761.0	760.3	759.4
132.5°	793.9	795.8	797.7	799.6	801.4	802.1	801.6	801.1	800.5	800.1	798.9
135°	853.4	854.8	856.1	857.5	859.0	859.6	859.3	859.1	858.8	858.6	857.7
137.5°	908.3	909.5	910.7	911.8	913.1	914.0	914.5	915.2	915.7	916.4	915.3
140°	946.4	947.5	948.8	949.9	951.1	951.8	952.0	952.3	952.5	952.8	952.5
142.5°	981.0	982.3	983.4	984.6	985.8	986.6	987.0	987.4	987.8	988.3	988.1
145°	1035.2	1035.7	1036.2	1036.7	1037.1	1037.7	1038.4	1039.1	1039.8	1040.5	1040.2
147.5°	1082.6	1083.5	1084.3	1085.2	1086.0	1086.7	1087.4	1088.0	1088.7	1089.3	1089.3
150°	1115.6	1116.1	1116.6	1117.0	1117.4	1117.9	1118.4	1118.8	1119.3	1119.8	1119.8
152.5°	1142.6	1143.3	1143.9	1144.6	1145.3	1145.7	1146.1	1146.3	1146.6	1146.9	1147.3
155°	1185.4	1185.4	1185.4	1185.4	1185.4	1185.5	1185.7	1185.9	1186.2	1186.4	1187.4
157.5°	1221.7	1221.5	1221.2	1220.9	1220.6	1220.6	1220.7	1220.9	1221.2	1221.3	1222.3
160°	1244.6	1244.1	1243.7	1243.2	1242.7	1242.4	1242.4	1242.4	1242.4	1242.4	1243.7
162.5°	1264.9	1264.2	1263.6	1262.9	1262.2	1262.0	1262.2	1262.4	1262.6	1262.7	1264.0
165°	1291.1	1290.4	1289.7	1289.0	1288.3	1287.9	1287.9	1287.9	1287.9	1287.9	1289.3
167.5°	1312.1	1311.1	1310.2	1309.2	1308.3	1307.9	1308.1	1308.3	1308.5	1308.6	1310.1
170°	1323.9	1323.0	1322.0	1321.1	1320.1	1319.6	1319.6	1319.6	1319.6	1319.6	1321.3
172.5°	1333.2	1332.3	1331.3	1330.4	1329.4	1328.9	1328.9	1328.9	1328.9	1328.9	1330.4
175°	1343.0	1342.0	1341.1	1340.1	1339.1	1338.7	1338.7	1338.7	1338.7	1338.7	1340.1
177.5°	1347.0	1346.2	1345.4	1344.7	1343.9	1343.5	1343.5	1343.5	1343.5	1343.5	1344.7
180°	1346.1	1346.1	1346.1	1346.1	1346.1	1346.1	1346.1	1346.1	1346.1	1346.1	1346.1



TEST NUMBER: P332143-930

CATALOG NUMBER: S123DIW-S560D1320U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	726.4	726.4	726.4	726.4	726.4	726.4	726.4	726.4
2.5°	723.6	724.6	725.8	726.3	726.2	726.0	725.9	725.9
5°	719.7	721.1	722.5	723.1	722.8	722.5	722.3	721.9
7.5°	712.1	713.3	714.6	715.1	714.9	714.8	714.6	714.4
10°	705.1	706.4	707.6	708.1	707.8	707.5	707.3	706.9
12.5°	697.4	698.4	699.3	699.6	699.4	699.3	699.1	699.0
15°	683.6	684.7	685.8	685.9	685.1	684.3	683.5	682.7
17.5°	666.1	666.8	667.6	667.8	667.6	667.2	666.9	666.6
20°	653.1	653.7	654.2	654.3	653.9	653.5	653.1	652.6
22.5°	639.4	639.8	640.3	640.3	639.8	639.2	638.7	638.1
25°	616.7	616.9	616.9	616.9	616.4	616.0	615.6	615.1
27.5°	592.6	592.6	592.7	592.6	592.0	591.5	590.9	590.4
30°	575.8	575.8	575.8	575.4	574.4	573.4	572.4	571.4
32.5°	558.3	557.5	556.7	556.0	555.5	555.1	554.5	554.0
35°	529.8	529.0	528.2	527.4	526.7	526.0	525.3	524.6
37.5°	500.3	499.4	498.4	497.7	497.3	496.8	496.4	495.9
40°	481.2	480.0	479.0	478.1	477.5	477.0	476.5	475.9
42.5°	461.2	460.1	458.9	458.1	457.5	457.1	456.5	455.9
45°	431.4	429.7	428.0	426.8	426.2	425.4	424.8	424.0
47.5°	399.9	398.3	396.6	395.5	394.9	394.3	393.7	393.1
50°	379.2	377.6	376.1	375.0	374.1	373.2	372.4	371.6
52.5°	358.2	356.9	355.6	354.4	353.6	352.8	352.0	351.1
55°	326.0	324.6	323.0	321.9	321.2	320.5	319.8	319.1
57.5°	294.6	293.2	291.9	290.7	289.9	289.2	288.4	287.6
60°	272.3	271.1	269.8	268.8	268.2	267.4	266.8	266.0
62.5°	250.8	249.6	248.3	247.4	247.0	246.5	246.1	245.6
65°	218.8	217.8	216.6	215.9	215.5	215.1	214.7	214.2
67.5°	187.2	186.2	185.2	184.4	183.8	183.3	182.7	182.1
70°	166.6	165.8	164.8	163.9	163.2	162.5	161.8	161.1
72.5°	145.9	145.0	144.2	143.6	143.2	142.8	142.5	142.1
75°	116.0	115.4	114.6	114.1	113.7	113.2	112.8	112.4
77.5°	88.1	87.6	87.2	86.9	86.9	86.9	86.9	86.9
80°	70.3	70.1	70.0	70.0	70.0	70.0	70.0	70.0
82.5°	54.1	53.8	53.6	53.4	53.3	53.2	53.1	53.0
85°	30.7	30.4	30.1	30.0	30.0	30.0	30.0	30.0
87.5°	16.2	16.3	16.4	16.5	16.6	16.6	16.7	16.9
90°	27.2	28.2	29.1	29.8	30.3	30.8	31.2	31.7
92.5°	42.1	42.9	43.6	43.9	43.5	43.3	43.0	42.7
95°	80.1	81.0	82.0	82.5	82.5	82.5	82.5	82.5
97.5°	124.6	125.7	126.8	127.3	127.2	127.1	127.0	126.9
100°	156.9	157.5	158.2	158.8	159.3	159.8	160.3	160.7
102.5°	194.0	194.8	195.5	195.8	195.7	195.6	195.5	195.4
105°	249.6	249.6	249.6	249.8	250.3	250.7	251.2	251.7
107.5°	309.7	310.4	311.1	311.4	311.1	310.8	310.5	310.2
110°	349.8	350.7	351.6	351.9	351.4	351.0	350.5	350.0



TEST NUMBER: P332143-930

CATALOG NUMBER: S123DIW-S560D1320U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	389.9	391.0	392.2	392.6	392.6	392.5	392.4	392.3
115°	450.9	451.2	451.4	451.4	451.2	450.9	450.7	450.5
117.5°	512.6	512.5	512.4	512.1	511.4	510.8	510.1	509.5
120°	553.6	553.4	553.2	552.8	552.4	551.9	551.4	550.9
122.5°	595.2	594.5	593.9	593.3	592.6	592.0	591.3	590.7
125°	656.9	656.0	655.0	654.1	653.1	652.2	651.3	650.3
127.5°	717.9	716.6	715.3	714.0	713.0	711.9	710.9	709.7
130°	758.4	757.5	756.5	755.2	753.6	752.0	750.3	748.7
132.5°	797.8	796.6	795.6	794.3	793.0	791.8	790.5	789.3
135°	856.7	855.8	854.8	854.2	853.7	853.2	852.7	852.3
137.5°	914.4	913.4	912.4	911.5	910.6	909.7	908.8	907.9
140°	952.3	952.0	951.8	950.9	949.3	947.5	945.9	944.3
142.5°	987.8	987.6	987.3	986.6	985.3	984.1	982.8	981.5
145°	1040.0	1039.8	1039.6	1039.0	1038.0	1037.1	1036.2	1035.2
147.5°	1089.3	1089.3	1089.3	1088.7	1087.3	1085.8	1084.4	1083.0
150°	1119.8	1119.8	1119.8	1119.1	1117.7	1116.3	1114.8	1113.5
152.5°	1147.6	1148.0	1148.3	1147.9	1146.7	1145.5	1144.3	1143.0
155°	1188.3	1189.3	1190.2	1189.8	1188.2	1186.6	1184.9	1183.2
157.5°	1223.3	1224.3	1225.3	1225.1	1223.8	1222.5	1221.2	1219.9
160°	1244.8	1246.0	1247.2	1247.3	1246.3	1245.5	1244.5	1243.5
162.5°	1265.1	1266.3	1267.5	1267.3	1265.8	1264.3	1262.8	1261.3
165°	1290.8	1292.2	1293.6	1293.5	1291.8	1290.2	1288.5	1286.9
167.5°	1311.6	1313.0	1314.5	1314.5	1313.0	1311.6	1310.1	1308.6
170°	1323.0	1324.6	1326.2	1326.2	1324.6	1323.0	1321.3	1319.6
172.5°	1331.9	1333.3	1334.8	1334.7	1333.1	1331.4	1329.8	1328.1
175°	1341.5	1343.0	1344.3	1344.2	1342.6	1340.9	1339.3	1337.7
177.5°	1345.8	1347.0	1348.1	1348.0	1346.6	1345.3	1344.0	1342.7
180°	1346.1	1346.1	1346.1	1346.1	1346.1	1346.1	1346.1	1346.1

(END OF REPORT)