

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332130-930

Luminaire Tested: **S123DIW-S560D755U930-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332130-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIW-S560D755U930-4F0-1E-UDD-F  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 755 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4354.8 lumens  
Efficiency: N/A  
Efficacy: 115.8 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 37.6  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332130-930

CATALOG NUMBER: S123DIW-S560D755U930-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

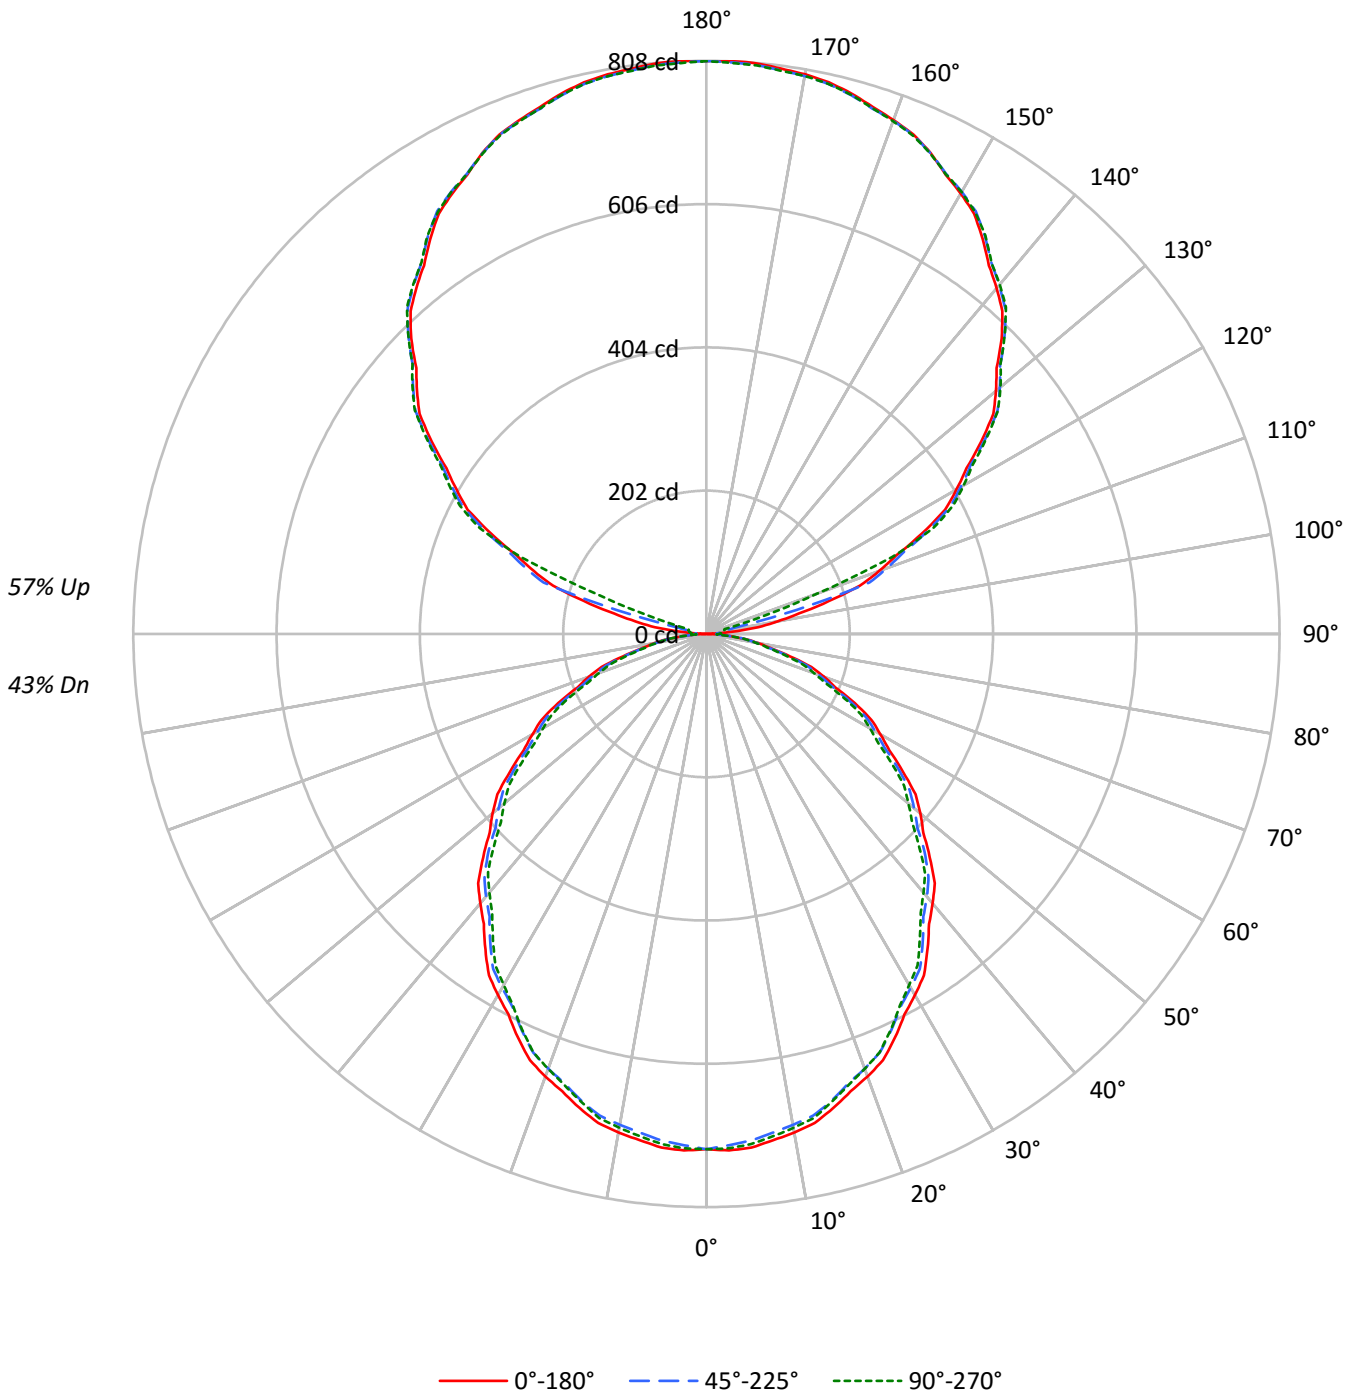



TEST NUMBER: P332130-930

CATALOG NUMBER: S123DIW-S560D755U930-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	80	80	80	64	64	64	50	50	50	43
1	96	92	88	85	88	84	81	78	70	67	65	56	55	53	44	43	42	36
2	88	80	74	69	80	74	68	64	61	57	54	50	47	44	39	37	35	31
3	80	70	63	57	73	65	58	53	54	49	45	44	40	38	34	32	30	26
4	73	62	54	48	66	57	50	45	48	43	39	39	35	32	31	28	26	22
5	67	55	47	41	61	51	44	39	43	37	33	35	31	28	28	25	23	19
6	62	50	42	36	56	46	39	34	38	33	29	32	27	24	25	22	20	17
7	57	45	37	31	52	41	34	29	35	29	25	29	25	21	23	20	18	15
8	53	41	33	28	48	38	31	26	32	26	23	26	22	19	21	18	16	13
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14	12
10	46	34	27	22	42	31	25	21	27	22	18	22	18	15	18	15	13	11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	7819	7819	7819
5°	7854	7747	7800
10°	7803	7679	7726
15°	7710	7592	7608
20°	7605	7468	7475
25°	7462	7321	7305
30°	7305	7157	7102
35°	7139	6984	6893
40°	6968	6792	6687
45°	6779	6616	6454
50°	6589	6400	6223
55°	6341	6176	5988
60°	6090	5916	5726
65°	5871	5631	5456
70°	5542	5306	5070
75°	5065	4882	4675
80°	4568	4376	4339
85°	4001	3853	3705



TEST NUMBER: P332130-930

CATALOG NUMBER: S123DIW-S560D755U930-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	68.4	1.6
10°-20°	193.2	4.4
20°-30°	285.4	6.6
30°-40°	333.3	7.7
40°-50°	335.1	7.7
50°-60°	294.4	6.8
60°-70°	219.3	5.0
70°-80°	124.9	2.9
80°-90°	38.1	0.9
90°-100°	29.4	0.7
100°-110°	139.9	3.2
110°-120°	336.1	7.7
120°-130°	428.0	9.8
130°-140°	457.3	10.5
140°-150°	427.6	9.8
150°-160°	344.9	7.9
160°-170°	222.6	5.1
170°-180°	76.7	1.8
0°-30°	547.0	12.6
0°-40°	880.3	20.2
0°-60°	1509.9	34.7
0°-90°	1892.2	43.5
90°-120°	505.4	11.6
90°-150°	1818.3	41.8
90°-180°	2463.0	56.6
0°-180°	4354.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	726	726	726	726	726	
5°	727	724	717	723	722	69
15°	692	689	681	686	683	195
25°	628	624	616	617	615	289
35°	543	539	532	528	525	340
45°	445	442	435	427	424	344
55°	338	337	329	322	319	303
65°	230	227	221	216	214	227
75°	122	119	117	114	112	130
85°	32	31	31	30	30	36
90°	1	7	14	17	18	3
95°	37	14	19	23	23	45
105°	179	182	131	31	26	190
115°	335	339	344	350	353	331
125°	473	477	480	481	482	422
135°	589	592	594	596	594	453
145°	679	683	684	686	686	425
155°	748	747	748	750	747	345
165°	789	787	786	791	787	223
175°	808	805	805	809	804	77
180°	808	808	808	808	808	



TEST NUMBER: P332130-930

CATALOG NUMBER: S123DIW-S560D755U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	726.4	726.4	726.4	726.4	726.4	726.4	726.4	726.4	726.4	726.4	726.4
2.5°	728.8	728.4	728.0	727.5	727.1	726.2	725.0	723.7	722.6	721.4	722.4
5°	726.9	726.3	725.5	724.9	724.1	723.1	721.5	720.0	718.5	717.0	718.4
7.5°	719.8	719.2	718.4	717.8	717.1	715.9	714.4	712.7	711.2	709.6	710.9
10°	713.9	713.1	712.5	711.8	711.1	709.8	708.0	706.2	704.4	702.6	703.8
12.5°	705.9	705.2	704.7	704.1	703.5	702.4	700.7	699.0	697.3	695.6	696.5
15°	691.9	691.5	690.9	690.3	689.7	688.6	686.8	685.0	683.1	681.3	682.5
17.5°	675.9	675.1	674.4	673.7	672.9	671.7	669.9	668.1	666.3	664.5	665.3
20°	663.9	663.1	662.2	661.4	660.6	659.3	657.5	655.7	653.8	652.0	652.6
22.5°	650.4	649.5	648.7	647.9	647.0	645.7	643.9	642.1	640.3	638.5	639.0
25°	628.3	627.5	626.6	625.8	624.9	623.6	621.8	620.0	618.2	616.4	616.5
27.5°	604.7	603.9	603.1	602.3	601.4	600.1	598.1	596.2	594.3	592.3	592.4
30°	587.7	587.0	586.3	585.6	584.9	583.6	581.6	579.7	577.8	575.8	575.8
32.5°	570.7	569.8	568.8	567.9	567.0	565.8	564.4	562.8	561.3	559.9	559.1
35°	543.3	542.5	541.7	540.9	540.1	538.7	536.9	535.1	533.3	531.5	530.7
37.5°	515.4	514.3	513.2	512.2	511.1	509.7	507.8	506.1	504.2	502.4	501.4
40°	495.9	495.0	494.2	493.4	492.5	491.1	489.2	487.3	485.3	483.4	482.2
42.5°	476.4	475.5	474.5	473.5	472.6	471.2	469.2	467.3	465.4	463.4	462.3
45°	445.3	444.7	444.2	443.6	443.0	441.9	440.1	438.3	436.5	434.6	433.0
47.5°	414.4	413.6	412.9	412.1	411.2	409.9	408.3	406.6	404.9	403.2	401.5
50°	393.5	392.7	392.1	391.3	390.7	389.5	387.6	385.8	384.0	382.2	380.7
52.5°	371.5	371.0	370.6	370.1	369.6	368.4	366.5	364.6	362.6	360.8	359.5
55°	337.9	337.7	337.6	337.5	337.3	336.3	334.5	332.7	330.9	329.1	327.6
57.5°	305.9	305.4	304.9	304.5	304.0	303.0	301.6	300.2	298.7	297.3	296.0
60°	282.9	282.7	282.7	282.5	282.3	281.4	279.8	278.1	276.5	274.8	273.5
62.5°	262.4	262.0	261.7	261.4	261.0	260.0	258.3	256.7	254.9	253.3	252.1
65°	230.5	229.8	229.1	228.4	227.7	226.7	225.3	223.9	222.5	221.1	220.0
67.5°	196.6	196.0	195.3	194.8	194.1	193.3	192.2	191.2	190.1	189.1	188.2
70°	176.1	175.3	174.5	173.7	172.8	171.9	171.1	170.3	169.4	168.6	167.6
72.5°	154.7	154.0	153.4	152.8	152.2	151.4	150.5	149.5	148.5	147.7	146.8
75°	121.8	121.2	120.7	120.1	119.6	119.1	118.6	118.2	117.8	117.4	116.8
77.5°	92.7	92.4	92.0	91.8	91.5	91.1	90.6	90.1	89.5	89.0	88.6
80°	73.7	73.3	72.9	72.5	72.0	71.7	71.4	71.1	70.8	70.6	70.4
82.5°	55.2	55.1	55.0	55.0	54.9	54.8	54.8	54.7	54.6	54.6	54.3
85°	32.4	32.2	32.0	31.6	31.4	31.2	31.2	31.2	31.2	31.2	31.0
87.5°	13.1	13.0	13.0	12.9	12.9	13.0	13.1	13.4	13.6	13.9	13.9
90°	0.6	2.0	3.3	4.6	6.0	7.5	9.2	10.9	12.6	14.4	14.9
92.5°	11.2	10.8	10.4	10.0	9.7	10.1	11.4	12.7	14.0	15.3	16.2
95°	36.6	31.1	25.7	20.2	14.8	12.7	14.2	15.7	17.1	18.6	19.6
97.5°	73.5	71.1	68.6	66.2	63.8	57.7	48.1	38.5	28.9	19.3	20.4
100°	101.4	104.0	106.7	109.4	112.0	103.0	82.2	61.4	40.6	19.8	20.9
102.5°	133.1	135.0	136.9	138.8	140.7	130.4	107.6	84.9	62.2	39.5	36.2
105°	178.8	180.3	181.7	183.2	184.7	179.4	167.4	155.4	143.4	131.4	107.8
107.5°	227.0	228.2	229.3	230.6	231.7	233.3	235.1	237.0	239.0	240.8	223.5
110°	259.2	260.2	261.3	262.4	263.4	264.7	266.2	267.7	269.1	270.6	266.2



TEST NUMBER: P332130-930

CATALOG NUMBER: S123DIW-S560D755U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	289.9	290.8	291.8	292.8	293.8	295.0	296.4	297.9	299.4	300.8	300.9
115°	335.3	336.1	337.0	337.8	338.6	339.6	340.8	341.9	343.2	344.4	345.7
117.5°	379.4	380.4	381.4	382.4	383.4	384.2	384.7	385.4	386.0	386.6	387.7
120°	406.8	408.0	409.2	410.3	411.6	412.4	412.8	413.2	413.6	413.9	415.1
122.5°	434.6	435.6	436.6	437.6	438.5	439.3	439.8	440.3	440.8	441.3	442.1
125°	472.8	473.9	474.9	476.0	477.0	477.8	478.3	478.9	479.4	480.0	480.2
127.5°	509.7	510.8	511.8	512.9	514.0	514.9	515.5	516.1	516.7	517.4	517.8
130°	532.7	533.9	534.9	536.0	537.0	537.9	538.3	538.9	539.4	540.0	540.5
132.5°	554.8	555.9	556.9	558.0	559.1	559.9	560.3	560.7	561.1	561.6	562.1
135°	588.6	589.4	590.1	590.9	591.7	592.4	593.0	593.5	594.0	594.5	594.9
137.5°	617.3	618.3	619.4	620.4	621.4	622.1	622.3	622.6	623.0	623.2	623.9
140°	636.5	637.3	638.1	639.0	639.8	640.3	640.7	641.2	641.6	642.0	642.5
142.5°	654.3	655.1	655.9	656.7	657.5	658.1	658.5	658.9	659.3	659.7	660.1
145°	679.1	680.0	681.0	681.9	682.9	683.5	683.7	684.0	684.3	684.5	684.8
147.5°	702.5	703.1	703.8	704.3	705.0	705.4	705.7	706.0	706.2	706.5	706.8
150°	717.0	717.3	717.7	718.1	718.5	718.8	719.2	719.4	719.7	719.9	720.2
152.5°	729.9	730.1	730.3	730.4	730.7	730.8	731.0	731.2	731.3	731.5	731.9
155°	748.1	747.9	747.6	747.3	747.1	747.0	747.1	747.3	747.4	747.5	748.2
157.5°	762.3	762.3	762.2	762.2	762.2	762.1	762.0	761.8	761.7	761.6	762.4
160°	770.9	770.8	770.7	770.5	770.4	770.3	770.1	770.0	769.9	769.7	770.5
162.5°	779.1	778.8	778.4	778.0	777.7	777.5	777.3	777.2	777.1	776.9	777.9
165°	789.0	788.6	788.1	787.7	787.3	787.1	786.9	786.8	786.7	786.5	787.6
167.5°	796.6	796.1	795.6	795.0	794.5	794.2	794.2	794.2	794.2	794.2	795.2
170°	801.0	800.4	799.9	799.3	798.8	798.5	798.5	798.5	798.5	798.5	799.6
172.5°	803.8	803.2	802.5	801.9	801.3	801.0	801.1	801.2	801.3	801.4	802.5
175°	807.6	806.8	806.2	805.5	804.9	804.6	804.7	804.9	805.0	805.1	806.1
177.5°	808.5	808.0	807.4	806.9	806.3	806.2	806.2	806.3	806.5	806.6	807.4
180°	807.6	807.6	807.6	807.6	807.6	807.6	807.6	807.6	807.6	807.6	807.6



TEST NUMBER: P332130-930

CATALOG NUMBER: S123DIW-S560D755U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	726.4	726.4	726.4	726.4	726.4	726.4	726.4	726.4
2.5°	723.6	724.6	725.8	726.3	726.2	726.0	725.9	725.9
5°	719.7	721.1	722.5	723.1	722.8	722.5	722.3	721.9
7.5°	712.1	713.3	714.6	715.1	714.9	714.8	714.6	714.4
10°	705.1	706.4	707.6	708.1	707.8	707.5	707.3	706.9
12.5°	697.4	698.4	699.3	699.6	699.4	699.3	699.1	699.0
15°	683.6	684.7	685.8	685.9	685.1	684.3	683.5	682.7
17.5°	666.1	666.8	667.6	667.8	667.6	667.2	666.9	666.6
20°	653.1	653.7	654.2	654.3	653.9	653.5	653.1	652.6
22.5°	639.4	639.8	640.3	640.3	639.8	639.2	638.7	638.1
25°	616.7	616.9	616.9	616.9	616.4	616.0	615.6	615.1
27.5°	592.6	592.6	592.7	592.6	592.0	591.5	590.9	590.4
30°	575.8	575.8	575.8	575.4	574.4	573.4	572.4	571.4
32.5°	558.3	557.5	556.7	556.0	555.5	555.1	554.5	554.0
35°	529.8	529.0	528.2	527.4	526.7	526.0	525.3	524.6
37.5°	500.3	499.4	498.4	497.7	497.3	496.8	496.4	495.9
40°	481.2	480.0	479.0	478.1	477.5	477.0	476.5	475.9
42.5°	461.2	460.1	458.9	458.1	457.5	457.1	456.5	455.9
45°	431.4	429.7	428.0	426.8	426.2	425.4	424.8	424.0
47.5°	399.9	398.3	396.6	395.5	394.9	394.3	393.7	393.1
50°	379.2	377.6	376.1	375.0	374.1	373.2	372.4	371.6
52.5°	358.2	356.9	355.6	354.4	353.6	352.8	352.0	351.1
55°	326.0	324.6	323.0	321.9	321.2	320.5	319.8	319.1
57.5°	294.6	293.2	291.9	290.7	289.9	289.2	288.4	287.6
60°	272.3	271.1	269.8	268.8	268.2	267.4	266.8	266.0
62.5°	250.8	249.6	248.3	247.4	247.0	246.5	246.1	245.6
65°	218.8	217.8	216.6	215.9	215.5	215.1	214.7	214.2
67.5°	187.2	186.2	185.2	184.4	183.8	183.3	182.7	182.1
70°	166.6	165.8	164.8	163.9	163.2	162.5	161.8	161.1
72.5°	145.9	145.0	144.2	143.6	143.2	142.8	142.5	142.1
75°	116.0	115.4	114.6	114.1	113.7	113.2	112.8	112.4
77.5°	88.1	87.6	87.2	86.9	86.9	86.9	86.9	86.9
80°	70.3	70.1	70.0	70.0	70.0	70.0	70.0	70.0
82.5°	54.1	53.8	53.6	53.4	53.3	53.2	53.1	53.0
85°	30.7	30.4	30.1	30.0	30.0	30.0	30.0	30.0
87.5°	13.9	13.9	13.9	13.9	13.9	14.0	14.0	14.1
90°	15.5	16.0	16.6	17.0	17.2	17.4	17.7	18.0
92.5°	17.0	17.9	18.8	19.2	19.4	19.6	19.7	19.9
95°	20.5	21.4	22.3	22.8	22.8	22.8	22.8	22.8
97.5°	21.4	22.5	23.6	24.2	24.3	24.5	24.6	24.7
100°	21.9	23.0	24.1	24.7	24.8	24.9	25.0	25.2
102.5°	32.9	29.6	26.3	24.7	24.9	25.2	25.4	25.7
105°	84.2	60.6	37.0	25.4	25.6	25.8	26.2	26.4
107.5°	206.2	188.9	171.6	154.1	136.2	118.5	100.7	82.9
110°	261.8	257.4	253.0	241.2	222.2	203.1	184.0	165.0





TEST NUMBER: P332130-930

CATALOG NUMBER: S123DIW-S560D755U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	301.0	301.1	301.2	299.1	295.1	291.1	287.1	283.1
115°	347.1	348.4	349.7	350.7	351.1	351.7	352.2	352.8
117.5°	388.7	389.8	390.9	391.4	391.6	391.7	391.8	391.9
120°	416.1	417.2	418.2	418.7	418.7	418.7	418.7	418.7
122.5°	442.8	443.5	444.3	444.7	444.8	444.9	445.1	445.2
125°	480.5	480.8	481.0	481.3	481.6	481.8	482.1	482.3
127.5°	518.3	518.7	519.1	519.2	518.9	518.6	518.4	518.1
130°	541.0	541.5	542.1	542.3	541.9	541.7	541.4	541.1
132.5°	562.6	563.1	563.7	563.8	563.4	563.0	562.6	562.2
135°	595.3	595.7	596.1	596.1	595.7	595.3	594.9	594.5
137.5°	624.5	625.2	625.8	626.0	625.7	625.4	625.2	624.9
140°	643.0	643.5	644.1	644.2	643.9	643.7	643.4	643.1
142.5°	660.6	661.0	661.4	661.5	661.0	660.7	660.3	659.9
145°	685.1	685.3	685.6	685.7	685.7	685.7	685.7	685.7
147.5°	707.0	707.3	707.6	707.4	706.8	706.1	705.6	704.9
150°	720.5	720.7	721.0	721.0	720.6	720.2	719.7	719.3
152.5°	732.4	732.9	733.4	733.3	732.7	732.1	731.5	730.8
155°	748.9	749.5	750.2	750.2	749.3	748.5	747.7	746.9
157.5°	763.2	763.9	764.8	764.7	763.6	762.5	761.6	760.5
160°	771.4	772.2	772.9	772.9	771.9	771.0	770.1	769.2
162.5°	778.8	779.7	780.6	780.6	779.8	778.9	778.1	777.3
165°	788.6	789.7	790.8	790.8	789.9	789.0	788.1	787.1
167.5°	796.3	797.4	798.5	798.5	797.4	796.3	795.2	794.2
170°	800.6	801.8	802.8	802.8	801.8	800.6	799.6	798.5
172.5°	803.6	804.6	805.7	805.6	804.5	803.3	802.1	801.0
175°	807.0	808.0	808.9	808.8	807.7	806.7	805.6	804.5
177.5°	808.3	809.1	810.0	809.8	808.8	807.7	806.7	805.6
180°	807.6	807.6	807.6	807.6	807.6	807.6	807.6	807.6

(END OF REPORT)