

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332178-930

Luminaire Tested: **S123DIW-S775D1535U930-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332178-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S775D1535U930-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1535 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7591.1 lumens
Efficiency: N/A
Efficacy: 111.5 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 68.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332178-930

CATALOG NUMBER: S123DIW-S775D1535U930-4F0-1E-UDD-F

Luminous Intensity Polar Plot

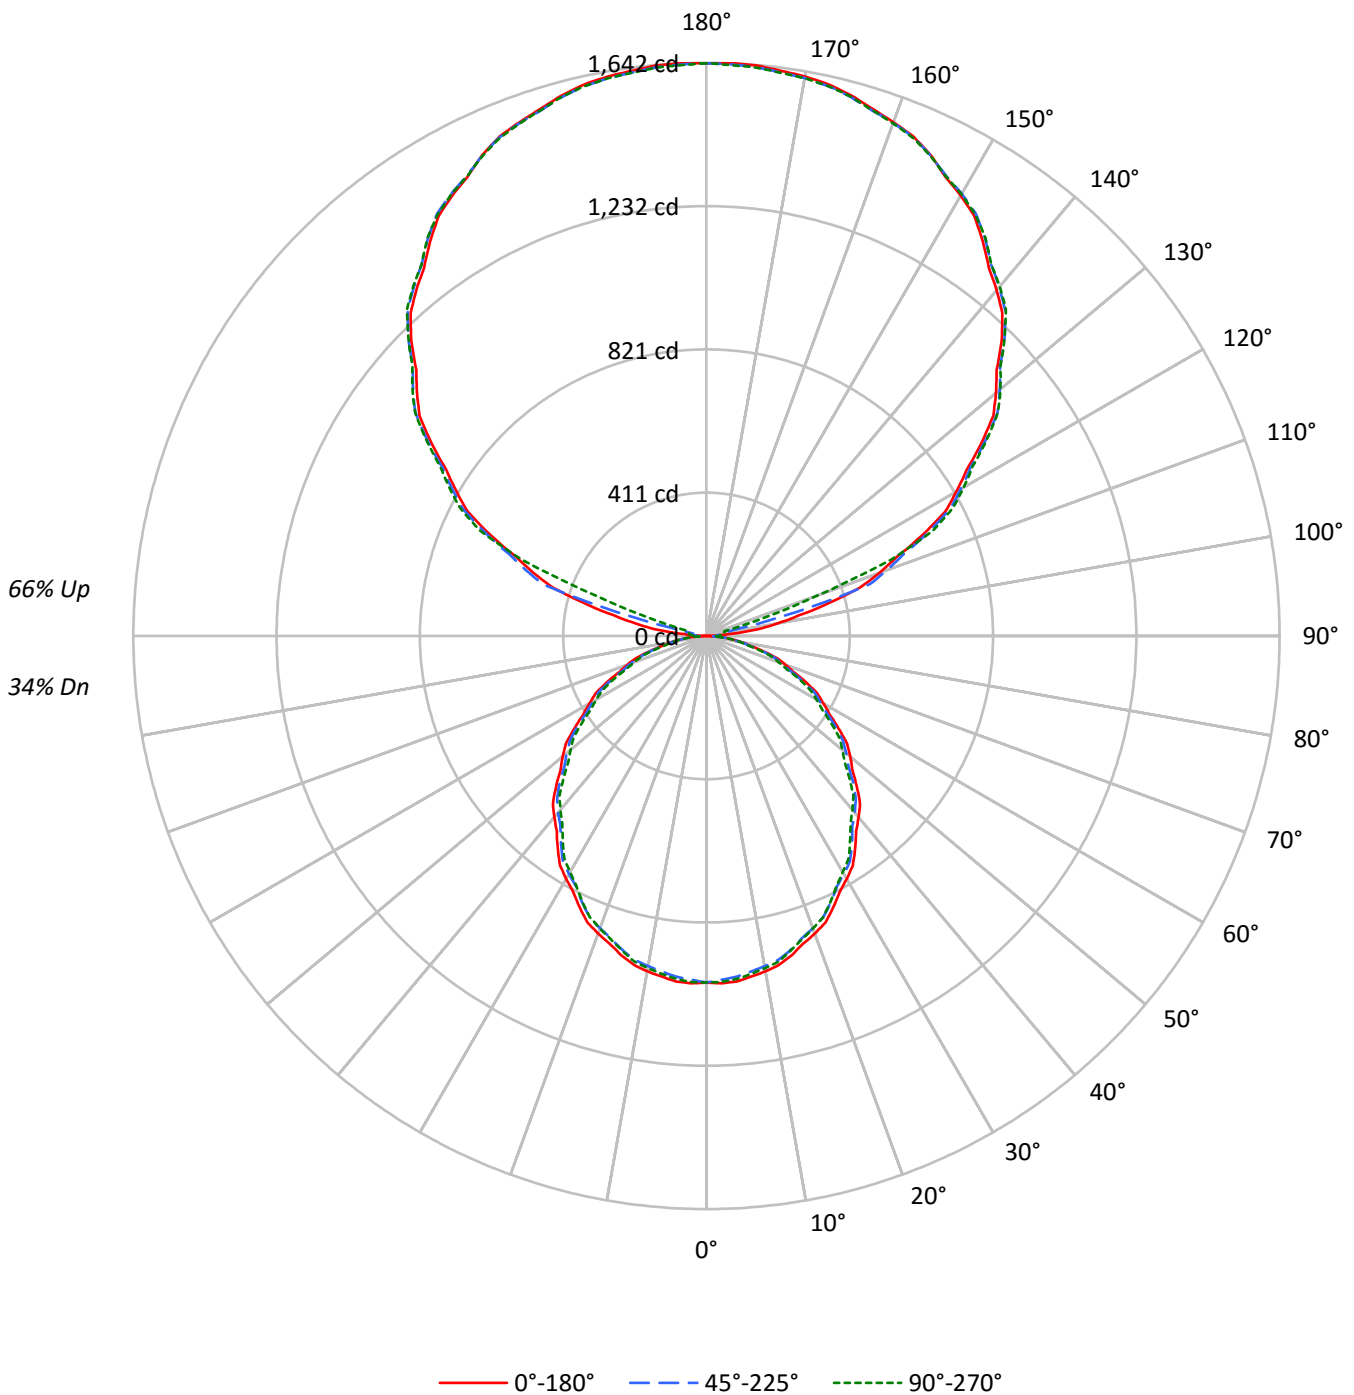



TEST NUMBER: P332178-930

CATALOG NUMBER: S123DIW-S775D1535U930-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	42	42	42	34
1	94	90	86	83	85	81	78	75	65	63	61	50	49	48	37	36	35	29
2	86	78	72	67	77	71	66	62	57	53	50	44	42	40	32	31	29	24
3	78	69	62	56	70	62	56	51	50	46	42	39	36	33	28	27	25	20
4	71	61	53	47	64	55	49	43	45	40	36	35	31	29	25	23	21	17
5	65	54	46	40	59	49	42	37	40	35	31	31	27	25	23	21	19	15
6	60	48	41	35	54	44	37	32	36	31	27	28	24	22	21	18	16	13
7	56	44	36	30	50	40	33	28	32	27	24	25	22	19	19	16	15	12
8	51	39	32	27	46	36	29	25	29	24	21	23	20	17	17	15	13	10
9	48	36	29	24	43	33	26	22	27	22	19	21	18	15	16	14	12	9
10	45	33	26	21	40	30	24	20	25	20	17	20	16	14	15	12	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10687	10687	10687
5°	10737	10589	10662
10°	10665	10497	10563
15°	10541	10379	10398
20°	10394	10208	10219
25°	10200	10007	9987
30°	9984	9783	9708
35°	9759	9546	9423
40°	9524	9284	9140
45°	9266	9045	8824
50°	9008	8748	8505
55°	8668	8443	8188
60°	8325	8086	7830
65°	8023	7697	7457
70°	7578	7254	6930
75°	6924	6675	6392
80°	6248	5976	5926
85°	5483	5274	5064



TEST NUMBER: P332178-930

CATALOG NUMBER: S123DIW-S775D1535U930-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	93.5	1.2
10°-20°	264.1	3.5
20°-30°	390.1	5.1
30°-40°	455.7	6.0
40°-50°	458.1	6.0
50°-60°	402.4	5.3
60°-70°	299.8	3.9
70°-80°	170.8	2.3
80°-90°	53.6	0.7
90°-100°	59.6	0.8
100°-110°	284.3	3.7
110°-120°	682.8	9.0
120°-130°	869.5	11.5
130°-140°	929.1	12.2
140°-150°	868.8	11.4
150°-160°	700.8	9.2
160°-170°	452.3	6.0
170°-180°	155.9	2.1
0°-30°	747.7	9.8
0°-40°	1203.3	15.9
0°-60°	2063.8	27.2
0°-90°	2588.1	34.1
90°-120°	1026.8	13.5
90°-150°	3694.1	48.7
90°-180°	5003.0	65.9
0°-180°	7591.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	993	993	993	993	993	
5°	994	989	980	988	987	94
15°	946	942	931	938	933	267
25°	859	853	843	843	841	395
35°	743	737	726	721	717	464
45°	609	605	594	584	580	470
55°	462	460	450	441	436	414
65°	315	310	302	296	293	311
75°	166	163	160	156	154	178
85°	44	43	43	41	41	49
90°	1	14	29	34	36	6
95°	74	28	38	46	46	92
105°	363	370	267	63	54	385
115°	681	689	700	711	717	672
125°	960	970	975	978	980	857
135°	1196	1203	1208	1211	1208	920
145°	1380	1388	1391	1393	1393	863
155°	1520	1518	1519	1524	1518	700
165°	1603	1599	1598	1607	1599	453
175°	1640	1635	1636	1643	1634	156
180°	1640	1640	1640	1640	1640	



TEST NUMBER: P332178-930

CATALOG NUMBER: S123DIW-S775D1535U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9
2.5°	996.2	995.6	995.1	994.4	993.8	992.7	991.0	989.4	987.7	986.0	987.5
5°	993.7	992.7	991.8	990.8	989.9	988.4	986.3	984.2	982.1	980.0	981.9
7.5°	984.0	983.0	982.0	981.1	980.2	978.6	976.4	974.3	972.1	970.0	971.7
10°	975.8	974.8	973.9	972.9	972.0	970.3	967.8	965.3	962.9	960.4	962.1
12.5°	964.8	964.0	963.3	962.5	961.6	960.1	957.8	955.4	953.2	950.8	952.1
15°	945.9	945.1	944.4	943.6	942.8	941.3	938.7	936.3	933.8	931.4	932.9
17.5°	923.8	922.8	921.9	920.9	919.9	918.2	915.7	913.2	910.8	908.3	909.4
20°	907.4	906.3	905.2	904.1	902.9	901.1	898.6	896.2	893.7	891.2	892.0
22.5°	889.0	887.9	886.7	885.6	884.4	882.6	880.2	877.8	875.3	872.8	873.4
25°	858.8	857.7	856.6	855.4	854.3	852.5	849.9	847.5	845.1	842.6	842.8
27.5°	826.6	825.4	824.3	823.2	822.1	820.3	817.6	815.0	812.3	809.6	809.8
30°	803.3	802.3	801.4	800.5	799.5	797.7	795.1	792.4	789.8	787.1	787.1
32.5°	780.1	778.9	777.6	776.3	775.1	773.5	771.4	769.3	767.3	765.2	764.2
35°	742.7	741.6	740.5	739.3	738.2	736.4	733.9	731.4	729.0	726.5	725.4
37.5°	704.4	703.0	701.6	700.1	698.7	696.8	694.2	691.7	689.2	686.7	685.3
40°	677.8	676.7	675.6	674.4	673.3	671.4	668.7	666.1	663.4	660.7	659.3
42.5°	651.2	649.9	648.6	647.3	646.0	644.1	641.4	638.7	636.1	633.4	631.9
45°	608.7	607.9	607.2	606.4	605.6	604.1	601.5	599.1	596.6	594.2	591.9
47.5°	566.5	565.4	564.3	563.2	562.1	560.4	558.1	555.8	553.4	551.1	548.9
50°	537.9	536.9	535.9	535.0	534.0	532.3	529.9	527.4	524.9	522.4	520.4
52.5°	507.8	507.1	506.5	505.8	505.2	503.5	500.9	498.3	495.7	493.1	491.3
55°	461.9	461.6	461.5	461.3	461.1	459.7	457.3	454.9	452.3	449.9	447.8
57.5°	418.2	417.5	416.9	416.2	415.6	414.3	412.3	410.3	408.3	406.3	404.5
60°	386.7	386.5	386.4	386.1	386.0	384.7	382.5	380.2	377.9	375.6	373.9
62.5°	358.7	358.2	357.8	357.3	356.8	355.4	353.1	350.8	348.5	346.3	344.5
65°	315.0	314.1	313.1	312.2	311.2	309.8	307.9	306.0	304.1	302.2	300.7
67.5°	268.7	267.9	267.1	266.2	265.4	264.2	262.9	261.4	259.9	258.5	257.1
70°	240.8	239.6	238.5	237.3	236.2	235.1	233.9	232.8	231.6	230.5	229.2
72.5°	211.4	210.5	209.7	208.9	208.1	207.0	205.7	204.4	203.1	201.8	200.6
75°	166.5	165.7	164.9	164.2	163.5	162.7	162.2	161.6	161.0	160.5	159.6
77.5°	126.7	126.3	125.9	125.5	125.0	124.5	123.8	123.1	122.5	121.7	121.1
80°	100.8	100.2	99.6	99.1	98.5	98.0	97.6	97.3	96.9	96.4	96.3
82.5°	75.5	75.3	75.3	75.1	75.0	74.9	74.8	74.8	74.7	74.6	74.3
85°	44.4	44.0	43.6	43.3	42.9	42.7	42.7	42.7	42.7	42.7	42.3
87.5°	18.0	18.1	18.2	18.3	18.3	18.7	19.2	19.7	20.3	20.9	21.0
90°	1.2	3.9	6.6	9.4	12.1	15.2	18.7	22.2	25.8	29.3	30.3
92.5°	22.7	21.9	21.1	20.4	19.6	20.5	23.2	25.9	28.5	31.2	32.9
95°	74.4	63.3	52.2	41.0	29.9	25.8	28.9	31.8	34.8	37.7	39.7
97.5°	149.4	144.5	139.5	134.4	129.5	117.2	97.8	78.3	58.8	39.2	41.4
100°	206.0	211.4	216.8	222.3	227.6	209.2	167.0	124.7	82.5	40.2	42.4
102.5°	270.4	274.3	278.2	282.0	285.9	264.8	218.7	172.5	126.4	80.2	73.5
105°	363.2	366.2	369.2	372.2	375.1	364.4	340.1	315.7	291.3	266.9	219.0
107.5°	461.2	463.6	465.9	468.4	470.8	473.9	477.7	481.6	485.4	489.3	454.1
110°	526.5	528.7	530.8	533.0	535.2	537.8	540.8	543.7	546.7	549.7	540.8



TEST NUMBER: P332178-930

CATALOG NUMBER: S123DIW-S775D1535U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	589.0	590.9	592.9	594.8	596.7	599.2	602.2	605.2	608.1	611.1	611.3
115°	681.3	683.0	684.6	686.2	687.9	689.9	692.4	694.7	697.2	699.6	702.3
117.5°	770.8	772.8	774.8	776.8	778.9	780.5	781.7	782.9	784.2	785.5	787.6
120°	826.4	828.8	831.3	833.7	836.2	837.8	838.5	839.4	840.2	841.0	843.2
122.5°	883.0	884.9	887.0	888.9	891.0	892.5	893.5	894.5	895.5	896.6	898.1
125°	960.4	962.6	964.8	966.9	969.1	970.8	971.8	972.9	974.0	975.1	975.7
127.5°	1035.5	1037.7	1039.9	1042.0	1044.2	1045.9	1047.3	1048.6	1049.9	1051.2	1052.0
130°	1082.3	1084.5	1086.7	1088.8	1091.0	1092.7	1093.7	1094.8	1095.9	1097.0	1098.0
132.5°	1127.2	1129.4	1131.6	1133.7	1135.9	1137.4	1138.2	1139.1	1140.0	1140.8	1141.9
135°	1195.7	1197.3	1199.0	1200.6	1202.2	1203.5	1204.6	1205.7	1206.8	1207.9	1208.7
137.5°	1254.2	1256.3	1258.3	1260.4	1262.4	1263.8	1264.4	1264.9	1265.6	1266.2	1267.5
140°	1293.2	1294.9	1296.5	1298.1	1299.8	1300.9	1301.7	1302.5	1303.3	1304.2	1305.3
142.5°	1329.3	1330.9	1332.5	1334.2	1335.8	1337.0	1337.8	1338.6	1339.5	1340.3	1341.1
145°	1379.7	1381.6	1383.6	1385.4	1387.3	1388.5	1389.1	1389.6	1390.2	1390.7	1391.2
147.5°	1427.3	1428.6	1429.8	1431.0	1432.2	1433.1	1433.7	1434.3	1434.8	1435.3	1435.9
150°	1456.5	1457.3	1458.2	1459.0	1459.8	1460.4	1461.0	1461.6	1462.1	1462.6	1463.1
152.5°	1482.9	1483.3	1483.6	1484.0	1484.4	1484.7	1485.1	1485.4	1485.7	1486.0	1487.0
155°	1519.9	1519.4	1518.8	1518.3	1517.8	1517.6	1517.9	1518.2	1518.4	1518.7	1520.0
157.5°	1548.7	1548.7	1548.6	1548.5	1548.5	1548.3	1548.0	1547.8	1547.5	1547.2	1548.8
160°	1566.3	1565.9	1565.7	1565.5	1565.1	1564.9	1564.6	1564.3	1564.1	1563.8	1565.5
162.5°	1582.8	1582.1	1581.4	1580.7	1580.0	1579.5	1579.2	1579.0	1578.7	1578.4	1580.3
165°	1602.8	1602.0	1601.2	1600.4	1599.5	1599.0	1598.7	1598.5	1598.2	1597.9	1600.1
167.5°	1618.4	1617.3	1616.2	1615.2	1614.0	1613.6	1613.6	1613.6	1613.6	1613.6	1615.7
170°	1627.2	1626.1	1625.0	1623.9	1622.9	1622.3	1622.3	1622.3	1622.3	1622.3	1624.5
172.5°	1633.0	1631.7	1630.4	1629.1	1627.8	1627.3	1627.5	1627.7	1627.9	1628.2	1630.4
175°	1640.5	1639.2	1637.9	1636.6	1635.2	1634.6	1634.9	1635.2	1635.4	1635.7	1637.6
177.5°	1642.5	1641.4	1640.4	1639.3	1638.2	1637.8	1638.0	1638.2	1638.4	1638.7	1640.4
180°	1640.5	1640.5	1640.5	1640.5	1640.5	1640.5	1640.5	1640.5	1640.5	1640.5	1640.5



TEST NUMBER: P332178-930

CATALOG NUMBER: S123DIW-S775D1535U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9
2.5°	989.0	990.6	992.1	992.8	992.6	992.5	992.3	992.1
5°	983.8	985.7	987.7	988.4	988.0	987.7	987.2	986.8
7.5°	973.4	975.1	976.8	977.5	977.3	977.1	976.8	976.6
10°	963.8	965.5	967.2	967.9	967.5	967.1	966.8	966.4
12.5°	953.3	954.6	955.9	956.3	956.1	955.9	955.7	955.4
15°	934.4	935.9	937.4	937.6	936.5	935.3	934.3	933.1
17.5°	910.4	911.5	912.6	912.9	912.5	912.1	911.7	911.3
20°	892.8	893.5	894.3	894.4	893.8	893.2	892.7	892.1
22.5°	874.0	874.7	875.2	875.1	874.5	873.8	873.0	872.3
25°	842.9	843.2	843.3	843.2	842.6	842.0	841.5	840.9
27.5°	809.9	810.1	810.2	809.9	809.3	808.5	807.8	807.1
30°	787.1	787.1	787.1	786.4	785.1	783.7	782.4	781.1
32.5°	763.1	762.1	761.0	760.1	759.4	758.6	757.9	757.2
35°	724.2	723.1	721.9	720.9	719.9	719.0	718.0	717.1
37.5°	684.0	682.6	681.3	680.3	679.6	679.1	678.4	677.8
40°	657.7	656.2	654.7	653.5	652.8	652.0	651.3	650.5
42.5°	630.4	628.8	627.4	626.2	625.5	624.7	623.9	623.2
45°	589.6	587.3	585.1	583.4	582.5	581.6	580.6	579.7
47.5°	546.7	544.5	542.2	540.6	539.8	539.0	538.2	537.3
50°	518.3	516.2	514.1	512.5	511.4	510.2	509.1	507.9
52.5°	489.5	487.7	485.9	484.5	483.4	482.2	481.1	480.0
55°	445.7	443.6	441.6	440.0	439.0	438.1	437.2	436.3
57.5°	402.6	400.8	398.9	397.5	396.3	395.3	394.1	393.1
60°	372.2	370.5	368.8	367.5	366.5	365.6	364.6	363.7
62.5°	342.8	341.1	339.4	338.3	337.6	337.0	336.3	335.7
65°	299.1	297.7	296.1	295.1	294.5	293.9	293.3	292.8
67.5°	255.8	254.5	253.2	252.1	251.4	250.5	249.7	248.9
70°	227.9	226.5	225.2	224.0	223.1	222.2	221.2	220.2
72.5°	199.4	198.3	197.1	196.2	195.8	195.3	194.8	194.3
75°	158.6	157.7	156.7	156.0	155.4	154.8	154.3	153.7
77.5°	120.4	119.8	119.1	118.9	118.9	118.9	118.9	118.9
80°	96.1	95.9	95.7	95.6	95.6	95.6	95.6	95.6
82.5°	73.9	73.6	73.2	73.0	72.9	72.7	72.6	72.4
85°	41.9	41.6	41.2	41.0	41.0	41.0	41.0	41.0
87.5°	21.0	21.0	21.1	21.2	21.4	21.4	21.5	21.7
90°	31.4	32.5	33.6	34.4	35.0	35.5	36.0	36.5
92.5°	34.7	36.4	38.2	39.1	39.5	39.8	40.1	40.4
95°	41.6	43.5	45.3	46.3	46.3	46.3	46.3	46.3
97.5°	43.6	45.7	47.9	49.2	49.4	49.7	50.0	50.2
100°	44.5	46.7	48.9	50.1	50.4	50.6	51.0	51.2
102.5°	66.8	60.1	53.3	50.2	50.7	51.2	51.7	52.2
105°	171.0	123.1	75.2	51.4	52.0	52.6	53.1	53.6
107.5°	418.9	383.8	348.6	313.0	276.9	240.7	204.6	168.4
110°	531.8	522.9	514.0	490.1	451.3	412.6	373.9	335.2



TEST NUMBER: P332178-930

CATALOG NUMBER: S123DIW-S775D1535U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	611.5	611.6	611.8	607.8	599.6	591.4	583.3	575.0
115°	705.1	707.8	710.5	712.3	713.5	714.5	715.6	716.7
117.5°	789.8	791.9	794.1	795.3	795.5	795.7	796.0	796.1
120°	845.4	847.5	849.7	850.8	850.8	850.8	850.8	850.8
122.5°	899.6	901.2	902.7	903.5	903.8	903.9	904.2	904.4
125°	976.2	976.7	977.2	977.8	978.4	978.8	979.4	980.0
127.5°	1052.9	1053.8	1054.6	1054.8	1054.3	1053.7	1053.1	1052.6
130°	1099.1	1100.2	1101.3	1101.6	1101.1	1100.5	1099.9	1099.4
132.5°	1143.0	1144.1	1145.2	1145.3	1144.6	1143.9	1143.0	1142.3
135°	1209.5	1210.3	1211.1	1211.1	1210.3	1209.5	1208.7	1207.9
137.5°	1268.8	1270.1	1271.4	1271.7	1271.2	1270.6	1270.1	1269.6
140°	1306.4	1307.4	1308.5	1308.8	1308.2	1307.7	1307.2	1306.6
142.5°	1342.0	1342.9	1343.7	1343.8	1343.0	1342.2	1341.5	1340.8
145°	1391.8	1392.4	1392.9	1393.2	1393.2	1393.2	1393.2	1393.2
147.5°	1436.4	1437.0	1437.5	1437.1	1435.9	1434.7	1433.4	1432.2
150°	1463.7	1464.3	1464.8	1464.7	1463.9	1463.1	1462.2	1461.4
152.5°	1488.0	1489.0	1490.0	1489.8	1488.6	1487.3	1486.0	1484.8
155°	1521.4	1522.7	1524.1	1524.0	1522.3	1520.7	1519.1	1517.5
157.5°	1550.5	1552.1	1553.7	1553.5	1551.4	1549.2	1547.1	1545.0
160°	1567.1	1568.6	1570.3	1570.2	1568.2	1566.4	1564.5	1562.6
162.5°	1582.1	1584.0	1585.8	1585.8	1584.2	1582.5	1580.9	1579.2
165°	1602.2	1604.4	1606.6	1606.7	1604.8	1603.0	1601.0	1599.1
167.5°	1617.9	1620.0	1622.2	1622.2	1620.0	1617.9	1615.7	1613.6
170°	1626.6	1628.8	1631.0	1631.0	1628.8	1626.6	1624.5	1622.3
172.5°	1632.5	1634.7	1636.8	1636.7	1634.3	1632.0	1629.5	1627.2
175°	1639.5	1641.4	1643.3	1643.2	1641.0	1638.8	1636.6	1634.5
177.5°	1642.1	1643.8	1645.6	1645.4	1643.2	1641.0	1638.8	1636.7
180°	1640.5	1640.5	1640.5	1640.5	1640.5	1640.5	1640.5	1640.5

(END OF REPORT)