

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332154-930

Luminaire Tested: **S123DIW-S775D460U930-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332154-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIW-S775D460U930-4F0-1E-UDD-F  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 460 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4088.4 lumens  
Efficiency: N/A  
Efficacy: 108.4 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 37.7  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332154-930

CATALOG NUMBER: S123DIW-S775D460U930-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

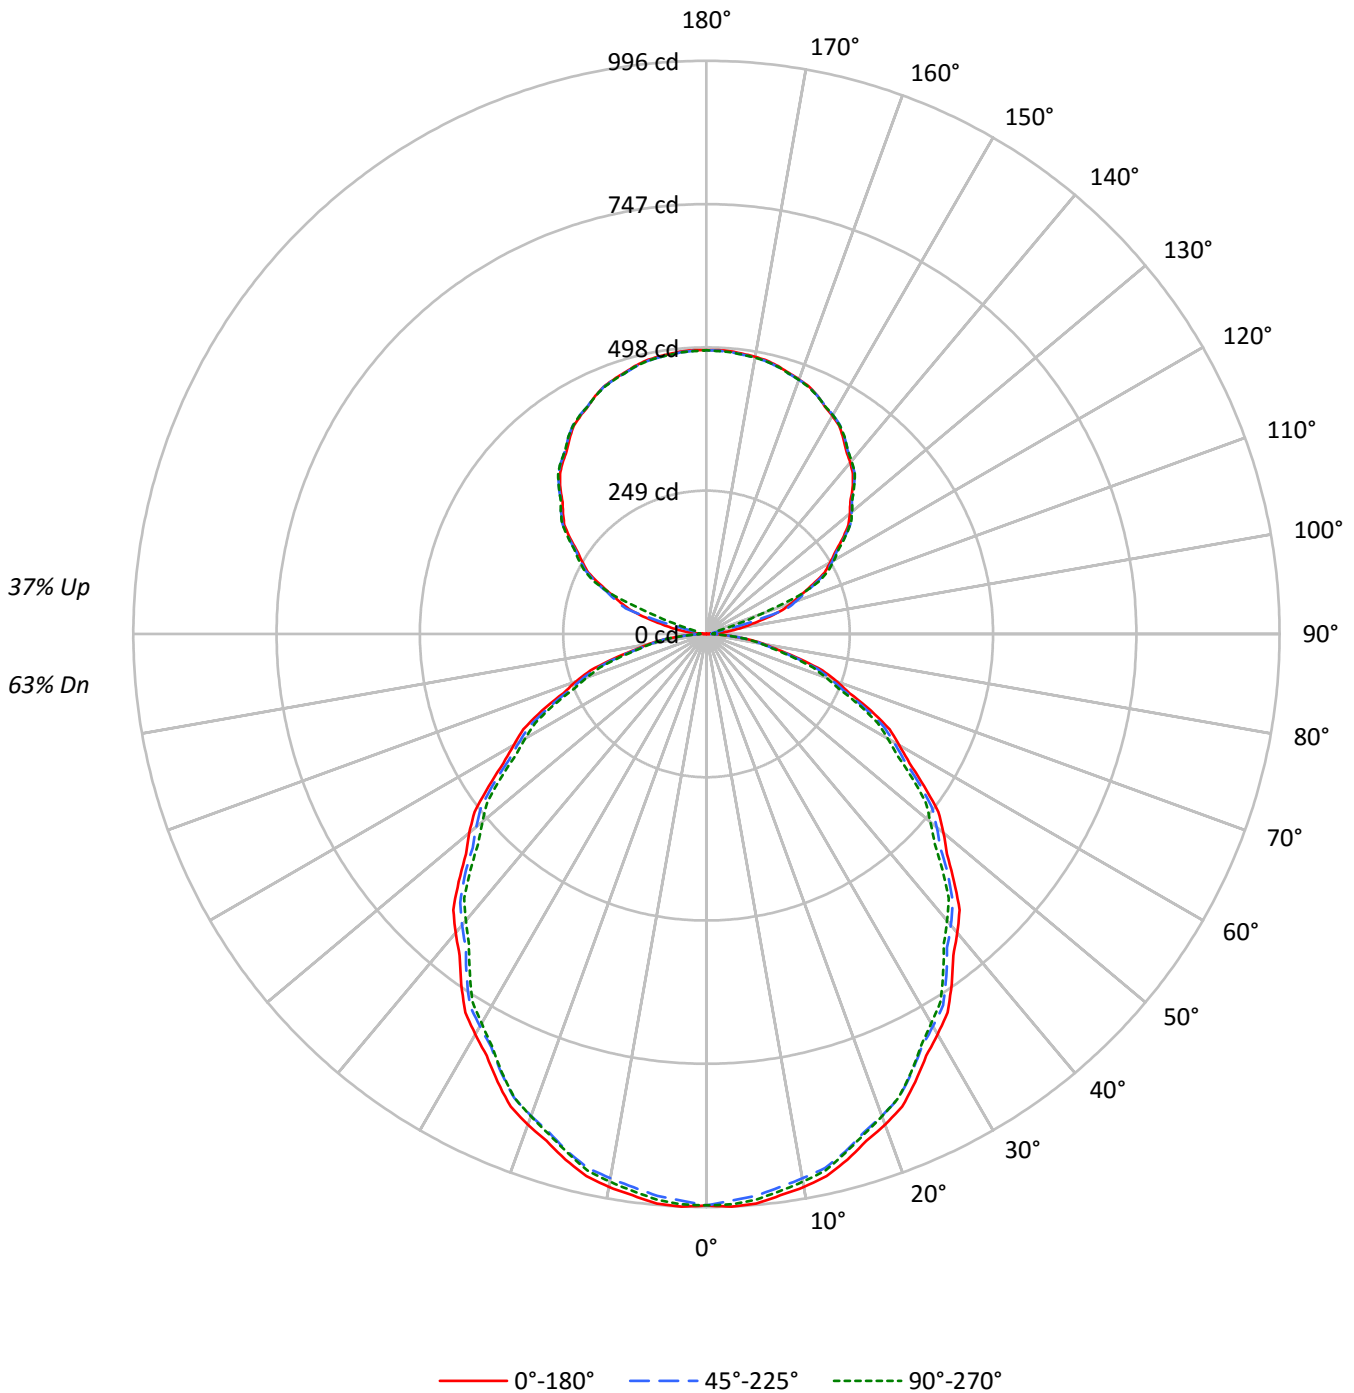



TEST NUMBER: P332154-930

CATALOG NUMBER: S123DIW-S775D460U930-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	91	91	91	79	79	79	68	68	68	63
1	101	96	92	89	94	90	87	84	79	77	74	69	68	66	60	59	58	53
2	92	84	78	72	86	79	73	69	70	65	62	61	58	55	53	51	48	44
3	84	74	66	60	78	70	63	57	61	56	52	54	50	46	47	44	41	38
4	77	65	57	51	71	62	54	49	55	49	44	48	43	40	42	38	35	32
5	70	58	50	44	66	55	48	42	49	43	38	43	38	34	38	34	31	28
6	65	52	44	38	61	50	42	36	44	38	33	39	34	30	34	30	27	25
7	60	47	39	33	56	45	37	32	40	34	29	36	31	27	31	27	24	22
8	56	43	35	30	52	41	34	29	37	31	26	33	28	24	29	25	22	19
9	52	39	32	27	49	37	30	26	34	28	24	30	25	22	27	23	20	18
10	49	36	29	24	46	34	28	23	31	25	21	28	23	20	25	21	18	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	10687	10687	10687
5°	10737	10589	10662
10°	10665	10497	10563
15°	10541	10379	10398
20°	10394	10208	10219
25°	10200	10007	9987
30°	9984	9783	9708
35°	9759	9546	9423
40°	9524	9284	9140
45°	9266	9045	8824
50°	9008	8748	8505
55°	8668	8443	8188
60°	8325	8086	7830
65°	8023	7697	7457
70°	7578	7254	6930
75°	6924	6675	6392
80°	6248	5976	5926
85°	5483	5274	5064



TEST NUMBER: P332154-930

CATALOG NUMBER: S123DIW-S775D460U930-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	93.5	2.3
10°-20°	264.1	6.5
20°-30°	390.1	9.5
30°-40°	455.7	11.1
40°-50°	458.1	11.2
50°-60°	402.4	9.8
60°-70°	299.8	7.3
70°-80°	170.8	4.2
80°-90°	50.4	1.2
90°-100°	17.9	0.4
100°-110°	85.4	2.1
110°-120°	205.2	5.0
120°-130°	261.3	6.4
130°-140°	279.2	6.8
140°-150°	261.1	6.4
150°-160°	210.6	5.2
160°-170°	135.9	3.3
170°-180°	46.8	1.1
0°-30°	747.7	18.3
0°-40°	1203.3	29.4
0°-60°	2063.8	50.5
0°-90°	2584.9	63.2
90°-120°	308.6	7.5
90°-150°	1110.2	27.2
90°-180°	1504.0	36.8
0°-180°	4088.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	993	993	993	993	993	
5°	994	989	980	988	987	94
15°	946	942	931	938	933	267
25°	859	853	843	843	841	395
35°	743	737	726	721	717	464
45°	609	605	594	584	580	470
55°	462	460	450	441	436	414
65°	315	310	302	296	293	311
75°	166	163	160	156	154	178
85°	44	43	43	41	41	49
90°	0	4	9	10	11	3
95°	22	8	11	14	14	28
105°	109	111	80	19	16	116
115°	205	207	210	214	215	202
125°	289	291	293	294	294	258
135°	359	362	363	364	363	277
145°	415	417	418	419	419	259
155°	457	456	456	458	456	210
165°	482	481	480	483	481	136
175°	493	491	492	494	491	47
180°	493	493	493	493	493	



TEST NUMBER: P332154-930

CATALOG NUMBER: S123DIW-S775D460U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9
2.5°	996.2	995.6	995.1	994.4	993.8	992.7	991.0	989.4	987.7	986.0	987.5
5°	993.7	992.7	991.8	990.8	989.9	988.4	986.3	984.2	982.1	980.0	981.9
7.5°	984.0	983.0	982.0	981.1	980.2	978.6	976.4	974.3	972.1	970.0	971.7
10°	975.8	974.8	973.9	972.9	972.0	970.3	967.8	965.3	962.9	960.4	962.1
12.5°	964.8	964.0	963.3	962.5	961.6	960.1	957.8	955.4	953.2	950.8	952.1
15°	945.9	945.1	944.4	943.6	942.8	941.3	938.7	936.3	933.8	931.4	932.9
17.5°	923.8	922.8	921.9	920.9	919.9	918.2	915.7	913.2	910.8	908.3	909.4
20°	907.4	906.3	905.2	904.1	902.9	901.1	898.6	896.2	893.7	891.2	892.0
22.5°	889.0	887.9	886.7	885.6	884.4	882.6	880.2	877.8	875.3	872.8	873.4
25°	858.8	857.7	856.6	855.4	854.3	852.5	849.9	847.5	845.1	842.6	842.8
27.5°	826.6	825.4	824.3	823.2	822.1	820.3	817.6	815.0	812.3	809.6	809.8
30°	803.3	802.3	801.4	800.5	799.5	797.7	795.1	792.4	789.8	787.1	787.1
32.5°	780.1	778.9	777.6	776.3	775.1	773.5	771.4	769.3	767.3	765.2	764.2
35°	742.7	741.6	740.5	739.3	738.2	736.4	733.9	731.4	729.0	726.5	725.4
37.5°	704.4	703.0	701.6	700.1	698.7	696.8	694.2	691.7	689.2	686.7	685.3
40°	677.8	676.7	675.6	674.4	673.3	671.4	668.7	666.1	663.4	660.7	659.3
42.5°	651.2	649.9	648.6	647.3	646.0	644.1	641.4	638.7	636.1	633.4	631.9
45°	608.7	607.9	607.2	606.4	605.6	604.1	601.5	599.1	596.6	594.2	591.9
47.5°	566.5	565.4	564.3	563.2	562.1	560.4	558.1	555.8	553.4	551.1	548.9
50°	537.9	536.9	535.9	535.0	534.0	532.3	529.9	527.4	524.9	522.4	520.4
52.5°	507.8	507.1	506.5	505.8	505.2	503.5	500.9	498.3	495.7	493.1	491.3
55°	461.9	461.6	461.5	461.3	461.1	459.7	457.3	454.9	452.3	449.9	447.8
57.5°	418.2	417.5	416.9	416.2	415.6	414.3	412.3	410.3	408.3	406.3	404.5
60°	386.7	386.5	386.4	386.1	386.0	384.7	382.5	380.2	377.9	375.6	373.9
62.5°	358.7	358.2	357.8	357.3	356.8	355.4	353.1	350.8	348.5	346.3	344.5
65°	315.0	314.1	313.1	312.2	311.2	309.8	307.9	306.0	304.1	302.2	300.7
67.5°	268.7	267.9	267.1	266.2	265.4	264.2	262.9	261.4	259.9	258.5	257.1
70°	240.8	239.6	238.5	237.3	236.2	235.1	233.9	232.8	231.6	230.5	229.2
72.5°	211.4	210.5	209.7	208.9	208.1	207.0	205.7	204.4	203.1	201.8	200.6
75°	166.5	165.7	164.9	164.2	163.5	162.7	162.2	161.6	161.0	160.5	159.6
77.5°	126.7	126.3	125.9	125.5	125.0	124.5	123.8	123.1	122.5	121.7	121.1
80°	100.8	100.2	99.6	99.1	98.5	98.0	97.6	97.3	96.9	96.4	96.3
82.5°	75.5	75.3	75.3	75.1	75.0	74.9	74.8	74.8	74.7	74.6	74.3
85°	44.4	44.0	43.6	43.3	42.9	42.7	42.7	42.7	42.7	42.7	42.3
87.5°	17.9	17.5	17.3	17.0	16.6	16.6	16.6	16.6	16.7	16.8	16.7
90°	0.3	1.1	2.0	2.8	3.6	4.6	5.6	6.7	7.7	8.8	9.1
92.5°	6.8	6.6	6.4	6.1	5.9	6.2	7.0	7.7	8.6	9.4	9.9
95°	22.3	19.0	15.7	12.3	9.0	7.7	8.6	9.5	10.4	11.3	11.9
97.5°	44.9	43.4	41.9	40.4	38.9	35.2	29.4	23.5	17.7	11.8	12.5
100°	61.9	63.5	65.1	66.8	68.4	62.9	50.2	37.5	24.8	12.1	12.7
102.5°	81.2	82.4	83.6	84.8	85.9	79.6	65.7	51.9	38.0	24.1	22.1
105°	109.2	110.1	111.0	111.9	112.8	109.5	102.2	94.9	87.6	80.2	65.8
107.5°	138.6	139.3	140.1	140.7	141.5	142.4	143.6	144.7	145.9	147.0	136.5
110°	158.2	158.9	159.6	160.2	160.9	161.6	162.5	163.4	164.3	165.2	162.5



TEST NUMBER: P332154-930

CATALOG NUMBER: S123DIW-S775D460U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	177.0	177.6	178.1	178.7	179.4	180.1	181.0	181.9	182.8	183.7	183.7
115°	204.7	205.2	205.7	206.2	206.7	207.3	208.1	208.8	209.5	210.3	211.1
117.5°	231.6	232.3	232.8	233.4	234.1	234.6	234.9	235.3	235.7	236.0	236.7
120°	248.3	249.1	249.8	250.5	251.3	251.8	252.0	252.3	252.5	252.7	253.4
122.5°	265.4	266.0	266.5	267.2	267.7	268.2	268.6	268.8	269.1	269.5	269.9
125°	288.6	289.3	289.9	290.6	291.2	291.7	292.0	292.4	292.7	293.0	293.2
127.5°	311.2	311.9	312.5	313.2	313.8	314.3	314.7	315.1	315.5	315.9	316.2
130°	325.3	326.0	326.6	327.3	327.9	328.4	328.7	329.1	329.4	329.6	330.0
132.5°	338.8	339.4	340.1	340.7	341.4	341.8	342.1	342.3	342.6	342.8	343.2
135°	359.3	359.8	360.3	360.8	361.3	361.7	362.0	362.3	362.6	363.0	363.2
137.5°	376.9	377.6	378.1	378.8	379.4	379.8	380.0	380.2	380.3	380.5	380.9
140°	388.7	389.1	389.6	390.1	390.6	390.9	391.2	391.4	391.7	391.9	392.2
142.5°	399.5	400.0	400.5	401.0	401.5	401.8	402.0	402.3	402.5	402.8	403.0
145°	414.7	415.2	415.8	416.4	416.9	417.3	417.4	417.6	417.8	417.9	418.1
147.5°	428.9	429.3	429.7	430.1	430.4	430.7	430.9	431.0	431.2	431.4	431.5
150°	437.7	438.0	438.2	438.5	438.7	438.9	439.0	439.2	439.4	439.5	439.7
152.5°	445.6	445.7	445.9	446.0	446.1	446.2	446.3	446.4	446.5	446.6	446.9
155°	456.7	456.6	456.4	456.3	456.2	456.1	456.2	456.2	456.3	456.4	456.8
157.5°	465.5	465.4	465.4	465.4	465.4	465.3	465.2	465.1	465.0	465.0	465.5
160°	470.7	470.6	470.5	470.4	470.3	470.3	470.2	470.1	470.0	469.9	470.4
162.5°	475.6	475.5	475.2	475.1	474.8	474.7	474.6	474.5	474.4	474.3	474.9
165°	481.7	481.4	481.2	480.9	480.7	480.5	480.5	480.4	480.3	480.2	480.9
167.5°	486.4	486.1	485.8	485.4	485.1	484.9	484.9	484.9	484.9	484.9	485.6
170°	489.0	488.7	488.4	488.0	487.7	487.5	487.5	487.5	487.5	487.5	488.2
172.5°	490.7	490.4	490.0	489.6	489.2	489.0	489.1	489.2	489.3	489.3	489.9
175°	493.0	492.6	492.2	491.8	491.4	491.2	491.3	491.4	491.5	491.5	492.1
177.5°	493.6	493.3	492.9	492.6	492.3	492.2	492.3	492.3	492.4	492.4	492.9
180°	493.0	493.0	493.0	493.0	493.0	493.0	493.0	493.0	493.0	493.0	493.0



TEST NUMBER: P332154-930

CATALOG NUMBER: S123DIW-S775D460U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9
2.5°	989.0	990.6	992.1	992.8	992.6	992.5	992.3	992.1
5°	983.8	985.7	987.7	988.4	988.0	987.7	987.2	986.8
7.5°	973.4	975.1	976.8	977.5	977.3	977.1	976.8	976.6
10°	963.8	965.5	967.2	967.9	967.5	967.1	966.8	966.4
12.5°	953.3	954.6	955.9	956.3	956.1	955.9	955.7	955.4
15°	934.4	935.9	937.4	937.6	936.5	935.3	934.3	933.1
17.5°	910.4	911.5	912.6	912.9	912.5	912.1	911.7	911.3
20°	892.8	893.5	894.3	894.4	893.8	893.2	892.7	892.1
22.5°	874.0	874.7	875.2	875.1	874.5	873.8	873.0	872.3
25°	842.9	843.2	843.3	843.2	842.6	842.0	841.5	840.9
27.5°	809.9	810.1	810.2	809.9	809.3	808.5	807.8	807.1
30°	787.1	787.1	787.1	786.4	785.1	783.7	782.4	781.1
32.5°	763.1	762.1	761.0	760.1	759.4	758.6	757.9	757.2
35°	724.2	723.1	721.9	720.9	719.9	719.0	718.0	717.1
37.5°	684.0	682.6	681.3	680.3	679.6	679.1	678.4	677.8
40°	657.7	656.2	654.7	653.5	652.8	652.0	651.3	650.5
42.5°	630.4	628.8	627.4	626.2	625.5	624.7	623.9	623.2
45°	589.6	587.3	585.1	583.4	582.5	581.6	580.6	579.7
47.5°	546.7	544.5	542.2	540.6	539.8	539.0	538.2	537.3
50°	518.3	516.2	514.1	512.5	511.4	510.2	509.1	507.9
52.5°	489.5	487.7	485.9	484.5	483.4	482.2	481.1	480.0
55°	445.7	443.6	441.6	440.0	439.0	438.1	437.2	436.3
57.5°	402.6	400.8	398.9	397.5	396.3	395.3	394.1	393.1
60°	372.2	370.5	368.8	367.5	366.5	365.6	364.6	363.7
62.5°	342.8	341.1	339.4	338.3	337.6	337.0	336.3	335.7
65°	299.1	297.7	296.1	295.1	294.5	293.9	293.3	292.8
67.5°	255.8	254.5	253.2	252.1	251.4	250.5	249.7	248.9
70°	227.9	226.5	225.2	224.0	223.1	222.2	221.2	220.2
72.5°	199.4	198.3	197.1	196.2	195.8	195.3	194.8	194.3
75°	158.6	157.7	156.7	156.0	155.4	154.8	154.3	153.7
77.5°	120.4	119.8	119.1	118.9	118.9	118.9	118.9	118.9
80°	96.1	95.9	95.7	95.6	95.6	95.6	95.6	95.6
82.5°	73.9	73.6	73.2	73.0	72.9	72.7	72.6	72.4
85°	41.9	41.6	41.2	41.0	41.0	41.0	41.0	41.0
87.5°	16.6	16.6	16.5	16.4	16.5	16.5	16.5	16.6
90°	9.5	9.8	10.1	10.4	10.5	10.7	10.8	11.0
92.5°	10.4	10.9	11.5	11.7	11.9	12.0	12.1	12.1
95°	12.5	13.0	13.6	13.9	13.9	13.9	13.9	13.9
97.5°	13.1	13.8	14.4	14.8	14.8	14.9	15.0	15.1
100°	13.4	14.0	14.7	15.1	15.2	15.2	15.3	15.4
102.5°	20.1	18.0	16.1	15.1	15.2	15.4	15.5	15.7
105°	51.4	37.0	22.6	15.5	15.7	15.8	16.0	16.1
107.5°	125.9	115.4	104.8	94.1	83.2	72.3	61.5	50.6
110°	159.8	157.1	154.4	147.3	135.7	124.0	112.3	100.8





TEST NUMBER: P332154-930

CATALOG NUMBER: S123DIW-S775D460U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	183.8	183.8	183.8	182.6	180.2	177.7	175.3	172.8
115°	211.9	212.7	213.5	214.1	214.4	214.7	215.1	215.4
117.5°	237.3	238.0	238.6	239.0	239.0	239.1	239.2	239.3
120°	254.0	254.7	255.4	255.7	255.7	255.7	255.7	255.7
122.5°	270.4	270.8	271.3	271.5	271.6	271.7	271.7	271.8
125°	293.3	293.5	293.7	293.8	294.0	294.2	294.3	294.5
127.5°	316.4	316.7	316.9	317.0	316.8	316.7	316.5	316.3
130°	330.3	330.6	330.9	331.0	330.8	330.7	330.5	330.4
132.5°	343.5	343.8	344.1	344.2	344.0	343.7	343.5	343.3
135°	363.5	363.7	363.9	363.9	363.7	363.5	363.2	363.0
137.5°	381.3	381.6	382.0	382.2	382.0	381.9	381.7	381.6
140°	392.6	392.9	393.2	393.3	393.1	393.0	392.8	392.6
142.5°	403.3	403.6	403.8	403.8	403.6	403.4	403.2	402.9
145°	418.2	418.4	418.6	418.7	418.7	418.7	418.7	418.7
147.5°	431.7	431.9	432.0	431.9	431.5	431.1	430.8	430.4
150°	439.9	440.0	440.2	440.2	439.9	439.7	439.4	439.2
152.5°	447.2	447.4	447.8	447.7	447.4	446.9	446.6	446.2
155°	457.2	457.6	458.0	458.0	457.5	457.0	456.5	456.1
157.5°	465.9	466.4	466.9	466.8	466.2	465.6	465.0	464.3
160°	470.9	471.4	471.9	471.9	471.3	470.8	470.2	469.6
162.5°	475.5	476.1	476.5	476.6	476.1	475.6	475.1	474.6
165°	481.5	482.2	482.8	482.8	482.2	481.8	481.2	480.6
167.5°	486.2	486.8	487.5	487.5	486.8	486.2	485.6	484.9
170°	488.9	489.5	490.2	490.2	489.5	488.9	488.2	487.5
172.5°	490.6	491.2	491.9	491.9	491.1	490.4	489.8	489.0
175°	492.7	493.3	493.8	493.8	493.2	492.5	491.9	491.2
177.5°	493.5	494.0	494.6	494.5	493.8	493.2	492.5	491.9
180°	493.0	493.0	493.0	493.0	493.0	493.0	493.0	493.0

(END OF REPORT)