

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332461-930

Luminaire Tested: **S123RDIW-S1000D1030U930-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332461-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S1000D1030U930-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1030 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6007.3 lumens
Efficiency: N/A
Efficacy: 98.2 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 61.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332461-930

CATALOG NUMBER: S123RDIW-S1000D1030U930-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

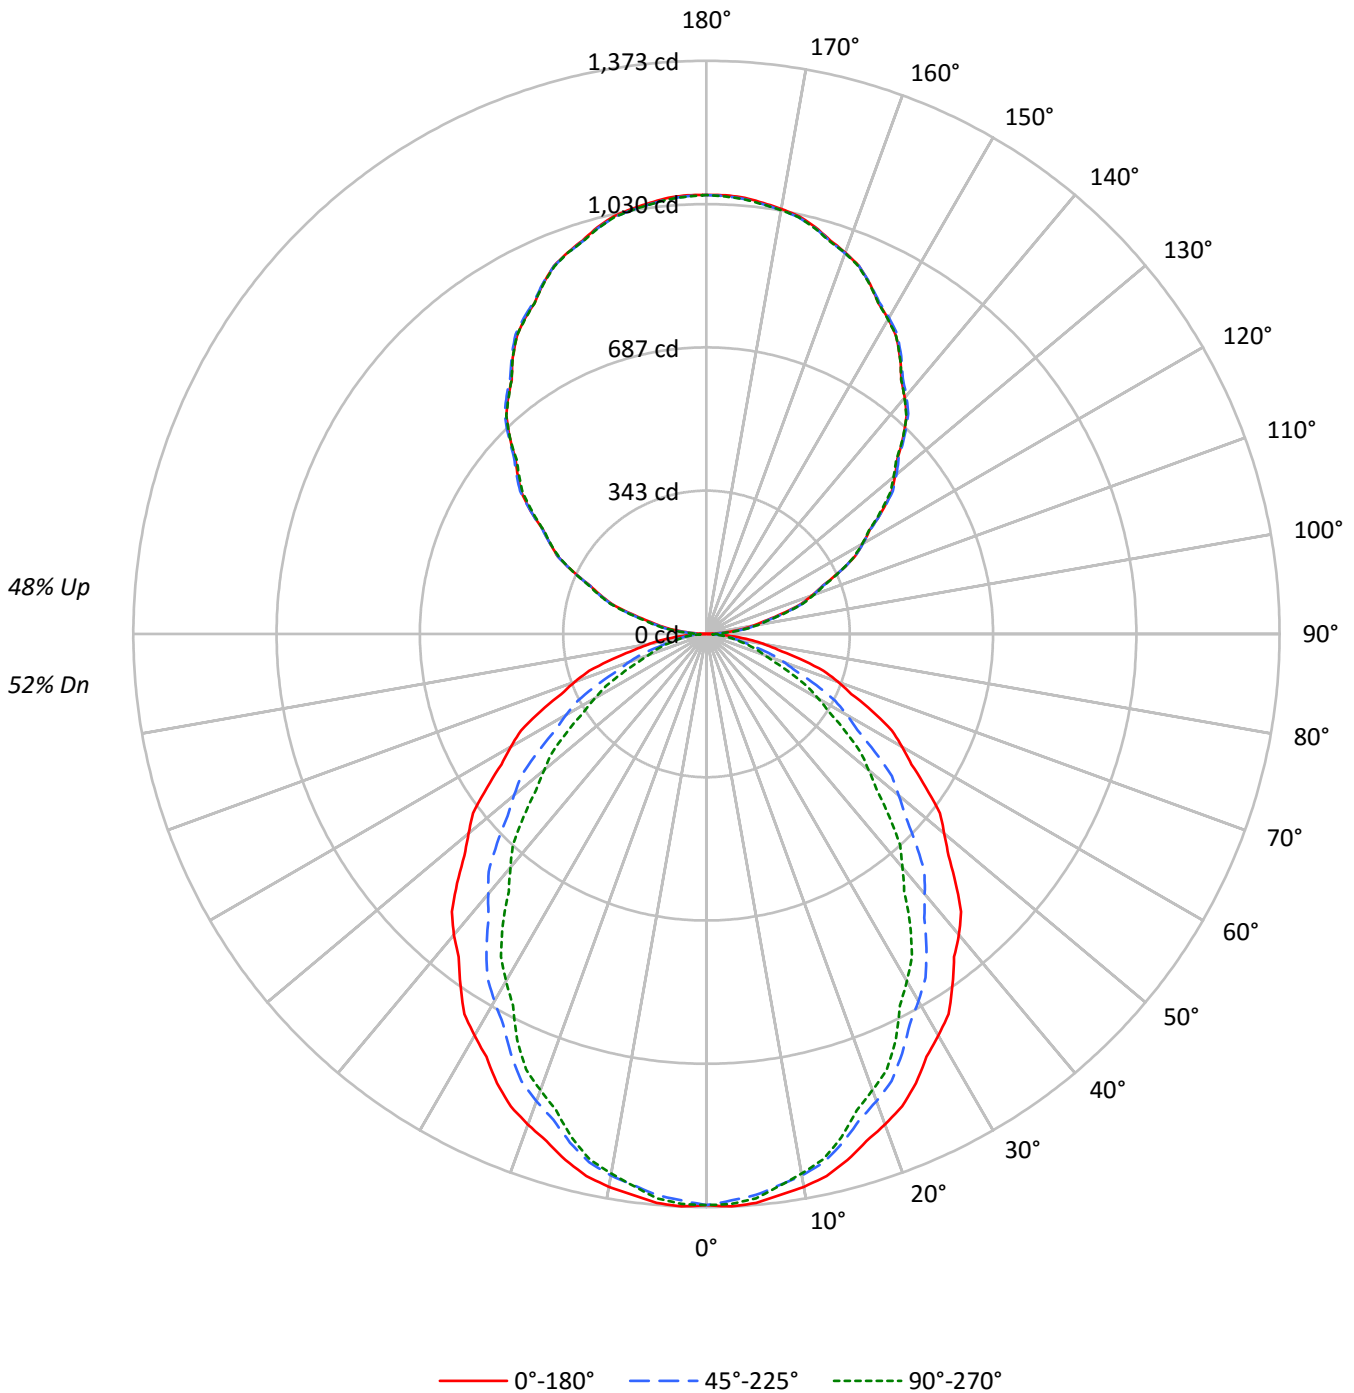



TEST NUMBER: P332461-930

CATALOG NUMBER: S123RDIW-S1000D1030U930-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	99	99	99	99	84	84	84	70	70	70	58	58	58	52
1	98	94	90	87	91	87	84	81	74	72	70	62	61	59	51	50	49	44
2	90	83	77	72	83	77	72	67	65	62	58	55	52	50	46	44	42	37
3	82	73	66	60	76	68	62	56	58	53	49	49	46	43	41	38	36	32
4	75	65	57	51	69	60	53	48	52	47	42	44	40	37	37	34	31	28
5	69	58	50	44	64	54	47	42	46	41	37	40	35	32	33	30	27	24
6	64	52	44	38	59	49	41	36	42	36	32	36	32	28	30	27	24	21
7	59	47	39	34	55	44	37	32	38	33	28	33	28	25	28	24	22	19
8	55	43	35	30	51	40	33	28	35	29	25	30	26	22	25	22	20	17
9	51	39	32	27	47	37	30	25	32	27	23	28	23	20	23	20	18	16
10	48	36	29	24	44	34	27	23	30	24	21	26	21	18	22	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	14727	14727	14727
5°	14783	14579	14664
10°	14700	14397	14348
15°	14542	14060	13912
20°	14325	13639	13321
25°	14101	13166	12744
30°	13806	12621	11931
35°	13502	12073	11184
40°	13222	11428	10260
45°	12855	10794	9426
50°	12450	10071	8492
55°	12037	9246	7621
60°	11657	8361	6665
65°	11163	7404	5708
70°	10546	6216	4611
75°	9649	4891	4338
80°	8598	4333	3986
85°	7262	3841	3569



TEST NUMBER: P332461-930

CATALOG NUMBER: S123RDIW-S1000D1030U930-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	128.5	2.1
10°-20°	357.5	6.0
20°-30°	514.7	8.6
30°-40°	579.8	9.7
40°-50°	554.7	9.2
50°-60°	454.2	7.6
60°-70°	306.5	5.1
70°-80°	154.2	2.6
80°-90°	43.9	0.7
90°-100°	68.5	1.1
100°-110°	205.0	3.4
110°-120°	348.7	5.8
120°-130°	458.7	7.6
130°-140°	515.5	8.6
140°-150°	506.8	8.4
150°-160°	426.6	7.1
160°-170°	284.0	4.7
170°-180°	99.4	1.7
0°-30°	1000.7	16.7
0°-40°	1580.5	26.3
0°-60°	2589.5	43.1
0°-90°	3094.0	51.5
90°-120°	622.2	10.4
90°-150°	2103.2	35.0
90°-180°	2913.0	48.5
0°-180°	6007.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1368	1368	1368	1368	1368	
5°	1368	1362	1349	1359	1357	130
15°	1305	1292	1262	1256	1248	367
25°	1187	1158	1109	1086	1073	546
35°	1028	986	919	873	851	643
45°	844	793	709	648	619	651
55°	641	585	493	431	406	575
65°	438	376	291	239	224	434
75°	232	178	118	107	104	247
85°	59	36	31	29	29	66
90°	1	9	20	23	25	6
95°	49	55	61	64	64	55
105°	186	188	195	195	197	199
115°	351	353	352	353	352	347
125°	514	516	515	511	508	458
135°	667	671	671	667	666	513
145°	809	810	813	812	809	505
155°	926	926	927	930	924	426
165°	1008	1006	1006	1010	1005	284
175°	1049	1046	1046	1050	1045	100
180°	1052	1052	1052	1052	1052	



TEST NUMBER: P332461-930

CATALOG NUMBER: S123RDIW-S1000D1030U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1368.2	1368.2	1368.2	1368.2	1368.2	1368.2	1368.2	1368.2	1368.2	1368.2	1368.2
2.5°	1372.6	1371.8	1371.1	1370.3	1369.5	1367.9	1365.5	1363.2	1360.8	1358.5	1360.6
5°	1368.2	1366.9	1365.7	1364.5	1363.3	1361.1	1358.2	1355.3	1352.3	1349.3	1351.5
7.5°	1355.5	1354.2	1352.9	1351.5	1350.2	1347.6	1343.8	1339.9	1336.1	1332.3	1333.5
10°	1344.9	1343.2	1341.4	1339.7	1338.0	1334.9	1330.5	1326.0	1321.6	1317.2	1317.4
12.5°	1329.8	1327.9	1326.0	1324.0	1322.1	1318.4	1313.0	1307.6	1302.2	1296.7	1296.6
15°	1305.0	1302.3	1299.5	1296.8	1294.1	1289.3	1282.4	1275.5	1268.6	1261.7	1260.5
17.5°	1273.7	1270.5	1267.4	1264.2	1261.0	1255.1	1246.3	1237.5	1228.7	1219.9	1217.3
20°	1250.6	1246.7	1242.7	1238.8	1234.8	1228.2	1218.8	1209.4	1200.0	1190.7	1187.5
22.5°	1224.8	1220.3	1215.8	1211.2	1206.7	1199.5	1189.4	1179.5	1169.5	1159.6	1155.6
25°	1187.3	1181.2	1175.0	1168.8	1162.7	1153.9	1142.6	1131.2	1119.9	1108.6	1103.3
27.5°	1141.8	1135.1	1128.2	1121.4	1114.6	1104.9	1092.3	1079.6	1067.0	1054.4	1047.2
30°	1110.8	1103.3	1096.0	1088.6	1081.2	1070.6	1056.8	1042.9	1029.2	1015.4	1007.0
32.5°	1079.7	1071.3	1062.9	1054.5	1046.2	1034.7	1020.1	1005.5	990.8	976.2	967.1
35°	1027.5	1018.6	1009.7	1000.9	992.1	979.9	964.7	949.3	934.1	918.8	908.2
37.5°	974.7	964.8	955.0	945.1	935.2	922.2	905.9	889.5	873.2	856.9	844.8
40°	941.0	930.2	919.2	908.4	897.6	883.4	865.9	848.4	830.9	813.3	800.5
42.5°	902.8	891.9	881.1	870.3	859.4	845.0	826.9	808.8	790.7	772.6	758.6
45°	844.5	833.3	822.2	811.1	800.1	785.1	766.1	747.1	728.1	709.1	695.0
47.5°	786.1	773.9	761.7	749.5	737.4	721.8	702.8	683.8	664.8	645.8	630.6
50°	743.5	731.9	720.3	708.7	697.1	681.3	661.4	641.4	621.4	601.4	586.1
52.5°	705.3	692.8	680.1	667.6	655.0	638.8	619.1	599.2	579.5	559.7	543.8
55°	641.4	629.3	617.2	605.1	593.0	576.5	555.5	534.6	513.6	492.7	478.4
57.5°	582.4	569.2	556.0	542.8	529.7	512.6	491.5	470.4	449.4	428.4	414.8
60°	541.5	528.0	514.4	500.8	487.2	470.3	449.8	429.3	408.9	388.4	375.0
62.5°	500.7	487.1	473.5	460.0	446.5	429.4	409.0	388.5	368.0	347.6	335.0
65°	438.3	424.8	411.2	397.6	384.1	367.7	348.5	329.2	310.0	290.7	278.7
67.5°	375.9	362.2	348.5	334.8	321.1	305.0	286.6	268.2	249.7	231.2	222.3
70°	335.1	321.8	308.5	295.1	281.8	266.6	249.3	232.0	214.7	197.5	188.9
72.5°	294.2	281.2	268.1	254.9	241.8	227.4	211.7	196.1	180.3	164.7	157.6
75°	232.0	220.0	208.2	196.4	184.6	171.9	158.3	144.7	131.2	117.6	115.1
77.5°	175.1	164.4	153.7	143.0	132.3	122.5	113.8	105.1	96.4	87.6	86.3
80°	138.7	128.6	118.5	108.4	98.2	90.7	85.4	80.2	75.1	69.9	69.1
82.5°	104.1	95.4	86.7	77.9	69.1	63.6	61.1	58.8	56.3	53.9	53.2
85°	58.8	53.4	47.9	42.6	37.1	34.0	33.3	32.5	31.8	31.1	30.6
87.5°	21.4	19.6	17.9	16.1	14.3	13.6	14.1	14.5	15.0	15.5	15.5
90°	0.8	2.7	4.5	6.4	8.2	10.3	12.6	15.1	17.4	19.8	20.5
92.5°	20.0	21.2	22.5	23.7	24.9	26.3	27.6	29.0	30.3	31.7	32.3
95°	48.8	50.0	51.3	52.6	53.9	55.3	56.7	58.2	59.7	61.1	61.9
97.5°	86.6	87.5	88.5	89.4	90.4	91.4	92.5	93.5	94.6	95.6	96.5
100°	112.3	113.4	114.5	115.6	116.8	117.7	118.7	119.6	120.5	121.4	122.0
102.5°	142.1	142.8	143.4	144.1	144.7	145.6	146.8	148.1	149.3	150.5	151.1
105°	185.9	186.2	186.6	186.9	187.4	188.3	190.0	191.6	193.3	194.9	194.9
107.5°	236.8	236.9	237.2	237.4	237.6	238.1	238.7	239.4	240.0	240.7	241.2
110°	268.5	268.8	269.2	269.5	269.9	270.3	270.7	271.0	271.4	271.7	272.5



TEST NUMBER: P332461-930

CATALOG NUMBER: S123RDIW-S1000D1030U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	301.5	301.7	301.9	302.1	302.4	302.5	302.6	302.6	302.7	302.8	303.7
115°	351.1	351.6	352.1	352.7	353.3	353.4	352.9	352.6	352.2	351.9	352.0
117.5°	401.0	401.3	401.7	402.0	402.4	402.4	401.9	401.4	400.9	400.5	400.4
120°	432.0	433.1	434.2	435.3	436.4	436.5	435.5	434.6	433.7	432.8	432.6
122.5°	464.4	465.2	466.0	466.8	467.6	467.7	467.3	466.8	466.4	465.9	465.4
125°	513.8	514.3	514.9	515.4	516.0	516.1	515.7	515.4	514.9	514.6	513.9
127.5°	559.4	560.5	561.7	562.9	564.0	564.4	564.0	563.6	563.2	562.8	561.8
130°	589.8	591.3	592.7	594.2	595.7	596.1	595.6	595.0	594.4	593.9	593.1
132.5°	620.1	621.6	623.1	624.6	626.1	626.6	626.1	625.7	625.3	624.9	624.0
135°	666.6	667.6	668.8	669.8	671.0	671.4	671.2	671.1	670.9	670.7	669.9
137.5°	709.6	710.5	711.3	712.2	713.2	713.9	714.4	714.9	715.3	715.8	715.0
140°	739.2	740.2	741.1	742.0	742.9	743.5	743.6	743.9	744.0	744.2	744.0
142.5°	766.4	767.3	768.2	769.1	770.1	770.6	770.9	771.3	771.7	772.0	771.8
145°	808.6	809.0	809.3	809.8	810.1	810.6	811.1	811.7	812.2	812.8	812.6
147.5°	845.6	846.3	846.9	847.7	848.3	848.9	849.4	849.9	850.4	850.9	850.9
150°	871.4	871.8	872.1	872.5	872.9	873.3	873.6	874.0	874.3	874.7	874.7
152.5°	892.6	893.1	893.6	894.1	894.6	895.0	895.2	895.4	895.7	895.9	896.2
155°	925.9	925.9	925.9	925.9	925.9	926.0	926.2	926.4	926.6	926.8	927.5
157.5°	954.4	954.1	953.9	953.7	953.5	953.4	953.6	953.7	953.9	954.0	954.8
160°	972.2	971.8	971.4	971.1	970.7	970.5	970.5	970.5	970.5	970.5	971.4
162.5°	988.1	987.6	987.0	986.5	986.0	985.8	985.9	986.1	986.3	986.4	987.3
165°	1008.5	1008.0	1007.5	1006.9	1006.3	1006.1	1006.1	1006.1	1006.1	1006.1	1007.1
167.5°	1024.9	1024.2	1023.4	1022.7	1022.0	1021.7	1021.8	1022.0	1022.1	1022.2	1023.4
170°	1034.1	1033.4	1032.7	1031.9	1031.2	1030.9	1030.9	1030.9	1030.9	1030.9	1032.1
172.5°	1041.4	1040.6	1039.9	1039.2	1038.4	1038.1	1038.1	1038.1	1038.1	1038.1	1039.3
175°	1049.0	1048.3	1047.6	1046.8	1046.1	1045.7	1045.7	1045.7	1045.7	1045.7	1046.8
177.5°	1052.1	1051.6	1051.0	1050.4	1049.8	1049.5	1049.5	1049.5	1049.5	1049.5	1050.4
180°	1051.5	1051.5	1051.5	1051.5	1051.5	1051.5	1051.5	1051.5	1051.5	1051.5	1051.5



TEST NUMBER: P332461-930

CATALOG NUMBER: S123RDIW-S1000D1030U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1368.2	1368.2	1368.2	1368.2	1368.2	1368.2	1368.2	1368.2
2.5°	1362.8	1365.0	1367.1	1368.0	1367.6	1367.3	1366.8	1366.4
5°	1353.8	1356.0	1358.2	1359.1	1358.6	1358.1	1357.6	1357.1
7.5°	1334.7	1335.9	1337.2	1337.4	1336.5	1335.7	1334.9	1334.0
10°	1317.7	1317.9	1318.2	1317.7	1316.4	1315.2	1313.9	1312.7
12.5°	1296.4	1296.3	1296.2	1295.3	1294.0	1292.5	1291.1	1289.6
15°	1259.2	1258.0	1256.8	1255.2	1253.5	1251.8	1250.1	1248.4
17.5°	1214.7	1212.1	1209.5	1206.9	1204.4	1201.8	1199.2	1196.6
20°	1184.2	1181.0	1177.9	1174.8	1171.8	1168.8	1165.9	1162.9
22.5°	1151.6	1147.6	1143.6	1140.2	1137.5	1134.7	1132.0	1129.2
25°	1098.2	1093.0	1087.9	1083.9	1081.2	1078.5	1075.8	1073.0
27.5°	1040.0	1032.8	1025.6	1019.9	1015.8	1011.6	1007.5	1003.4
30°	998.6	990.2	981.8	975.7	971.7	967.8	963.8	959.9
32.5°	957.9	948.8	939.6	932.9	928.8	924.6	920.5	916.3
35°	897.6	887.0	876.4	868.9	864.5	860.0	855.6	851.1
37.5°	832.8	820.8	808.8	800.0	794.5	789.0	783.6	778.1
40°	787.7	774.9	762.1	752.8	747.1	741.5	735.8	730.2
42.5°	744.5	730.5	716.5	706.9	701.9	696.8	691.7	686.6
45°	680.9	666.9	652.8	642.9	636.9	631.0	625.1	619.2
47.5°	615.2	600.0	584.7	574.4	569.1	563.9	558.6	553.3
50°	570.9	555.5	540.3	529.8	524.2	518.4	512.8	507.1
52.5°	528.0	512.1	496.2	485.7	480.6	475.6	470.5	465.4
55°	464.1	449.8	435.5	425.8	420.9	416.0	411.1	406.1
57.5°	401.3	387.8	374.3	365.4	361.3	357.0	352.9	348.6
60°	361.7	348.5	335.1	326.4	322.2	318.0	313.8	309.6
62.5°	322.5	310.0	297.4	288.9	284.6	280.2	275.8	271.4
65°	266.6	254.5	242.4	235.0	232.3	229.6	226.9	224.1
67.5°	213.2	204.2	195.2	189.1	186.3	183.4	180.4	177.6
70°	180.3	171.6	163.0	157.4	154.6	151.9	149.2	146.5
72.5°	150.6	143.5	136.5	132.4	131.3	130.1	129.0	127.8
75°	112.7	110.2	107.8	106.3	105.8	105.3	104.8	104.3
77.5°	85.0	83.6	82.3	81.4	81.0	80.5	80.0	79.5
80°	68.4	67.7	66.9	66.4	65.9	65.4	64.8	64.3
82.5°	52.4	51.7	51.0	50.5	50.5	50.4	50.2	50.1
85°	30.1	29.6	29.1	28.9	28.9	28.9	28.9	28.9
87.5°	15.4	15.3	15.3	15.2	15.1	15.0	14.8	14.8
90°	21.3	22.0	22.7	23.3	23.6	24.1	24.4	24.8
92.5°	32.9	33.5	34.1	34.2	34.0	33.8	33.6	33.3
95°	62.6	63.3	64.1	64.4	64.4	64.4	64.4	64.4
97.5°	97.3	98.2	99.1	99.4	99.3	99.3	99.2	99.1
100°	122.5	123.1	123.6	124.1	124.4	124.8	125.1	125.6
102.5°	151.6	152.1	152.7	153.0	152.9	152.8	152.7	152.6
105°	194.9	194.9	194.9	195.1	195.5	195.8	196.2	196.6
107.5°	241.9	242.5	243.0	243.2	243.0	242.8	242.6	242.3
110°	273.2	273.9	274.7	274.8	274.5	274.1	273.8	273.4



TEST NUMBER: P332461-930

CATALOG NUMBER: S123RDIW-S1000D1030U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	304.6	305.4	306.3	306.7	306.6	306.6	306.6	306.5
115°	352.2	352.5	352.6	352.6	352.5	352.2	352.0	351.9
117.5°	400.4	400.3	400.3	400.0	399.5	399.0	398.4	397.9
120°	432.4	432.3	432.1	431.8	431.5	431.0	430.7	430.3
122.5°	464.9	464.4	464.0	463.4	462.9	462.4	461.9	461.4
125°	513.1	512.4	511.7	510.9	510.2	509.5	508.7	508.0
127.5°	560.8	559.8	558.7	557.7	556.9	556.1	555.2	554.4
130°	592.4	591.7	590.9	590.0	588.6	587.3	586.1	584.8
132.5°	623.2	622.3	621.4	620.5	619.5	618.5	617.5	616.5
135°	669.2	668.5	667.7	667.2	666.8	666.5	666.1	665.8
137.5°	714.3	713.5	712.7	712.0	711.3	710.6	709.9	709.2
140°	743.9	743.6	743.5	742.7	741.4	740.2	738.9	737.6
142.5°	771.6	771.4	771.3	770.6	769.6	768.7	767.7	766.7
145°	812.4	812.2	812.0	811.5	810.8	810.1	809.3	808.6
147.5°	850.9	850.9	850.9	850.4	849.3	848.2	847.1	846.0
150°	874.7	874.7	874.7	874.2	873.1	872.0	870.9	869.8
152.5°	896.4	896.7	897.1	896.7	895.8	894.8	893.8	892.9
155°	928.2	929.0	929.7	929.4	928.1	926.8	925.6	924.3
157.5°	955.5	956.3	957.1	957.0	955.9	955.0	953.9	952.8
160°	972.4	973.3	974.2	974.3	973.5	972.8	972.1	971.3
162.5°	988.2	989.1	990.1	989.9	988.8	987.6	986.4	985.2
165°	1008.3	1009.3	1010.5	1010.4	1009.1	1007.8	1006.5	1005.3
167.5°	1024.5	1025.6	1026.8	1026.8	1025.6	1024.5	1023.4	1022.2
170°	1033.4	1034.7	1036.0	1036.0	1034.7	1033.4	1032.1	1030.9
172.5°	1040.4	1041.5	1042.7	1042.6	1041.3	1040.0	1038.7	1037.5
175°	1047.9	1049.0	1050.1	1050.0	1048.7	1047.4	1046.2	1044.9
177.5°	1051.2	1052.1	1053.0	1053.0	1051.9	1050.9	1049.9	1048.9
180°	1051.5	1051.5	1051.5	1051.5	1051.5	1051.5	1051.5	1051.5

(END OF REPORT)