

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332462-930

Luminaire Tested: **S123RDIW-S1000D1320U930-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332462-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S1000D1320U930-4F0-1E-UDD-A
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 1320 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7534.1 lumens
Efficiency: N/A
Efficacy: 107.9 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.22 / 1.36
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 69.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332462-930

CATALOG NUMBER: S123RDIW-S1000D1320U930-4F0-1E-UDD-A

Luminous Intensity Polar Plot

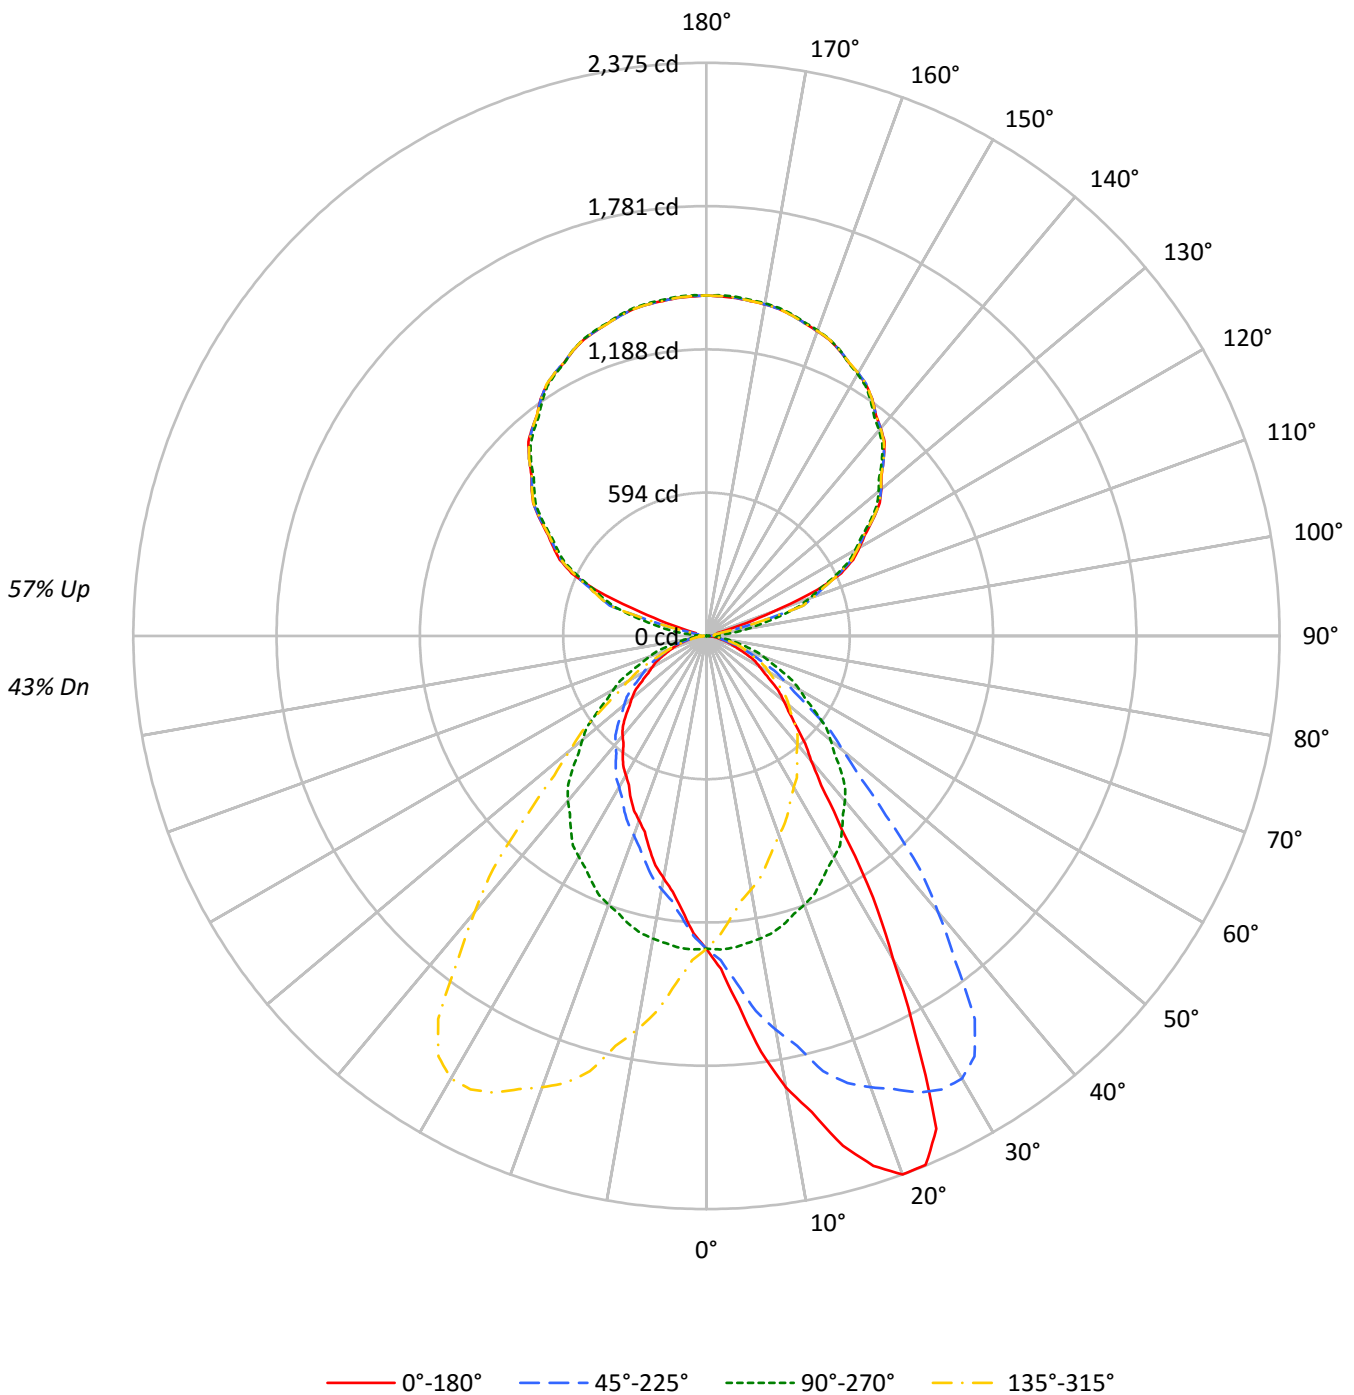



TEST NUMBER: P332462-930

CATALOG NUMBER: S123RDIW-S1000D1320U930-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																			
RCR																																														
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	50	50	50	43																												
1	97	93	89	86	88	85	82	79	70	68	66	57	55	54	45	44	43	37																												
2	88	81	76	71	81	75	70	66	62	59	56	51	48	46	40	38	37	32																												
3	81	72	65	59	74	66	60	55	55	51	47	45	42	39	36	34	32	28																												
4	74	64	56	51	68	59	52	47	49	44	41	40	37	34	32	30	28	24																												
5	68	57	49	44	62	53	46	41	44	39	35	37	33	30	29	27	25	21																												
6	63	51	44	38	58	48	41	36	40	35	31	33	29	26	27	24	22	19																												
7	58	47	39	33	53	43	36	31	36	31	27	30	26	23	24	22	20	17																												
8	54	42	35	30	50	39	33	28	33	28	24	28	24	21	23	20	18	15																												
9	50	39	31	26	46	36	29	25	31	25	22	26	22	19	21	18	16	14																												
10	47	35	28	24	43	33	27	22	28	23	20	24	20	17	19	17	15	13																												

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	13951	13951	13951	13951
5°	16630	14011	12337	14011
10°	20764	13930	11146	13930
15°	24373	13788	10165	13788
20°	27202	13575	9330	13575
25°	26766	13351	8817	13351
30°	19240	13144	8289	13144
35°	12846	12875	7947	12875
40°	9465	12552	7593	12552
45°	7939	11985	7247	11985
50°	7005	11241	6764	11241
55°	6142	10393	6101	10393
60°	5470	9580	5591	9580
65°	4806	8706	5201	8706
70°	3770	7928	4749	7928
75°	3323	6924	4338	6924
80°	2889	5883	4265	5883
85°	2322	4730	4520	4730



TEST NUMBER: P332462-930

CATALOG NUMBER: S123RDIW-S1000D1320U930-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	127.5	1.7
10°-20°	398.2	5.3
20°-30°	625.6	8.3
30°-40°	652.7	8.7
40°-50°	558.6	7.4
50°-60°	425.7	5.7
60°-70°	272.9	3.6
70°-80°	131.3	1.7
80°-90°	38.7	0.5
90°-100°	51.3	0.7
100°-110°	244.5	3.2
110°-120°	587.3	7.8
120°-130°	747.9	9.9
130°-140°	799.1	10.6
140°-150°	747.2	9.9
150°-160°	602.7	8.0
160°-170°	389.0	5.2
170°-180°	134.1	1.8
0°-30°	1151.2	15.3
0°-40°	1803.9	23.9
0°-60°	2788.2	37.0
0°-90°	3231.0	42.9
90°-120°	883.1	11.7
90°-150°	3177.3	42.2
90°-180°	4303.0	57.1
0°-180°	7534.1	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1296	1296	1296	1296	1296	
5°	1539	1297	1142	1297	1539	159
15°	2187	1237	912	1237	2187	620
25°	2254	1124	742	1124	2254	969
35°	978	980	605	980	978	641
45°	522	787	476	787	522	410
55°	327	554	325	554	327	296
65°	189	342	204	342	189	186
75°	80	166	104	166	80	86
85°	19	38	37	38	19	22
90°	32	1	32	1	32	15
95°	40	64	40	64	40	33
105°	46	312	46	312	46	105
115°	616	586	616	586	616	570
125°	843	826	843	826	843	753
135°	1039	1028	1039	1028	1039	801
145°	1198	1187	1198	1187	1198	748
155°	1305	1307	1305	1307	1305	602
165°	1375	1379	1375	1379	1375	388
175°	1406	1411	1406	1411	1406	134
180°	1411	1411	1411	1411	1411	



TEST NUMBER: P332462-930

CATALOG NUMBER: S123RDIW-S1000D1320U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1380.5	1382.2	1376.5	1375.6	1368.9	1367.1	1367.1	1357.8	1352.0	1344.5	1340.0
5°	1539.1	1548.0	1543.5	1533.6	1516.9	1513.0	1502.5	1485.9	1467.0	1443.7	1432.6
7.5°	1737.3	1749.4	1744.7	1729.3	1711.9	1697.8	1668.1	1640.5	1601.7	1567.7	1538.7
10°	1899.7	1887.0	1877.0	1862.1	1845.9	1819.8	1788.8	1746.0	1696.7	1657.8	1614.6
12.5°	2021.4	2019.3	2006.6	1991.2	1968.5	1943.7	1905.5	1853.5	1796.1	1740.0	1690.4
15°	2187.2	2190.5	2182.1	2166.1	2133.9	2090.1	2032.4	2010.8	1928.6	1867.6	1806.5
17.5°	2301.9	2301.3	2300.1	2277.9	2245.0	2213.8	2160.3	2103.4	2029.0	1943.0	1860.8
20°	2374.7	2369.2	2370.2	2345.3	2320.9	2284.8	2232.7	2150.0	2089.0	1989.7	1904.8
22.5°	2372.9	2371.8	2376.0	2367.5	2349.8	2322.1	2281.0	2211.3	2133.3	2033.1	1937.6
25°	2253.7	2249.3	2275.4	2282.6	2310.9	2315.9	2303.7	2265.4	2191.6	2088.4	1970.3
27.5°	1886.2	1883.7	1932.2	1992.8	2069.6	2129.2	2187.0	2214.8	2191.6	2117.7	1999.3
30°	1548.0	1600.2	1624.6	1712.2	1809.9	1926.4	2028.5	2125.6	2149.5	2117.3	2020.1
32.5°	1285.2	1330.7	1351.1	1426.4	1517.4	1653.8	1807.0	1944.5	2041.6	2066.2	2007.8
35°	977.6	978.2	1024.7	1058.1	1142.4	1282.8	1431.5	1615.7	1798.8	1937.5	1951.9
37.5°	780.1	782.9	811.1	844.2	907.5	981.7	1112.6	1265.8	1477.3	1690.3	1815.1
40°	673.6	678.6	699.7	732.4	777.9	833.9	936.0	1080.3	1256.7	1493.6	1687.3
42.5°	605.2	613.3	624.2	649.4	677.6	730.0	812.6	924.1	1084.5	1308.6	1531.9
45°	521.5	525.9	534.3	545.9	571.4	608.1	663.6	738.5	871.6	1052.0	1275.5
47.5°	460.1	457.7	466.5	476.0	492.9	517.9	555.1	616.2	711.2	855.9	1045.5
50°	418.3	417.8	423.9	431.1	447.2	465.5	496.0	542.1	617.5	737.4	911.0
52.5°	379.3	381.4	385.7	394.7	406.3	421.1	448.5	481.7	546.5	650.0	794.8
55°	327.3	329.1	335.1	340.1	348.5	363.4	380.6	408.4	452.7	524.9	644.2
57.5°	283.4	282.7	288.5	289.8	299.1	311.4	324.7	346.3	378.4	432.0	512.3
60°	254.1	252.4	257.5	261.3	266.4	276.3	287.4	308.5	334.0	373.4	442.2
62.5°	227.5	226.7	230.4	234.2	238.4	247.4	256.8	273.0	293.2	326.4	381.0
65°	188.7	190.3	192.0	193.6	195.8	201.4	210.3	221.4	235.2	258.5	297.9
67.5°	148.2	149.9	150.5	153.9	158.7	162.2	167.5	177.4	187.1	206.8	229.2
70°	119.8	119.3	119.8	121.5	127.6	133.7	141.0	148.1	154.3	168.1	186.9
72.5°	103.0	102.0	103.5	103.8	106.7	108.4	113.0	119.8	127.6	137.1	150.6
75°	79.9	79.9	79.9	79.9	82.1	83.2	84.9	86.6	89.4	93.8	103.8
77.5°	59.0	59.1	59.9	60.5	60.9	61.6	62.6	64.2	65.2	67.6	71.9
80°	46.6	47.1	46.6	47.1	47.1	48.3	48.8	50.5	51.0	53.8	55.5
82.5°	35.1	34.7	35.1	35.6	35.6	36.8	36.9	38.1	38.2	39.6	41.3
85°	18.8	17.8	18.8	18.3	19.4	18.3	18.8	20.0	20.0	20.5	22.7
87.5°	10.8	11.5	10.5	10.9	10.8	11.1	10.9	10.8	11.4	10.8	10.7
90°	31.5	31.0	30.5	30.1	29.6	28.9	28.0	27.0	26.1	25.2	22.1
92.5°	34.8	34.5	34.2	34.0	33.7	32.8	31.3	29.8	28.3	26.8	24.5
95°	39.9	39.9	39.9	39.9	39.9	39.1	37.4	35.8	34.2	32.5	29.9
97.5°	43.2	43.0	42.7	42.5	42.2	41.2	39.4	37.5	35.6	33.8	30.5
100°	44.0	43.8	43.5	43.3	43.1	42.1	40.2	38.3	36.4	34.6	30.9
102.5°	44.8	44.4	44.0	43.6	43.2	45.9	51.6	57.4	63.2	69.0	108.7
105°	46.1	45.7	45.2	44.8	44.3	64.7	105.9	147.1	188.3	229.6	250.5
107.5°	144.9	175.9	207.0	238.1	269.2	299.9	330.1	360.4	390.5	420.8	417.5
110°	288.3	321.6	354.9	388.2	421.5	442.1	449.7	457.4	465.1	472.8	470.3



TEST NUMBER: P332462-930

CATALOG NUMBER: S123RDIW-S1000D1320U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	494.6	501.7	508.7	515.7	522.8	526.2	526.0	525.9	525.8	525.6	523.1
115°	616.4	615.5	614.6	613.6	612.7	611.1	608.7	606.4	604.1	601.8	599.7
117.5°	684.8	684.6	684.4	684.2	684.0	683.0	681.1	679.3	677.4	675.6	674.5
120°	731.7	731.7	731.7	731.7	731.7	730.8	729.0	727.1	725.2	723.3	722.7
122.5°	777.9	777.7	777.5	777.3	777.1	776.4	775.1	773.8	772.5	771.2	770.3
125°	842.9	842.4	842.0	841.5	841.0	840.5	840.1	839.6	839.1	838.7	837.7
127.5°	905.3	905.8	906.3	906.8	907.2	907.1	906.3	905.6	904.8	904.1	902.9
130°	945.6	946.1	946.6	947.0	947.5	947.2	946.3	945.3	944.4	943.5	942.6
132.5°	982.5	983.2	983.8	984.5	985.1	985.0	984.1	983.1	982.2	981.2	980.5
135°	1038.9	1039.6	1040.3	1041.0	1041.7	1041.7	1041.0	1040.3	1039.6	1038.9	1038.0
137.5°	1091.9	1092.4	1092.9	1093.3	1093.8	1093.5	1092.3	1091.3	1090.1	1089.0	1088.5
140°	1123.8	1124.3	1124.7	1125.2	1125.7	1125.4	1124.5	1123.6	1122.7	1121.7	1121.0
142.5°	1153.2	1153.8	1154.5	1155.1	1155.8	1155.8	1155.0	1154.2	1153.5	1152.8	1152.0
145°	1198.2	1198.2	1198.2	1198.2	1198.2	1198.0	1197.5	1197.1	1196.6	1196.1	1195.7
147.5°	1231.8	1232.9	1234.0	1235.0	1236.1	1236.4	1235.9	1235.4	1235.0	1234.5	1234.0
150°	1256.9	1257.7	1258.3	1259.1	1259.7	1259.9	1259.4	1258.9	1258.5	1258.0	1257.5
152.5°	1277.1	1278.1	1279.2	1280.3	1281.4	1281.5	1280.7	1279.8	1279.0	1278.1	1277.8
155°	1305.2	1306.6	1308.0	1309.4	1310.8	1310.9	1309.7	1308.6	1307.4	1306.2	1306.0
157.5°	1328.9	1330.6	1332.5	1334.3	1336.1	1336.4	1335.0	1333.6	1332.1	1330.7	1331.0
160°	1343.9	1345.6	1347.2	1348.8	1350.5	1350.6	1349.2	1347.8	1346.4	1345.0	1345.2
162.5°	1358.2	1359.7	1361.1	1362.5	1364.0	1363.9	1362.4	1360.7	1359.2	1357.6	1357.8
165°	1375.4	1377.0	1378.7	1380.3	1381.9	1381.9	1380.0	1378.1	1376.2	1374.4	1374.6
167.5°	1387.8	1389.7	1391.6	1393.3	1395.2	1395.2	1393.3	1391.6	1389.7	1387.8	1387.8
170°	1395.3	1397.2	1399.1	1400.9	1402.8	1402.8	1400.9	1399.1	1397.2	1395.3	1395.3
172.5°	1399.5	1401.6	1403.6	1405.7	1407.7	1407.9	1406.0	1404.1	1402.2	1400.4	1400.2
175°	1405.8	1407.7	1409.6	1411.4	1413.2	1413.4	1411.8	1410.1	1408.5	1406.9	1406.6
177.5°	1407.7	1409.6	1411.4	1413.3	1415.2	1415.4	1413.9	1412.3	1410.9	1409.4	1409.2
180°	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0



TEST NUMBER: P332462-930

CATALOG NUMBER: S123RDIW-S1000D1320U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1338.2	1336.9	1330.7	1323.6	1314.3	1308.1	1303.2	1300.6	1292.6	1282.8	1276.1
5°	1420.9	1404.3	1386.6	1364.9	1344.9	1324.4	1311.7	1296.7	1278.3	1257.8	1243.4
7.5°	1509.5	1476.8	1441.7	1405.4	1369.5	1337.4	1309.0	1284.7	1255.5	1226.0	1205.4
10°	1577.4	1529.7	1480.3	1429.8	1383.7	1340.5	1307.2	1274.5	1239.5	1205.7	1180.1
12.5°	1639.1	1576.3	1519.4	1457.3	1398.4	1346.7	1298.8	1260.3	1218.2	1182.1	1153.1
15°	1717.2	1652.9	1584.0	1489.7	1411.5	1346.1	1287.8	1237.3	1186.3	1141.8	1113.5
17.5°	1790.2	1693.4	1600.9	1522.2	1420.6	1338.8	1267.7	1207.3	1151.3	1104.2	1069.4
20°	1820.4	1726.6	1626.2	1525.8	1426.0	1334.4	1251.7	1185.1	1126.9	1073.6	1041.5
22.5°	1838.6	1732.4	1626.7	1518.7	1412.6	1317.5	1235.7	1162.5	1099.3	1048.7	1009.0
25°	1859.8	1733.3	1616.8	1510.3	1402.1	1298.9	1201.8	1124.1	1055.9	1002.0	959.9
27.5°	1873.8	1725.0	1587.3	1468.8	1359.1	1256.4	1167.3	1085.0	1015.8	958.9	913.6
30°	1876.5	1718.3	1564.6	1436.5	1324.9	1230.6	1136.3	1057.5	984.3	923.8	881.7
32.5°	1880.0	1701.9	1534.0	1397.8	1283.7	1190.3	1104.8	1029.6	954.6	895.0	851.9
35°	1865.4	1692.8	1487.5	1331.1	1216.8	1126.3	1049.2	979.8	906.0	848.3	804.5
37.5°	1802.3	1656.8	1439.3	1255.8	1136.3	1052.6	989.7	929.3	861.5	799.3	758.0
40°	1738.9	1621.2	1402.1	1210.1	1085.2	999.2	942.6	893.3	827.9	769.6	725.2
42.5°	1644.3	1572.9	1366.6	1162.1	1027.5	944.7	896.9	850.7	793.2	734.0	692.4
45°	1470.9	1480.3	1293.9	1085.8	947.6	864.5	819.5	787.3	736.3	687.5	644.7
47.5°	1253.4	1341.6	1208.5	1004.4	863.4	785.3	746.0	718.0	683.5	635.6	596.6
50°	1111.3	1237.3	1140.2	949.9	810.7	733.0	694.1	671.3	641.4	603.6	566.5
52.5°	980.4	1115.7	1057.6	889.1	753.3	682.3	644.4	625.7	601.9	566.4	532.7
55°	799.5	936.5	923.2	797.3	667.5	603.6	574.8	553.8	537.6	511.0	484.4
57.5°	646.7	776.7	783.5	695.2	591.8	528.7	503.9	488.0	477.5	457.4	432.8
60°	550.4	669.7	693.0	626.4	537.6	482.2	457.7	445.0	436.7	420.5	401.7
62.5°	470.5	572.0	598.4	550.5	485.7	433.7	414.7	402.4	396.7	382.9	366.2
65°	360.1	444.4	469.9	443.3	409.4	367.9	352.3	341.8	336.8	329.1	316.8
67.5°	270.8	332.2	360.2	341.4	329.2	303.0	293.1	287.4	283.0	277.6	267.4
70°	217.5	263.0	291.9	286.8	276.9	263.0	255.8	251.9	247.4	243.0	234.2
72.5°	174.9	206.2	233.3	235.8	227.6	224.9	218.5	216.9	214.2	208.9	204.0
75°	115.9	137.6	156.5	163.7	167.0	169.7	167.0	166.5	165.9	161.4	158.7
77.5°	76.0	87.6	99.5	111.9	117.1	120.8	121.7	123.8	122.3	119.9	118.6
80°	58.3	61.1	69.4	79.9	88.2	91.6	93.8	94.9	94.3	93.8	91.6
82.5°	42.3	44.6	48.5	55.9	62.9	68.5	69.8	69.5	70.8	71.1	69.4
85°	22.7	23.3	24.4	25.5	29.4	35.5	37.2	38.3	39.4	39.4	36.0
87.5°	10.9	9.9	10.2	9.6	10.5	10.4	12.6	14.4	15.3	14.0	14.5
90°	19.1	16.1	13.0	10.4	8.1	5.7	3.3	1.1	3.3	5.7	8.1
92.5°	22.3	20.0	17.7	16.9	17.5	18.2	18.8	19.5	18.8	18.2	17.5
95°	27.4	24.8	22.3	25.8	35.3	44.8	54.4	63.9	54.4	44.8	35.3
97.5°	67.3	84.1	100.9	111.4	115.7	119.9	124.3	128.5	124.3	119.9	115.7
100°	107.3	143.7	179.9	195.8	191.1	186.5	181.8	177.2	181.8	186.5	191.1
102.5°	148.4	188.1	227.8	246.0	242.6	239.2	235.9	232.5	235.9	239.2	242.6
105°	271.5	292.4	313.5	322.6	320.1	317.6	315.0	312.4	315.0	317.6	320.1
107.5°	414.2	410.9	407.6	404.9	402.8	400.8	398.8	396.7	398.8	400.8	402.8
110°	467.7	465.1	462.5	460.3	458.4	456.6	454.8	452.9	454.8	456.6	458.4



TEST NUMBER: P332462-930

CATALOG NUMBER: S123RDIW-S1000D1320U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	520.5	518.0	515.4	513.2	511.6	509.9	508.3	506.5	508.3	509.9	511.6
115°	597.5	595.4	593.4	591.6	590.2	588.8	587.4	586.0	587.4	588.8	590.2
117.5°	673.4	672.3	671.2	669.8	668.1	666.4	664.7	663.0	664.7	666.4	668.1
120°	721.9	721.2	720.6	719.2	717.1	714.9	712.9	710.8	712.9	714.9	717.1
122.5°	769.4	768.5	767.6	766.3	764.6	762.9	761.2	759.5	761.2	762.9	764.6
125°	836.8	835.8	834.9	833.6	831.7	829.8	827.9	826.1	827.9	829.8	831.7
127.5°	901.9	900.7	899.6	898.1	896.3	894.4	892.5	890.6	892.5	894.4	896.3
130°	941.7	940.7	939.8	938.4	936.5	934.7	932.8	930.9	932.8	934.7	936.5
132.5°	979.7	979.0	978.3	977.0	975.1	973.2	971.3	969.5	971.3	973.2	975.1
135°	1037.1	1036.1	1035.2	1034.0	1032.6	1031.2	1029.8	1028.4	1029.8	1031.2	1032.6
137.5°	1088.0	1087.4	1087.0	1085.8	1084.0	1082.3	1080.5	1078.7	1080.5	1082.3	1084.0
140°	1120.3	1119.7	1118.9	1117.9	1116.5	1115.1	1113.7	1112.3	1113.7	1115.1	1116.5
142.5°	1151.4	1150.6	1150.0	1148.9	1147.5	1146.1	1144.7	1143.3	1144.7	1146.1	1147.5
145°	1195.2	1194.7	1194.3	1193.3	1191.6	1190.0	1188.4	1186.7	1188.4	1190.0	1191.6
147.5°	1233.5	1233.1	1232.7	1231.9	1230.8	1229.7	1228.7	1227.6	1228.7	1229.7	1230.8
150°	1257.0	1256.6	1256.1	1255.6	1254.8	1254.2	1253.4	1252.8	1253.4	1254.2	1254.8
152.5°	1277.6	1277.3	1277.0	1276.7	1276.4	1276.0	1275.7	1275.4	1275.7	1276.0	1276.4
155°	1305.8	1305.5	1305.3	1305.4	1305.9	1306.4	1306.8	1307.3	1306.8	1306.4	1305.9
157.5°	1331.2	1331.5	1331.7	1331.8	1331.9	1332.0	1332.0	1332.0	1332.0	1332.0	1331.9
160°	1345.5	1345.7	1346.0	1346.1	1346.4	1346.6	1346.9	1347.1	1346.9	1346.6	1346.4
162.5°	1358.0	1358.3	1358.5	1358.9	1359.5	1360.2	1360.7	1361.4	1360.7	1360.2	1359.5
165°	1374.8	1375.1	1375.3	1375.7	1376.5	1377.1	1377.9	1378.6	1377.9	1377.1	1376.5
167.5°	1387.8	1387.8	1387.8	1388.2	1389.2	1390.1	1391.1	1392.0	1391.1	1390.1	1389.2
170°	1395.3	1395.3	1395.3	1395.8	1396.8	1397.7	1398.6	1399.5	1398.6	1397.7	1396.8
172.5°	1400.0	1399.8	1399.6	1400.1	1401.2	1402.3	1403.5	1404.6	1403.5	1402.3	1401.2
175°	1406.4	1406.1	1405.9	1406.4	1407.5	1408.8	1409.9	1411.0	1409.9	1408.8	1407.5
177.5°	1409.0	1408.8	1408.7	1409.0	1410.0	1410.9	1411.8	1412.8	1411.8	1410.9	1410.0
180°	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0



TEST NUMBER: P332462-930

CATALOG NUMBER: S123RDIW-S1000D1320U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1273.9	1268.1	1264.1	1255.2	1249.5	1243.2	1237.1	1241.0	1240.6	1240.2	1240.2
5°	1231.2	1218.4	1206.8	1191.8	1182.3	1170.7	1161.8	1160.7	1162.9	1155.2	1150.7
7.5°	1188.8	1171.3	1154.9	1138.3	1120.8	1106.8	1098.0	1093.9	1088.3	1083.5	1078.5
10°	1159.0	1138.6	1122.4	1101.9	1083.0	1066.4	1055.9	1048.6	1044.7	1040.9	1033.6
12.5°	1128.5	1108.3	1087.9	1064.6	1046.7	1027.4	1019.5	1011.4	1004.0	999.6	989.7
15°	1083.6	1057.5	1035.9	1011.5	991.5	972.7	961.6	945.4	943.2	937.7	927.7
17.5°	1038.7	1010.3	980.5	962.5	939.9	920.2	903.4	898.0	882.1	876.1	867.4
20°	1003.1	977.1	954.3	930.5	897.7	879.4	866.1	858.9	846.1	838.4	832.8
22.5°	972.5	946.0	919.7	891.9	864.9	844.3	834.6	823.4	816.4	805.5	799.5
25°	928.8	899.9	868.3	838.4	819.0	803.4	787.9	777.9	767.9	762.9	751.8
27.5°	878.0	847.8	818.2	795.5	771.7	756.4	742.2	733.4	721.4	713.0	706.9
30°	850.0	814.5	789.0	768.4	737.9	723.5	713.0	701.9	693.0	684.1	678.0
32.5°	817.6	785.2	761.0	735.6	712.2	696.4	682.8	673.0	665.4	657.0	650.9
35°	766.8	739.6	714.6	689.1	671.9	655.8	639.8	631.4	624.2	616.4	610.9
37.5°	720.8	695.5	671.7	647.5	626.1	613.1	600.1	593.8	584.0	578.8	573.2
40°	692.4	667.5	642.0	618.6	596.5	586.4	574.8	565.4	556.5	552.6	546.5
42.5°	661.4	636.4	614.9	589.8	571.6	558.1	547.3	537.0	530.4	524.6	521.2
45°	615.3	593.1	572.0	547.1	529.9	518.2	506.0	496.6	490.5	486.6	480.5
47.5°	570.6	548.4	527.0	505.2	488.6	475.2	463.1	456.5	448.4	443.7	439.5
50°	538.2	518.2	495.5	475.5	458.9	445.6	435.5	427.2	420.0	413.9	411.2
52.5°	508.4	487.1	467.5	448.9	431.3	416.2	407.2	398.4	393.0	386.0	382.7
55°	459.4	438.9	422.2	403.9	386.7	374.0	362.9	355.1	349.5	341.8	337.4
57.5°	413.4	394.9	375.0	359.2	341.4	330.7	321.5	311.0	304.2	298.1	293.8
60°	382.3	361.2	344.0	329.1	313.5	299.6	291.3	283.0	275.7	269.6	265.8
62.5°	349.8	331.5	315.1	298.8	284.6	272.6	262.9	255.9	249.6	245.6	241.8
65°	300.2	285.8	269.1	255.8	242.5	233.6	225.8	219.7	215.2	212.5	209.2
67.5°	254.5	240.4	225.9	212.9	204.0	197.2	192.1	186.9	184.7	181.1	178.9
70°	224.7	210.3	197.5	187.5	178.6	173.7	170.3	166.5	164.2	159.8	157.6
72.5°	192.3	181.9	172.7	164.4	157.4	152.8	148.5	143.8	140.2	135.3	133.1
75°	151.5	142.0	134.9	129.3	124.8	118.7	112.6	107.6	106.0	104.3	103.8
77.5°	112.2	106.2	101.0	96.3	90.7	86.3	85.0	83.9	83.6	82.7	82.7
80°	88.2	82.7	78.8	73.2	69.9	69.9	69.9	68.8	69.4	69.4	69.4
82.5°	65.6	60.5	58.4	56.3	55.7	56.2	56.2	56.3	56.0	56.9	56.5
85°	33.8	34.4	35.5	35.0	35.5	35.5	36.6	36.0	36.6	35.5	36.6
87.5°	14.5	16.4	17.4	18.5	19.5	19.6	20.3	20.5	21.1	21.3	21.4
90°	10.4	13.0	16.1	19.1	22.1	25.2	26.1	27.0	28.0	28.9	29.6
92.5°	16.9	17.7	20.0	22.3	24.5	26.8	28.3	29.8	31.3	32.8	33.7
95°	25.8	22.3	24.8	27.4	29.9	32.5	34.2	35.8	37.4	39.1	39.9
97.5°	111.4	100.9	84.1	67.3	50.5	33.8	35.6	37.5	39.4	41.2	42.2
100°	195.8	179.9	143.7	107.3	70.9	34.6	36.4	38.3	40.2	42.1	43.1
102.5°	246.0	227.8	188.1	148.4	108.7	69.0	63.2	57.4	51.6	45.9	43.2
105°	322.6	313.5	292.4	271.5	250.5	229.6	188.3	147.1	105.9	64.7	44.3
107.5°	404.9	407.6	410.9	414.2	417.5	420.8	390.5	360.4	330.1	299.9	269.2
110°	460.3	462.5	465.1	467.7	470.3	472.8	465.1	457.4	449.7	442.1	421.5



TEST NUMBER: P332462-930

CATALOG NUMBER: S123RDIW-S1000D1320U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	513.2	515.4	518.0	520.5	523.1	525.6	525.8	525.9	526.0	526.2	522.8
115°	591.6	593.4	595.4	597.5	599.7	601.8	604.1	606.4	608.7	611.1	612.7
117.5°	669.8	671.2	672.3	673.4	674.5	675.6	677.4	679.3	681.1	683.0	684.0
120°	719.2	720.6	721.2	721.9	722.7	723.3	725.2	727.1	729.0	730.8	731.7
122.5°	766.3	767.6	768.5	769.4	770.3	771.2	772.5	773.8	775.1	776.4	777.1
125°	833.6	834.9	835.8	836.8	837.7	838.7	839.1	839.6	840.1	840.5	841.0
127.5°	898.1	899.6	900.7	901.9	902.9	904.1	904.8	905.6	906.3	907.1	907.2
130°	938.4	939.8	940.7	941.7	942.6	943.5	944.4	945.3	946.3	947.2	947.5
132.5°	977.0	978.3	979.0	979.7	980.5	981.2	982.2	983.1	984.1	985.0	985.1
135°	1034.0	1035.2	1036.1	1037.1	1038.0	1038.9	1039.6	1040.3	1041.0	1041.7	1041.7
137.5°	1085.8	1087.0	1087.4	1088.0	1088.5	1089.0	1090.1	1091.3	1092.3	1093.5	1093.8
140°	1117.9	1118.9	1119.7	1120.3	1121.0	1121.7	1122.7	1123.6	1124.5	1125.4	1125.7
142.5°	1148.9	1150.0	1150.6	1151.4	1152.0	1152.8	1153.5	1154.2	1155.0	1155.8	1155.8
145°	1193.3	1194.3	1194.7	1195.2	1195.7	1196.1	1196.6	1197.1	1197.5	1198.0	1198.2
147.5°	1231.9	1232.7	1233.1	1233.5	1234.0	1234.5	1235.0	1235.4	1235.9	1236.4	1236.1
150°	1255.6	1256.1	1256.6	1257.0	1257.5	1258.0	1258.5	1258.9	1259.4	1259.9	1259.7
152.5°	1276.7	1277.0	1277.3	1277.6	1277.8	1278.1	1279.0	1279.8	1280.7	1281.5	1281.4
155°	1305.4	1305.3	1305.5	1305.8	1306.0	1306.2	1307.4	1308.6	1309.7	1310.9	1310.8
157.5°	1331.8	1331.7	1331.5	1331.2	1331.0	1330.7	1332.1	1333.6	1335.0	1336.4	1336.1
160°	1346.1	1346.0	1345.7	1345.5	1345.2	1345.0	1346.4	1347.8	1349.2	1350.6	1350.5
162.5°	1358.9	1358.5	1358.3	1358.0	1357.8	1357.6	1359.2	1360.7	1362.4	1363.9	1364.0
165°	1375.7	1375.3	1375.1	1374.8	1374.6	1374.4	1376.2	1378.1	1380.0	1381.9	1381.9
167.5°	1388.2	1387.8	1387.8	1387.8	1387.8	1387.8	1389.7	1391.6	1393.3	1395.2	1395.2
170°	1395.8	1395.3	1395.3	1395.3	1395.3	1395.3	1397.2	1399.1	1400.9	1402.8	1402.8
172.5°	1400.1	1399.6	1399.8	1400.0	1400.2	1400.4	1402.2	1404.1	1406.0	1407.9	1407.7
175°	1406.4	1405.9	1406.1	1406.4	1406.6	1406.9	1408.5	1410.1	1411.8	1413.4	1413.2
177.5°	1409.0	1408.7	1408.8	1409.0	1409.2	1409.4	1410.9	1412.3	1413.9	1415.4	1415.2
180°	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0



TEST NUMBER: P332462-930

CATALOG NUMBER: S123RDIW-S1000D1320U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1234.9	1234.4	1234.9	1233.1	1234.9	1234.4	1234.9	1240.2	1240.2	1240.6	1241.0
5°	1149.1	1148.5	1146.9	1141.8	1146.9	1148.5	1149.1	1150.7	1155.2	1162.9	1160.7
7.5°	1074.2	1073.4	1068.5	1068.6	1068.5	1073.4	1074.2	1078.5	1083.5	1088.3	1093.9
10°	1029.8	1030.3	1023.7	1019.8	1023.7	1030.3	1029.8	1033.6	1040.9	1044.7	1048.6
12.5°	986.8	984.1	978.8	974.5	978.8	984.1	986.8	989.7	999.6	1004.0	1011.4
15°	929.9	924.4	911.0	912.2	911.0	924.4	929.9	927.7	937.7	943.2	945.4
17.5°	863.0	858.9	858.7	850.9	858.7	858.9	863.0	867.4	876.1	882.1	898.0
20°	823.9	821.2	822.2	814.5	822.2	821.2	823.9	832.8	838.4	846.1	858.9
22.5°	793.3	790.5	785.9	783.4	785.9	790.5	793.3	799.5	805.5	816.4	823.4
25°	748.4	744.0	739.6	742.4	739.6	744.0	748.4	751.8	762.9	767.9	777.9
27.5°	703.7	700.3	695.9	695.3	695.9	700.3	703.7	706.9	713.0	721.4	733.4
30°	675.2	671.9	669.7	666.9	669.7	671.9	675.2	678.0	684.1	693.0	701.9
32.5°	646.4	645.7	641.7	641.2	641.7	645.7	646.4	650.9	657.0	665.4	673.0
35°	608.6	605.4	604.2	604.8	604.2	605.4	608.6	610.9	616.4	624.2	631.4
37.5°	572.8	568.3	566.4	564.4	566.4	568.3	572.8	573.2	578.8	584.0	593.8
40°	547.1	542.7	541.5	540.4	541.5	542.7	547.1	546.5	552.6	556.5	565.4
42.5°	518.2	516.4	515.8	513.8	515.8	516.4	518.2	521.2	524.6	530.4	537.0
45°	478.8	478.3	474.9	476.1	474.9	478.3	478.8	480.5	486.6	490.5	496.6
47.5°	437.3	434.9	432.5	434.1	432.5	434.9	437.3	439.5	443.7	448.4	456.5
50°	409.0	407.8	402.8	403.9	402.8	407.8	409.0	411.2	413.9	420.0	427.2
52.5°	380.5	376.3	374.4	373.7	374.4	376.3	380.5	382.7	386.0	393.0	398.4
55°	333.5	328.5	326.3	325.1	326.3	328.5	333.5	337.4	341.8	349.5	355.1
57.5°	287.3	285.9	284.2	285.4	284.2	285.9	287.3	293.8	298.1	304.2	311.0
60°	260.2	260.2	260.2	259.7	260.2	260.2	260.2	265.8	269.6	275.7	283.0
62.5°	239.4	238.0	237.6	238.4	237.6	238.0	239.4	241.8	245.6	249.6	255.9
65°	207.5	206.9	204.7	204.2	204.7	206.9	207.5	209.2	212.5	215.2	219.7
67.5°	177.4	175.5	174.8	174.0	174.8	175.5	177.4	178.9	181.1	184.7	186.9
70°	154.8	153.7	150.3	150.9	150.3	153.7	154.8	157.6	159.8	164.2	166.5
72.5°	130.4	129.3	128.6	127.8	128.6	129.3	130.4	133.1	135.3	140.2	143.8
75°	103.2	102.6	102.1	104.3	102.1	102.6	103.2	103.8	104.3	106.0	107.6
77.5°	82.7	82.7	83.0	82.1	83.0	82.7	82.7	82.7	82.7	83.6	83.9
80°	69.4	69.4	68.8	68.8	68.8	69.4	69.4	69.4	69.4	69.4	68.8
82.5°	55.6	56.0	56.3	55.5	56.3	56.0	55.6	56.5	56.9	56.0	56.3
85°	36.6	36.0	37.2	36.6	37.2	36.0	36.6	36.6	35.5	36.6	36.0
87.5°	22.4	21.6	21.8	22.3	21.8	21.6	22.4	21.4	21.3	21.1	20.5
90°	30.1	30.5	31.0	31.5	31.0	30.5	30.1	29.6	28.9	28.0	27.0
92.5°	34.0	34.2	34.5	34.8	34.5	34.2	34.0	33.7	32.8	31.3	29.8
95°	39.9	39.9	39.9	39.9	39.9	39.9	39.9	39.9	39.1	37.4	35.8
97.5°	42.5	42.7	43.0	43.2	43.0	42.7	42.5	42.2	41.2	39.4	37.5
100°	43.3	43.5	43.8	44.0	43.8	43.5	43.3	43.1	42.1	40.2	38.3
102.5°	43.6	44.0	44.4	44.8	44.4	44.0	43.6	43.2	45.9	51.6	57.4
105°	44.8	45.2	45.7	46.1	45.7	45.2	44.8	44.3	64.7	105.9	147.1
107.5°	238.1	207.0	175.9	144.9	175.9	207.0	238.1	269.2	299.9	330.1	360.4
110°	388.2	354.9	321.6	288.3	321.6	354.9	388.2	421.5	442.1	449.7	457.4



TEST NUMBER: P332462-930

CATALOG NUMBER: S123RDIW-S1000D1320U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	515.7	508.7	501.7	494.6	501.7	508.7	515.7	522.8	526.2	526.0	525.9
115°	613.6	614.6	615.5	616.4	615.5	614.6	613.6	612.7	611.1	608.7	606.4
117.5°	684.2	684.4	684.6	684.8	684.6	684.4	684.2	684.0	683.0	681.1	679.3
120°	731.7	731.7	731.7	731.7	731.7	731.7	731.7	731.7	730.8	729.0	727.1
122.5°	777.3	777.5	777.7	777.9	777.7	777.5	777.3	777.1	776.4	775.1	773.8
125°	841.5	842.0	842.4	842.9	842.4	842.0	841.5	841.0	840.5	840.1	839.6
127.5°	906.8	906.3	905.8	905.3	905.8	906.3	906.8	907.2	907.1	906.3	905.6
130°	947.0	946.6	946.1	945.6	946.1	946.6	947.0	947.5	947.2	946.3	945.3
132.5°	984.5	983.8	983.2	982.5	983.2	983.8	984.5	985.1	985.0	984.1	983.1
135°	1041.0	1040.3	1039.6	1038.9	1039.6	1040.3	1041.0	1041.7	1041.7	1041.0	1040.3
137.5°	1093.3	1092.9	1092.4	1091.9	1092.4	1092.9	1093.3	1093.8	1093.5	1092.3	1091.3
140°	1125.2	1124.7	1124.3	1123.8	1124.3	1124.7	1125.2	1125.7	1125.4	1124.5	1123.6
142.5°	1155.1	1154.5	1153.8	1153.2	1153.8	1154.5	1155.1	1155.8	1155.8	1155.0	1154.2
145°	1198.2	1198.2	1198.2	1198.2	1198.2	1198.2	1198.2	1198.2	1198.0	1197.5	1197.1
147.5°	1235.0	1234.0	1232.9	1231.8	1232.9	1234.0	1235.0	1236.1	1236.4	1235.9	1235.4
150°	1259.1	1258.3	1257.7	1256.9	1257.7	1258.3	1259.1	1259.7	1259.9	1259.4	1258.9
152.5°	1280.3	1279.2	1278.1	1277.1	1278.1	1279.2	1280.3	1281.4	1281.5	1280.7	1279.8
155°	1309.4	1308.0	1306.6	1305.2	1306.6	1308.0	1309.4	1310.8	1310.9	1309.7	1308.6
157.5°	1334.3	1332.5	1330.6	1328.9	1330.6	1332.5	1334.3	1336.1	1336.4	1335.0	1333.6
160°	1348.8	1347.2	1345.6	1343.9	1345.6	1347.2	1348.8	1350.5	1350.6	1349.2	1347.8
162.5°	1362.5	1361.1	1359.7	1358.2	1359.7	1361.1	1362.5	1364.0	1363.9	1362.4	1360.7
165°	1380.3	1378.7	1377.0	1375.4	1377.0	1378.7	1380.3	1381.9	1381.9	1380.0	1378.1
167.5°	1393.3	1391.6	1389.7	1387.8	1389.7	1391.6	1393.3	1395.2	1395.2	1393.3	1391.6
170°	1400.9	1399.1	1397.2	1395.3	1397.2	1399.1	1400.9	1402.8	1402.8	1400.9	1399.1
172.5°	1405.7	1403.6	1401.6	1399.5	1401.6	1403.6	1405.7	1407.7	1407.9	1406.0	1404.1
175°	1411.4	1409.6	1407.7	1405.8	1407.7	1409.6	1411.4	1413.2	1413.4	1411.8	1410.1
177.5°	1413.3	1411.4	1409.6	1407.7	1409.6	1411.4	1413.3	1415.2	1415.4	1413.9	1412.3
180°	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0



TEST NUMBER: P332462-930

CATALOG NUMBER: S123RDIW-S1000D1320U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1237.1	1243.2	1249.5	1255.2	1264.1	1268.1	1273.9	1276.1	1282.8	1292.6	1300.6
5°	1161.8	1170.7	1182.3	1191.8	1206.8	1218.4	1231.2	1243.4	1257.8	1278.3	1296.7
7.5°	1098.0	1106.8	1120.8	1138.3	1154.9	1171.3	1188.8	1205.4	1226.0	1255.5	1284.7
10°	1055.9	1066.4	1083.0	1101.9	1122.4	1138.6	1159.0	1180.1	1205.7	1239.5	1274.5
12.5°	1019.5	1027.4	1046.7	1064.6	1087.9	1108.3	1128.5	1153.1	1182.1	1218.2	1260.3
15°	961.6	972.7	991.5	1011.5	1035.9	1057.5	1083.6	1113.5	1141.8	1186.3	1237.3
17.5°	903.4	920.2	939.9	962.5	980.5	1010.3	1038.7	1069.4	1104.2	1151.3	1207.3
20°	866.1	879.4	897.7	930.5	954.3	977.1	1003.1	1041.5	1073.6	1126.9	1185.1
22.5°	834.6	844.3	864.9	891.9	919.7	946.0	972.5	1009.0	1048.7	1099.3	1162.5
25°	787.9	803.4	819.0	838.4	868.3	899.9	928.8	959.9	1002.0	1055.9	1124.1
27.5°	742.2	756.4	771.7	795.5	818.2	847.8	878.0	913.6	958.9	1015.8	1085.0
30°	713.0	723.5	737.9	768.4	789.0	814.5	850.0	881.7	923.8	984.3	1057.5
32.5°	682.8	696.4	712.2	735.6	761.0	785.2	817.6	851.9	895.0	954.6	1029.6
35°	639.8	655.8	671.9	689.1	714.6	739.6	766.8	804.5	848.3	906.0	979.8
37.5°	600.1	613.1	626.1	647.5	671.7	695.5	720.8	758.0	799.3	861.5	929.3
40°	574.8	586.4	596.5	618.6	642.0	667.5	692.4	725.2	769.6	827.9	893.3
42.5°	547.3	558.1	571.6	589.8	614.9	636.4	661.4	692.4	734.0	793.2	850.7
45°	506.0	518.2	529.9	547.1	572.0	593.1	615.3	644.7	687.5	736.3	787.3
47.5°	463.1	475.2	488.6	505.2	527.0	548.4	570.6	596.6	635.6	683.5	718.0
50°	435.5	445.6	458.9	475.5	495.5	518.2	538.2	566.5	603.6	641.4	671.3
52.5°	407.2	416.2	431.3	448.9	467.5	487.1	508.4	532.7	566.4	601.9	625.7
55°	362.9	374.0	386.7	403.9	422.2	438.9	459.4	484.4	511.0	537.6	553.8
57.5°	321.5	330.7	341.4	359.2	375.0	394.9	413.4	432.8	457.4	477.5	488.0
60°	291.3	299.6	313.5	329.1	344.0	361.2	382.3	401.7	420.5	436.7	445.0
62.5°	262.9	272.6	284.6	298.8	315.1	331.5	349.8	366.2	382.9	396.7	402.4
65°	225.8	233.6	242.5	255.8	269.1	285.8	300.2	316.8	329.1	336.8	341.8
67.5°	192.1	197.2	204.0	212.9	225.9	240.4	254.5	267.4	277.6	283.0	287.4
70°	170.3	173.7	178.6	187.5	197.5	210.3	224.7	234.2	243.0	247.4	251.9
72.5°	148.5	152.8	157.4	164.4	172.7	181.9	192.3	204.0	208.9	214.2	216.9
75°	112.6	118.7	124.8	129.3	134.9	142.0	151.5	158.7	161.4	165.9	166.5
77.5°	85.0	86.3	90.7	96.3	101.0	106.2	112.2	118.6	119.9	122.3	123.8
80°	69.9	69.9	69.9	73.2	78.8	82.7	88.2	91.6	93.8	94.3	94.9
82.5°	56.2	56.2	55.7	56.3	58.4	60.5	65.6	69.4	71.1	70.8	69.5
85°	36.6	35.5	35.5	35.0	35.5	34.4	33.8	36.0	39.4	39.4	38.3
87.5°	20.3	19.6	19.5	18.5	17.4	16.4	14.5	14.5	14.0	15.3	14.4
90°	26.1	25.2	22.1	19.1	16.1	13.0	10.4	8.1	5.7	3.3	1.1
92.5°	28.3	26.8	24.5	22.3	20.0	17.7	16.9	17.5	18.2	18.8	19.5
95°	34.2	32.5	29.9	27.4	24.8	22.3	25.8	35.3	44.8	54.4	63.9
97.5°	35.6	33.8	50.5	67.3	84.1	100.9	111.4	115.7	119.9	124.3	128.5
100°	36.4	34.6	70.9	107.3	143.7	179.9	195.8	191.1	186.5	181.8	177.2
102.5°	63.2	69.0	108.7	148.4	188.1	227.8	246.0	242.6	239.2	235.9	232.5
105°	188.3	229.6	250.5	271.5	292.4	313.5	322.6	320.1	317.6	315.0	312.4
107.5°	390.5	420.8	417.5	414.2	410.9	407.6	404.9	402.8	400.8	398.8	396.7
110°	465.1	472.8	470.3	467.7	465.1	462.5	460.3	458.4	456.6	454.8	452.9



TEST NUMBER: P332462-930

CATALOG NUMBER: S123RDIW-S1000D1320U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	525.8	525.6	523.1	520.5	518.0	515.4	513.2	511.6	509.9	508.3	506.5
115°	604.1	601.8	599.7	597.5	595.4	593.4	591.6	590.2	588.8	587.4	586.0
117.5°	677.4	675.6	674.5	673.4	672.3	671.2	669.8	668.1	666.4	664.7	663.0
120°	725.2	723.3	722.7	721.9	721.2	720.6	719.2	717.1	714.9	712.9	710.8
122.5°	772.5	771.2	770.3	769.4	768.5	767.6	766.3	764.6	762.9	761.2	759.5
125°	839.1	838.7	837.7	836.8	835.8	834.9	833.6	831.7	829.8	827.9	826.1
127.5°	904.8	904.1	902.9	901.9	900.7	899.6	898.1	896.3	894.4	892.5	890.6
130°	944.4	943.5	942.6	941.7	940.7	939.8	938.4	936.5	934.7	932.8	930.9
132.5°	982.2	981.2	980.5	979.7	979.0	978.3	977.0	975.1	973.2	971.3	969.5
135°	1039.6	1038.9	1038.0	1037.1	1036.1	1035.2	1034.0	1032.6	1031.2	1029.8	1028.4
137.5°	1090.1	1089.0	1088.5	1088.0	1087.4	1087.0	1085.8	1084.0	1082.3	1080.5	1078.7
140°	1122.7	1121.7	1121.0	1120.3	1119.7	1118.9	1117.9	1116.5	1115.1	1113.7	1112.3
142.5°	1153.5	1152.8	1152.0	1151.4	1150.6	1150.0	1148.9	1147.5	1146.1	1144.7	1143.3
145°	1196.6	1196.1	1195.7	1195.2	1194.7	1194.3	1193.3	1191.6	1190.0	1188.4	1186.7
147.5°	1235.0	1234.5	1234.0	1233.5	1233.1	1232.7	1231.9	1230.8	1229.7	1228.7	1227.6
150°	1258.5	1258.0	1257.5	1257.0	1256.6	1256.1	1255.6	1254.8	1254.2	1253.4	1252.8
152.5°	1279.0	1278.1	1277.8	1277.6	1277.3	1277.0	1276.7	1276.4	1276.0	1275.7	1275.4
155°	1307.4	1306.2	1306.0	1305.8	1305.5	1305.3	1305.4	1305.9	1306.4	1306.8	1307.3
157.5°	1332.1	1330.7	1331.0	1331.2	1331.5	1331.7	1331.8	1331.9	1332.0	1332.0	1332.0
160°	1346.4	1345.0	1345.2	1345.5	1345.7	1346.0	1346.1	1346.4	1346.6	1346.9	1347.1
162.5°	1359.2	1357.6	1357.8	1358.0	1358.3	1358.5	1358.9	1359.5	1360.2	1360.7	1361.4
165°	1376.2	1374.4	1374.6	1374.8	1375.1	1375.3	1375.7	1376.5	1377.1	1377.9	1378.6
167.5°	1389.7	1387.8	1387.8	1387.8	1387.8	1387.8	1388.2	1389.2	1390.1	1391.1	1392.0
170°	1397.2	1395.3	1395.3	1395.3	1395.3	1395.3	1395.8	1396.8	1397.7	1398.6	1399.5
172.5°	1402.2	1400.4	1400.2	1400.0	1399.8	1399.6	1400.1	1401.2	1402.3	1403.5	1404.6
175°	1408.5	1406.9	1406.6	1406.4	1406.1	1405.9	1406.4	1407.5	1408.8	1409.9	1411.0
177.5°	1410.9	1409.4	1409.2	1409.0	1408.8	1408.7	1409.0	1410.0	1410.9	1411.8	1412.8
180°	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0



TEST NUMBER: P332462-930

CATALOG NUMBER: S123RDIW-S1000D1320U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1303.2	1308.1	1314.3	1323.6	1330.7	1336.9	1338.2	1340.0	1344.5	1352.0	1357.8
5°	1311.7	1324.4	1344.9	1364.9	1386.6	1404.3	1420.9	1432.6	1443.7	1467.0	1485.9
7.5°	1309.0	1337.4	1369.5	1405.4	1441.7	1476.8	1509.5	1538.7	1567.7	1601.7	1640.5
10°	1307.2	1340.5	1383.7	1429.8	1480.3	1529.7	1577.4	1614.6	1657.8	1696.7	1746.0
12.5°	1298.8	1346.7	1398.4	1457.3	1519.4	1576.3	1639.1	1690.4	1740.0	1796.1	1853.5
15°	1287.8	1346.1	1411.5	1489.7	1584.0	1652.9	1717.2	1806.5	1867.6	1928.6	2010.8
17.5°	1267.7	1338.8	1420.6	1522.2	1600.9	1693.4	1790.2	1860.8	1943.0	2029.0	2103.4
20°	1251.7	1334.4	1426.0	1525.8	1626.2	1726.6	1820.4	1904.8	1989.7	2089.0	2150.0
22.5°	1235.7	1317.5	1412.6	1518.7	1626.7	1732.4	1838.6	1937.6	2033.1	2133.3	2211.3
25°	1201.8	1298.9	1402.1	1510.3	1616.8	1733.3	1859.8	1970.3	2088.4	2191.6	2265.4
27.5°	1167.3	1256.4	1359.1	1468.8	1587.3	1725.0	1873.8	1999.3	2117.7	2191.6	2214.8
30°	1136.3	1230.6	1324.9	1436.5	1564.6	1718.3	1876.5	2020.1	2117.3	2149.5	2125.6
32.5°	1104.8	1190.3	1283.7	1397.8	1534.0	1701.9	1880.0	2007.8	2066.2	2041.6	1944.5
35°	1049.2	1126.3	1216.8	1331.1	1487.5	1692.8	1865.4	1951.9	1937.5	1798.8	1615.7
37.5°	989.7	1052.6	1136.3	1255.8	1439.3	1656.8	1802.3	1815.1	1690.3	1477.3	1265.8
40°	942.6	999.2	1085.2	1210.1	1402.1	1621.2	1738.9	1687.3	1493.6	1256.7	1080.3
42.5°	896.9	944.7	1027.5	1162.1	1366.6	1572.9	1644.3	1531.9	1308.6	1084.5	924.1
45°	819.5	864.5	947.6	1085.8	1293.9	1480.3	1470.9	1275.5	1052.0	871.6	738.5
47.5°	746.0	785.3	863.4	1004.4	1208.5	1341.6	1253.4	1045.5	855.9	711.2	616.2
50°	694.1	733.0	810.7	949.9	1140.2	1237.3	1111.3	911.0	737.4	617.5	542.1
52.5°	644.4	682.3	753.3	889.1	1057.6	1115.7	980.4	794.8	650.0	546.5	481.7
55°	574.8	603.6	667.5	797.3	923.2	936.5	799.5	644.2	524.9	452.7	408.4
57.5°	503.9	528.7	591.8	695.2	783.5	776.7	646.7	512.3	432.0	378.4	346.3
60°	457.7	482.2	537.6	626.4	693.0	669.7	550.4	442.2	373.4	334.0	308.5
62.5°	414.7	433.7	485.7	550.5	598.4	572.0	470.5	381.0	326.4	293.2	273.0
65°	352.3	367.9	409.4	443.3	469.9	444.4	360.1	297.9	258.5	235.2	221.4
67.5°	293.1	303.0	329.2	341.4	360.2	332.2	270.8	229.2	206.8	187.1	177.4
70°	255.8	263.0	276.9	286.8	291.9	263.0	217.5	186.9	168.1	154.3	148.1
72.5°	218.5	224.9	227.6	235.8	233.3	206.2	174.9	150.6	137.1	127.6	119.8
75°	167.0	169.7	167.0	163.7	156.5	137.6	115.9	103.8	93.8	89.4	86.6
77.5°	121.7	120.8	117.1	111.9	99.5	87.6	76.0	71.9	67.6	65.2	64.2
80°	93.8	91.6	88.2	79.9	69.4	61.1	58.3	55.5	53.8	51.0	50.5
82.5°	69.8	68.5	62.9	55.9	48.5	44.6	42.3	41.3	39.6	38.2	38.1
85°	37.2	35.5	29.4	25.5	24.4	23.3	22.7	22.7	20.5	20.0	20.0
87.5°	12.6	10.4	10.5	9.6	10.2	9.9	10.9	10.7	10.8	11.4	10.8
90°	3.3	5.7	8.1	10.4	13.0	16.1	19.1	22.1	25.2	26.1	27.0
92.5°	18.8	18.2	17.5	16.9	17.7	20.0	22.3	24.5	26.8	28.3	29.8
95°	54.4	44.8	35.3	25.8	22.3	24.8	27.4	29.9	32.5	34.2	35.8
97.5°	124.3	119.9	115.7	111.4	100.9	84.1	67.3	50.5	33.8	35.6	37.5
100°	181.8	186.5	191.1	195.8	179.9	143.7	107.3	70.9	34.6	36.4	38.3
102.5°	235.9	239.2	242.6	246.0	227.8	188.1	148.4	108.7	69.0	63.2	57.4
105°	315.0	317.6	320.1	322.6	313.5	292.4	271.5	250.5	229.6	188.3	147.1
107.5°	398.8	400.8	402.8	404.9	407.6	410.9	414.2	417.5	420.8	390.5	360.4
110°	454.8	456.6	458.4	460.3	462.5	465.1	467.7	470.3	472.8	465.1	457.4



TEST NUMBER: P332462-930

CATALOG NUMBER: S123RDIW-S1000D1320U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	508.3	509.9	511.6	513.2	515.4	518.0	520.5	523.1	525.6	525.8	525.9
115°	587.4	588.8	590.2	591.6	593.4	595.4	597.5	599.7	601.8	604.1	606.4
117.5°	664.7	666.4	668.1	669.8	671.2	672.3	673.4	674.5	675.6	677.4	679.3
120°	712.9	714.9	717.1	719.2	720.6	721.2	721.9	722.7	723.3	725.2	727.1
122.5°	761.2	762.9	764.6	766.3	767.6	768.5	769.4	770.3	771.2	772.5	773.8
125°	827.9	829.8	831.7	833.6	834.9	835.8	836.8	837.7	838.7	839.1	839.6
127.5°	892.5	894.4	896.3	898.1	899.6	900.7	901.9	902.9	904.1	904.8	905.6
130°	932.8	934.7	936.5	938.4	939.8	940.7	941.7	942.6	943.5	944.4	945.3
132.5°	971.3	973.2	975.1	977.0	978.3	979.0	979.7	980.5	981.2	982.2	983.1
135°	1029.8	1031.2	1032.6	1034.0	1035.2	1036.1	1037.1	1038.0	1038.9	1039.6	1040.3
137.5°	1080.5	1082.3	1084.0	1085.8	1087.0	1087.4	1088.0	1088.5	1089.0	1090.1	1091.3
140°	1113.7	1115.1	1116.5	1117.9	1118.9	1119.7	1120.3	1121.0	1121.7	1122.7	1123.6
142.5°	1144.7	1146.1	1147.5	1148.9	1150.0	1150.6	1151.4	1152.0	1152.8	1153.5	1154.2
145°	1188.4	1190.0	1191.6	1193.3	1194.3	1194.7	1195.2	1195.7	1196.1	1196.6	1197.1
147.5°	1228.7	1229.7	1230.8	1231.9	1232.7	1233.1	1233.5	1234.0	1234.5	1235.0	1235.4
150°	1253.4	1254.2	1254.8	1255.6	1256.1	1256.6	1257.0	1257.5	1258.0	1258.5	1258.9
152.5°	1275.7	1276.0	1276.4	1276.7	1277.0	1277.3	1277.6	1277.8	1278.1	1279.0	1279.8
155°	1306.8	1306.4	1305.9	1305.4	1305.3	1305.5	1305.8	1306.0	1306.2	1307.4	1308.6
157.5°	1332.0	1332.0	1331.9	1331.8	1331.7	1331.5	1331.2	1331.0	1330.7	1332.1	1333.6
160°	1346.9	1346.6	1346.4	1346.1	1346.0	1345.7	1345.5	1345.2	1345.0	1346.4	1347.8
162.5°	1360.7	1360.2	1359.5	1358.9	1358.5	1358.3	1358.0	1357.8	1357.6	1359.2	1360.7
165°	1377.9	1377.1	1376.5	1375.7	1375.3	1375.1	1374.8	1374.6	1374.4	1376.2	1378.1
167.5°	1391.1	1390.1	1389.2	1388.2	1387.8	1387.8	1387.8	1387.8	1387.8	1389.7	1391.6
170°	1398.6	1397.7	1396.8	1395.8	1395.3	1395.3	1395.3	1395.3	1395.3	1397.2	1399.1
172.5°	1403.5	1402.3	1401.2	1400.1	1399.6	1399.8	1400.0	1400.2	1400.4	1402.2	1404.1
175°	1409.9	1408.8	1407.5	1406.4	1405.9	1406.1	1406.4	1406.6	1406.9	1408.5	1410.1
177.5°	1411.8	1410.9	1410.0	1409.0	1408.7	1408.8	1409.0	1409.2	1409.4	1410.9	1412.3
180°	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0



TEST NUMBER: P332462-930

CATALOG NUMBER: S123RDIW-S1000D1320U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1367.1	1367.1	1368.9	1375.6	1376.5	1382.2	1380.5
5°	1502.5	1513.0	1516.9	1533.6	1543.5	1548.0	1539.1
7.5°	1668.1	1697.8	1711.9	1729.3	1744.7	1749.4	1737.3
10°	1788.8	1819.8	1845.9	1862.1	1877.0	1887.0	1899.7
12.5°	1905.5	1943.7	1968.5	1991.2	2006.6	2019.3	2021.4
15°	2032.4	2090.1	2133.9	2166.1	2182.1	2190.5	2187.2
17.5°	2160.3	2213.8	2245.0	2277.9	2300.1	2301.3	2301.9
20°	2232.7	2284.8	2320.9	2345.3	2370.2	2369.2	2374.7
22.5°	2281.0	2322.1	2349.8	2367.5	2376.0	2371.8	2372.9
25°	2303.7	2315.9	2310.9	2282.6	2275.4	2249.3	2253.7
27.5°	2187.0	2129.2	2069.6	1992.8	1932.2	1883.7	1886.2
30°	2028.5	1926.4	1809.9	1712.2	1624.6	1600.2	1548.0
32.5°	1807.0	1653.8	1517.4	1426.4	1351.1	1330.7	1285.2
35°	1431.5	1282.8	1142.4	1058.1	1024.7	978.2	977.6
37.5°	1112.6	981.7	907.5	844.2	811.1	782.9	780.1
40°	936.0	833.9	777.9	732.4	699.7	678.6	673.6
42.5°	812.6	730.0	677.6	649.4	624.2	613.3	605.2
45°	663.6	608.1	571.4	545.9	534.3	525.9	521.5
47.5°	555.1	517.9	492.9	476.0	466.5	457.7	460.1
50°	496.0	465.5	447.2	431.1	423.9	417.8	418.3
52.5°	448.5	421.1	406.3	394.7	385.7	381.4	379.3
55°	380.6	363.4	348.5	340.1	335.1	329.1	327.3
57.5°	324.7	311.4	299.1	289.8	288.5	282.7	283.4
60°	287.4	276.3	266.4	261.3	257.5	252.4	254.1
62.5°	256.8	247.4	238.4	234.2	230.4	226.7	227.5
65°	210.3	201.4	195.8	193.6	192.0	190.3	188.7
67.5°	167.5	162.2	158.7	153.9	150.5	149.9	148.2
70°	141.0	133.7	127.6	121.5	119.8	119.3	119.8
72.5°	113.0	108.4	106.7	103.8	103.5	102.0	103.0
75°	84.9	83.2	82.1	79.9	79.9	79.9	79.9
77.5°	62.6	61.6	60.9	60.5	59.9	59.1	59.0
80°	48.8	48.3	47.1	47.1	46.6	47.1	46.6
82.5°	36.9	36.8	35.6	35.6	35.1	34.7	35.1
85°	18.8	18.3	19.4	18.3	18.8	17.8	18.8
87.5°	10.9	11.1	10.8	10.9	10.5	11.5	10.8
90°	28.0	28.9	29.6	30.1	30.5	31.0	31.5
92.5°	31.3	32.8	33.7	34.0	34.2	34.5	34.8
95°	37.4	39.1	39.9	39.9	39.9	39.9	39.9
97.5°	39.4	41.2	42.2	42.5	42.7	43.0	43.2
100°	40.2	42.1	43.1	43.3	43.5	43.8	44.0
102.5°	51.6	45.9	43.2	43.6	44.0	44.4	44.8
105°	105.9	64.7	44.3	44.8	45.2	45.7	46.1
107.5°	330.1	299.9	269.2	238.1	207.0	175.9	144.9
110°	449.7	442.1	421.5	388.2	354.9	321.6	288.3



TEST NUMBER: P332462-930

CATALOG NUMBER: S123RDIW-S1000D1320U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	526.0	526.2	522.8	515.7	508.7	501.7	494.6
115°	608.7	611.1	612.7	613.6	614.6	615.5	616.4
117.5°	681.1	683.0	684.0	684.2	684.4	684.6	684.8
120°	729.0	730.8	731.7	731.7	731.7	731.7	731.7
122.5°	775.1	776.4	777.1	777.3	777.5	777.7	777.9
125°	840.1	840.5	841.0	841.5	842.0	842.4	842.9
127.5°	906.3	907.1	907.2	906.8	906.3	905.8	905.3
130°	946.3	947.2	947.5	947.0	946.6	946.1	945.6
132.5°	984.1	985.0	985.1	984.5	983.8	983.2	982.5
135°	1041.0	1041.7	1041.7	1041.0	1040.3	1039.6	1038.9
137.5°	1092.3	1093.5	1093.8	1093.3	1092.9	1092.4	1091.9
140°	1124.5	1125.4	1125.7	1125.2	1124.7	1124.3	1123.8
142.5°	1155.0	1155.8	1155.8	1155.1	1154.5	1153.8	1153.2
145°	1197.5	1198.0	1198.2	1198.2	1198.2	1198.2	1198.2
147.5°	1235.9	1236.4	1236.1	1235.0	1234.0	1232.9	1231.8
150°	1259.4	1259.9	1259.7	1259.1	1258.3	1257.7	1256.9
152.5°	1280.7	1281.5	1281.4	1280.3	1279.2	1278.1	1277.1
155°	1309.7	1310.9	1310.8	1309.4	1308.0	1306.6	1305.2
157.5°	1335.0	1336.4	1336.1	1334.3	1332.5	1330.6	1328.9
160°	1349.2	1350.6	1350.5	1348.8	1347.2	1345.6	1343.9
162.5°	1362.4	1363.9	1364.0	1362.5	1361.1	1359.7	1358.2
165°	1380.0	1381.9	1381.9	1380.3	1378.7	1377.0	1375.4
167.5°	1393.3	1395.2	1395.2	1393.3	1391.6	1389.7	1387.8
170°	1400.9	1402.8	1402.8	1400.9	1399.1	1397.2	1395.3
172.5°	1406.0	1407.9	1407.7	1405.7	1403.6	1401.6	1399.5
175°	1411.8	1413.4	1413.2	1411.4	1409.6	1407.7	1405.8
177.5°	1413.9	1415.4	1415.2	1413.3	1411.4	1409.6	1407.7
180°	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0

(END OF REPORT)