

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332467-930

Luminaire Tested: **S123RDIW-S1000D1535U930-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332467-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S1000D1535U930-4F0-1E-UDD-A1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 1535 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7568.0 lumens
Efficiency: N/A
Efficacy: 98.8 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.22 / 1.36
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 76.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332467-930

CATALOG NUMBER: S123RDIW-S1000D1535U930-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

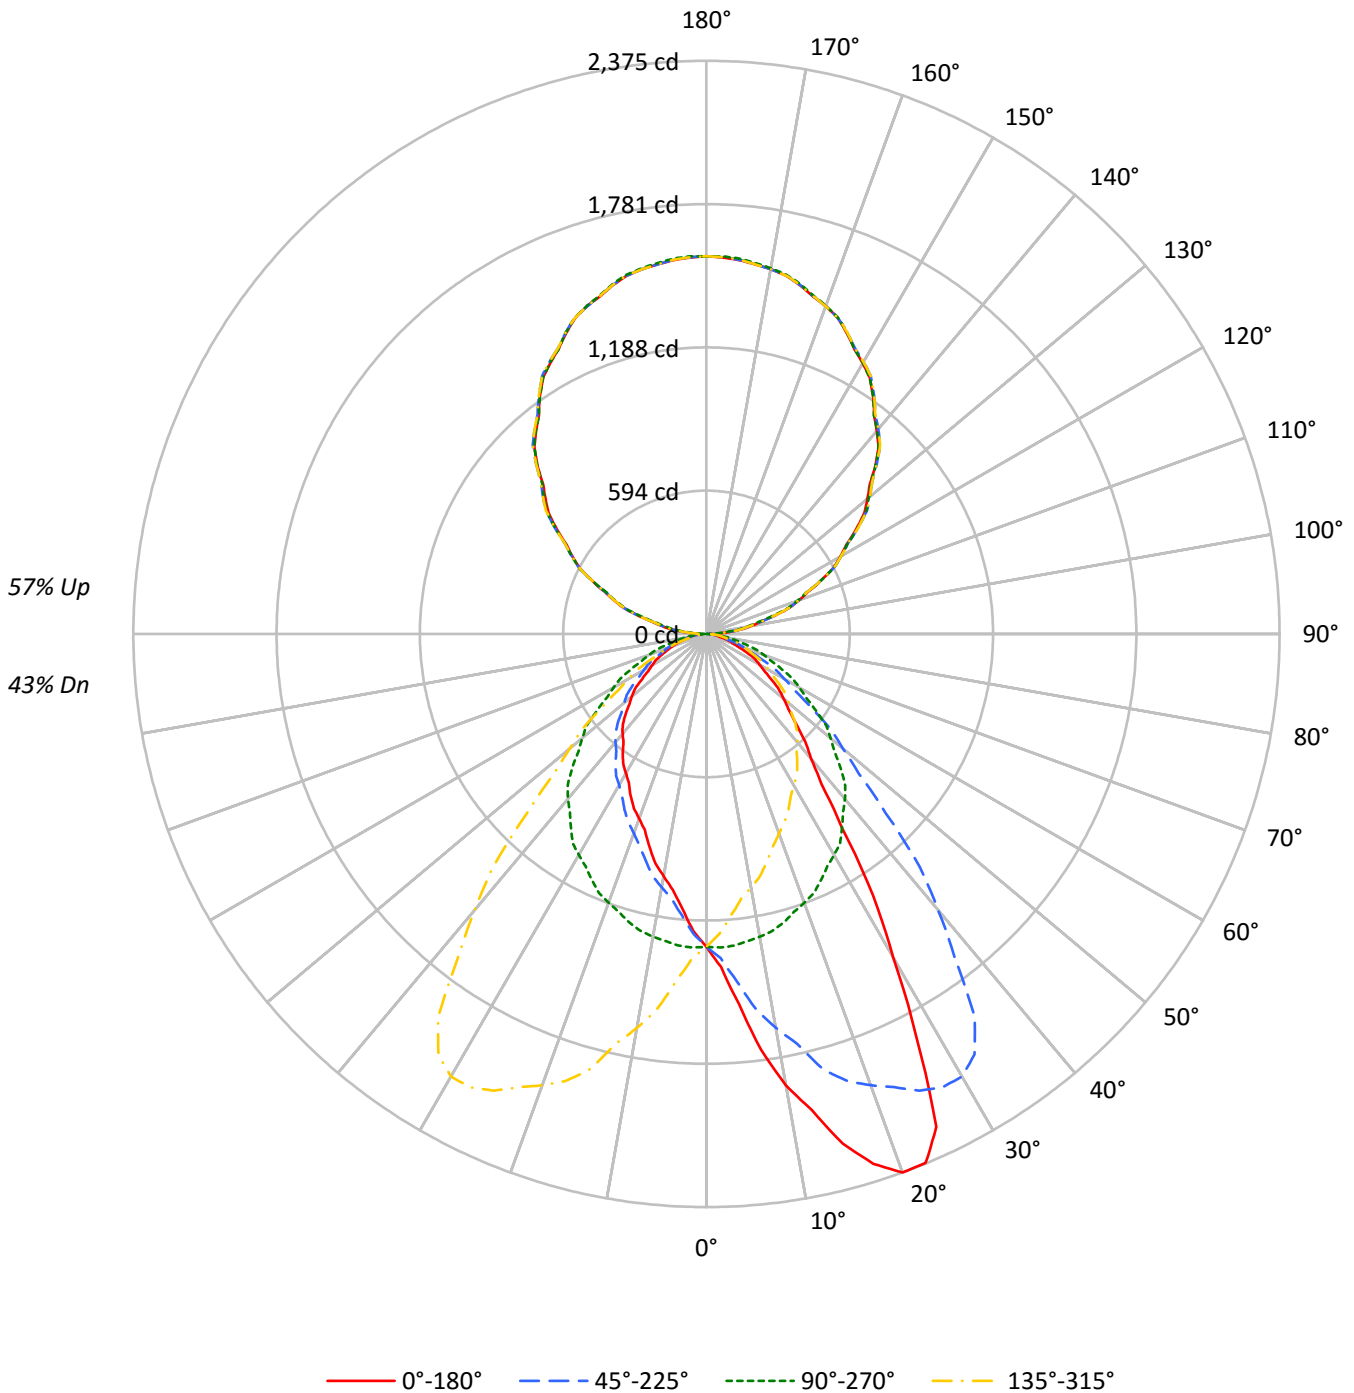



TEST NUMBER: P332467-930

CATALOG NUMBER: S123RDIW-S1000D1535U930-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	49	49	49	43																												
1	97	93	89	86	88	85	82	79	70	68	66	57	55	54	44	44	43	37																												
2	88	81	76	71	81	75	70	65	62	59	55	50	48	46	40	38	37	32																												
3	81	72	65	59	74	66	60	55	55	51	47	45	42	39	36	34	32	27																												
4	74	64	56	51	68	59	52	47	49	44	41	40	37	34	32	30	28	24																												
5	68	57	49	44	62	53	46	41	44	39	35	36	33	30	29	27	24	21																												
6	63	51	44	38	57	47	41	36	40	35	31	33	29	26	27	24	22	19																												
7	58	46	39	33	53	43	36	31	36	31	27	30	26	23	24	22	19	17																												
8	54	42	35	30	49	39	32	28	33	28	24	28	24	21	22	20	18	15																												
9	50	39	31	26	46	36	29	25	30	25	22	25	22	19	21	18	16	14																												
10	47	35	28	24	43	33	27	22	28	23	20	24	20	17	19	17	15	13																												

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	13951	13951	13951	13951
5°	16630	14011	12337	14011
10°	20764	13930	11146	13930
15°	24373	13788	10165	13788
20°	27202	13575	9330	13575
25°	26766	13351	8817	13351
30°	19240	13144	8289	13144
35°	12846	12875	7947	12875
40°	9465	12552	7593	12552
45°	7939	11985	7247	11985
50°	7005	11241	6764	11241
55°	6142	10393	6101	10393
60°	5470	9580	5591	9580
65°	4806	8706	5201	8706
70°	3770	7928	4749	7928
75°	3323	6924	4338	6924
80°	2889	5883	4265	5883
85°	2322	4730	4520	4730



TEST NUMBER: P332467-930

CATALOG NUMBER: S123RDIW-S1000D1535U930-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	127.5	1.7
10°-20°	398.2	5.3
20°-30°	625.6	8.3
30°-40°	652.7	8.6
40°-50°	558.6	7.4
50°-60°	425.7	5.6
60°-70°	272.9	3.6
70°-80°	131.3	1.7
80°-90°	39.4	0.5
90°-100°	102.0	1.3
100°-110°	305.2	4.0
110°-120°	519.0	6.9
120°-130°	682.7	9.0
130°-140°	767.4	10.1
140°-150°	754.3	10.0
150°-160°	635.0	8.4
160°-170°	422.7	5.6
170°-180°	148.0	2.0
0°-30°	1151.2	15.2
0°-40°	1803.9	23.8
0°-60°	2788.2	36.8
0°-90°	3231.7	42.7
90°-120°	926.2	12.2
90°-150°	3130.5	41.4
90°-180°	4336.0	57.3
0°-180°	7568.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1296	1296	1296	1296	1296	
5°	1539	1297	1142	1297	1539	159
15°	2187	1237	912	1237	2187	620
25°	2254	1124	742	1124	2254	969
35°	978	980	605	980	978	641
45°	522	787	476	787	522	410
55°	327	554	325	554	327	296
65°	189	342	204	342	189	186
75°	80	166	104	166	80	86
85°	19	38	37	38	19	23
90°	37	1	37	1	37	19
95°	96	73	96	73	96	98
105°	293	277	293	277	293	310
115°	524	522	524	522	524	519
125°	756	765	756	765	756	676
135°	991	992	991	992	991	762
145°	1204	1204	1204	1204	1204	751
155°	1376	1378	1376	1378	1376	633
165°	1496	1501	1496	1501	1496	422
175°	1555	1561	1555	1561	1555	148
180°	1565	1565	1565	1565	1565	



TEST NUMBER: P332467-930

CATALOG NUMBER: S123RDIW-S1000D1535U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1380.5	1382.2	1376.5	1375.6	1368.9	1367.1	1367.1	1357.8	1352.0	1344.5	1340.0
5°	1539.1	1548.0	1543.5	1533.6	1516.9	1513.0	1502.5	1485.9	1467.0	1443.7	1432.6
7.5°	1737.3	1749.4	1744.7	1729.3	1711.9	1697.8	1668.1	1640.5	1601.7	1567.7	1538.7
10°	1899.7	1887.0	1877.0	1862.1	1845.9	1819.8	1788.8	1746.0	1696.7	1657.8	1614.6
12.5°	2021.4	2019.3	2006.6	1991.2	1968.5	1943.7	1905.5	1853.5	1796.1	1740.0	1690.4
15°	2187.2	2190.5	2182.1	2166.1	2133.9	2090.1	2032.4	2010.8	1928.6	1867.6	1806.5
17.5°	2301.9	2301.3	2300.1	2277.9	2245.0	2213.8	2160.3	2103.4	2029.0	1943.0	1860.8
20°	2374.7	2369.2	2370.2	2345.3	2320.9	2284.8	2232.7	2150.0	2089.0	1989.7	1904.8
22.5°	2372.9	2371.8	2376.0	2367.5	2349.8	2322.1	2281.0	2211.3	2133.3	2033.1	1937.6
25°	2253.7	2249.3	2275.4	2282.6	2310.9	2315.9	2303.7	2265.4	2191.6	2088.4	1970.3
27.5°	1886.2	1883.7	1932.2	1992.8	2069.6	2129.2	2187.0	2214.8	2191.6	2117.7	1999.3
30°	1548.0	1600.2	1624.6	1712.2	1809.9	1926.4	2028.5	2125.6	2149.5	2117.3	2020.1
32.5°	1285.2	1330.7	1351.1	1426.4	1517.4	1653.8	1807.0	1944.5	2041.6	2066.2	2007.8
35°	977.6	978.2	1024.7	1058.1	1142.4	1282.8	1431.5	1615.7	1798.8	1937.5	1951.9
37.5°	780.1	782.9	811.1	844.2	907.5	981.7	1112.6	1265.8	1477.3	1690.3	1815.1
40°	673.6	678.6	699.7	732.4	777.9	833.9	936.0	1080.3	1256.7	1493.6	1687.3
42.5°	605.2	613.3	624.2	649.4	677.6	730.0	812.6	924.1	1084.5	1308.6	1531.9
45°	521.5	525.9	534.3	545.9	571.4	608.1	663.6	738.5	871.6	1052.0	1275.5
47.5°	460.1	457.7	466.5	476.0	492.9	517.9	555.1	616.2	711.2	855.9	1045.5
50°	418.3	417.8	423.9	431.1	447.2	465.5	496.0	542.1	617.5	737.4	911.0
52.5°	379.3	381.4	385.7	394.7	406.3	421.1	448.5	481.7	546.5	650.0	794.8
55°	327.3	329.1	335.1	340.1	348.5	363.4	380.6	408.4	452.7	524.9	644.2
57.5°	283.4	282.7	288.5	289.8	299.1	311.4	324.7	346.3	378.4	432.0	512.3
60°	254.1	252.4	257.5	261.3	266.4	276.3	287.4	308.5	334.0	373.4	442.2
62.5°	227.5	226.7	230.4	234.2	238.4	247.4	256.8	273.0	293.2	326.4	381.0
65°	188.7	190.3	192.0	193.6	195.8	201.4	210.3	221.4	235.2	258.5	297.9
67.5°	148.2	149.9	150.5	153.9	158.7	162.2	167.5	177.4	187.1	206.8	229.2
70°	119.8	119.3	119.8	121.5	127.6	133.7	141.0	148.1	154.3	168.1	186.9
72.5°	103.0	102.0	103.5	103.8	106.7	108.4	113.0	119.8	127.6	137.1	150.6
75°	79.9	79.9	79.9	79.9	82.1	83.2	84.9	86.6	89.4	93.8	103.8
77.5°	59.0	59.1	59.9	60.5	60.9	61.6	62.6	64.2	65.2	67.6	71.9
80°	46.6	47.1	46.6	47.1	47.1	48.3	48.8	50.5	51.0	53.8	55.5
82.5°	35.1	34.7	35.1	35.6	35.6	36.8	36.9	38.1	38.2	39.6	41.3
85°	18.8	17.8	18.8	18.3	19.4	18.3	18.8	20.0	20.0	20.5	22.7
87.5°	11.8	12.6	11.6	11.9	11.8	12.1	11.9	11.7	12.3	11.7	11.4
90°	36.9	36.4	35.8	35.2	34.7	33.9	32.8	31.7	30.6	29.5	25.9
92.5°	49.7	50.0	50.3	50.6	51.0	50.7	49.8	48.9	48.1	47.2	45.2
95°	95.9	95.9	95.9	95.9	95.9	95.3	94.2	93.2	92.0	91.0	88.8
97.5°	147.6	147.7	147.7	147.9	148.0	147.4	146.1	144.9	143.7	142.4	140.8
100°	186.9	186.3	185.8	185.2	184.7	184.0	183.2	182.4	181.6	180.8	179.4
102.5°	227.2	227.3	227.4	227.6	227.6	227.3	226.5	225.7	224.9	224.0	222.2
105°	292.6	292.0	291.6	291.0	290.4	290.2	290.2	290.2	290.2	290.2	287.7
107.5°	360.7	361.0	361.3	361.7	362.0	361.7	360.9	360.0	359.1	358.2	357.3
110°	406.9	407.5	408.1	408.5	409.1	408.9	407.7	406.7	405.6	404.5	403.9



TEST NUMBER: P332467-930

CATALOG NUMBER: S123RDIW-S1000D1535U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	456.1	456.2	456.3	456.5	456.6	455.9	454.6	453.3	452.0	450.7	450.6
115°	523.7	524.0	524.3	524.6	524.8	524.8	524.6	524.3	524.0	523.7	524.3
117.5°	592.3	593.1	593.9	594.6	595.4	595.8	595.9	595.9	596.0	596.1	596.7
120°	640.5	641.1	641.6	642.2	642.7	643.1	643.4	643.7	643.9	644.2	645.6
122.5°	686.7	687.5	688.3	689.1	689.8	690.6	691.3	691.9	692.7	693.4	694.1
125°	756.1	757.2	758.3	759.4	760.4	761.6	762.6	763.8	764.8	766.0	766.5
127.5°	825.2	826.5	827.7	829.0	830.2	831.6	833.2	834.7	836.2	837.7	838.4
130°	870.4	872.4	874.2	876.2	878.1	879.6	880.7	881.7	882.9	883.9	884.8
132.5°	917.6	919.1	920.6	922.1	923.6	925.0	926.3	927.6	928.9	930.2	930.7
135°	990.9	991.5	992.0	992.5	993.1	993.9	995.0	996.1	997.2	998.3	998.6
137.5°	1055.6	1056.6	1057.7	1058.7	1059.7	1060.9	1062.0	1063.2	1064.3	1065.4	1064.7
140°	1097.9	1099.8	1101.7	1103.6	1105.5	1106.6	1106.9	1107.2	1107.4	1107.7	1107.4
142.5°	1141.2	1142.6	1144.1	1145.6	1147.0	1147.9	1148.2	1148.5	1148.8	1149.0	1148.5
145°	1203.6	1204.7	1205.8	1206.9	1207.9	1208.7	1208.9	1209.2	1209.5	1209.7	1208.9
147.5°	1259.1	1260.8	1262.5	1264.1	1265.8	1266.6	1266.6	1266.6	1266.6	1266.6	1265.8
150°	1294.6	1296.2	1297.9	1299.5	1301.1	1302.0	1302.0	1302.0	1302.0	1302.0	1301.4
152.5°	1329.0	1330.4	1331.9	1333.3	1334.7	1335.2	1334.7	1334.3	1333.9	1333.4	1333.1
155°	1375.7	1377.6	1379.6	1381.4	1383.4	1383.8	1382.7	1381.6	1380.5	1379.4	1379.2
157.5°	1418.3	1419.8	1421.3	1422.9	1424.4	1424.6	1423.4	1422.3	1421.1	1420.0	1419.8
160°	1445.8	1446.9	1448.0	1449.1	1450.2	1450.0	1448.7	1447.3	1445.9	1444.5	1444.5
162.5°	1466.5	1468.2	1470.0	1471.7	1473.5	1473.7	1472.3	1470.9	1469.6	1468.2	1467.9
165°	1496.2	1498.1	1500.1	1501.9	1503.9	1504.0	1502.4	1500.7	1499.1	1497.5	1497.5
167.5°	1521.5	1523.2	1524.9	1526.6	1528.3	1528.3	1526.6	1524.9	1523.2	1521.5	1521.3
170°	1534.3	1536.3	1538.1	1540.1	1542.0	1542.0	1540.1	1538.1	1536.3	1534.3	1534.3
172.5°	1544.2	1546.1	1548.0	1549.9	1551.8	1551.9	1550.2	1548.5	1546.9	1545.2	1545.2
175°	1555.3	1557.1	1559.0	1561.0	1562.8	1563.0	1561.4	1559.7	1558.1	1556.5	1556.5
177.5°	1561.1	1562.7	1564.2	1565.7	1567.2	1567.3	1566.0	1564.7	1563.4	1562.1	1562.1
180°	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0



TEST NUMBER: P332467-930

CATALOG NUMBER: S123RDIW-S1000D1535U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1338.2	1336.9	1330.7	1323.6	1314.3	1308.1	1303.2	1300.6	1292.6	1282.8	1276.1
5°	1420.9	1404.3	1386.6	1364.9	1344.9	1324.4	1311.7	1296.7	1278.3	1257.8	1243.4
7.5°	1509.5	1476.8	1441.7	1405.4	1369.5	1337.4	1309.0	1284.7	1255.5	1226.0	1205.4
10°	1577.4	1529.7	1480.3	1429.8	1383.7	1340.5	1307.2	1274.5	1239.5	1205.7	1180.1
12.5°	1639.1	1576.3	1519.4	1457.3	1398.4	1346.7	1298.8	1260.3	1218.2	1182.1	1153.1
15°	1717.2	1652.9	1584.0	1489.7	1411.5	1346.1	1287.8	1237.3	1186.3	1141.8	1113.5
17.5°	1790.2	1693.4	1600.9	1522.2	1420.6	1338.8	1267.7	1207.3	1151.3	1104.2	1069.4
20°	1820.4	1726.6	1626.2	1525.8	1426.0	1334.4	1251.7	1185.1	1126.9	1073.6	1041.5
22.5°	1838.6	1732.4	1626.7	1518.7	1412.6	1317.5	1235.7	1162.5	1099.3	1048.7	1009.0
25°	1859.8	1733.3	1616.8	1510.3	1402.1	1298.9	1201.8	1124.1	1055.9	1002.0	959.9
27.5°	1873.8	1725.0	1587.3	1468.8	1359.1	1256.4	1167.3	1085.0	1015.8	958.9	913.6
30°	1876.5	1718.3	1564.6	1436.5	1324.9	1230.6	1136.3	1057.5	984.3	923.8	881.7
32.5°	1880.0	1701.9	1534.0	1397.8	1283.7	1190.3	1104.8	1029.6	954.6	895.0	851.9
35°	1865.4	1692.8	1487.5	1331.1	1216.8	1126.3	1049.2	979.8	906.0	848.3	804.5
37.5°	1802.3	1656.8	1439.3	1255.8	1136.3	1052.6	989.7	929.3	861.5	799.3	758.0
40°	1738.9	1621.2	1402.1	1210.1	1085.2	999.2	942.6	893.3	827.9	769.6	725.2
42.5°	1644.3	1572.9	1366.6	1162.1	1027.5	944.7	896.9	850.7	793.2	734.0	692.4
45°	1470.9	1480.3	1293.9	1085.8	947.6	864.5	819.5	787.3	736.3	687.5	644.7
47.5°	1253.4	1341.6	1208.5	1004.4	863.4	785.3	746.0	718.0	683.5	635.6	596.6
50°	1111.3	1237.3	1140.2	949.9	810.7	733.0	694.1	671.3	641.4	603.6	566.5
52.5°	980.4	1115.7	1057.6	889.1	753.3	682.3	644.4	625.7	601.9	566.4	532.7
55°	799.5	936.5	923.2	797.3	667.5	603.6	574.8	553.8	537.6	511.0	484.4
57.5°	646.7	776.7	783.5	695.2	591.8	528.7	503.9	488.0	477.5	457.4	432.8
60°	550.4	669.7	693.0	626.4	537.6	482.2	457.7	445.0	436.7	420.5	401.7
62.5°	470.5	572.0	598.4	550.5	485.7	433.7	414.7	402.4	396.7	382.9	366.2
65°	360.1	444.4	469.9	443.3	409.4	367.9	352.3	341.8	336.8	329.1	316.8
67.5°	270.8	332.2	360.2	341.4	329.2	303.0	293.1	287.4	283.0	277.6	267.4
70°	217.5	263.0	291.9	286.8	276.9	263.0	255.8	251.9	247.4	243.0	234.2
72.5°	174.9	206.2	233.3	235.8	227.6	224.9	218.5	216.9	214.2	208.9	204.0
75°	115.9	137.6	156.5	163.7	167.0	169.7	167.0	166.5	165.9	161.4	158.7
77.5°	76.0	87.6	99.5	111.9	117.1	120.8	121.7	123.8	122.3	119.9	118.6
80°	58.3	61.1	69.4	79.9	88.2	91.6	93.8	94.9	94.3	93.8	91.6
82.5°	42.3	44.6	48.5	55.9	62.9	68.5	69.8	69.5	70.8	71.1	69.4
85°	22.7	23.3	24.4	25.5	29.4	35.5	37.2	38.3	39.4	39.4	36.0
87.5°	11.6	10.4	10.6	9.9	10.8	10.7	12.8	14.4	15.4	14.2	14.8
90°	22.4	18.8	15.3	12.1	9.5	6.7	4.0	1.2	4.0	6.7	9.5
92.5°	43.1	41.2	39.1	37.2	35.3	33.4	31.6	29.8	31.6	33.4	35.3
95°	86.6	84.4	82.3	80.2	78.3	76.4	74.4	72.6	74.4	76.4	78.3
97.5°	139.2	137.6	136.0	134.5	133.1	131.7	130.3	128.8	130.3	131.7	133.1
100°	178.0	176.6	175.3	173.7	172.1	170.5	168.8	167.2	168.8	170.5	172.1
102.5°	220.4	218.6	216.8	215.4	214.4	213.4	212.5	211.5	212.5	213.4	214.4
105°	285.2	282.7	280.3	278.8	278.3	277.7	277.2	276.6	277.2	277.7	278.3
107.5°	356.3	355.3	354.3	353.7	353.4	353.0	352.7	352.4	352.7	353.0	353.4
110°	403.4	402.8	402.3	401.8	401.2	400.6	400.1	399.6	400.1	400.6	401.2



TEST NUMBER: P332467-930

CATALOG NUMBER: S123RDIW-S1000D1535U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	450.5	450.4	450.3	450.0	449.7	449.4	449.1	448.7	449.1	449.4	449.7
115°	524.8	525.4	525.9	525.8	525.0	524.2	523.3	522.5	523.3	524.2	525.0
117.5°	597.5	598.2	598.8	598.9	598.4	597.9	597.3	596.8	597.3	597.9	598.4
120°	646.9	648.3	649.7	649.5	647.9	646.3	644.7	643.0	644.7	646.3	647.9
122.5°	694.8	695.5	696.3	696.0	694.8	693.6	692.4	691.2	692.4	693.6	694.8
125°	767.0	767.6	768.1	768.0	767.2	766.4	765.5	764.7	765.5	766.4	767.2
127.5°	838.9	839.5	840.2	839.6	837.8	836.1	834.3	832.6	834.3	836.1	837.8
130°	885.6	886.4	887.2	886.6	884.4	882.2	880.0	877.8	880.0	882.2	884.4
132.5°	931.4	932.0	932.6	931.8	929.6	927.4	925.2	923.1	925.2	927.4	929.6
135°	998.8	999.1	999.4	998.7	997.0	995.4	993.8	992.1	993.8	995.4	997.0
137.5°	1064.0	1063.3	1062.6	1061.5	1060.2	1058.8	1057.4	1056.1	1057.4	1058.8	1060.2
140°	1107.2	1106.9	1106.6	1105.8	1104.4	1103.1	1101.7	1100.3	1101.7	1103.1	1104.4
142.5°	1148.0	1147.5	1147.0	1146.1	1144.8	1143.4	1142.0	1140.7	1142.0	1143.4	1144.8
145°	1208.1	1207.3	1206.5	1205.8	1205.3	1204.7	1204.2	1203.6	1204.2	1204.7	1205.3
147.5°	1265.0	1264.3	1263.5	1262.7	1261.7	1260.6	1259.6	1258.7	1259.6	1260.6	1261.7
150°	1300.9	1300.3	1299.8	1299.3	1298.7	1298.1	1297.6	1297.1	1297.6	1298.1	1298.7
152.5°	1332.8	1332.4	1332.1	1331.5	1330.8	1330.1	1329.3	1328.5	1329.3	1330.1	1330.8
155°	1378.8	1378.6	1378.3	1378.2	1378.2	1378.2	1378.2	1378.2	1378.2	1378.2	1378.2
157.5°	1419.5	1419.4	1419.1	1419.2	1419.5	1419.8	1420.2	1420.5	1420.2	1419.8	1419.5
160°	1444.5	1444.5	1444.5	1444.9	1445.4	1445.9	1446.5	1447.1	1446.5	1445.9	1445.4
162.5°	1467.8	1467.5	1467.3	1467.6	1468.4	1469.1	1469.9	1470.6	1469.9	1469.1	1468.4
165°	1497.5	1497.5	1497.5	1497.9	1498.7	1499.5	1500.3	1501.1	1500.3	1499.5	1498.7
167.5°	1521.1	1520.9	1520.7	1521.1	1522.2	1523.3	1524.4	1525.5	1524.4	1523.3	1522.2
170°	1534.3	1534.3	1534.3	1534.9	1535.9	1537.1	1538.1	1539.2	1538.1	1537.1	1535.9
172.5°	1545.2	1545.2	1545.2	1545.7	1546.8	1547.8	1549.0	1550.0	1549.0	1547.8	1546.8
175°	1556.5	1556.5	1556.5	1557.0	1558.1	1559.2	1560.3	1561.4	1560.3	1559.2	1558.1
177.5°	1562.1	1562.1	1562.1	1562.5	1563.4	1564.3	1565.2	1566.0	1565.2	1564.3	1563.4
180°	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0



TEST NUMBER: P332467-930

CATALOG NUMBER: S123RDIW-S1000D1535U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1273.9	1268.1	1264.1	1255.2	1249.5	1243.2	1237.1	1241.0	1240.6	1240.2	1240.2
5°	1231.2	1218.4	1206.8	1191.8	1182.3	1170.7	1161.8	1160.7	1162.9	1155.2	1150.7
7.5°	1188.8	1171.3	1154.9	1138.3	1120.8	1106.8	1098.0	1093.9	1088.3	1083.5	1078.5
10°	1159.0	1138.6	1122.4	1101.9	1083.0	1066.4	1055.9	1048.6	1044.7	1040.9	1033.6
12.5°	1128.5	1108.3	1087.9	1064.6	1046.7	1027.4	1019.5	1011.4	1004.0	999.6	989.7
15°	1083.6	1057.5	1035.9	1011.5	991.5	972.7	961.6	945.4	943.2	937.7	927.7
17.5°	1038.7	1010.3	980.5	962.5	939.9	920.2	903.4	898.0	882.1	876.1	867.4
20°	1003.1	977.1	954.3	930.5	897.7	879.4	866.1	858.9	846.1	838.4	832.8
22.5°	972.5	946.0	919.7	891.9	864.9	844.3	834.6	823.4	816.4	805.5	799.5
25°	928.8	899.9	868.3	838.4	819.0	803.4	787.9	777.9	767.9	762.9	751.8
27.5°	878.0	847.8	818.2	795.5	771.7	756.4	742.2	733.4	721.4	713.0	706.9
30°	850.0	814.5	789.0	768.4	737.9	723.5	713.0	701.9	693.0	684.1	678.0
32.5°	817.6	785.2	761.0	735.6	712.2	696.4	682.8	673.0	665.4	657.0	650.9
35°	766.8	739.6	714.6	689.1	671.9	655.8	639.8	631.4	624.2	616.4	610.9
37.5°	720.8	695.5	671.7	647.5	626.1	613.1	600.1	593.8	584.0	578.8	573.2
40°	692.4	667.5	642.0	618.6	596.5	586.4	574.8	565.4	556.5	552.6	546.5
42.5°	661.4	636.4	614.9	589.8	571.6	558.1	547.3	537.0	530.4	524.6	521.2
45°	615.3	593.1	572.0	547.1	529.9	518.2	506.0	496.6	490.5	486.6	480.5
47.5°	570.6	548.4	527.0	505.2	488.6	475.2	463.1	456.5	448.4	443.7	439.5
50°	538.2	518.2	495.5	475.5	458.9	445.6	435.5	427.2	420.0	413.9	411.2
52.5°	508.4	487.1	467.5	448.9	431.3	416.2	407.2	398.4	393.0	386.0	382.7
55°	459.4	438.9	422.2	403.9	386.7	374.0	362.9	355.1	349.5	341.8	337.4
57.5°	413.4	394.9	375.0	359.2	341.4	330.7	321.5	311.0	304.2	298.1	293.8
60°	382.3	361.2	344.0	329.1	313.5	299.6	291.3	283.0	275.7	269.6	265.8
62.5°	349.8	331.5	315.1	298.8	284.6	272.6	262.9	255.9	249.6	245.6	241.8
65°	300.2	285.8	269.1	255.8	242.5	233.6	225.8	219.7	215.2	212.5	209.2
67.5°	254.5	240.4	225.9	212.9	204.0	197.2	192.1	186.9	184.7	181.1	178.9
70°	224.7	210.3	197.5	187.5	178.6	173.7	170.3	166.5	164.2	159.8	157.6
72.5°	192.3	181.9	172.7	164.4	157.4	152.8	148.5	143.8	140.2	135.3	133.1
75°	151.5	142.0	134.9	129.3	124.8	118.7	112.6	107.6	106.0	104.3	103.8
77.5°	112.2	106.2	101.0	96.3	90.7	86.3	85.0	83.9	83.6	82.7	82.7
80°	88.2	82.7	78.8	73.2	69.9	69.9	69.9	68.8	69.4	69.4	69.4
82.5°	65.6	60.5	58.4	56.3	55.7	56.2	56.2	56.3	56.0	56.9	56.5
85°	33.8	34.4	35.5	35.0	35.5	35.5	36.6	36.0	36.6	35.5	36.6
87.5°	14.8	16.8	17.9	19.2	20.3	20.5	21.2	21.4	22.1	22.3	22.5
90°	12.1	15.3	18.8	22.4	25.9	29.5	30.6	31.7	32.8	33.9	34.7
92.5°	37.2	39.1	41.2	43.1	45.2	47.2	48.1	48.9	49.8	50.7	51.0
95°	80.2	82.3	84.4	86.6	88.8	91.0	92.0	93.2	94.2	95.3	95.9
97.5°	134.5	136.0	137.6	139.2	140.8	142.4	143.7	144.9	146.1	147.4	148.0
100°	173.7	175.3	176.6	178.0	179.4	180.8	181.6	182.4	183.2	184.0	184.7
102.5°	215.4	216.8	218.6	220.4	222.2	224.0	224.9	225.7	226.5	227.3	227.6
105°	278.8	280.3	282.7	285.2	287.7	290.2	290.2	290.2	290.2	290.2	290.4
107.5°	353.7	354.3	355.3	356.3	357.3	358.2	359.1	360.0	360.9	361.7	362.0
110°	401.8	402.3	402.8	403.4	403.9	404.5	405.6	406.7	407.7	408.9	409.1



TEST NUMBER: P332467-930

CATALOG NUMBER: S123RDIW-S1000D1535U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	450.0	450.3	450.4	450.5	450.6	450.7	452.0	453.3	454.6	455.9	456.6
115°	525.8	525.9	525.4	524.8	524.3	523.7	524.0	524.3	524.6	524.8	524.8
117.5°	598.9	598.8	598.2	597.5	596.7	596.1	596.0	595.9	595.9	595.8	595.4
120°	649.5	649.7	648.3	646.9	645.6	644.2	643.9	643.7	643.4	643.1	642.7
122.5°	696.0	696.3	695.5	694.8	694.1	693.4	692.7	691.9	691.3	690.6	689.8
125°	768.0	768.1	767.6	767.0	766.5	766.0	764.8	763.8	762.6	761.6	760.4
127.5°	839.6	840.2	839.5	838.9	838.4	837.7	836.2	834.7	833.2	831.6	830.2
130°	886.6	887.2	886.4	885.6	884.8	883.9	882.9	881.7	880.7	879.6	878.1
132.5°	931.8	932.6	932.0	931.4	930.7	930.2	928.9	927.6	926.3	925.0	923.6
135°	998.7	999.4	999.1	998.8	998.6	998.3	997.2	996.1	995.0	993.9	993.1
137.5°	1061.5	1062.6	1063.3	1064.0	1064.7	1065.4	1064.3	1063.2	1062.0	1060.9	1059.7
140°	1105.8	1106.6	1106.9	1107.2	1107.4	1107.7	1107.4	1107.2	1106.9	1106.6	1105.5
142.5°	1146.1	1147.0	1147.5	1148.0	1148.5	1149.0	1148.8	1148.5	1148.2	1147.9	1147.0
145°	1205.8	1206.5	1207.3	1208.1	1208.9	1209.7	1209.5	1209.2	1208.9	1208.7	1207.9
147.5°	1262.7	1263.5	1264.3	1265.0	1265.8	1266.6	1266.6	1266.6	1266.6	1266.6	1265.8
150°	1299.3	1299.8	1300.3	1300.9	1301.4	1302.0	1302.0	1302.0	1302.0	1302.0	1301.1
152.5°	1331.5	1332.1	1332.4	1332.8	1333.1	1333.4	1333.9	1334.3	1334.7	1335.2	1334.7
155°	1378.2	1378.3	1378.6	1378.8	1379.2	1379.4	1380.5	1381.6	1382.7	1383.8	1383.4
157.5°	1419.2	1419.1	1419.4	1419.5	1419.8	1420.0	1421.1	1422.3	1423.4	1424.6	1424.4
160°	1444.9	1444.5	1444.5	1444.5	1444.5	1444.5	1445.9	1447.3	1448.7	1450.0	1450.2
162.5°	1467.6	1467.3	1467.5	1467.8	1467.9	1468.2	1469.6	1470.9	1472.3	1473.7	1473.5
165°	1497.9	1497.5	1497.5	1497.5	1497.5	1497.5	1499.1	1500.7	1502.4	1504.0	1503.9
167.5°	1521.1	1520.7	1520.9	1521.1	1521.3	1521.5	1523.2	1524.9	1526.6	1528.3	1528.3
170°	1534.9	1534.3	1534.3	1534.3	1534.3	1534.3	1536.3	1538.1	1540.1	1542.0	1542.0
172.5°	1545.7	1545.2	1545.2	1545.2	1545.2	1545.2	1546.9	1548.5	1550.2	1551.9	1551.8
175°	1557.0	1556.5	1556.5	1556.5	1556.5	1556.5	1558.1	1559.7	1561.4	1563.0	1562.8
177.5°	1562.5	1562.1	1562.1	1562.1	1562.1	1562.1	1563.4	1564.7	1566.0	1567.3	1567.2
180°	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0



TEST NUMBER: P332467-930

CATALOG NUMBER: S123RDIW-S1000D1535U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1234.9	1234.4	1234.9	1233.1	1234.9	1234.4	1234.9	1240.2	1240.2	1240.6	1241.0
5°	1149.1	1148.5	1146.9	1141.8	1146.9	1148.5	1149.1	1150.7	1155.2	1162.9	1160.7
7.5°	1074.2	1073.4	1068.5	1068.6	1068.5	1073.4	1074.2	1078.5	1083.5	1088.3	1093.9
10°	1029.8	1030.3	1023.7	1019.8	1023.7	1030.3	1029.8	1033.6	1040.9	1044.7	1048.6
12.5°	986.8	984.1	978.8	974.5	978.8	984.1	986.8	989.7	999.6	1004.0	1011.4
15°	929.9	924.4	911.0	912.2	911.0	924.4	929.9	927.7	937.7	943.2	945.4
17.5°	863.0	858.9	858.7	850.9	858.7	858.9	863.0	867.4	876.1	882.1	898.0
20°	823.9	821.2	822.2	814.5	822.2	821.2	823.9	832.8	838.4	846.1	858.9
22.5°	793.3	790.5	785.9	783.4	785.9	790.5	793.3	799.5	805.5	816.4	823.4
25°	748.4	744.0	739.6	742.4	739.6	744.0	748.4	751.8	762.9	767.9	777.9
27.5°	703.7	700.3	695.9	695.3	695.9	700.3	703.7	706.9	713.0	721.4	733.4
30°	675.2	671.9	669.7	666.9	669.7	671.9	675.2	678.0	684.1	693.0	701.9
32.5°	646.4	645.7	641.7	641.2	641.7	645.7	646.4	650.9	657.0	665.4	673.0
35°	608.6	605.4	604.2	604.8	604.2	605.4	608.6	610.9	616.4	624.2	631.4
37.5°	572.8	568.3	566.4	564.4	566.4	568.3	572.8	573.2	578.8	584.0	593.8
40°	547.1	542.7	541.5	540.4	541.5	542.7	547.1	546.5	552.6	556.5	565.4
42.5°	518.2	516.4	515.8	513.8	515.8	516.4	518.2	521.2	524.6	530.4	537.0
45°	478.8	478.3	474.9	476.1	474.9	478.3	478.8	480.5	486.6	490.5	496.6
47.5°	437.3	434.9	432.5	434.1	432.5	434.9	437.3	439.5	443.7	448.4	456.5
50°	409.0	407.8	402.8	403.9	402.8	407.8	409.0	411.2	413.9	420.0	427.2
52.5°	380.5	376.3	374.4	373.7	374.4	376.3	380.5	382.7	386.0	393.0	398.4
55°	333.5	328.5	326.3	325.1	326.3	328.5	333.5	337.4	341.8	349.5	355.1
57.5°	287.3	285.9	284.2	285.4	284.2	285.9	287.3	293.8	298.1	304.2	311.0
60°	260.2	260.2	260.2	259.7	260.2	260.2	260.2	265.8	269.6	275.7	283.0
62.5°	239.4	238.0	237.6	238.4	237.6	238.0	239.4	241.8	245.6	249.6	255.9
65°	207.5	206.9	204.7	204.2	204.7	206.9	207.5	209.2	212.5	215.2	219.7
67.5°	177.4	175.5	174.8	174.0	174.8	175.5	177.4	178.9	181.1	184.7	186.9
70°	154.8	153.7	150.3	150.9	150.3	153.7	154.8	157.6	159.8	164.2	166.5
72.5°	130.4	129.3	128.6	127.8	128.6	129.3	130.4	133.1	135.3	140.2	143.8
75°	103.2	102.6	102.1	104.3	102.1	102.6	103.2	103.8	104.3	106.0	107.6
77.5°	82.7	82.7	83.0	82.1	83.0	82.7	82.7	82.7	82.7	83.6	83.9
80°	69.4	69.4	68.8	68.8	68.8	69.4	69.4	69.4	69.4	69.4	68.8
82.5°	55.6	56.0	56.3	55.5	56.3	56.0	55.6	56.5	56.9	56.0	56.3
85°	36.6	36.0	37.2	36.6	37.2	36.0	36.6	36.6	35.5	36.6	36.0
87.5°	23.5	22.7	22.8	23.3	22.8	22.7	23.5	22.5	22.3	22.1	21.4
90°	35.2	35.8	36.4	36.9	36.4	35.8	35.2	34.7	33.9	32.8	31.7
92.5°	50.6	50.3	50.0	49.7	50.0	50.3	50.6	51.0	50.7	49.8	48.9
95°	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.9	95.3	94.2	93.2
97.5°	147.9	147.7	147.7	147.6	147.7	147.7	147.9	148.0	147.4	146.1	144.9
100°	185.2	185.8	186.3	186.9	186.3	185.8	185.2	184.7	184.0	183.2	182.4
102.5°	227.6	227.4	227.3	227.2	227.3	227.4	227.6	227.6	227.3	226.5	225.7
105°	291.0	291.6	292.0	292.6	292.0	291.6	291.0	290.4	290.2	290.2	290.2
107.5°	361.7	361.3	361.0	360.7	361.0	361.3	361.7	362.0	361.7	360.9	360.0
110°	408.5	408.1	407.5	406.9	407.5	408.1	408.5	409.1	408.9	407.7	406.7



TEST NUMBER: P332467-930

CATALOG NUMBER: S123RDIW-S1000D1535U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	456.5	456.3	456.2	456.1	456.2	456.3	456.5	456.6	455.9	454.6	453.3
115°	524.6	524.3	524.0	523.7	524.0	524.3	524.6	524.8	524.8	524.6	524.3
117.5°	594.6	593.9	593.1	592.3	593.1	593.9	594.6	595.4	595.8	595.9	595.9
120°	642.2	641.6	641.1	640.5	641.1	641.6	642.2	642.7	643.1	643.4	643.7
122.5°	689.1	688.3	687.5	686.7	687.5	688.3	689.1	689.8	690.6	691.3	691.9
125°	759.4	758.3	757.2	756.1	757.2	758.3	759.4	760.4	761.6	762.6	763.8
127.5°	829.0	827.7	826.5	825.2	826.5	827.7	829.0	830.2	831.6	833.2	834.7
130°	876.2	874.2	872.4	870.4	872.4	874.2	876.2	878.1	879.6	880.7	881.7
132.5°	922.1	920.6	919.1	917.6	919.1	920.6	922.1	923.6	925.0	926.3	927.6
135°	992.5	992.0	991.5	990.9	991.5	992.0	992.5	993.1	993.9	995.0	996.1
137.5°	1058.7	1057.7	1056.6	1055.6	1056.6	1057.7	1058.7	1059.7	1060.9	1062.0	1063.2
140°	1103.6	1101.7	1099.8	1097.9	1099.8	1101.7	1103.6	1105.5	1106.6	1106.9	1107.2
142.5°	1145.6	1144.1	1142.6	1141.2	1142.6	1144.1	1145.6	1147.0	1147.9	1148.2	1148.5
145°	1206.9	1205.8	1204.7	1203.6	1204.7	1205.8	1206.9	1207.9	1208.7	1208.9	1209.2
147.5°	1264.1	1262.5	1260.8	1259.1	1260.8	1262.5	1264.1	1265.8	1266.6	1266.6	1266.6
150°	1299.5	1297.9	1296.2	1294.6	1296.2	1297.9	1299.5	1301.1	1302.0	1302.0	1302.0
152.5°	1333.3	1331.9	1330.4	1329.0	1330.4	1331.9	1333.3	1334.7	1335.2	1334.7	1334.3
155°	1381.4	1379.6	1377.6	1375.7	1377.6	1379.6	1381.4	1383.4	1383.8	1382.7	1381.6
157.5°	1422.9	1421.3	1419.8	1418.3	1419.8	1421.3	1422.9	1424.4	1424.6	1423.4	1422.3
160°	1449.1	1448.0	1446.9	1445.8	1446.9	1448.0	1449.1	1450.2	1450.0	1448.7	1447.3
162.5°	1471.7	1470.0	1468.2	1466.5	1468.2	1470.0	1471.7	1473.5	1473.7	1472.3	1470.9
165°	1501.9	1500.1	1498.1	1496.2	1498.1	1500.1	1501.9	1503.9	1504.0	1502.4	1500.7
167.5°	1526.6	1524.9	1523.2	1521.5	1523.2	1524.9	1526.6	1528.3	1528.3	1526.6	1524.9
170°	1540.1	1538.1	1536.3	1534.3	1536.3	1538.1	1540.1	1542.0	1542.0	1540.1	1538.1
172.5°	1549.9	1548.0	1546.1	1544.2	1546.1	1548.0	1549.9	1551.8	1551.9	1550.2	1548.5
175°	1561.0	1559.0	1557.1	1555.3	1557.1	1559.0	1561.0	1562.8	1563.0	1561.4	1559.7
177.5°	1565.7	1564.2	1562.7	1561.1	1562.7	1564.2	1565.7	1567.2	1567.3	1566.0	1564.7
180°	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0



TEST NUMBER: P332467-930

CATALOG NUMBER: S123RDIW-S1000D1535U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1237.1	1243.2	1249.5	1255.2	1264.1	1268.1	1273.9	1276.1	1282.8	1292.6	1300.6
5°	1161.8	1170.7	1182.3	1191.8	1206.8	1218.4	1231.2	1243.4	1257.8	1278.3	1296.7
7.5°	1098.0	1106.8	1120.8	1138.3	1154.9	1171.3	1188.8	1205.4	1226.0	1255.5	1284.7
10°	1055.9	1066.4	1083.0	1101.9	1122.4	1138.6	1159.0	1180.1	1205.7	1239.5	1274.5
12.5°	1019.5	1027.4	1046.7	1064.6	1087.9	1108.3	1128.5	1153.1	1182.1	1218.2	1260.3
15°	961.6	972.7	991.5	1011.5	1035.9	1057.5	1083.6	1113.5	1141.8	1186.3	1237.3
17.5°	903.4	920.2	939.9	962.5	980.5	1010.3	1038.7	1069.4	1104.2	1151.3	1207.3
20°	866.1	879.4	897.7	930.5	954.3	977.1	1003.1	1041.5	1073.6	1126.9	1185.1
22.5°	834.6	844.3	864.9	891.9	919.7	946.0	972.5	1009.0	1048.7	1099.3	1162.5
25°	787.9	803.4	819.0	838.4	868.3	899.9	928.8	959.9	1002.0	1055.9	1124.1
27.5°	742.2	756.4	771.7	795.5	818.2	847.8	878.0	913.6	958.9	1015.8	1085.0
30°	713.0	723.5	737.9	768.4	789.0	814.5	850.0	881.7	923.8	984.3	1057.5
32.5°	682.8	696.4	712.2	735.6	761.0	785.2	817.6	851.9	895.0	954.6	1029.6
35°	639.8	655.8	671.9	689.1	714.6	739.6	766.8	804.5	848.3	906.0	979.8
37.5°	600.1	613.1	626.1	647.5	671.7	695.5	720.8	758.0	799.3	861.5	929.3
40°	574.8	586.4	596.5	618.6	642.0	667.5	692.4	725.2	769.6	827.9	893.3
42.5°	547.3	558.1	571.6	589.8	614.9	636.4	661.4	692.4	734.0	793.2	850.7
45°	506.0	518.2	529.9	547.1	572.0	593.1	615.3	644.7	687.5	736.3	787.3
47.5°	463.1	475.2	488.6	505.2	527.0	548.4	570.6	596.6	635.6	683.5	718.0
50°	435.5	445.6	458.9	475.5	495.5	518.2	538.2	566.5	603.6	641.4	671.3
52.5°	407.2	416.2	431.3	448.9	467.5	487.1	508.4	532.7	566.4	601.9	625.7
55°	362.9	374.0	386.7	403.9	422.2	438.9	459.4	484.4	511.0	537.6	553.8
57.5°	321.5	330.7	341.4	359.2	375.0	394.9	413.4	432.8	457.4	477.5	488.0
60°	291.3	299.6	313.5	329.1	344.0	361.2	382.3	401.7	420.5	436.7	445.0
62.5°	262.9	272.6	284.6	298.8	315.1	331.5	349.8	366.2	382.9	396.7	402.4
65°	225.8	233.6	242.5	255.8	269.1	285.8	300.2	316.8	329.1	336.8	341.8
67.5°	192.1	197.2	204.0	212.9	225.9	240.4	254.5	267.4	277.6	283.0	287.4
70°	170.3	173.7	178.6	187.5	197.5	210.3	224.7	234.2	243.0	247.4	251.9
72.5°	148.5	152.8	157.4	164.4	172.7	181.9	192.3	204.0	208.9	214.2	216.9
75°	112.6	118.7	124.8	129.3	134.9	142.0	151.5	158.7	161.4	165.9	166.5
77.5°	85.0	86.3	90.7	96.3	101.0	106.2	112.2	118.6	119.9	122.3	123.8
80°	69.9	69.9	69.9	73.2	78.8	82.7	88.2	91.6	93.8	94.3	94.9
82.5°	56.2	56.2	55.7	56.3	58.4	60.5	65.6	69.4	71.1	70.8	69.5
85°	36.6	35.5	35.5	35.0	35.5	34.4	33.8	36.0	39.4	39.4	38.3
87.5°	21.2	20.5	20.3	19.2	17.9	16.8	14.8	14.8	14.2	15.4	14.4
90°	30.6	29.5	25.9	22.4	18.8	15.3	12.1	9.5	6.7	4.0	1.2
92.5°	48.1	47.2	45.2	43.1	41.2	39.1	37.2	35.3	33.4	31.6	29.8
95°	92.0	91.0	88.8	86.6	84.4	82.3	80.2	78.3	76.4	74.4	72.6
97.5°	143.7	142.4	140.8	139.2	137.6	136.0	134.5	133.1	131.7	130.3	128.8
100°	181.6	180.8	179.4	178.0	176.6	175.3	173.7	172.1	170.5	168.8	167.2
102.5°	224.9	224.0	222.2	220.4	218.6	216.8	215.4	214.4	213.4	212.5	211.5
105°	290.2	290.2	287.7	285.2	282.7	280.3	278.8	278.3	277.7	277.2	276.6
107.5°	359.1	358.2	357.3	356.3	355.3	354.3	353.7	353.4	353.0	352.7	352.4
110°	405.6	404.5	403.9	403.4	402.8	402.3	401.8	401.2	400.6	400.1	399.6



TEST NUMBER: P332467-930

CATALOG NUMBER: S123RDIW-S1000D1535U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	452.0	450.7	450.6	450.5	450.4	450.3	450.0	449.7	449.4	449.1	448.7
115°	524.0	523.7	524.3	524.8	525.4	525.9	525.8	525.0	524.2	523.3	522.5
117.5°	596.0	596.1	596.7	597.5	598.2	598.8	598.9	598.4	597.9	597.3	596.8
120°	643.9	644.2	645.6	646.9	648.3	649.7	649.5	647.9	646.3	644.7	643.0
122.5°	692.7	693.4	694.1	694.8	695.5	696.3	696.0	694.8	693.6	692.4	691.2
125°	764.8	766.0	766.5	767.0	767.6	768.1	768.0	767.2	766.4	765.5	764.7
127.5°	836.2	837.7	838.4	838.9	839.5	840.2	839.6	837.8	836.1	834.3	832.6
130°	882.9	883.9	884.8	885.6	886.4	887.2	886.6	884.4	882.2	880.0	877.8
132.5°	928.9	930.2	930.7	931.4	932.0	932.6	931.8	929.6	927.4	925.2	923.1
135°	997.2	998.3	998.6	998.8	999.1	999.4	998.7	997.0	995.4	993.8	992.1
137.5°	1064.3	1065.4	1064.7	1064.0	1063.3	1062.6	1061.5	1060.2	1058.8	1057.4	1056.1
140°	1107.4	1107.7	1107.4	1107.2	1106.9	1106.6	1105.8	1104.4	1103.1	1101.7	1100.3
142.5°	1148.8	1149.0	1148.5	1148.0	1147.5	1147.0	1146.1	1144.8	1143.4	1142.0	1140.7
145°	1209.5	1209.7	1208.9	1208.1	1207.3	1206.5	1205.8	1205.3	1204.7	1204.2	1203.6
147.5°	1266.6	1266.6	1265.8	1265.0	1264.3	1263.5	1262.7	1261.7	1260.6	1259.6	1258.7
150°	1302.0	1302.0	1301.4	1300.9	1300.3	1299.8	1299.3	1298.7	1298.1	1297.6	1297.1
152.5°	1333.9	1333.4	1333.1	1332.8	1332.4	1332.1	1331.5	1330.8	1330.1	1329.3	1328.5
155°	1380.5	1379.4	1379.2	1378.8	1378.6	1378.3	1378.2	1378.2	1378.2	1378.2	1378.2
157.5°	1421.1	1420.0	1419.8	1419.5	1419.4	1419.1	1419.2	1419.5	1419.8	1420.2	1420.5
160°	1445.9	1444.5	1444.5	1444.5	1444.5	1444.5	1444.9	1445.4	1445.9	1446.5	1447.1
162.5°	1469.6	1468.2	1467.9	1467.8	1467.5	1467.3	1467.6	1468.4	1469.1	1469.9	1470.6
165°	1499.1	1497.5	1497.5	1497.5	1497.5	1497.5	1497.9	1498.7	1499.5	1500.3	1501.1
167.5°	1523.2	1521.5	1521.3	1521.1	1520.9	1520.7	1521.1	1522.2	1523.3	1524.4	1525.5
170°	1536.3	1534.3	1534.3	1534.3	1534.3	1534.3	1534.9	1535.9	1537.1	1538.1	1539.2
172.5°	1546.9	1545.2	1545.2	1545.2	1545.2	1545.2	1545.7	1546.8	1547.8	1549.0	1550.0
175°	1558.1	1556.5	1556.5	1556.5	1556.5	1556.5	1557.0	1558.1	1559.2	1560.3	1561.4
177.5°	1563.4	1562.1	1562.1	1562.1	1562.1	1562.1	1562.5	1563.4	1564.3	1565.2	1566.0
180°	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0



TEST NUMBER: P332467-930

CATALOG NUMBER: S123RDIW-S1000D1535U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1303.2	1308.1	1314.3	1323.6	1330.7	1336.9	1338.2	1340.0	1344.5	1352.0	1357.8
5°	1311.7	1324.4	1344.9	1364.9	1386.6	1404.3	1420.9	1432.6	1443.7	1467.0	1485.9
7.5°	1309.0	1337.4	1369.5	1405.4	1441.7	1476.8	1509.5	1538.7	1567.7	1601.7	1640.5
10°	1307.2	1340.5	1383.7	1429.8	1480.3	1529.7	1577.4	1614.6	1657.8	1696.7	1746.0
12.5°	1298.8	1346.7	1398.4	1457.3	1519.4	1576.3	1639.1	1690.4	1740.0	1796.1	1853.5
15°	1287.8	1346.1	1411.5	1489.7	1584.0	1652.9	1717.2	1806.5	1867.6	1928.6	2010.8
17.5°	1267.7	1338.8	1420.6	1522.2	1600.9	1693.4	1790.2	1860.8	1943.0	2029.0	2103.4
20°	1251.7	1334.4	1426.0	1525.8	1626.2	1726.6	1820.4	1904.8	1989.7	2089.0	2150.0
22.5°	1235.7	1317.5	1412.6	1518.7	1626.7	1732.4	1838.6	1937.6	2033.1	2133.3	2211.3
25°	1201.8	1298.9	1402.1	1510.3	1616.8	1733.3	1859.8	1970.3	2088.4	2191.6	2265.4
27.5°	1167.3	1256.4	1359.1	1468.8	1587.3	1725.0	1873.8	1999.3	2117.7	2191.6	2214.8
30°	1136.3	1230.6	1324.9	1436.5	1564.6	1718.3	1876.5	2020.1	2117.3	2149.5	2125.6
32.5°	1104.8	1190.3	1283.7	1397.8	1534.0	1701.9	1880.0	2007.8	2066.2	2041.6	1944.5
35°	1049.2	1126.3	1216.8	1331.1	1487.5	1692.8	1865.4	1951.9	1937.5	1798.8	1615.7
37.5°	989.7	1052.6	1136.3	1255.8	1439.3	1656.8	1802.3	1815.1	1690.3	1477.3	1265.8
40°	942.6	999.2	1085.2	1210.1	1402.1	1621.2	1738.9	1687.3	1493.6	1256.7	1080.3
42.5°	896.9	944.7	1027.5	1162.1	1366.6	1572.9	1644.3	1531.9	1308.6	1084.5	924.1
45°	819.5	864.5	947.6	1085.8	1293.9	1480.3	1470.9	1275.5	1052.0	871.6	738.5
47.5°	746.0	785.3	863.4	1004.4	1208.5	1341.6	1253.4	1045.5	855.9	711.2	616.2
50°	694.1	733.0	810.7	949.9	1140.2	1237.3	1111.3	911.0	737.4	617.5	542.1
52.5°	644.4	682.3	753.3	889.1	1057.6	1115.7	980.4	794.8	650.0	546.5	481.7
55°	574.8	603.6	667.5	797.3	923.2	936.5	799.5	644.2	524.9	452.7	408.4
57.5°	503.9	528.7	591.8	695.2	783.5	776.7	646.7	512.3	432.0	378.4	346.3
60°	457.7	482.2	537.6	626.4	693.0	669.7	550.4	442.2	373.4	334.0	308.5
62.5°	414.7	433.7	485.7	550.5	598.4	572.0	470.5	381.0	326.4	293.2	273.0
65°	352.3	367.9	409.4	443.3	469.9	444.4	360.1	297.9	258.5	235.2	221.4
67.5°	293.1	303.0	329.2	341.4	360.2	332.2	270.8	229.2	206.8	187.1	177.4
70°	255.8	263.0	276.9	286.8	291.9	263.0	217.5	186.9	168.1	154.3	148.1
72.5°	218.5	224.9	227.6	235.8	233.3	206.2	174.9	150.6	137.1	127.6	119.8
75°	167.0	169.7	167.0	163.7	156.5	137.6	115.9	103.8	93.8	89.4	86.6
77.5°	121.7	120.8	117.1	111.9	99.5	87.6	76.0	71.9	67.6	65.2	64.2
80°	93.8	91.6	88.2	79.9	69.4	61.1	58.3	55.5	53.8	51.0	50.5
82.5°	69.8	68.5	62.9	55.9	48.5	44.6	42.3	41.3	39.6	38.2	38.1
85°	37.2	35.5	29.4	25.5	24.4	23.3	22.7	22.7	20.5	20.0	20.0
87.5°	12.8	10.7	10.8	9.9	10.6	10.4	11.6	11.4	11.7	12.3	11.7
90°	4.0	6.7	9.5	12.1	15.3	18.8	22.4	25.9	29.5	30.6	31.7
92.5°	31.6	33.4	35.3	37.2	39.1	41.2	43.1	45.2	47.2	48.1	48.9
95°	74.4	76.4	78.3	80.2	82.3	84.4	86.6	88.8	91.0	92.0	93.2
97.5°	130.3	131.7	133.1	134.5	136.0	137.6	139.2	140.8	142.4	143.7	144.9
100°	168.8	170.5	172.1	173.7	175.3	176.6	178.0	179.4	180.8	181.6	182.4
102.5°	212.5	213.4	214.4	215.4	216.8	218.6	220.4	222.2	224.0	224.9	225.7
105°	277.2	277.7	278.3	278.8	280.3	282.7	285.2	287.7	290.2	290.2	290.2
107.5°	352.7	353.0	353.4	353.7	354.3	355.3	356.3	357.3	358.2	359.1	360.0
110°	400.1	400.6	401.2	401.8	402.3	402.8	403.4	403.9	404.5	405.6	406.7



TEST NUMBER: P332467-930

CATALOG NUMBER: S123RDIW-S1000D1535U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	449.1	449.4	449.7	450.0	450.3	450.4	450.5	450.6	450.7	452.0	453.3
115°	523.3	524.2	525.0	525.8	525.9	525.4	524.8	524.3	523.7	524.0	524.3
117.5°	597.3	597.9	598.4	598.9	598.8	598.2	597.5	596.7	596.1	596.0	595.9
120°	644.7	646.3	647.9	649.5	649.7	648.3	646.9	645.6	644.2	643.9	643.7
122.5°	692.4	693.6	694.8	696.0	696.3	695.5	694.8	694.1	693.4	692.7	691.9
125°	765.5	766.4	767.2	768.0	768.1	767.6	767.0	766.5	766.0	764.8	763.8
127.5°	834.3	836.1	837.8	839.6	840.2	839.5	838.9	838.4	837.7	836.2	834.7
130°	880.0	882.2	884.4	886.6	887.2	886.4	885.6	884.8	883.9	882.9	881.7
132.5°	925.2	927.4	929.6	931.8	932.6	932.0	931.4	930.7	930.2	928.9	927.6
135°	993.8	995.4	997.0	998.7	999.4	999.1	998.8	998.6	998.3	997.2	996.1
137.5°	1057.4	1058.8	1060.2	1061.5	1062.6	1063.3	1064.0	1064.7	1065.4	1064.3	1063.2
140°	1101.7	1103.1	1104.4	1105.8	1106.6	1106.9	1107.2	1107.4	1107.7	1107.4	1107.2
142.5°	1142.0	1143.4	1144.8	1146.1	1147.0	1147.5	1148.0	1148.5	1149.0	1148.8	1148.5
145°	1204.2	1204.7	1205.3	1205.8	1206.5	1207.3	1208.1	1208.9	1209.7	1209.5	1209.2
147.5°	1259.6	1260.6	1261.7	1262.7	1263.5	1264.3	1265.0	1265.8	1266.6	1266.6	1266.6
150°	1297.6	1298.1	1298.7	1299.3	1299.8	1300.3	1300.9	1301.4	1302.0	1302.0	1302.0
152.5°	1329.3	1330.1	1330.8	1331.5	1332.1	1332.4	1332.8	1333.1	1333.4	1333.9	1334.3
155°	1378.2	1378.2	1378.2	1378.2	1378.3	1378.6	1378.8	1379.2	1379.4	1380.5	1381.6
157.5°	1420.2	1419.8	1419.5	1419.2	1419.1	1419.4	1419.5	1419.8	1420.0	1421.1	1422.3
160°	1446.5	1445.9	1445.4	1444.9	1444.5	1444.5	1444.5	1444.5	1444.5	1445.9	1447.3
162.5°	1469.9	1469.1	1468.4	1467.6	1467.3	1467.5	1467.8	1467.9	1468.2	1469.6	1470.9
165°	1500.3	1499.5	1498.7	1497.9	1497.5	1497.5	1497.5	1497.5	1497.5	1499.1	1500.7
167.5°	1524.4	1523.3	1522.2	1521.1	1520.7	1520.9	1521.1	1521.3	1521.5	1523.2	1524.9
170°	1538.1	1537.1	1535.9	1534.9	1534.3	1534.3	1534.3	1534.3	1534.3	1536.3	1538.1
172.5°	1549.0	1547.8	1546.8	1545.7	1545.2	1545.2	1545.2	1545.2	1545.2	1546.9	1548.5
175°	1560.3	1559.2	1558.1	1557.0	1556.5	1556.5	1556.5	1556.5	1556.5	1558.1	1559.7
177.5°	1565.2	1564.3	1563.4	1562.5	1562.1	1562.1	1562.1	1562.1	1562.1	1563.4	1564.7
180°	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0



TEST NUMBER: P332467-930

CATALOG NUMBER: S123RDIW-S1000D1535U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1367.1	1367.1	1368.9	1375.6	1376.5	1382.2	1380.5
5°	1502.5	1513.0	1516.9	1533.6	1543.5	1548.0	1539.1
7.5°	1668.1	1697.8	1711.9	1729.3	1744.7	1749.4	1737.3
10°	1788.8	1819.8	1845.9	1862.1	1877.0	1887.0	1899.7
12.5°	1905.5	1943.7	1968.5	1991.2	2006.6	2019.3	2021.4
15°	2032.4	2090.1	2133.9	2166.1	2182.1	2190.5	2187.2
17.5°	2160.3	2213.8	2245.0	2277.9	2300.1	2301.3	2301.9
20°	2232.7	2284.8	2320.9	2345.3	2370.2	2369.2	2374.7
22.5°	2281.0	2322.1	2349.8	2367.5	2376.0	2371.8	2372.9
25°	2303.7	2315.9	2310.9	2282.6	2275.4	2249.3	2253.7
27.5°	2187.0	2129.2	2069.6	1992.8	1932.2	1883.7	1886.2
30°	2028.5	1926.4	1809.9	1712.2	1624.6	1600.2	1548.0
32.5°	1807.0	1653.8	1517.4	1426.4	1351.1	1330.7	1285.2
35°	1431.5	1282.8	1142.4	1058.1	1024.7	978.2	977.6
37.5°	1112.6	981.7	907.5	844.2	811.1	782.9	780.1
40°	936.0	833.9	777.9	732.4	699.7	678.6	673.6
42.5°	812.6	730.0	677.6	649.4	624.2	613.3	605.2
45°	663.6	608.1	571.4	545.9	534.3	525.9	521.5
47.5°	555.1	517.9	492.9	476.0	466.5	457.7	460.1
50°	496.0	465.5	447.2	431.1	423.9	417.8	418.3
52.5°	448.5	421.1	406.3	394.7	385.7	381.4	379.3
55°	380.6	363.4	348.5	340.1	335.1	329.1	327.3
57.5°	324.7	311.4	299.1	289.8	288.5	282.7	283.4
60°	287.4	276.3	266.4	261.3	257.5	252.4	254.1
62.5°	256.8	247.4	238.4	234.2	230.4	226.7	227.5
65°	210.3	201.4	195.8	193.6	192.0	190.3	188.7
67.5°	167.5	162.2	158.7	153.9	150.5	149.9	148.2
70°	141.0	133.7	127.6	121.5	119.8	119.3	119.8
72.5°	113.0	108.4	106.7	103.8	103.5	102.0	103.0
75°	84.9	83.2	82.1	79.9	79.9	79.9	79.9
77.5°	62.6	61.6	60.9	60.5	59.9	59.1	59.0
80°	48.8	48.3	47.1	47.1	46.6	47.1	46.6
82.5°	36.9	36.8	35.6	35.6	35.1	34.7	35.1
85°	18.8	18.3	19.4	18.3	18.8	17.8	18.8
87.5°	11.9	12.1	11.8	11.9	11.6	12.6	11.8
90°	32.8	33.9	34.7	35.2	35.8	36.4	36.9
92.5°	49.8	50.7	51.0	50.6	50.3	50.0	49.7
95°	94.2	95.3	95.9	95.9	95.9	95.9	95.9
97.5°	146.1	147.4	148.0	147.9	147.7	147.7	147.6
100°	183.2	184.0	184.7	185.2	185.8	186.3	186.9
102.5°	226.5	227.3	227.6	227.6	227.4	227.3	227.2
105°	290.2	290.2	290.4	291.0	291.6	292.0	292.6
107.5°	360.9	361.7	362.0	361.7	361.3	361.0	360.7
110°	407.7	408.9	409.1	408.5	408.1	407.5	406.9



TEST NUMBER: P332467-930

CATALOG NUMBER: S123RDIW-S1000D1535U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	454.6	455.9	456.6	456.5	456.3	456.2	456.1
115°	524.6	524.8	524.8	524.6	524.3	524.0	523.7
117.5°	595.9	595.8	595.4	594.6	593.9	593.1	592.3
120°	643.4	643.1	642.7	642.2	641.6	641.1	640.5
122.5°	691.3	690.6	689.8	689.1	688.3	687.5	686.7
125°	762.6	761.6	760.4	759.4	758.3	757.2	756.1
127.5°	833.2	831.6	830.2	829.0	827.7	826.5	825.2
130°	880.7	879.6	878.1	876.2	874.2	872.4	870.4
132.5°	926.3	925.0	923.6	922.1	920.6	919.1	917.6
135°	995.0	993.9	993.1	992.5	992.0	991.5	990.9
137.5°	1062.0	1060.9	1059.7	1058.7	1057.7	1056.6	1055.6
140°	1106.9	1106.6	1105.5	1103.6	1101.7	1099.8	1097.9
142.5°	1148.2	1147.9	1147.0	1145.6	1144.1	1142.6	1141.2
145°	1208.9	1208.7	1207.9	1206.9	1205.8	1204.7	1203.6
147.5°	1266.6	1266.6	1265.8	1264.1	1262.5	1260.8	1259.1
150°	1302.0	1302.0	1301.1	1299.5	1297.9	1296.2	1294.6
152.5°	1334.7	1335.2	1334.7	1333.3	1331.9	1330.4	1329.0
155°	1382.7	1383.8	1383.4	1381.4	1379.6	1377.6	1375.7
157.5°	1423.4	1424.6	1424.4	1422.9	1421.3	1419.8	1418.3
160°	1448.7	1450.0	1450.2	1449.1	1448.0	1446.9	1445.8
162.5°	1472.3	1473.7	1473.5	1471.7	1470.0	1468.2	1466.5
165°	1502.4	1504.0	1503.9	1501.9	1500.1	1498.1	1496.2
167.5°	1526.6	1528.3	1528.3	1526.6	1524.9	1523.2	1521.5
170°	1540.1	1542.0	1542.0	1540.1	1538.1	1536.3	1534.3
172.5°	1550.2	1551.9	1551.8	1549.9	1548.0	1546.1	1544.2
175°	1561.4	1563.0	1562.8	1561.0	1559.0	1557.1	1555.3
177.5°	1566.0	1567.3	1567.2	1565.7	1564.2	1562.7	1561.1
180°	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0

(END OF REPORT)