

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332404-930

Luminaire Tested: **S123RDIW-S340D1320U930-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332404-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S340D1320U930-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1320 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5365.2 lumens
Efficiency: N/A
Efficacy: 115.1 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 46.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332404-930

CATALOG NUMBER: S123RDIW-S340D1320U930-4F0-1E-UDD-F

Luminous Intensity Polar Plot

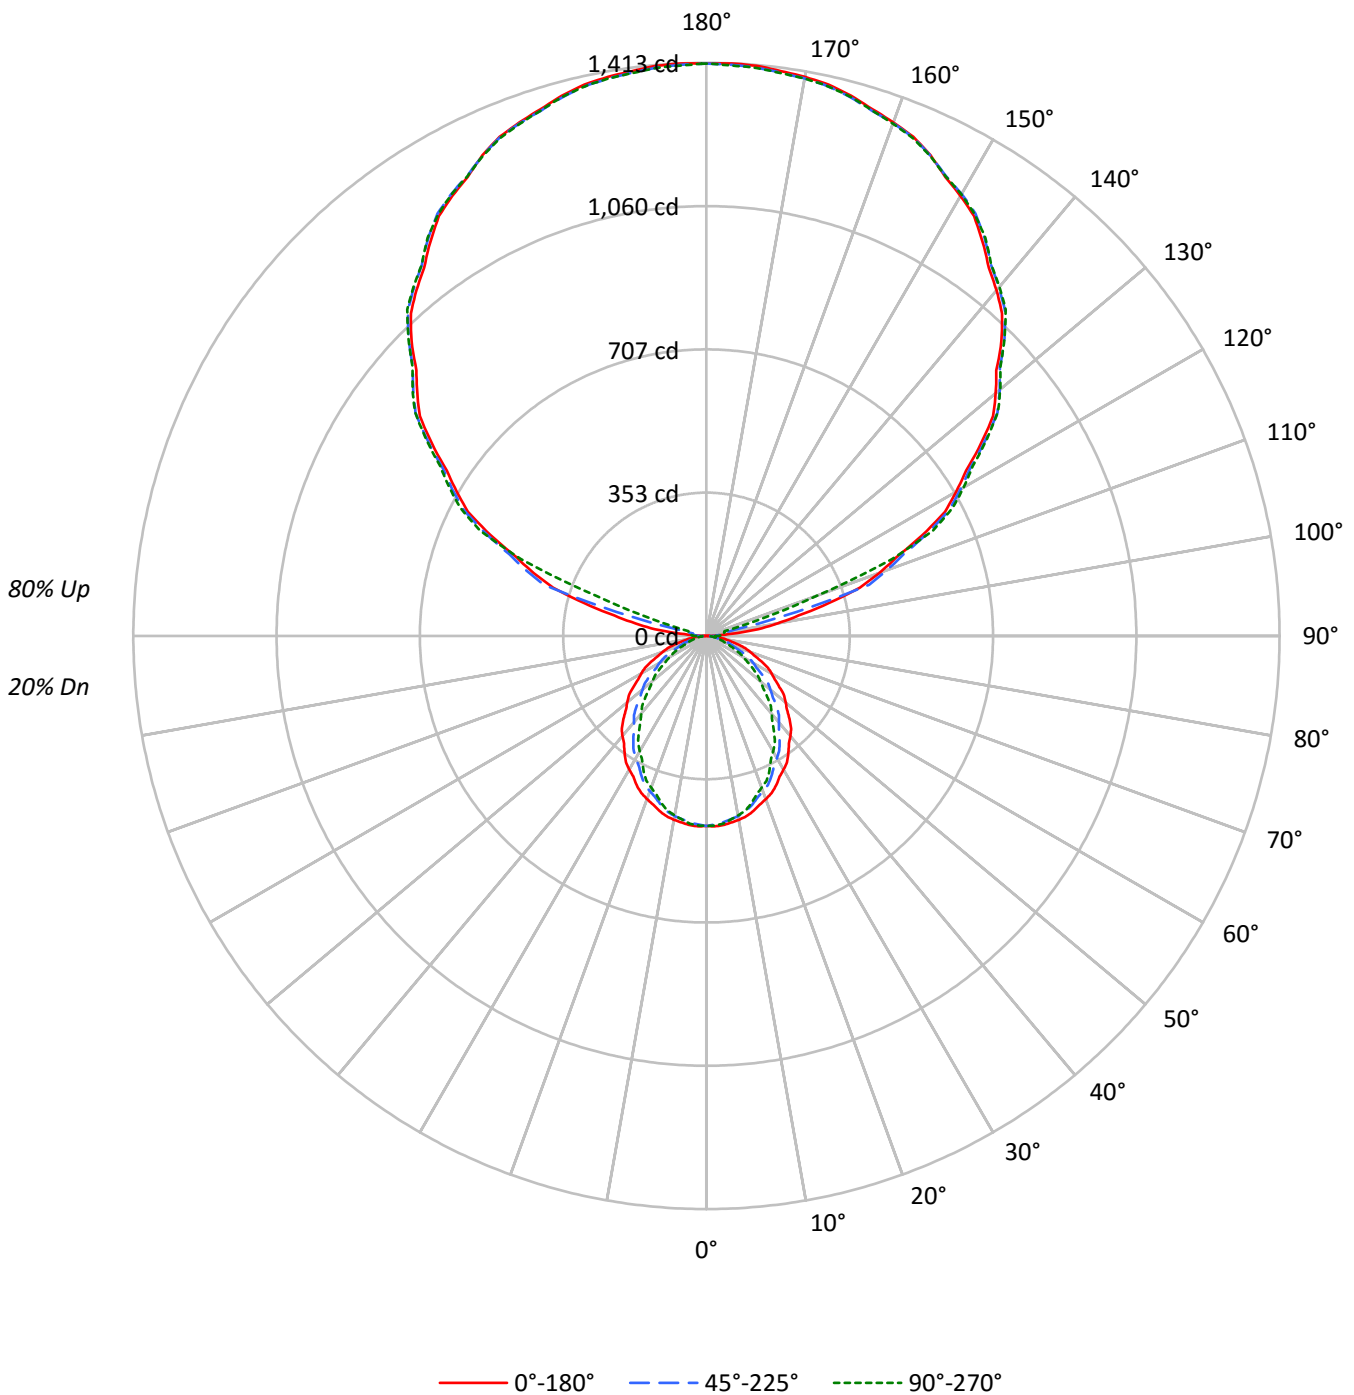



TEST NUMBER: P332404-930

CATALOG NUMBER: S123RDIW-S340D1320U930-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	100	100	100	100	88	88	88	88	67	67	67	47	47	47	28	28	28	20
1	91	87	83	80	80	77	74	71	58	56	55	41	40	39	25	25	24	17
2	83	76	70	66	73	67	63	59	51	48	45	36	34	33	22	21	20	14
3	76	67	60	55	67	59	54	49	45	41	38	32	30	28	20	19	18	12
4	69	59	52	46	61	53	46	41	40	36	32	29	26	24	18	16	15	11
5	63	53	45	39	56	47	40	35	36	31	28	26	23	20	16	14	13	9
6	58	47	39	34	51	42	35	31	32	28	24	23	20	18	15	13	12	8
7	54	42	35	29	47	38	31	27	29	24	21	21	18	16	13	12	10	7
8	50	38	31	26	44	34	28	23	26	22	19	19	16	14	12	11	9	7
9	46	35	28	23	41	31	25	21	24	20	17	17	15	12	11	10	8	6
10	43	32	25	20	38	28	22	18	22	18	15	16	13	11	10	9	8	5

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5042	5042	5042
5°	5061	4991	5020
10°	5032	4928	4912
15°	4979	4813	4763
20°	4904	4669	4560
25°	4828	4507	4363
30°	4727	4320	4084
35°	4623	4133	3829
40°	4526	3912	3513
45°	4401	3694	3227
50°	4262	3448	2907
55°	4121	3166	2609
60°	3991	2863	2282
65°	3823	2534	1954
70°	3610	2127	1577
75°	3302	1676	1485
80°	2944	1488	1364
85°	2482	1309	1223



TEST NUMBER: P332404-930

CATALOG NUMBER: S123RDIW-S340D1320U930-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	44.0	0.8
10°-20°	122.4	2.3
20°-30°	176.2	3.3
30°-40°	198.5	3.7
40°-50°	189.9	3.5
50°-60°	155.5	2.9
60°-70°	104.9	2.0
70°-80°	52.8	1.0
80°-90°	17.9	0.3
90°-100°	51.3	1.0
100°-110°	244.5	4.6
110°-120°	587.3	10.9
120°-130°	747.9	13.9
130°-140°	799.1	14.9
140°-150°	747.2	13.9
150°-160°	602.7	11.2
160°-170°	389.0	7.3
170°-180°	134.1	2.5
0°-30°	342.6	6.4
0°-40°	541.1	10.1
0°-60°	886.5	16.5
0°-90°	1062.1	19.8
90°-120°	883.1	16.5
90°-150°	3177.3	59.2
90°-180°	4303.0	80.2
0°-180°	5365.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	468	468	468	468	468	
5°	468	466	462	465	465	44
15°	447	442	432	430	427	126
25°	406	396	380	372	367	187
35°	352	338	314	299	291	220
45°	289	271	243	222	212	223
55°	220	200	169	147	139	197
65°	150	129	100	82	77	148
75°	79	61	40	37	36	85
85°	20	12	11	10	10	23
90°	1	12	25	29	32	4
95°	64	24	32	40	40	79
105°	312	318	230	54	46	331
115°	586	592	602	612	616	578
125°	826	834	839	841	843	737
135°	1028	1035	1039	1042	1039	791
145°	1187	1194	1196	1198	1198	743
155°	1307	1305	1306	1311	1305	602
165°	1379	1376	1374	1382	1375	389
175°	1411	1406	1407	1413	1406	134
180°	1411	1411	1411	1411	1411	



TEST NUMBER: P332404-930

CATALOG NUMBER: S123RDIW-S340D1320U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	468.4	468.4	468.4	468.4	468.4	468.4	468.4	468.4	468.4	468.4	468.4
2.5°	469.9	469.6	469.4	469.1	468.9	468.3	467.5	466.7	465.9	465.0	465.8
5°	468.4	468.0	467.6	467.2	466.7	466.0	465.0	464.0	462.9	461.9	462.7
7.5°	464.1	463.6	463.2	462.7	462.3	461.4	460.1	458.8	457.4	456.1	456.5
10°	460.4	459.8	459.3	458.7	458.0	457.0	455.5	454.0	452.4	450.9	451.0
12.5°	455.3	454.6	454.0	453.3	452.7	451.3	449.5	447.7	445.8	443.9	443.8
15°	446.8	445.8	444.9	443.9	443.0	441.4	439.0	436.7	434.3	431.9	431.5
17.5°	436.0	435.0	433.9	432.8	431.7	429.7	426.6	423.6	420.7	417.7	416.8
20°	428.1	426.8	425.4	424.1	422.7	420.4	417.3	414.0	410.8	407.6	406.5
22.5°	419.3	417.8	416.2	414.7	413.1	410.7	407.2	403.8	400.4	397.0	395.6
25°	406.5	404.4	402.3	400.1	398.0	395.0	391.2	387.3	383.4	379.5	377.7
27.5°	390.9	388.6	386.2	383.9	381.6	378.3	374.0	369.6	365.3	360.9	358.5
30°	380.3	377.7	375.2	372.7	370.1	366.5	361.7	357.0	352.3	347.6	344.7
32.5°	369.7	366.7	363.9	361.0	358.2	354.2	349.2	344.2	339.2	334.2	331.1
35°	351.8	348.7	345.7	342.7	339.7	335.5	330.3	325.0	319.8	314.5	311.0
37.5°	333.7	330.3	326.9	323.6	320.2	315.7	310.1	304.5	299.0	293.3	289.3
40°	322.1	318.5	314.7	311.0	307.3	302.4	296.4	290.4	284.5	278.4	274.1
42.5°	309.1	305.3	301.7	297.9	294.2	289.3	283.1	276.9	270.7	264.5	259.7
45°	289.1	285.3	281.5	277.7	273.9	268.7	262.3	255.8	249.2	242.7	237.9
47.5°	269.1	265.0	260.7	256.6	252.4	247.1	240.6	234.1	227.6	221.1	215.9
50°	254.5	250.5	246.6	242.6	238.6	233.3	226.4	219.6	212.7	205.9	200.6
52.5°	241.5	237.2	232.8	228.5	224.2	218.7	211.9	205.1	198.4	191.6	186.2
55°	219.6	215.4	211.3	207.2	203.0	197.4	190.2	183.0	175.9	168.7	163.8
57.5°	199.3	194.9	190.4	185.8	181.3	175.5	168.3	161.0	153.8	146.7	142.0
60°	185.4	180.8	176.1	171.5	166.8	161.0	154.0	147.0	140.0	133.0	128.4
62.5°	171.4	166.7	162.1	157.5	152.9	147.0	140.0	133.0	126.0	119.0	114.7
65°	150.1	145.4	140.8	136.2	131.5	125.9	119.3	112.7	106.2	99.5	95.4
67.5°	128.7	124.0	119.3	114.6	109.9	104.4	98.1	91.8	85.4	79.2	76.1
70°	114.7	110.1	105.6	101.0	96.5	91.2	85.4	79.4	73.5	67.6	64.7
72.5°	100.8	96.3	91.8	87.2	82.8	77.9	72.5	67.1	61.7	56.3	54.0
75°	79.4	75.3	71.3	67.3	63.2	58.9	54.2	49.6	44.9	40.3	39.5
77.5°	59.9	56.3	52.6	48.9	45.3	42.0	39.0	36.0	33.0	30.0	29.6
80°	47.5	44.0	40.6	37.1	33.7	31.1	29.3	27.5	25.7	24.0	23.6
82.5°	35.6	32.6	29.7	26.7	23.6	21.8	21.0	20.1	19.3	18.4	18.2
85°	20.1	18.3	16.4	14.6	12.7	11.7	11.4	11.2	10.9	10.6	10.4
87.5°	7.5	7.3	6.9	6.7	6.4	6.5	7.2	7.7	8.4	9.0	9.1
90°	1.1	3.3	5.7	8.1	10.4	13.0	16.1	19.1	22.1	25.2	26.1
92.5°	19.5	18.8	18.2	17.5	16.9	17.7	20.0	22.3	24.5	26.8	28.3
95°	63.9	54.4	44.8	35.3	25.8	22.3	24.8	27.4	29.9	32.5	34.2
97.5°	128.5	124.3	119.9	115.7	111.4	100.9	84.1	67.3	50.5	33.8	35.6
100°	177.2	181.8	186.5	191.1	195.8	179.9	143.7	107.3	70.9	34.6	36.4
102.5°	232.5	235.9	239.2	242.6	246.0	227.8	188.1	148.4	108.7	69.0	63.2
105°	312.4	315.0	317.6	320.1	322.6	313.5	292.4	271.5	250.5	229.6	188.3
107.5°	396.7	398.8	400.8	402.8	404.9	407.6	410.9	414.2	417.5	420.8	390.5
110°	452.9	454.8	456.6	458.4	460.3	462.5	465.1	467.7	470.3	472.8	465.1



TEST NUMBER: P332404-930

CATALOG NUMBER: S123RDIW-S340D1320U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	506.5	508.3	509.9	511.6	513.2	515.4	518.0	520.5	523.1	525.6	525.8
115°	586.0	587.4	588.8	590.2	591.6	593.4	595.4	597.5	599.7	601.8	604.1
117.5°	663.0	664.7	666.4	668.1	669.8	671.2	672.3	673.4	674.5	675.6	677.4
120°	710.8	712.9	714.9	717.1	719.2	720.6	721.2	721.9	722.7	723.3	725.2
122.5°	759.5	761.2	762.9	764.6	766.3	767.6	768.5	769.4	770.3	771.2	772.5
125°	826.1	827.9	829.8	831.7	833.6	834.9	835.8	836.8	837.7	838.7	839.1
127.5°	890.6	892.5	894.4	896.3	898.1	899.6	900.7	901.9	902.9	904.1	904.8
130°	930.9	932.8	934.7	936.5	938.4	939.8	940.7	941.7	942.6	943.5	944.4
132.5°	969.5	971.3	973.2	975.1	977.0	978.3	979.0	979.7	980.5	981.2	982.2
135°	1028.4	1029.8	1031.2	1032.6	1034.0	1035.2	1036.1	1037.1	1038.0	1038.9	1039.6
137.5°	1078.7	1080.5	1082.3	1084.0	1085.8	1087.0	1087.4	1088.0	1088.5	1089.0	1090.1
140°	1112.3	1113.7	1115.1	1116.5	1117.9	1118.9	1119.7	1120.3	1121.0	1121.7	1122.7
142.5°	1143.3	1144.7	1146.1	1147.5	1148.9	1150.0	1150.6	1151.4	1152.0	1152.8	1153.5
145°	1186.7	1188.4	1190.0	1191.6	1193.3	1194.3	1194.7	1195.2	1195.7	1196.1	1196.6
147.5°	1227.6	1228.7	1229.7	1230.8	1231.9	1232.7	1233.1	1233.5	1234.0	1234.5	1235.0
150°	1252.8	1253.4	1254.2	1254.8	1255.6	1256.1	1256.6	1257.0	1257.5	1258.0	1258.5
152.5°	1275.4	1275.7	1276.0	1276.4	1276.7	1277.0	1277.3	1277.6	1277.8	1278.1	1279.0
155°	1307.3	1306.8	1306.4	1305.9	1305.4	1305.3	1305.5	1305.8	1306.0	1306.2	1307.4
157.5°	1332.0	1332.0	1332.0	1331.9	1331.8	1331.7	1331.5	1331.2	1331.0	1330.7	1332.1
160°	1347.1	1346.9	1346.6	1346.4	1346.1	1346.0	1345.7	1345.5	1345.2	1345.0	1346.4
162.5°	1361.4	1360.7	1360.2	1359.5	1358.9	1358.5	1358.3	1358.0	1357.8	1357.6	1359.2
165°	1378.6	1377.9	1377.1	1376.5	1375.7	1375.3	1375.1	1374.8	1374.6	1374.4	1376.2
167.5°	1392.0	1391.1	1390.1	1389.2	1388.2	1387.8	1387.8	1387.8	1387.8	1387.8	1389.7
170°	1399.5	1398.6	1397.7	1396.8	1395.8	1395.3	1395.3	1395.3	1395.3	1395.3	1397.2
172.5°	1404.6	1403.5	1402.3	1401.2	1400.1	1399.6	1399.8	1400.0	1400.2	1400.4	1402.2
175°	1411.0	1409.9	1408.8	1407.5	1406.4	1405.9	1406.1	1406.4	1406.6	1406.9	1408.5
177.5°	1412.8	1411.8	1410.9	1410.0	1409.0	1408.7	1408.8	1409.0	1409.2	1409.4	1410.9
180°	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0



TEST NUMBER: P332404-930

CATALOG NUMBER: S123RDIW-S340D1320U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	468.4	468.4	468.4	468.4	468.4	468.4	468.4	468.4
2.5°	466.5	467.2	468.1	468.3	468.2	468.1	467.9	467.8
5°	463.5	464.2	465.0	465.3	465.1	465.0	464.8	464.6
7.5°	457.0	457.4	457.8	457.9	457.5	457.3	457.0	456.7
10°	451.1	451.2	451.3	451.1	450.7	450.3	449.8	449.4
12.5°	443.8	443.8	443.8	443.4	443.0	442.5	442.0	441.5
15°	431.0	430.6	430.2	429.7	429.2	428.5	428.0	427.4
17.5°	415.9	415.0	414.1	413.2	412.3	411.4	410.6	409.7
20°	405.4	404.3	403.2	402.2	401.1	400.1	399.2	398.1
22.5°	394.3	392.9	391.5	390.4	389.4	388.5	387.5	386.6
25°	375.9	374.2	372.4	371.0	370.1	369.2	368.3	367.4
27.5°	356.0	353.6	351.1	349.2	347.7	346.3	345.0	343.5
30°	341.9	339.0	336.1	334.0	332.6	331.3	330.0	328.6
32.5°	327.9	324.8	321.6	319.4	318.0	316.6	315.1	313.7
35°	307.3	303.6	300.0	297.4	296.0	294.4	292.9	291.4
37.5°	285.1	281.0	276.9	273.9	272.0	270.1	268.2	266.4
40°	269.7	265.3	260.9	257.7	255.8	253.9	251.9	250.0
42.5°	254.9	250.1	245.3	242.1	240.3	238.6	236.8	235.1
45°	233.1	228.3	223.5	220.0	218.1	216.1	214.0	212.0
47.5°	210.6	205.4	200.2	196.7	194.9	193.1	191.2	189.4
50°	195.4	190.2	185.0	181.4	179.4	177.5	175.5	173.6
52.5°	180.8	175.3	169.9	166.3	164.5	162.8	161.1	159.3
55°	158.9	154.0	149.1	145.8	144.1	142.4	140.7	139.0
57.5°	137.4	132.7	128.2	125.1	123.7	122.2	120.8	119.4
60°	123.8	119.3	114.7	111.7	110.3	108.8	107.5	106.0
62.5°	110.4	106.2	101.8	98.9	97.4	96.0	94.4	92.9
65°	91.2	87.2	83.0	80.5	79.5	78.6	77.7	76.7
67.5°	73.0	69.9	66.8	64.7	63.8	62.8	61.8	60.8
70°	61.7	58.8	55.8	53.9	52.9	52.0	51.0	50.1
72.5°	51.5	49.2	46.7	45.3	44.9	44.5	44.2	43.8
75°	38.6	37.7	36.9	36.4	36.2	36.0	35.9	35.7
77.5°	29.1	28.6	28.2	27.9	27.7	27.6	27.4	27.2
80°	23.4	23.2	22.9	22.7	22.5	22.3	22.2	22.0
82.5°	17.9	17.7	17.4	17.3	17.3	17.2	17.2	17.2
85°	10.3	10.1	9.9	9.9	9.9	9.9	9.9	9.9
87.5°	9.2	9.4	9.5	9.5	9.5	9.6	9.6	9.6
90°	27.0	28.0	28.9	29.6	30.1	30.5	31.0	31.5
92.5°	29.8	31.3	32.8	33.7	34.0	34.2	34.5	34.8
95°	35.8	37.4	39.1	39.9	39.9	39.9	39.9	39.9
97.5°	37.5	39.4	41.2	42.2	42.5	42.7	43.0	43.2
100°	38.3	40.2	42.1	43.1	43.3	43.5	43.8	44.0
102.5°	57.4	51.6	45.9	43.2	43.6	44.0	44.4	44.8
105°	147.1	105.9	64.7	44.3	44.8	45.2	45.7	46.1
107.5°	360.4	330.1	299.9	269.2	238.1	207.0	175.9	144.9
110°	457.4	449.7	442.1	421.5	388.2	354.9	321.6	288.3



TEST NUMBER: P332404-930

CATALOG NUMBER: S123RDIW-S340D1320U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	525.9	526.0	526.2	522.8	515.7	508.7	501.7	494.6
115°	606.4	608.7	611.1	612.7	613.6	614.6	615.5	616.4
117.5°	679.3	681.1	683.0	684.0	684.2	684.4	684.6	684.8
120°	727.1	729.0	730.8	731.7	731.7	731.7	731.7	731.7
122.5°	773.8	775.1	776.4	777.1	777.3	777.5	777.7	777.9
125°	839.6	840.1	840.5	841.0	841.5	842.0	842.4	842.9
127.5°	905.6	906.3	907.1	907.2	906.8	906.3	905.8	905.3
130°	945.3	946.3	947.2	947.5	947.0	946.6	946.1	945.6
132.5°	983.1	984.1	985.0	985.1	984.5	983.8	983.2	982.5
135°	1040.3	1041.0	1041.7	1041.7	1041.0	1040.3	1039.6	1038.9
137.5°	1091.3	1092.3	1093.5	1093.8	1093.3	1092.9	1092.4	1091.9
140°	1123.6	1124.5	1125.4	1125.7	1125.2	1124.7	1124.3	1123.8
142.5°	1154.2	1155.0	1155.8	1155.8	1155.1	1154.5	1153.8	1153.2
145°	1197.1	1197.5	1198.0	1198.2	1198.2	1198.2	1198.2	1198.2
147.5°	1235.4	1235.9	1236.4	1236.1	1235.0	1234.0	1232.9	1231.8
150°	1258.9	1259.4	1259.9	1259.7	1259.1	1258.3	1257.7	1256.9
152.5°	1279.8	1280.7	1281.5	1281.4	1280.3	1279.2	1278.1	1277.1
155°	1308.6	1309.7	1310.9	1310.8	1309.4	1308.0	1306.6	1305.2
157.5°	1333.6	1335.0	1336.4	1336.1	1334.3	1332.5	1330.6	1328.9
160°	1347.8	1349.2	1350.6	1350.5	1348.8	1347.2	1345.6	1343.9
162.5°	1360.7	1362.4	1363.9	1364.0	1362.5	1361.1	1359.7	1358.2
165°	1378.1	1380.0	1381.9	1381.9	1380.3	1378.7	1377.0	1375.4
167.5°	1391.6	1393.3	1395.2	1395.2	1393.3	1391.6	1389.7	1387.8
170°	1399.1	1400.9	1402.8	1402.8	1400.9	1399.1	1397.2	1395.3
172.5°	1404.1	1406.0	1407.9	1407.7	1405.7	1403.6	1401.6	1399.5
175°	1410.1	1411.8	1413.4	1413.2	1411.4	1409.6	1407.7	1405.8
177.5°	1412.3	1413.9	1415.4	1415.2	1413.3	1411.4	1409.6	1407.7
180°	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0

(END OF REPORT)