

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332409-930

Luminaire Tested: **S123RDIW-S340D1535U930-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332409-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S340D1535U930-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1535 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5399.0 lumens
Efficiency: N/A
Efficacy: 101.1 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 53.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332409-930

CATALOG NUMBER: S123RDIW-S340D1535U930-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

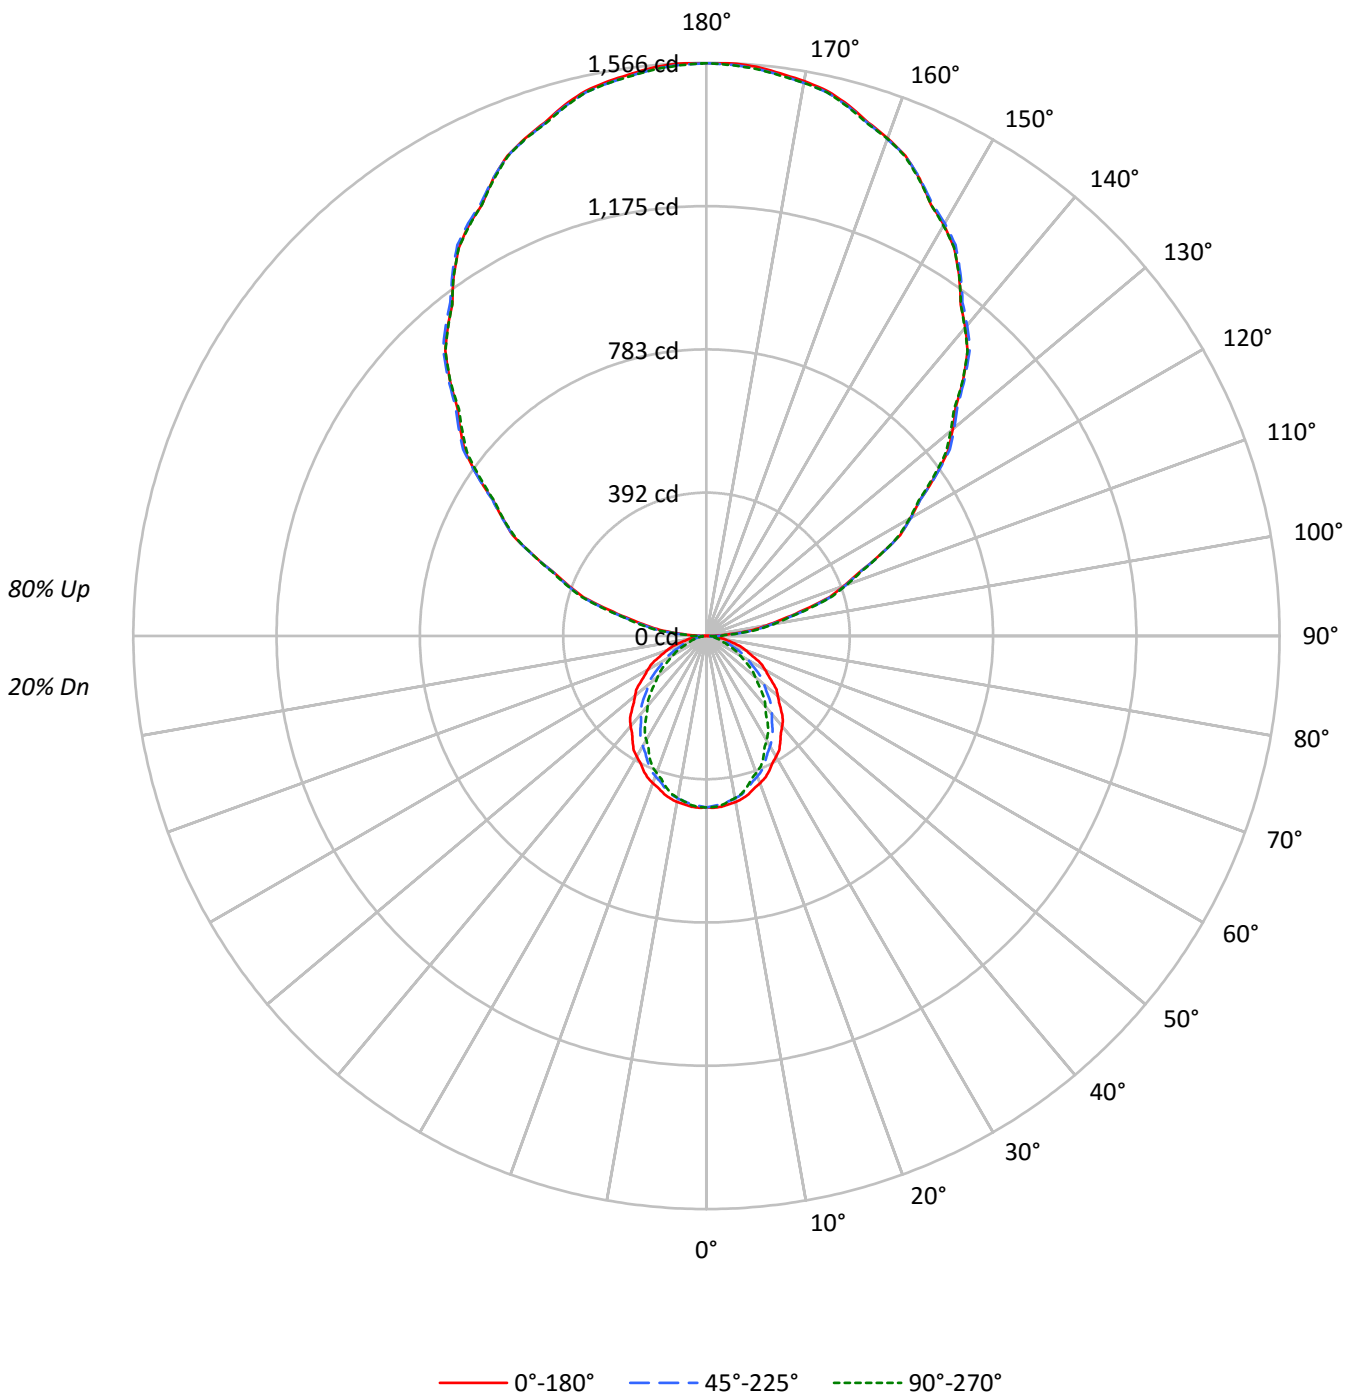



TEST NUMBER: P332409-930

CATALOG NUMBER: S123RDIW-S340D1535U930-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	100	100	100	100	88	88	88	88	66	66	66	47	47	47	28	28	28	20
1	91	87	83	80	80	77	74	71	58	56	55	41	40	39	25	25	24	17
2	83	76	70	65	73	67	63	59	51	48	45	36	34	33	22	21	20	14
3	76	67	60	55	67	59	54	49	45	41	38	32	30	28	20	19	17	12
4	69	59	52	46	61	52	46	41	40	36	32	28	26	24	18	16	15	11
5	63	52	45	39	56	47	40	35	36	31	28	26	23	20	16	14	13	9
6	58	47	39	34	51	42	35	31	32	28	24	23	20	18	14	13	12	8
7	54	42	35	29	47	38	31	27	29	24	21	21	18	16	13	12	10	7
8	50	38	31	26	44	34	28	23	26	22	19	19	16	14	12	10	9	7
9	46	35	28	23	41	31	25	21	24	20	17	17	14	12	11	10	8	6
10	43	32	25	20	38	28	22	18	22	18	15	16	13	11	10	9	8	5

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5042	5042	5042
5°	5061	4991	5020
10°	5032	4928	4912
15°	4979	4813	4763
20°	4904	4669	4560
25°	4828	4507	4363
30°	4727	4320	4084
35°	4623	4133	3829
40°	4526	3912	3513
45°	4401	3694	3227
50°	4262	3448	2907
55°	4121	3166	2609
60°	3991	2863	2282
65°	3823	2534	1954
70°	3610	2127	1577
75°	3302	1676	1485
80°	2944	1488	1364
85°	2482	1309	1223



TEST NUMBER: P332409-930

CATALOG NUMBER: S123RDIW-S340D1535U930-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	44.0	0.8
10°-20°	122.4	2.3
20°-30°	176.2	3.3
30°-40°	198.5	3.7
40°-50°	189.9	3.5
50°-60°	155.5	2.9
60°-70°	104.9	1.9
70°-80°	52.8	1.0
80°-90°	18.6	0.3
90°-100°	102.0	1.9
100°-110°	305.2	5.7
110°-120°	519.0	9.6
120°-130°	682.7	12.6
130°-140°	767.4	14.2
140°-150°	754.3	14.0
150°-160°	635.0	11.8
160°-170°	422.7	7.8
170°-180°	148.0	2.7
0°-30°	342.6	6.3
0°-40°	541.1	10.0
0°-60°	886.5	16.4
0°-90°	1062.8	19.7
90°-120°	926.2	17.2
90°-150°	3130.5	58.0
90°-180°	4336.0	80.3
0°-180°	5399.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	468	468	468	468	468	
5°	468	466	462	465	465	44
15°	447	442	432	430	427	126
25°	406	396	380	372	367	187
35°	352	338	314	299	291	220
45°	289	271	243	222	212	223
55°	220	200	169	147	139	197
65°	150	129	100	82	77	148
75°	79	61	40	37	36	85
85°	20	12	11	10	10	23
90°	1	14	30	34	37	5
95°	73	81	91	96	96	82
105°	277	280	290	290	293	296
115°	522	526	524	525	524	517
125°	765	768	766	761	756	682
135°	992	999	998	994	991	764
145°	1204	1206	1210	1208	1204	752
155°	1378	1378	1379	1384	1376	634
165°	1501	1498	1498	1504	1496	423
175°	1561	1557	1556	1563	1555	148
180°	1565	1565	1565	1565	1565	



TEST NUMBER: P332409-930

CATALOG NUMBER: S123RDIW-S340D1535U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	468.4	468.4	468.4	468.4	468.4	468.4	468.4	468.4	468.4	468.4	468.4
2.5°	469.9	469.6	469.4	469.1	468.9	468.3	467.5	466.7	465.9	465.0	465.8
5°	468.4	468.0	467.6	467.2	466.7	466.0	465.0	464.0	462.9	461.9	462.7
7.5°	464.1	463.6	463.2	462.7	462.3	461.4	460.1	458.8	457.4	456.1	456.5
10°	460.4	459.8	459.3	458.7	458.0	457.0	455.5	454.0	452.4	450.9	451.0
12.5°	455.3	454.6	454.0	453.3	452.7	451.3	449.5	447.7	445.8	443.9	443.8
15°	446.8	445.8	444.9	443.9	443.0	441.4	439.0	436.7	434.3	431.9	431.5
17.5°	436.0	435.0	433.9	432.8	431.7	429.7	426.6	423.6	420.7	417.7	416.8
20°	428.1	426.8	425.4	424.1	422.7	420.4	417.3	414.0	410.8	407.6	406.5
22.5°	419.3	417.8	416.2	414.7	413.1	410.7	407.2	403.8	400.4	397.0	395.6
25°	406.5	404.4	402.3	400.1	398.0	395.0	391.2	387.3	383.4	379.5	377.7
27.5°	390.9	388.6	386.2	383.9	381.6	378.3	374.0	369.6	365.3	360.9	358.5
30°	380.3	377.7	375.2	372.7	370.1	366.5	361.7	357.0	352.3	347.6	344.7
32.5°	369.7	366.7	363.9	361.0	358.2	354.2	349.2	344.2	339.2	334.2	331.1
35°	351.8	348.7	345.7	342.7	339.7	335.5	330.3	325.0	319.8	314.5	311.0
37.5°	333.7	330.3	326.9	323.6	320.2	315.7	310.1	304.5	299.0	293.3	289.3
40°	322.1	318.5	314.7	311.0	307.3	302.4	296.4	290.4	284.5	278.4	274.1
42.5°	309.1	305.3	301.7	297.9	294.2	289.3	283.1	276.9	270.7	264.5	259.7
45°	289.1	285.3	281.5	277.7	273.9	268.7	262.3	255.8	249.2	242.7	237.9
47.5°	269.1	265.0	260.7	256.6	252.4	247.1	240.6	234.1	227.6	221.1	215.9
50°	254.5	250.5	246.6	242.6	238.6	233.3	226.4	219.6	212.7	205.9	200.6
52.5°	241.5	237.2	232.8	228.5	224.2	218.7	211.9	205.1	198.4	191.6	186.2
55°	219.6	215.4	211.3	207.2	203.0	197.4	190.2	183.0	175.9	168.7	163.8
57.5°	199.3	194.9	190.4	185.8	181.3	175.5	168.3	161.0	153.8	146.7	142.0
60°	185.4	180.8	176.1	171.5	166.8	161.0	154.0	147.0	140.0	133.0	128.4
62.5°	171.4	166.7	162.1	157.5	152.9	147.0	140.0	133.0	126.0	119.0	114.7
65°	150.1	145.4	140.8	136.2	131.5	125.9	119.3	112.7	106.2	99.5	95.4
67.5°	128.7	124.0	119.3	114.6	109.9	104.4	98.1	91.8	85.4	79.2	76.1
70°	114.7	110.1	105.6	101.0	96.5	91.2	85.4	79.4	73.5	67.6	64.7
72.5°	100.8	96.3	91.8	87.2	82.8	77.9	72.5	67.1	61.7	56.3	54.0
75°	79.4	75.3	71.3	67.3	63.2	58.9	54.2	49.6	44.9	40.3	39.5
77.5°	59.9	56.3	52.6	48.9	45.3	42.0	39.0	36.0	33.0	30.0	29.6
80°	47.5	44.0	40.6	37.1	33.7	31.1	29.3	27.5	25.7	24.0	23.6
82.5°	35.6	32.6	29.7	26.7	23.6	21.8	21.0	20.1	19.3	18.4	18.2
85°	20.1	18.3	16.4	14.6	12.7	11.7	11.4	11.2	10.9	10.6	10.4
87.5°	7.5	7.3	7.2	6.9	6.8	7.0	7.7	8.4	9.1	9.9	10.0
90°	1.2	4.0	6.7	9.5	12.1	15.3	18.8	22.4	25.9	29.5	30.6
92.5°	29.8	31.6	33.4	35.3	37.2	39.1	41.2	43.1	45.2	47.2	48.1
95°	72.6	74.4	76.4	78.3	80.2	82.3	84.4	86.6	88.8	91.0	92.0
97.5°	128.8	130.3	131.7	133.1	134.5	136.0	137.6	139.2	140.8	142.4	143.7
100°	167.2	168.8	170.5	172.1	173.7	175.3	176.6	178.0	179.4	180.8	181.6
102.5°	211.5	212.5	213.4	214.4	215.4	216.8	218.6	220.4	222.2	224.0	224.9
105°	276.6	277.2	277.7	278.3	278.8	280.3	282.7	285.2	287.7	290.2	290.2
107.5°	352.4	352.7	353.0	353.4	353.7	354.3	355.3	356.3	357.3	358.2	359.1
110°	399.6	400.1	400.6	401.2	401.8	402.3	402.8	403.4	403.9	404.5	405.6



TEST NUMBER: P332409-930

CATALOG NUMBER: S123RDIW-S340D1535U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	448.7	449.1	449.4	449.7	450.0	450.3	450.4	450.5	450.6	450.7	452.0
115°	522.5	523.3	524.2	525.0	525.8	525.9	525.4	524.8	524.3	523.7	524.0
117.5°	596.8	597.3	597.9	598.4	598.9	598.8	598.2	597.5	596.7	596.1	596.0
120°	643.0	644.7	646.3	647.9	649.5	649.7	648.3	646.9	645.6	644.2	643.9
122.5°	691.2	692.4	693.6	694.8	696.0	696.3	695.5	694.8	694.1	693.4	692.7
125°	764.7	765.5	766.4	767.2	768.0	768.1	767.6	767.0	766.5	766.0	764.8
127.5°	832.6	834.3	836.1	837.8	839.6	840.2	839.5	838.9	838.4	837.7	836.2
130°	877.8	880.0	882.2	884.4	886.6	887.2	886.4	885.6	884.8	883.9	882.9
132.5°	923.1	925.2	927.4	929.6	931.8	932.6	932.0	931.4	930.7	930.2	928.9
135°	992.1	993.8	995.4	997.0	998.7	999.4	999.1	998.8	998.6	998.3	997.2
137.5°	1056.1	1057.4	1058.8	1060.2	1061.5	1062.6	1063.3	1064.0	1064.7	1065.4	1064.3
140°	1100.3	1101.7	1103.1	1104.4	1105.8	1106.6	1106.9	1107.2	1107.4	1107.7	1107.4
142.5°	1140.7	1142.0	1143.4	1144.8	1146.1	1147.0	1147.5	1148.0	1148.5	1149.0	1148.8
145°	1203.6	1204.2	1204.7	1205.3	1205.8	1206.5	1207.3	1208.1	1208.9	1209.7	1209.5
147.5°	1258.7	1259.6	1260.6	1261.7	1262.7	1263.5	1264.3	1265.0	1265.8	1266.6	1266.6
150°	1297.1	1297.6	1298.1	1298.7	1299.3	1299.8	1300.3	1300.9	1301.4	1302.0	1302.0
152.5°	1328.5	1329.3	1330.1	1330.8	1331.5	1332.1	1332.4	1332.8	1333.1	1333.4	1333.9
155°	1378.2	1378.2	1378.2	1378.2	1378.2	1378.3	1378.6	1378.8	1379.2	1379.4	1380.5
157.5°	1420.5	1420.2	1419.8	1419.5	1419.2	1419.1	1419.4	1419.5	1419.8	1420.0	1421.1
160°	1447.1	1446.5	1445.9	1445.4	1444.9	1444.5	1444.5	1444.5	1444.5	1444.5	1445.9
162.5°	1470.6	1469.9	1469.1	1468.4	1467.6	1467.3	1467.5	1467.8	1467.9	1468.2	1469.6
165°	1501.1	1500.3	1499.5	1498.7	1497.9	1497.5	1497.5	1497.5	1497.5	1497.5	1499.1
167.5°	1525.5	1524.4	1523.3	1522.2	1521.1	1520.7	1520.9	1521.1	1521.3	1521.5	1523.2
170°	1539.2	1538.1	1537.1	1535.9	1534.9	1534.3	1534.3	1534.3	1534.3	1534.3	1536.3
172.5°	1550.0	1549.0	1547.8	1546.8	1545.7	1545.2	1545.2	1545.2	1545.2	1545.2	1546.9
175°	1561.4	1560.3	1559.2	1558.1	1557.0	1556.5	1556.5	1556.5	1556.5	1556.5	1558.1
177.5°	1566.0	1565.2	1564.3	1563.4	1562.5	1562.1	1562.1	1562.1	1562.1	1562.1	1563.4
180°	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0



TEST NUMBER: P332409-930

CATALOG NUMBER: S123RDIW-S340D1535U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	468.4	468.4	468.4	468.4	468.4	468.4	468.4	468.4
2.5°	466.5	467.2	468.1	468.3	468.2	468.1	467.9	467.8
5°	463.5	464.2	465.0	465.3	465.1	465.0	464.8	464.6
7.5°	457.0	457.4	457.8	457.9	457.5	457.3	457.0	456.7
10°	451.1	451.2	451.3	451.1	450.7	450.3	449.8	449.4
12.5°	443.8	443.8	443.8	443.4	443.0	442.5	442.0	441.5
15°	431.0	430.6	430.2	429.7	429.2	428.5	428.0	427.4
17.5°	415.9	415.0	414.1	413.2	412.3	411.4	410.6	409.7
20°	405.4	404.3	403.2	402.2	401.1	400.1	399.2	398.1
22.5°	394.3	392.9	391.5	390.4	389.4	388.5	387.5	386.6
25°	375.9	374.2	372.4	371.0	370.1	369.2	368.3	367.4
27.5°	356.0	353.6	351.1	349.2	347.7	346.3	345.0	343.5
30°	341.9	339.0	336.1	334.0	332.6	331.3	330.0	328.6
32.5°	327.9	324.8	321.6	319.4	318.0	316.6	315.1	313.7
35°	307.3	303.6	300.0	297.4	296.0	294.4	292.9	291.4
37.5°	285.1	281.0	276.9	273.9	272.0	270.1	268.2	266.4
40°	269.7	265.3	260.9	257.7	255.8	253.9	251.9	250.0
42.5°	254.9	250.1	245.3	242.1	240.3	238.6	236.8	235.1
45°	233.1	228.3	223.5	220.0	218.1	216.1	214.0	212.0
47.5°	210.6	205.4	200.2	196.7	194.9	193.1	191.2	189.4
50°	195.4	190.2	185.0	181.4	179.4	177.5	175.5	173.6
52.5°	180.8	175.3	169.9	166.3	164.5	162.8	161.1	159.3
55°	158.9	154.0	149.1	145.8	144.1	142.4	140.7	139.0
57.5°	137.4	132.7	128.2	125.1	123.7	122.2	120.8	119.4
60°	123.8	119.3	114.7	111.7	110.3	108.8	107.5	106.0
62.5°	110.4	106.2	101.8	98.9	97.4	96.0	94.4	92.9
65°	91.2	87.2	83.0	80.5	79.5	78.6	77.7	76.7
67.5°	73.0	69.9	66.8	64.7	63.8	62.8	61.8	60.8
70°	61.7	58.8	55.8	53.9	52.9	52.0	51.0	50.1
72.5°	51.5	49.2	46.7	45.3	44.9	44.5	44.2	43.8
75°	38.6	37.7	36.9	36.4	36.2	36.0	35.9	35.7
77.5°	29.1	28.6	28.2	27.9	27.7	27.6	27.4	27.2
80°	23.4	23.2	22.9	22.7	22.5	22.3	22.2	22.0
82.5°	17.9	17.7	17.4	17.3	17.3	17.2	17.2	17.2
85°	10.3	10.1	9.9	9.9	9.9	9.9	9.9	9.9
87.5°	10.2	10.3	10.4	10.5	10.6	10.6	10.7	10.7
90°	31.7	32.8	33.9	34.7	35.2	35.8	36.4	36.9
92.5°	48.9	49.8	50.7	51.0	50.6	50.3	50.0	49.7
95°	93.2	94.2	95.3	95.9	95.9	95.9	95.9	95.9
97.5°	144.9	146.1	147.4	148.0	147.9	147.7	147.7	147.6
100°	182.4	183.2	184.0	184.7	185.2	185.8	186.3	186.9
102.5°	225.7	226.5	227.3	227.6	227.6	227.4	227.3	227.2
105°	290.2	290.2	290.2	290.4	291.0	291.6	292.0	292.6
107.5°	360.0	360.9	361.7	362.0	361.7	361.3	361.0	360.7
110°	406.7	407.7	408.9	409.1	408.5	408.1	407.5	406.9



TEST NUMBER: P332409-930

CATALOG NUMBER: S123RDIW-S340D1535U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	453.3	454.6	455.9	456.6	456.5	456.3	456.2	456.1
115°	524.3	524.6	524.8	524.8	524.6	524.3	524.0	523.7
117.5°	595.9	595.9	595.8	595.4	594.6	593.9	593.1	592.3
120°	643.7	643.4	643.1	642.7	642.2	641.6	641.1	640.5
122.5°	691.9	691.3	690.6	689.8	689.1	688.3	687.5	686.7
125°	763.8	762.6	761.6	760.4	759.4	758.3	757.2	756.1
127.5°	834.7	833.2	831.6	830.2	829.0	827.7	826.5	825.2
130°	881.7	880.7	879.6	878.1	876.2	874.2	872.4	870.4
132.5°	927.6	926.3	925.0	923.6	922.1	920.6	919.1	917.6
135°	996.1	995.0	993.9	993.1	992.5	992.0	991.5	990.9
137.5°	1063.2	1062.0	1060.9	1059.7	1058.7	1057.7	1056.6	1055.6
140°	1107.2	1106.9	1106.6	1105.5	1103.6	1101.7	1099.8	1097.9
142.5°	1148.5	1148.2	1147.9	1147.0	1145.6	1144.1	1142.6	1141.2
145°	1209.2	1208.9	1208.7	1207.9	1206.9	1205.8	1204.7	1203.6
147.5°	1266.6	1266.6	1266.6	1265.8	1264.1	1262.5	1260.8	1259.1
150°	1302.0	1302.0	1302.0	1301.1	1299.5	1297.9	1296.2	1294.6
152.5°	1334.3	1334.7	1335.2	1334.7	1333.3	1331.9	1330.4	1329.0
155°	1381.6	1382.7	1383.8	1383.4	1381.4	1379.6	1377.6	1375.7
157.5°	1422.3	1423.4	1424.6	1424.4	1422.9	1421.3	1419.8	1418.3
160°	1447.3	1448.7	1450.0	1450.2	1449.1	1448.0	1446.9	1445.8
162.5°	1470.9	1472.3	1473.7	1473.5	1471.7	1470.0	1468.2	1466.5
165°	1500.7	1502.4	1504.0	1503.9	1501.9	1500.1	1498.1	1496.2
167.5°	1524.9	1526.6	1528.3	1528.3	1526.6	1524.9	1523.2	1521.5
170°	1538.1	1540.1	1542.0	1542.0	1540.1	1538.1	1536.3	1534.3
172.5°	1548.5	1550.2	1551.9	1551.8	1549.9	1548.0	1546.1	1544.2
175°	1559.7	1561.4	1563.0	1562.8	1561.0	1559.0	1557.1	1555.3
177.5°	1564.7	1566.0	1567.3	1567.2	1565.7	1564.2	1562.7	1561.1
180°	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0

(END OF REPORT)