

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332395-930

Luminaire Tested: **S123RDIW-S340D755U930-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332395-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIW-S340D755U930-4F0-1E-UDD-A1  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 340 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING  
UPLIGHT 755 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3241.4 lumens  
Efficiency: N/A  
Efficacy: 106.6 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.22 / 1.36  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 30.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332395-930

CATALOG NUMBER: S123RDIW-S340D755U930-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

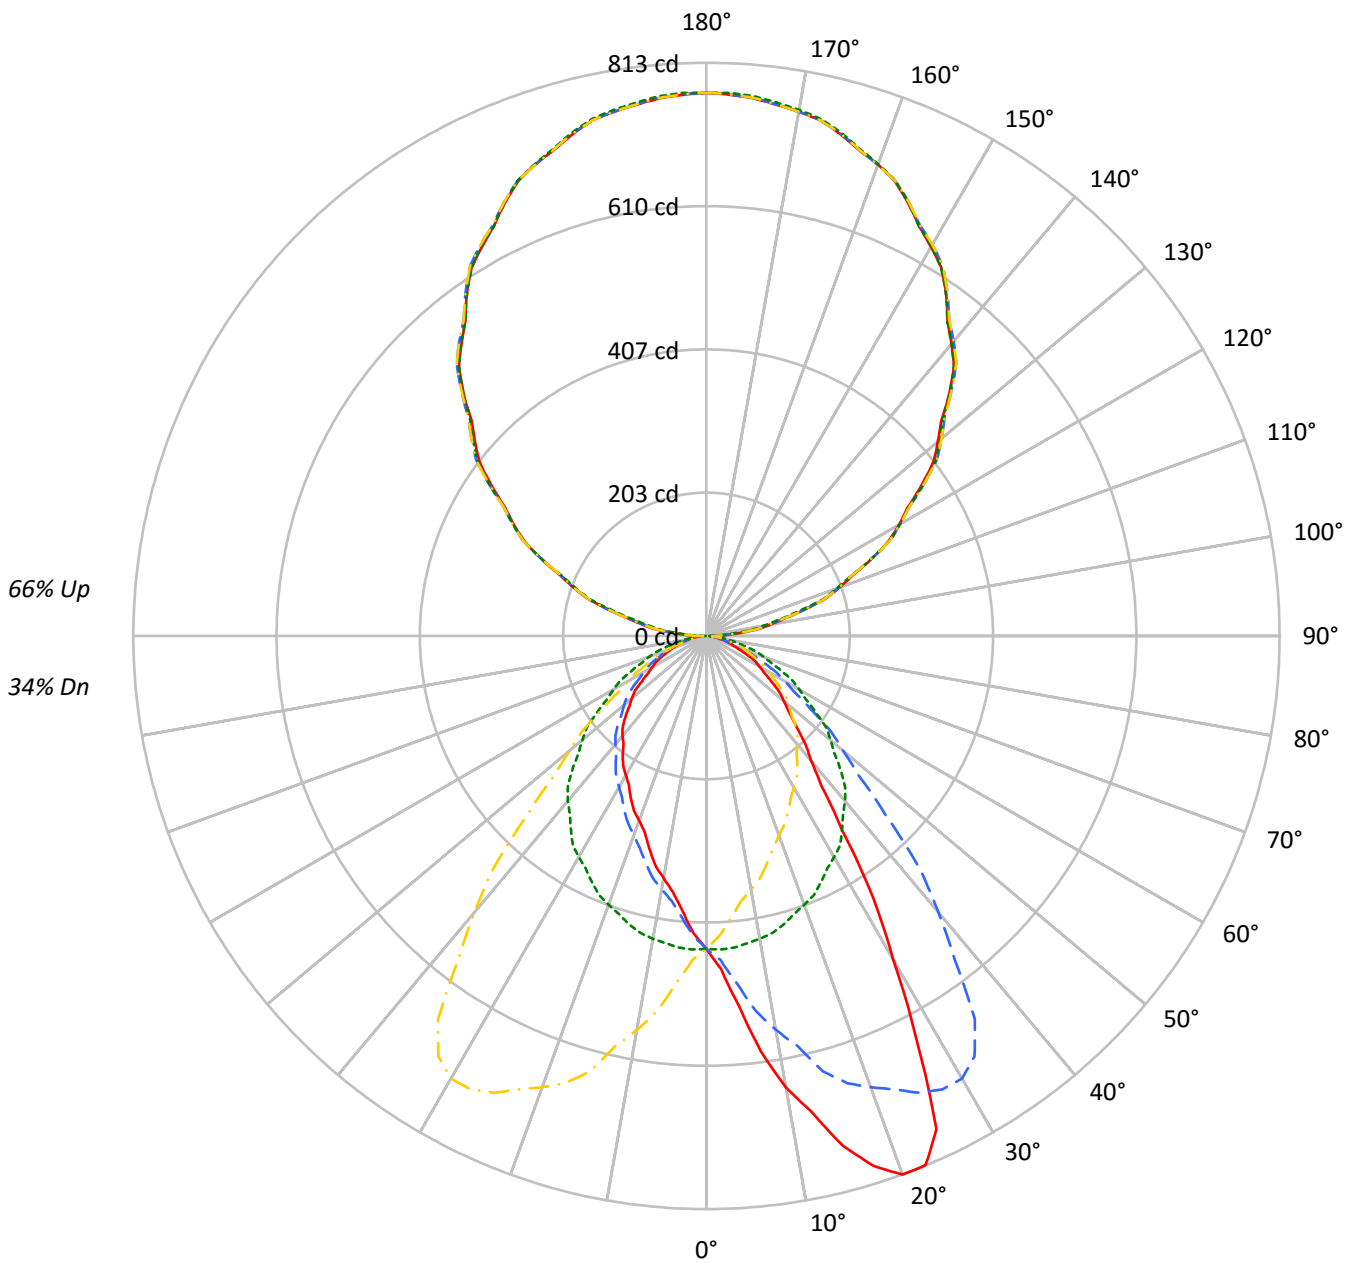



TEST NUMBER: P332395-930

CATALOG NUMBER: S123RDIW-S340D755U930-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	103	103	103	103	93	93	93	93	75	75	75	57	57	57	42	42	42	34				
1	95	91	87	84	85	82	79	76	66	64	62	51	50	48	37	37	36	30				
2	86	79	74	69	78	72	67	63	58	55	52	45	43	41	33	32	31	25				
3	79	70	63	58	71	64	58	53	52	47	44	40	37	35	30	28	27	22				
4	72	62	55	49	65	57	50	45	46	41	38	36	33	30	27	25	23	19				
5	67	56	48	42	60	51	44	39	41	36	33	33	29	26	24	22	20	17				
6	61	50	42	37	55	45	39	34	37	32	29	29	26	23	22	20	18	15				
7	57	45	37	32	51	41	34	30	34	29	25	27	23	21	20	18	16	13				
8	53	41	33	28	48	37	31	26	31	26	22	25	21	18	19	16	15	12				
9	49	37	30	25	44	34	28	23	28	23	20	23	19	17	17	15	13	11				
10	46	34	27	23	41	31	25	21	26	21	18	21	17	15	16	14	12	10				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	4776	4776	4776	4776
5°	5693	4796	4224	4796
10°	7109	4769	3816	4769
15°	8344	4719	3480	4719
20°	9313	4647	3194	4647
25°	9164	4570	3018	4570
30°	6586	4501	2838	4501
35°	4398	4407	2720	4407
40°	3240	4297	2599	4297
45°	2719	4102	2481	4102
50°	2398	3848	2316	3848
55°	2104	3558	2089	3558
60°	1873	3279	1914	3279
65°	1645	2980	1780	2980
70°	1290	2716	1627	2716
75°	1135	2371	1485	2371
80°	992	2008	1463	2008
85°	790	1618	1556	1618



TEST NUMBER: P332395-930

CATALOG NUMBER: S123RDIW-S340D755U930-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	43.6	1.3
10°-20°	136.3	4.2
20°-30°	214.2	6.6
30°-40°	223.4	6.9
40°-50°	191.2	5.9
50°-60°	145.7	4.5
60°-70°	93.4	2.9
70°-80°	44.9	1.4
80°-90°	14.2	0.4
90°-100°	50.2	1.5
100°-110°	150.2	4.6
110°-120°	255.5	7.9
120°-130°	336.1	10.4
130°-140°	377.7	11.7
140°-150°	371.3	11.5
150°-160°	312.6	9.6
160°-170°	208.1	6.4
170°-180°	72.9	2.2
0°-30°	394.1	12.2
0°-40°	617.6	19.1
0°-60°	954.5	29.4
0°-90°	1107.1	34.2
90°-120°	455.9	14.1
90°-150°	1540.9	47.5
90°-180°	2134.0	65.8
0°-180°	3241.4	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	444	444	444	444	444	
5°	527	444	391	444	527	54
15°	749	424	312	424	749	212
25°	772	385	254	385	772	332
35°	335	335	207	335	335	219
45°	179	270	163	270	179	140
55°	112	190	111	190	112	101
65°	65	117	70	117	65	64
75°	27	57	36	57	27	29
85°	6	13	13	13	6	8
90°	18	1	18	1	18	9
95°	47	36	47	36	47	48
105°	144	136	144	136	144	153
115°	258	257	258	257	258	255
125°	372	376	372	376	372	333
135°	488	488	488	488	488	375
145°	592	592	592	592	592	370
155°	677	678	677	678	677	312
165°	736	739	736	739	736	208
175°	766	768	766	768	766	73
180°	770	770	770	770	770	



TEST NUMBER: P332395-930

CATALOG NUMBER: S123RDIW-S340D755U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7
2.5°	472.6	473.2	471.2	470.9	468.6	468.1	468.1	464.8	462.8	460.3	458.8
5°	526.9	529.9	528.4	525.1	519.3	518.0	514.4	508.7	502.2	494.2	490.5
7.5°	594.8	598.9	597.3	592.1	586.0	581.2	571.0	561.6	548.4	536.7	526.8
10°	650.4	646.0	642.6	637.5	631.9	623.1	612.4	597.8	580.9	567.5	552.8
12.5°	692.0	691.3	687.0	681.7	673.9	665.4	652.3	634.5	614.9	595.7	578.7
15°	748.8	749.9	747.1	741.6	730.5	715.5	695.8	688.4	660.2	639.4	618.5
17.5°	788.1	787.8	787.4	779.8	768.6	757.9	739.6	720.1	694.6	665.2	637.1
20°	813.0	811.1	811.5	802.9	794.6	782.2	764.3	736.1	715.2	681.2	652.1
22.5°	812.4	812.0	813.4	810.5	804.5	795.0	780.9	757.0	730.3	696.0	663.3
25°	771.6	770.1	778.9	781.5	791.2	792.9	788.6	775.6	750.3	714.9	674.5
27.5°	645.7	644.9	661.5	682.2	708.5	729.0	748.7	758.2	750.3	725.0	684.4
30°	529.9	547.8	556.2	586.2	619.6	659.5	694.5	727.7	735.9	724.8	691.6
32.5°	440.0	455.6	462.6	488.3	519.5	566.2	618.6	665.7	699.0	707.4	687.4
35°	334.7	334.8	350.8	362.2	391.1	439.1	490.1	553.1	615.8	663.3	668.2
37.5°	267.1	268.0	277.7	289.0	310.7	336.1	380.9	433.3	505.7	578.6	621.4
40°	230.6	232.3	239.5	250.7	266.3	285.5	320.4	369.8	430.2	511.4	577.6
42.5°	207.2	209.9	213.7	222.3	232.0	250.0	278.2	316.3	371.3	448.0	524.5
45°	178.6	180.1	183.0	186.9	195.7	208.1	227.1	252.8	298.4	360.1	436.7
47.5°	157.5	156.7	159.7	162.9	168.8	177.3	190.0	210.9	243.4	293.0	357.9
50°	143.2	143.0	145.1	147.6	153.1	159.4	169.8	185.6	211.4	252.4	311.9
52.5°	129.9	130.5	132.1	135.1	139.1	144.1	153.5	164.9	187.1	222.5	272.1
55°	112.1	112.7	114.7	116.4	119.3	124.4	130.3	139.8	155.0	179.7	220.5
57.5°	97.0	96.8	98.7	99.2	102.4	106.6	111.1	118.5	129.6	147.9	175.4
60°	87.0	86.4	88.1	89.4	91.2	94.6	98.4	105.6	114.4	127.8	151.4
62.5°	77.9	77.6	78.8	80.2	81.6	84.7	87.9	93.4	100.4	111.7	130.4
65°	64.6	65.1	65.7	66.3	67.0	69.0	72.0	75.8	80.6	88.5	102.0
67.5°	50.8	51.4	51.5	52.7	54.3	55.5	57.4	60.7	64.1	70.8	78.4
70°	41.0	40.8	41.0	41.6	43.7	45.7	48.3	50.7	52.8	57.6	64.0
72.5°	35.2	34.9	35.4	35.5	36.5	37.1	38.6	41.0	43.7	46.9	51.5
75°	27.3	27.3	27.3	27.3	28.1	28.5	29.0	29.6	30.6	32.1	35.5
77.5°	20.2	20.2	20.5	20.7	20.9	21.1	21.4	22.0	22.3	23.2	24.6
80°	16.0	16.1	16.0	16.1	16.1	16.6	16.7	17.3	17.4	18.4	19.0
82.5°	12.0	11.9	12.0	12.2	12.2	12.6	12.6	13.0	13.0	13.5	14.1
85°	6.4	6.1	6.4	6.3	6.7	6.3	6.4	6.8	6.8	7.0	7.8
87.5°	5.1	5.4	5.1	5.1	5.1	5.1	5.1	5.0	5.1	4.9	4.6
90°	18.2	17.9	17.6	17.4	17.0	16.7	16.1	15.6	15.1	14.5	12.8
92.5°	24.5	24.6	24.8	24.9	25.1	24.9	24.5	24.1	23.6	23.2	22.3
95°	47.2	47.2	47.2	47.2	47.2	47.0	46.4	45.8	45.3	44.8	43.7
97.5°	72.6	72.6	72.7	72.8	72.8	72.6	71.9	71.3	70.7	70.1	69.3
100°	92.0	91.7	91.5	91.2	90.9	90.6	90.2	89.8	89.4	88.9	88.3
102.5°	111.9	111.9	111.9	112.0	112.0	111.9	111.5	111.0	110.6	110.2	109.3
105°	144.1	143.7	143.5	143.2	142.9	142.8	142.8	142.8	142.8	142.8	141.6
107.5°	177.6	177.7	177.9	178.1	178.2	178.1	177.7	177.2	176.8	176.3	175.9
110°	200.3	200.6	200.8	201.1	201.4	201.2	200.7	200.2	199.7	199.1	198.9



TEST NUMBER: P332395-930

CATALOG NUMBER: S123RDIW-S340D755U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	224.5	224.5	224.6	224.7	224.7	224.5	223.8	223.1	222.5	221.8	221.8
115°	257.8	258.0	258.0	258.2	258.4	258.4	258.2	258.0	258.0	257.8	258.0
117.5°	291.6	292.0	292.3	292.7	293.1	293.3	293.3	293.3	293.3	293.3	293.8
120°	315.3	315.5	315.8	316.1	316.3	316.6	316.7	316.8	317.0	317.1	317.8
122.5°	338.0	338.4	338.8	339.2	339.6	339.9	340.2	340.6	341.0	341.3	341.7
125°	372.2	372.7	373.2	373.8	374.3	374.9	375.4	375.9	376.5	377.0	377.2
127.5°	406.2	406.8	407.4	408.1	408.6	409.4	410.1	410.8	411.6	412.4	412.6
130°	428.4	429.4	430.3	431.3	432.2	432.9	433.5	434.1	434.6	435.1	435.5
132.5°	451.7	452.4	453.1	453.9	454.6	455.3	455.9	456.6	457.2	457.9	458.1
135°	487.7	488.0	488.3	488.5	488.9	489.3	489.8	490.3	490.8	491.4	491.5
137.5°	519.6	520.1	520.6	521.1	521.6	522.2	522.7	523.3	523.8	524.4	524.1
140°	540.4	541.4	542.3	543.2	544.1	544.7	544.9	544.9	545.1	545.3	545.1
142.5°	561.7	562.4	563.1	563.9	564.6	565.0	565.2	565.3	565.4	565.6	565.3
145°	592.5	593.0	593.5	594.0	594.6	594.9	595.1	595.2	595.3	595.5	595.1
147.5°	619.8	620.6	621.4	622.2	623.1	623.5	623.5	623.5	623.5	623.5	623.1
150°	637.2	638.1	638.9	639.6	640.4	640.8	640.8	640.8	640.8	640.8	640.6
152.5°	654.2	654.8	655.6	656.2	657.0	657.2	657.0	656.8	656.6	656.3	656.2
155°	677.2	678.1	679.1	680.0	680.9	681.1	680.6	680.0	679.6	679.0	678.8
157.5°	698.1	698.9	699.6	700.3	701.1	701.2	700.7	700.1	699.5	699.0	698.9
160°	711.7	712.2	712.7	713.3	713.8	713.7	713.1	712.4	711.8	711.0	711.0
162.5°	721.8	722.7	723.6	724.4	725.3	725.4	724.7	724.0	723.3	722.7	722.6
165°	736.5	737.4	738.3	739.3	740.2	740.3	739.5	738.7	737.8	737.0	737.0
167.5°	748.9	749.7	750.6	751.5	752.3	752.3	751.5	750.6	749.7	748.9	748.9
170°	755.2	756.2	757.1	758.1	759.0	759.0	758.1	757.1	756.2	755.2	755.2
172.5°	760.1	761.0	762.0	762.9	763.9	763.9	763.0	762.2	761.4	760.5	760.5
175°	765.5	766.5	767.4	768.3	769.3	769.3	768.5	767.8	767.0	766.1	766.1
177.5°	768.4	769.2	769.9	770.7	771.4	771.5	770.9	770.2	769.6	768.9	768.9
180°	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4



TEST NUMBER: P332395-930

CATALOG NUMBER: S123RDIW-S340D755U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7
2.5°	458.1	457.7	455.6	453.1	450.0	447.8	446.1	445.2	442.5	439.1	436.9
5°	486.5	480.8	474.7	467.2	460.4	453.4	449.1	443.9	437.7	430.6	425.7
7.5°	516.7	505.6	493.6	481.1	468.9	457.9	448.1	439.8	429.8	419.7	412.7
10°	540.1	523.7	506.8	489.5	473.8	458.9	447.5	436.3	424.4	412.8	404.0
12.5°	561.2	539.6	520.2	498.9	478.7	461.1	444.7	431.5	417.0	404.7	394.8
15°	587.9	565.8	542.3	510.0	483.2	460.8	440.8	423.5	406.1	390.9	381.2
17.5°	612.9	579.8	548.0	521.1	486.3	458.4	434.0	413.4	394.1	378.1	366.1
20°	623.2	591.1	556.8	522.4	488.2	456.8	428.5	405.7	385.8	367.5	356.5
22.5°	629.4	593.1	556.8	519.9	483.6	451.0	423.1	397.9	376.3	359.1	345.4
25°	636.7	593.4	553.5	517.1	480.0	444.7	411.4	384.8	361.5	343.1	328.6
27.5°	641.5	590.5	543.4	502.9	465.3	430.2	399.7	371.5	347.7	328.2	312.7
30°	642.4	588.2	535.7	491.8	453.6	421.3	389.0	362.1	337.0	316.3	301.8
32.5°	643.6	582.6	525.1	478.6	439.4	407.5	378.2	352.5	326.8	306.4	291.6
35°	638.6	579.5	509.2	455.7	416.5	385.6	359.2	335.4	310.2	290.4	275.4
37.5°	617.0	567.2	492.8	429.9	389.0	360.4	338.8	318.1	295.0	273.6	259.5
40°	595.3	555.1	480.0	414.3	371.5	342.1	322.7	305.8	283.4	263.4	248.3
42.5°	563.0	538.4	467.8	397.9	351.8	323.4	307.0	291.2	271.6	251.3	237.0
45°	503.5	506.8	443.0	371.7	324.4	296.0	280.5	269.5	252.1	235.4	220.7
47.5°	429.1	459.3	413.8	343.9	295.6	268.9	255.4	245.8	234.0	217.6	204.2
50°	380.5	423.5	390.4	325.2	277.5	250.9	237.7	229.8	219.6	206.7	194.0
52.5°	335.7	382.0	362.1	304.4	257.9	233.6	220.6	214.2	206.0	193.9	182.4
55°	273.7	320.7	316.1	273.0	228.5	206.7	196.8	189.6	184.1	175.0	165.8
57.5°	221.4	265.9	268.2	238.0	202.6	181.0	172.5	167.1	163.5	156.6	148.1
60°	188.4	229.3	237.3	214.4	184.1	165.1	156.7	152.3	149.5	144.0	137.5
62.5°	161.1	195.8	204.9	188.5	166.3	148.5	141.9	137.8	135.8	131.1	125.4
65°	123.3	152.1	160.9	151.8	140.1	126.0	120.6	117.0	115.3	112.7	108.4
67.5°	92.7	113.7	123.4	116.9	112.7	103.7	100.4	98.4	96.9	95.1	91.6
70°	74.4	90.0	99.9	98.2	94.8	90.0	87.6	86.3	84.7	83.2	80.1
72.5°	59.8	70.6	79.8	80.7	77.9	77.0	74.8	74.2	73.3	71.5	69.8
75°	39.7	47.1	53.6	56.0	57.2	58.1	57.2	57.0	56.8	55.3	54.3
77.5°	26.0	30.0	34.1	38.3	40.1	41.3	41.7	42.4	41.8	41.1	40.6
80°	20.0	20.9	23.7	27.3	30.2	31.3	32.1	32.4	32.3	32.1	31.3
82.5°	14.5	15.2	16.6	19.2	21.5	23.4	23.9	23.8	24.2	24.4	23.7
85°	7.8	8.0	8.4	8.7	10.0	12.1	12.7	13.1	13.5	13.5	12.3
87.5°	4.6	4.2	4.1	3.8	4.0	3.8	4.5	5.0	5.4	5.1	5.3
90°	11.0	9.3	7.5	6.0	4.6	3.3	2.0	0.6	2.0	3.3	4.6
92.5°	21.3	20.2	19.2	18.3	17.4	16.5	15.6	14.7	15.6	16.5	17.4
95°	42.6	41.6	40.4	39.5	38.6	37.6	36.6	35.7	36.6	37.6	38.6
97.5°	68.5	67.8	66.9	66.2	65.6	64.8	64.1	63.4	64.1	64.8	65.6
100°	87.6	86.9	86.3	85.5	84.7	83.9	83.1	82.3	83.1	83.9	84.7
102.5°	108.5	107.6	106.7	106.0	105.5	105.1	104.6	104.1	104.6	105.1	105.5
105°	140.4	139.2	137.9	137.2	137.0	136.7	136.4	136.2	136.4	136.7	137.0
107.5°	175.4	174.9	174.4	174.1	173.9	173.7	173.6	173.4	173.6	173.7	173.9
110°	198.5	198.3	198.0	197.7	197.5	197.2	197.0	196.7	197.0	197.2	197.5





TEST NUMBER: P332395-930

CATALOG NUMBER: S123RDIW-S340D755U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	221.8	221.7	221.6	221.5	221.4	221.2	221.0	220.9	221.0	221.2	221.4
115°	258.4	258.6	258.9	258.8	258.4	258.0	257.6	257.2	257.6	258.0	258.4
117.5°	294.1	294.4	294.8	294.8	294.6	294.2	294.0	293.8	294.0	294.2	294.6
120°	318.5	319.1	319.8	319.8	318.9	318.1	317.3	316.5	317.3	318.1	318.9
122.5°	342.0	342.3	342.7	342.6	342.0	341.4	340.8	340.2	340.8	341.4	342.0
125°	377.6	377.8	378.1	378.1	377.6	377.2	376.8	376.4	376.8	377.2	377.6
127.5°	412.9	413.3	413.5	413.3	412.4	411.6	410.7	409.8	410.7	411.6	412.4
130°	435.9	436.3	436.8	436.3	435.3	434.2	433.2	432.1	433.2	434.2	435.3
132.5°	458.4	458.8	459.0	458.7	457.5	456.5	455.4	454.4	455.4	456.5	457.5
135°	491.6	491.8	492.0	491.5	490.8	490.0	489.2	488.4	489.2	490.0	490.8
137.5°	523.7	523.3	523.0	522.5	521.9	521.1	520.5	519.8	520.5	521.1	521.9
140°	544.9	544.9	544.7	544.3	543.6	543.0	542.3	541.6	542.3	543.0	543.6
142.5°	565.1	564.8	564.6	564.1	563.5	562.8	562.1	561.5	562.1	562.8	563.5
145°	594.7	594.3	593.9	593.5	593.2	593.0	592.7	592.5	592.7	593.0	593.2
147.5°	622.6	622.3	621.9	621.5	621.0	620.5	620.0	619.5	620.0	620.5	621.0
150°	640.3	640.0	639.8	639.5	639.3	639.0	638.7	638.5	638.7	639.0	639.3
152.5°	656.0	655.8	655.7	655.4	655.1	654.7	654.3	654.0	654.3	654.7	655.1
155°	678.7	678.6	678.4	678.4	678.4	678.4	678.4	678.4	678.4	678.4	678.4
157.5°	698.7	698.6	698.5	698.5	698.7	698.9	699.0	699.2	699.0	698.9	698.7
160°	711.0	711.0	711.0	711.2	711.4	711.8	712.0	712.2	712.0	711.8	711.4
162.5°	722.4	722.4	722.3	722.4	722.8	723.1	723.5	723.9	723.5	723.1	722.8
165°	737.0	737.0	737.0	737.3	737.7	738.1	738.5	738.9	738.5	738.1	737.7
167.5°	748.7	748.6	748.5	748.7	749.3	749.8	750.3	750.9	750.3	749.8	749.3
170°	755.2	755.2	755.2	755.5	756.0	756.6	757.1	757.7	757.1	756.6	756.0
172.5°	760.5	760.5	760.5	760.8	761.3	761.9	762.5	763.0	762.5	761.9	761.3
175°	766.1	766.1	766.1	766.4	767.0	767.4	768.0	768.5	768.0	767.4	767.0
177.5°	768.9	768.9	768.9	769.2	769.6	770.0	770.4	770.9	770.4	770.0	769.6
180°	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4



TEST NUMBER: P332395-930

CATALOG NUMBER: S123RDIW-S340D755U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7
2.5°	436.1	434.1	432.8	429.7	427.8	425.7	423.5	424.9	424.7	424.6	424.6
5°	421.5	417.1	413.1	408.0	404.8	400.8	397.8	397.4	398.1	395.5	394.0
7.5°	407.0	401.0	395.3	389.7	383.7	378.9	375.9	374.5	372.6	371.0	369.2
10°	396.8	389.8	384.3	377.2	370.8	365.1	361.5	359.0	357.7	356.4	353.8
12.5°	386.3	379.4	372.4	364.4	358.3	351.7	349.0	346.3	343.7	342.2	338.8
15°	371.0	362.1	354.7	346.3	339.4	333.0	329.2	323.7	322.9	321.0	317.6
17.5°	355.6	345.9	335.7	329.5	321.8	315.0	309.2	307.4	302.0	299.9	296.9
20°	343.4	334.5	326.7	318.5	307.4	301.1	296.5	294.1	289.7	287.0	285.1
22.5°	333.0	323.8	314.9	305.3	296.1	289.0	285.7	281.8	279.5	275.7	273.7
25°	318.0	308.1	297.3	287.0	280.4	275.1	269.7	266.3	262.9	261.1	257.4
27.5°	300.6	290.2	280.1	272.3	264.2	258.9	254.1	251.1	247.0	244.1	242.0
30°	291.0	278.8	270.1	263.1	252.7	247.7	244.1	240.3	237.3	234.2	232.1
32.5°	279.9	268.8	260.6	251.8	243.9	238.4	233.7	230.4	227.8	224.9	222.8
35°	262.5	253.2	244.7	235.9	230.0	224.5	219.0	216.1	213.7	211.0	209.1
37.5°	246.8	238.1	229.9	221.7	214.3	209.9	205.5	203.3	199.9	198.1	196.2
40°	237.1	228.5	219.8	211.8	204.2	200.8	196.8	193.6	190.5	189.1	187.1
42.5°	226.4	217.8	210.5	201.9	195.7	191.0	187.4	183.8	181.6	179.6	178.5
45°	210.7	203.1	195.8	187.3	181.4	177.4	173.3	170.0	168.0	166.6	164.5
47.5°	195.3	187.8	180.4	173.0	167.3	162.7	158.5	156.3	153.5	151.9	150.5
50°	184.3	177.4	169.7	162.8	157.1	152.5	149.1	146.3	143.8	141.7	140.7
52.5°	174.1	166.8	160.0	153.7	147.7	142.5	139.4	136.4	134.5	132.2	131.0
55°	157.3	150.3	144.6	138.3	132.4	128.0	124.3	121.6	119.7	117.0	115.5
57.5°	141.5	135.2	128.4	122.9	116.9	113.2	110.1	106.5	104.1	102.1	100.5
60°	130.9	123.7	117.7	112.7	107.3	102.6	99.7	96.9	94.4	92.3	91.0
62.5°	119.8	113.5	107.9	102.3	97.4	93.3	90.0	87.6	85.4	84.1	82.8
65°	102.7	97.8	92.1	87.6	83.0	80.0	77.3	75.3	73.7	72.7	71.6
67.5°	87.1	82.3	77.4	72.9	69.8	67.5	65.8	64.0	63.2	62.0	61.2
70°	77.0	72.0	67.6	64.2	61.1	59.4	58.3	57.0	56.3	54.7	54.0
72.5°	65.9	62.3	59.1	56.3	53.9	52.3	50.9	49.2	48.0	46.3	45.6
75°	51.9	48.6	46.1	44.3	42.7	40.7	38.6	36.9	36.3	35.7	35.5
77.5°	38.4	36.4	34.6	32.9	31.1	29.6	29.1	28.7	28.6	28.3	28.3
80°	30.2	28.3	27.0	25.1	24.0	24.0	24.0	23.6	23.7	23.7	23.7
82.5°	22.4	20.7	20.0	19.3	19.1	19.2	19.2	19.3	19.2	19.5	19.3
85°	11.6	11.7	12.1	12.0	12.1	12.1	12.6	12.3	12.6	12.1	12.6
87.5°	5.5	6.2	6.7	7.3	7.7	7.9	8.2	8.3	8.6	8.6	8.7
90°	6.0	7.5	9.3	11.0	12.8	14.5	15.1	15.6	16.1	16.7	17.0
92.5°	18.3	19.2	20.2	21.3	22.3	23.2	23.6	24.1	24.5	24.9	25.1
95°	39.5	40.4	41.6	42.6	43.7	44.8	45.3	45.8	46.4	47.0	47.2
97.5°	66.2	66.9	67.8	68.5	69.3	70.1	70.7	71.3	71.9	72.6	72.8
100°	85.5	86.3	86.9	87.6	88.3	88.9	89.4	89.8	90.2	90.6	90.9
102.5°	106.0	106.7	107.6	108.5	109.3	110.2	110.6	111.0	111.5	111.9	112.0
105°	137.2	137.9	139.2	140.4	141.6	142.8	142.8	142.8	142.8	142.8	142.9
107.5°	174.1	174.4	174.9	175.4	175.9	176.3	176.8	177.2	177.7	178.1	178.2
110°	197.7	198.0	198.3	198.5	198.9	199.1	199.7	200.2	200.7	201.2	201.4



TEST NUMBER: P332395-930

CATALOG NUMBER: S123RDIW-S340D755U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	221.5	221.6	221.7	221.8	221.8	221.8	222.5	223.1	223.8	224.5	224.7
115°	258.8	258.9	258.6	258.4	258.0	257.8	258.0	258.0	258.2	258.4	258.4
117.5°	294.8	294.8	294.4	294.1	293.8	293.3	293.3	293.3	293.3	293.3	293.1
120°	319.8	319.8	319.1	318.5	317.8	317.1	317.0	316.8	316.7	316.6	316.3
122.5°	342.6	342.7	342.3	342.0	341.7	341.3	341.0	340.6	340.2	339.9	339.6
125°	378.1	378.1	377.8	377.6	377.2	377.0	376.5	375.9	375.4	374.9	374.3
127.5°	413.3	413.5	413.3	412.9	412.6	412.4	411.6	410.8	410.1	409.4	408.6
130°	436.3	436.8	436.3	435.9	435.5	435.1	434.6	434.1	433.5	432.9	432.2
132.5°	458.7	459.0	458.8	458.4	458.1	457.9	457.2	456.6	455.9	455.3	454.6
135°	491.5	492.0	491.8	491.6	491.5	491.4	490.8	490.3	489.8	489.3	488.9
137.5°	522.5	523.0	523.3	523.7	524.1	524.4	523.8	523.3	522.7	522.2	521.6
140°	544.3	544.7	544.9	544.9	545.1	545.3	545.1	544.9	544.9	544.7	544.1
142.5°	564.1	564.6	564.8	565.1	565.3	565.6	565.4	565.3	565.2	565.0	564.6
145°	593.5	593.9	594.3	594.7	595.1	595.5	595.3	595.2	595.1	594.9	594.6
147.5°	621.5	621.9	622.3	622.6	623.1	623.5	623.5	623.5	623.5	623.5	623.1
150°	639.5	639.8	640.0	640.3	640.6	640.8	640.8	640.8	640.8	640.8	640.4
152.5°	655.4	655.7	655.8	656.0	656.2	656.3	656.6	656.8	657.0	657.2	657.0
155°	678.4	678.4	678.6	678.7	678.8	679.0	679.6	680.0	680.6	681.1	680.9
157.5°	698.5	698.5	698.6	698.7	698.9	699.0	699.5	700.1	700.7	701.2	701.1
160°	711.2	711.0	711.0	711.0	711.0	711.0	711.8	712.4	713.1	713.7	713.8
162.5°	722.4	722.3	722.4	722.4	722.6	722.7	723.3	724.0	724.7	725.4	725.3
165°	737.3	737.0	737.0	737.0	737.0	737.0	737.8	738.7	739.5	740.3	740.2
167.5°	748.7	748.5	748.6	748.7	748.9	748.9	749.7	750.6	751.5	752.3	752.3
170°	755.5	755.2	755.2	755.2	755.2	755.2	756.2	757.1	758.1	759.0	759.0
172.5°	760.8	760.5	760.5	760.5	760.5	760.5	761.4	762.2	763.0	763.9	763.9
175°	766.4	766.1	766.1	766.1	766.1	766.1	767.0	767.8	768.5	769.3	769.3
177.5°	769.2	768.9	768.9	768.9	768.9	768.9	769.6	770.2	770.9	771.5	771.4
180°	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4



TEST NUMBER: P332395-930

CATALOG NUMBER: S123RDIW-S340D755U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7
2.5°	422.7	422.6	422.7	422.2	422.7	422.6	422.7	424.6	424.6	424.7	424.9
5°	393.4	393.2	392.6	390.9	392.6	393.2	393.4	394.0	395.5	398.1	397.4
7.5°	367.7	367.5	365.8	365.8	365.8	367.5	367.7	369.2	371.0	372.6	374.5
10°	352.5	352.7	350.4	349.1	350.4	352.7	352.5	353.8	356.4	357.7	359.0
12.5°	337.8	337.0	335.1	333.6	335.1	337.0	337.8	338.8	342.2	343.7	346.3
15°	318.4	316.4	311.9	312.3	311.9	316.4	318.4	317.6	321.0	322.9	323.7
17.5°	295.5	294.1	294.0	291.3	294.0	294.1	295.5	296.9	299.9	302.0	307.4
20°	282.1	281.1	281.5	278.8	281.5	281.1	282.1	285.1	287.0	289.7	294.1
22.5°	271.6	270.6	269.0	268.2	269.0	270.6	271.6	273.7	275.7	279.5	281.8
25°	256.2	254.7	253.2	254.1	253.2	254.7	256.2	257.4	261.1	262.9	266.3
27.5°	240.9	239.8	238.2	238.1	238.2	239.8	240.9	242.0	244.1	247.0	251.1
30°	231.1	230.0	229.3	228.3	229.3	230.0	231.1	232.1	234.2	237.3	240.3
32.5°	221.3	221.0	219.7	219.5	219.7	221.0	221.3	222.8	224.9	227.8	230.4
35°	208.4	207.2	206.8	207.0	206.8	207.2	208.4	209.1	211.0	213.7	216.1
37.5°	196.1	194.6	193.9	193.2	193.9	194.6	196.1	196.2	198.1	199.9	203.3
40°	187.3	185.8	185.4	185.0	185.4	185.8	187.3	187.1	189.1	190.5	193.6
42.5°	177.4	176.8	176.6	175.9	176.6	176.8	177.4	178.5	179.6	181.6	183.8
45°	164.0	163.7	162.6	163.0	162.6	163.7	164.0	164.5	166.6	168.0	170.0
47.5°	149.7	148.9	148.1	148.6	148.1	148.9	149.7	150.5	151.9	153.5	156.3
50°	140.0	139.6	137.9	138.3	137.9	139.6	140.0	140.7	141.7	143.8	146.3
52.5°	130.3	128.8	128.2	127.9	128.2	128.8	130.3	131.0	132.2	134.5	136.4
55°	114.1	112.4	111.7	111.3	111.7	112.4	114.1	115.5	117.0	119.7	121.6
57.5°	98.3	97.9	97.3	97.7	97.3	97.9	98.3	100.5	102.1	104.1	106.5
60°	89.1	89.1	89.1	88.9	89.1	89.1	89.1	91.0	92.3	94.4	96.9
62.5°	81.9	81.4	81.4	81.6	81.4	81.4	81.9	82.8	84.1	85.4	87.6
65°	71.0	70.8	70.1	69.9	70.1	70.8	71.0	71.6	72.7	73.7	75.3
67.5°	60.7	60.1	59.8	59.6	59.8	60.1	60.7	61.2	62.0	63.2	64.0
70°	53.0	52.6	51.4	51.7	51.4	52.6	53.0	54.0	54.7	56.3	57.0
72.5°	44.7	44.3	44.0	43.8	44.0	44.3	44.7	45.6	46.3	48.0	49.2
75°	35.3	35.1	35.0	35.7	35.0	35.1	35.3	35.5	35.7	36.3	36.9
77.5°	28.3	28.3	28.5	28.1	28.5	28.3	28.3	28.3	28.3	28.6	28.7
80°	23.7	23.7	23.6	23.6	23.6	23.7	23.7	23.7	23.7	23.7	23.6
82.5°	19.0	19.2	19.3	19.0	19.3	19.2	19.0	19.3	19.5	19.2	19.3
85°	12.6	12.3	12.7	12.6	12.7	12.3	12.6	12.6	12.1	12.6	12.3
87.5°	9.1	8.8	8.9	9.1	8.9	8.8	9.1	8.7	8.6	8.6	8.3
90°	17.4	17.6	17.9	18.2	17.9	17.6	17.4	17.0	16.7	16.1	15.6
92.5°	24.9	24.8	24.6	24.5	24.6	24.8	24.9	25.1	24.9	24.5	24.1
95°	47.2	47.2	47.2	47.2	47.2	47.2	47.2	47.2	47.0	46.4	45.8
97.5°	72.8	72.7	72.6	72.6	72.6	72.7	72.8	72.8	72.6	71.9	71.3
100°	91.2	91.5	91.7	92.0	91.7	91.5	91.2	90.9	90.6	90.2	89.8
102.5°	112.0	111.9	111.9	111.9	111.9	111.9	112.0	112.0	111.9	111.5	111.0
105°	143.2	143.5	143.7	144.1	143.7	143.5	143.2	142.9	142.8	142.8	142.8
107.5°	178.1	177.9	177.7	177.6	177.7	177.9	178.1	178.2	178.1	177.7	177.2
110°	201.1	200.8	200.6	200.3	200.6	200.8	201.1	201.4	201.2	200.7	200.2



TEST NUMBER: P332395-930

CATALOG NUMBER: S123RDIW-S340D755U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	224.7	224.6	224.5	224.5	224.5	224.6	224.7	224.7	224.5	223.8	223.1
115°	258.2	258.0	258.0	257.8	258.0	258.0	258.2	258.4	258.4	258.2	258.0
117.5°	292.7	292.3	292.0	291.6	292.0	292.3	292.7	293.1	293.3	293.3	293.3
120°	316.1	315.8	315.5	315.3	315.5	315.8	316.1	316.3	316.6	316.7	316.8
122.5°	339.2	338.8	338.4	338.0	338.4	338.8	339.2	339.6	339.9	340.2	340.6
125°	373.8	373.2	372.7	372.2	372.7	373.2	373.8	374.3	374.9	375.4	375.9
127.5°	408.1	407.4	406.8	406.2	406.8	407.4	408.1	408.6	409.4	410.1	410.8
130°	431.3	430.3	429.4	428.4	429.4	430.3	431.3	432.2	432.9	433.5	434.1
132.5°	453.9	453.1	452.4	451.7	452.4	453.1	453.9	454.6	455.3	455.9	456.6
135°	488.5	488.3	488.0	487.7	488.0	488.3	488.5	488.9	489.3	489.8	490.3
137.5°	521.1	520.6	520.1	519.6	520.1	520.6	521.1	521.6	522.2	522.7	523.3
140°	543.2	542.3	541.4	540.4	541.4	542.3	543.2	544.1	544.7	544.9	544.9
142.5°	563.9	563.1	562.4	561.7	562.4	563.1	563.9	564.6	565.0	565.2	565.3
145°	594.0	593.5	593.0	592.5	593.0	593.5	594.0	594.6	594.9	595.1	595.2
147.5°	622.2	621.4	620.6	619.8	620.6	621.4	622.2	623.1	623.5	623.5	623.5
150°	639.6	638.9	638.1	637.2	638.1	638.9	639.6	640.4	640.8	640.8	640.8
152.5°	656.2	655.6	654.8	654.2	654.8	655.6	656.2	657.0	657.2	657.0	656.8
155°	680.0	679.1	678.1	677.2	678.1	679.1	680.0	680.9	681.1	680.6	680.0
157.5°	700.3	699.6	698.9	698.1	698.9	699.6	700.3	701.1	701.2	700.7	700.1
160°	713.3	712.7	712.2	711.7	712.2	712.7	713.3	713.8	713.7	713.1	712.4
162.5°	724.4	723.6	722.7	721.8	722.7	723.6	724.4	725.3	725.4	724.7	724.0
165°	739.3	738.3	737.4	736.5	737.4	738.3	739.3	740.2	740.3	739.5	738.7
167.5°	751.5	750.6	749.7	748.9	749.7	750.6	751.5	752.3	752.3	751.5	750.6
170°	758.1	757.1	756.2	755.2	756.2	757.1	758.1	759.0	759.0	758.1	757.1
172.5°	762.9	762.0	761.0	760.1	761.0	762.0	762.9	763.9	763.9	763.0	762.2
175°	768.3	767.4	766.5	765.5	766.5	767.4	768.3	769.3	769.3	768.5	767.8
177.5°	770.7	769.9	769.2	768.4	769.2	769.9	770.7	771.4	771.5	770.9	770.2
180°	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4



TEST NUMBER: P332395-930

CATALOG NUMBER: S123RDIW-S340D755U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7
2.5°	423.5	425.7	427.8	429.7	432.8	434.1	436.1	436.9	439.1	442.5	445.2
5°	397.8	400.8	404.8	408.0	413.1	417.1	421.5	425.7	430.6	437.7	443.9
7.5°	375.9	378.9	383.7	389.7	395.3	401.0	407.0	412.7	419.7	429.8	439.8
10°	361.5	365.1	370.8	377.2	384.3	389.8	396.8	404.0	412.8	424.4	436.3
12.5°	349.0	351.7	358.3	364.4	372.4	379.4	386.3	394.8	404.7	417.0	431.5
15°	329.2	333.0	339.4	346.3	354.7	362.1	371.0	381.2	390.9	406.1	423.5
17.5°	309.2	315.0	321.8	329.5	335.7	345.9	355.6	366.1	378.1	394.1	413.4
20°	296.5	301.1	307.4	318.5	326.7	334.5	343.4	356.5	367.5	385.8	405.7
22.5°	285.7	289.0	296.1	305.3	314.9	323.8	333.0	345.4	359.1	376.3	397.9
25°	269.7	275.1	280.4	287.0	297.3	308.1	318.0	328.6	343.1	361.5	384.8
27.5°	254.1	258.9	264.2	272.3	280.1	290.2	300.6	312.7	328.2	347.7	371.5
30°	244.1	247.7	252.7	263.1	270.1	278.8	291.0	301.8	316.3	337.0	362.1
32.5°	233.7	238.4	243.9	251.8	260.6	268.8	279.9	291.6	306.4	326.8	352.5
35°	219.0	224.5	230.0	235.9	244.7	253.2	262.5	275.4	290.4	310.2	335.4
37.5°	205.5	209.9	214.3	221.7	229.9	238.1	246.8	259.5	273.6	295.0	318.1
40°	196.8	200.8	204.2	211.8	219.8	228.5	237.1	248.3	263.4	283.4	305.8
42.5°	187.4	191.0	195.7	201.9	210.5	217.8	226.4	237.0	251.3	271.6	291.2
45°	173.3	177.4	181.4	187.3	195.8	203.1	210.7	220.7	235.4	252.1	269.5
47.5°	158.5	162.7	167.3	173.0	180.4	187.8	195.3	204.2	217.6	234.0	245.8
50°	149.1	152.5	157.1	162.8	169.7	177.4	184.3	194.0	206.7	219.6	229.8
52.5°	139.4	142.5	147.7	153.7	160.0	166.8	174.1	182.4	193.9	206.0	214.2
55°	124.3	128.0	132.4	138.3	144.6	150.3	157.3	165.8	175.0	184.1	189.6
57.5°	110.1	113.2	116.9	122.9	128.4	135.2	141.5	148.1	156.6	163.5	167.1
60°	99.7	102.6	107.3	112.7	117.7	123.7	130.9	137.5	144.0	149.5	152.3
62.5°	90.0	93.3	97.4	102.3	107.9	113.5	119.8	125.4	131.1	135.8	137.8
65°	77.3	80.0	83.0	87.6	92.1	97.8	102.7	108.4	112.7	115.3	117.0
67.5°	65.8	67.5	69.8	72.9	77.4	82.3	87.1	91.6	95.1	96.9	98.4
70°	58.3	59.4	61.1	64.2	67.6	72.0	77.0	80.1	83.2	84.7	86.3
72.5°	50.9	52.3	53.9	56.3	59.1	62.3	65.9	69.8	71.5	73.3	74.2
75°	38.6	40.7	42.7	44.3	46.1	48.6	51.9	54.3	55.3	56.8	57.0
77.5°	29.1	29.6	31.1	32.9	34.6	36.4	38.4	40.6	41.1	41.8	42.4
80°	24.0	24.0	24.0	25.1	27.0	28.3	30.2	31.3	32.1	32.3	32.4
82.5°	19.2	19.2	19.1	19.3	20.0	20.7	22.4	23.7	24.4	24.2	23.8
85°	12.6	12.1	12.1	12.0	12.1	11.7	11.6	12.3	13.5	13.5	13.1
87.5°	8.2	7.9	7.7	7.3	6.7	6.2	5.5	5.3	5.1	5.4	5.0
90°	15.1	14.5	12.8	11.0	9.3	7.5	6.0	4.6	3.3	2.0	0.6
92.5°	23.6	23.2	22.3	21.3	20.2	19.2	18.3	17.4	16.5	15.6	14.7
95°	45.3	44.8	43.7	42.6	41.6	40.4	39.5	38.6	37.6	36.6	35.7
97.5°	70.7	70.1	69.3	68.5	67.8	66.9	66.2	65.6	64.8	64.1	63.4
100°	89.4	88.9	88.3	87.6	86.9	86.3	85.5	84.7	83.9	83.1	82.3
102.5°	110.6	110.2	109.3	108.5	107.6	106.7	106.0	105.5	105.1	104.6	104.1
105°	142.8	142.8	141.6	140.4	139.2	137.9	137.2	137.0	136.7	136.4	136.2
107.5°	176.8	176.3	175.9	175.4	174.9	174.4	174.1	173.9	173.7	173.6	173.4
110°	199.7	199.1	198.9	198.5	198.3	198.0	197.7	197.5	197.2	197.0	196.7



TEST NUMBER: P332395-930

CATALOG NUMBER: S123RDIW-S340D755U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	222.5	221.8	221.8	221.8	221.7	221.6	221.5	221.4	221.2	221.0	220.9
115°	258.0	257.8	258.0	258.4	258.6	258.9	258.8	258.4	258.0	257.6	257.2
117.5°	293.3	293.3	293.8	294.1	294.4	294.8	294.8	294.6	294.2	294.0	293.8
120°	317.0	317.1	317.8	318.5	319.1	319.8	319.8	318.9	318.1	317.3	316.5
122.5°	341.0	341.3	341.7	342.0	342.3	342.7	342.6	342.0	341.4	340.8	340.2
125°	376.5	377.0	377.2	377.6	377.8	378.1	378.1	377.6	377.2	376.8	376.4
127.5°	411.6	412.4	412.6	412.9	413.3	413.5	413.3	412.4	411.6	410.7	409.8
130°	434.6	435.1	435.5	435.9	436.3	436.8	436.3	435.3	434.2	433.2	432.1
132.5°	457.2	457.9	458.1	458.4	458.8	459.0	458.7	457.5	456.5	455.4	454.4
135°	490.8	491.4	491.5	491.6	491.8	492.0	491.5	490.8	490.0	489.2	488.4
137.5°	523.8	524.4	524.1	523.7	523.3	523.0	522.5	521.9	521.1	520.5	519.8
140°	545.1	545.3	545.1	544.9	544.9	544.7	544.3	543.6	543.0	542.3	541.6
142.5°	565.4	565.6	565.3	565.1	564.8	564.6	564.1	563.5	562.8	562.1	561.5
145°	595.3	595.5	595.1	594.7	594.3	593.9	593.5	593.2	593.0	592.7	592.5
147.5°	623.5	623.5	623.1	622.6	622.3	621.9	621.5	621.0	620.5	620.0	619.5
150°	640.8	640.8	640.6	640.3	640.0	639.8	639.5	639.3	639.0	638.7	638.5
152.5°	656.6	656.3	656.2	656.0	655.8	655.7	655.4	655.1	654.7	654.3	654.0
155°	679.6	679.0	678.8	678.7	678.6	678.4	678.4	678.4	678.4	678.4	678.4
157.5°	699.5	699.0	698.9	698.7	698.6	698.5	698.5	698.7	698.9	699.0	699.2
160°	711.8	711.0	711.0	711.0	711.0	711.0	711.2	711.4	711.8	712.0	712.2
162.5°	723.3	722.7	722.6	722.4	722.4	722.3	722.4	722.8	723.1	723.5	723.9
165°	737.8	737.0	737.0	737.0	737.0	737.0	737.3	737.7	738.1	738.5	738.9
167.5°	749.7	748.9	748.9	748.7	748.6	748.5	748.7	749.3	749.8	750.3	750.9
170°	756.2	755.2	755.2	755.2	755.2	755.2	755.5	756.0	756.6	757.1	757.7
172.5°	761.4	760.5	760.5	760.5	760.5	760.5	760.8	761.3	761.9	762.5	763.0
175°	767.0	766.1	766.1	766.1	766.1	766.1	766.4	767.0	767.4	768.0	768.5
177.5°	769.6	768.9	768.9	768.9	768.9	768.9	769.2	769.6	770.0	770.4	770.9
180°	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4



TEST NUMBER: P332395-930

CATALOG NUMBER: S123RDIW-S340D755U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7	443.7
2.5°	446.1	447.8	450.0	453.1	455.6	457.7	458.1	458.8	460.3	462.8	464.8
5°	449.1	453.4	460.4	467.2	474.7	480.8	486.5	490.5	494.2	502.2	508.7
7.5°	448.1	457.9	468.9	481.1	493.6	505.6	516.7	526.8	536.7	548.4	561.6
10°	447.5	458.9	473.8	489.5	506.8	523.7	540.1	552.8	567.5	580.9	597.8
12.5°	444.7	461.1	478.7	498.9	520.2	539.6	561.2	578.7	595.7	614.9	634.5
15°	440.8	460.8	483.2	510.0	542.3	565.8	587.9	618.5	639.4	660.2	688.4
17.5°	434.0	458.4	486.3	521.1	548.0	579.8	612.9	637.1	665.2	694.6	720.1
20°	428.5	456.8	488.2	522.4	556.8	591.1	623.2	652.1	681.2	715.2	736.1
22.5°	423.1	451.0	483.6	519.9	556.8	593.1	629.4	663.3	696.0	730.3	757.0
25°	411.4	444.7	480.0	517.1	553.5	593.4	636.7	674.5	714.9	750.3	775.6
27.5°	399.7	430.2	465.3	502.9	543.4	590.5	641.5	684.4	725.0	750.3	758.2
30°	389.0	421.3	453.6	491.8	535.7	588.2	642.4	691.6	724.8	735.9	727.7
32.5°	378.2	407.5	439.4	478.6	525.1	582.6	643.6	687.4	707.4	699.0	665.7
35°	359.2	385.6	416.5	455.7	509.2	579.5	638.6	668.2	663.3	615.8	553.1
37.5°	338.8	360.4	389.0	429.9	492.8	567.2	617.0	621.4	578.6	505.7	433.3
40°	322.7	342.1	371.5	414.3	480.0	555.1	595.3	577.6	511.4	430.2	369.8
42.5°	307.0	323.4	351.8	397.9	467.8	538.4	563.0	524.5	448.0	371.3	316.3
45°	280.5	296.0	324.4	371.7	443.0	506.8	503.5	436.7	360.1	298.4	252.8
47.5°	255.4	268.9	295.6	343.9	413.8	459.3	429.1	357.9	293.0	243.4	210.9
50°	237.7	250.9	277.5	325.2	390.4	423.5	380.5	311.9	252.4	211.4	185.6
52.5°	220.6	233.6	257.9	304.4	362.1	382.0	335.7	272.1	222.5	187.1	164.9
55°	196.8	206.7	228.5	273.0	316.1	320.7	273.7	220.5	179.7	155.0	139.8
57.5°	172.5	181.0	202.6	238.0	268.2	265.9	221.4	175.4	147.9	129.6	118.5
60°	156.7	165.1	184.1	214.4	237.3	229.3	188.4	151.4	127.8	114.4	105.6
62.5°	141.9	148.5	166.3	188.5	204.9	195.8	161.1	130.4	111.7	100.4	93.4
65°	120.6	126.0	140.1	151.8	160.9	152.1	123.3	102.0	88.5	80.6	75.8
67.5°	100.4	103.7	112.7	116.9	123.4	113.7	92.7	78.4	70.8	64.1	60.7
70°	87.6	90.0	94.8	98.2	99.9	90.0	74.4	64.0	57.6	52.8	50.7
72.5°	74.8	77.0	77.9	80.7	79.8	70.6	59.8	51.5	46.9	43.7	41.0
75°	57.2	58.1	57.2	56.0	53.6	47.1	39.7	35.5	32.1	30.6	29.6
77.5°	41.7	41.3	40.1	38.3	34.1	30.0	26.0	24.6	23.2	22.3	22.0
80°	32.1	31.3	30.2	27.3	23.7	20.9	20.0	19.0	18.4	17.4	17.3
82.5°	23.9	23.4	21.5	19.2	16.6	15.2	14.5	14.1	13.5	13.0	13.0
85°	12.7	12.1	10.0	8.7	8.4	8.0	7.8	7.8	7.0	6.8	6.8
87.5°	4.5	3.8	4.0	3.8	4.1	4.2	4.6	4.6	4.9	5.1	5.0
90°	2.0	3.3	4.6	6.0	7.5	9.3	11.0	12.8	14.5	15.1	15.6
92.5°	15.6	16.5	17.4	18.3	19.2	20.2	21.3	22.3	23.2	23.6	24.1
95°	36.6	37.6	38.6	39.5	40.4	41.6	42.6	43.7	44.8	45.3	45.8
97.5°	64.1	64.8	65.6	66.2	66.9	67.8	68.5	69.3	70.1	70.7	71.3
100°	83.1	83.9	84.7	85.5	86.3	86.9	87.6	88.3	88.9	89.4	89.8
102.5°	104.6	105.1	105.5	106.0	106.7	107.6	108.5	109.3	110.2	110.6	111.0
105°	136.4	136.7	137.0	137.2	137.9	139.2	140.4	141.6	142.8	142.8	142.8
107.5°	173.6	173.7	173.9	174.1	174.4	174.9	175.4	175.9	176.3	176.8	177.2
110°	197.0	197.2	197.5	197.7	198.0	198.3	198.5	198.9	199.1	199.7	200.2





TEST NUMBER: P332395-930

CATALOG NUMBER: S123RDIW-S340D755U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	221.0	221.2	221.4	221.5	221.6	221.7	221.8	221.8	221.8	222.5	223.1
115°	257.6	258.0	258.4	258.8	258.9	258.6	258.4	258.0	257.8	258.0	258.0
117.5°	294.0	294.2	294.6	294.8	294.8	294.4	294.1	293.8	293.3	293.3	293.3
120°	317.3	318.1	318.9	319.8	319.8	319.1	318.5	317.8	317.1	317.0	316.8
122.5°	340.8	341.4	342.0	342.6	342.7	342.3	342.0	341.7	341.3	341.0	340.6
125°	376.8	377.2	377.6	378.1	378.1	377.8	377.6	377.2	377.0	376.5	375.9
127.5°	410.7	411.6	412.4	413.3	413.5	413.3	412.9	412.6	412.4	411.6	410.8
130°	433.2	434.2	435.3	436.3	436.8	436.3	435.9	435.5	435.1	434.6	434.1
132.5°	455.4	456.5	457.5	458.7	459.0	458.8	458.4	458.1	457.9	457.2	456.6
135°	489.2	490.0	490.8	491.5	492.0	491.8	491.6	491.5	491.4	490.8	490.3
137.5°	520.5	521.1	521.9	522.5	523.0	523.3	523.7	524.1	524.4	523.8	523.3
140°	542.3	543.0	543.6	544.3	544.7	544.9	544.9	545.1	545.3	545.1	544.9
142.5°	562.1	562.8	563.5	564.1	564.6	564.8	565.1	565.3	565.6	565.4	565.3
145°	592.7	593.0	593.2	593.5	593.9	594.3	594.7	595.1	595.5	595.3	595.2
147.5°	620.0	620.5	621.0	621.5	621.9	622.3	622.6	623.1	623.5	623.5	623.5
150°	638.7	639.0	639.3	639.5	639.8	640.0	640.3	640.6	640.8	640.8	640.8
152.5°	654.3	654.7	655.1	655.4	655.7	655.8	656.0	656.2	656.3	656.6	656.8
155°	678.4	678.4	678.4	678.4	678.4	678.6	678.7	678.8	679.0	679.6	680.0
157.5°	699.0	698.9	698.7	698.5	698.5	698.6	698.7	698.9	699.0	699.5	700.1
160°	712.0	711.8	711.4	711.2	711.0	711.0	711.0	711.0	711.0	711.8	712.4
162.5°	723.5	723.1	722.8	722.4	722.3	722.4	722.4	722.6	722.7	723.3	724.0
165°	738.5	738.1	737.7	737.3	737.0	737.0	737.0	737.0	737.0	737.8	738.7
167.5°	750.3	749.8	749.3	748.7	748.5	748.6	748.7	748.9	748.9	749.7	750.6
170°	757.1	756.6	756.0	755.5	755.2	755.2	755.2	755.2	755.2	756.2	757.1
172.5°	762.5	761.9	761.3	760.8	760.5	760.5	760.5	760.5	760.5	761.4	762.2
175°	768.0	767.4	767.0	766.4	766.1	766.1	766.1	766.1	766.1	767.0	767.8
177.5°	770.4	770.0	769.6	769.2	768.9	768.9	768.9	768.9	768.9	769.6	770.2
180°	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4	770.4



TEST NUMBER: P332395-930

CATALOG NUMBER: S123RDIW-S340D755U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	443.7	443.7	443.7	443.7	443.7	443.7	443.7
2.5°	468.1	468.1	468.6	470.9	471.2	473.2	472.6
5°	514.4	518.0	519.3	525.1	528.4	529.9	526.9
7.5°	571.0	581.2	586.0	592.1	597.3	598.9	594.8
10°	612.4	623.1	631.9	637.5	642.6	646.0	650.4
12.5°	652.3	665.4	673.9	681.7	687.0	691.3	692.0
15°	695.8	715.5	730.5	741.6	747.1	749.9	748.8
17.5°	739.6	757.9	768.6	779.8	787.4	787.8	788.1
20°	764.3	782.2	794.6	802.9	811.5	811.1	813.0
22.5°	780.9	795.0	804.5	810.5	813.4	812.0	812.4
25°	788.6	792.9	791.2	781.5	778.9	770.1	771.6
27.5°	748.7	729.0	708.5	682.2	661.5	644.9	645.7
30°	694.5	659.5	619.6	586.2	556.2	547.8	529.9
32.5°	618.6	566.2	519.5	488.3	462.6	455.6	440.0
35°	490.1	439.1	391.1	362.2	350.8	334.8	334.7
37.5°	380.9	336.1	310.7	289.0	277.7	268.0	267.1
40°	320.4	285.5	266.3	250.7	239.5	232.3	230.6
42.5°	278.2	250.0	232.0	222.3	213.7	209.9	207.2
45°	227.1	208.1	195.7	186.9	183.0	180.1	178.6
47.5°	190.0	177.3	168.8	162.9	159.7	156.7	157.5
50°	169.8	159.4	153.1	147.6	145.1	143.0	143.2
52.5°	153.5	144.1	139.1	135.1	132.1	130.5	129.9
55°	130.3	124.4	119.3	116.4	114.7	112.7	112.1
57.5°	111.1	106.6	102.4	99.2	98.7	96.8	97.0
60°	98.4	94.6	91.2	89.4	88.1	86.4	87.0
62.5°	87.9	84.7	81.6	80.2	78.8	77.6	77.9
65°	72.0	69.0	67.0	66.3	65.7	65.1	64.6
67.5°	57.4	55.5	54.3	52.7	51.5	51.4	50.8
70°	48.3	45.7	43.7	41.6	41.0	40.8	41.0
72.5°	38.6	37.1	36.5	35.5	35.4	34.9	35.2
75°	29.0	28.5	28.1	27.3	27.3	27.3	27.3
77.5°	21.4	21.1	20.9	20.7	20.5	20.2	20.2
80°	16.7	16.6	16.1	16.1	16.0	16.1	16.0
82.5°	12.6	12.6	12.2	12.2	12.0	11.9	12.0
85°	6.4	6.3	6.7	6.3	6.4	6.1	6.4
87.5°	5.1	5.1	5.1	5.1	5.1	5.4	5.1
90°	16.1	16.7	17.0	17.4	17.6	17.9	18.2
92.5°	24.5	24.9	25.1	24.9	24.8	24.6	24.5
95°	46.4	47.0	47.2	47.2	47.2	47.2	47.2
97.5°	71.9	72.6	72.8	72.8	72.7	72.6	72.6
100°	90.2	90.6	90.9	91.2	91.5	91.7	92.0
102.5°	111.5	111.9	112.0	112.0	111.9	111.9	111.9
105°	142.8	142.8	142.9	143.2	143.5	143.7	144.1
107.5°	177.7	178.1	178.2	178.1	177.9	177.7	177.6
110°	200.7	201.2	201.4	201.1	200.8	200.6	200.3



TEST NUMBER: P332395-930

CATALOG NUMBER: S123RDIW-S340D755U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	223.8	224.5	224.7	224.7	224.6	224.5	224.5
115°	258.2	258.4	258.4	258.2	258.0	258.0	257.8
117.5°	293.3	293.3	293.1	292.7	292.3	292.0	291.6
120°	316.7	316.6	316.3	316.1	315.8	315.5	315.3
122.5°	340.2	339.9	339.6	339.2	338.8	338.4	338.0
125°	375.4	374.9	374.3	373.8	373.2	372.7	372.2
127.5°	410.1	409.4	408.6	408.1	407.4	406.8	406.2
130°	433.5	432.9	432.2	431.3	430.3	429.4	428.4
132.5°	455.9	455.3	454.6	453.9	453.1	452.4	451.7
135°	489.8	489.3	488.9	488.5	488.3	488.0	487.7
137.5°	522.7	522.2	521.6	521.1	520.6	520.1	519.6
140°	544.9	544.7	544.1	543.2	542.3	541.4	540.4
142.5°	565.2	565.0	564.6	563.9	563.1	562.4	561.7
145°	595.1	594.9	594.6	594.0	593.5	593.0	592.5
147.5°	623.5	623.5	623.1	622.2	621.4	620.6	619.8
150°	640.8	640.8	640.4	639.6	638.9	638.1	637.2
152.5°	657.0	657.2	657.0	656.2	655.6	654.8	654.2
155°	680.6	681.1	680.9	680.0	679.1	678.1	677.2
157.5°	700.7	701.2	701.1	700.3	699.6	698.9	698.1
160°	713.1	713.7	713.8	713.3	712.7	712.2	711.7
162.5°	724.7	725.4	725.3	724.4	723.6	722.7	721.8
165°	739.5	740.3	740.2	739.3	738.3	737.4	736.5
167.5°	751.5	752.3	752.3	751.5	750.6	749.7	748.9
170°	758.1	759.0	759.0	758.1	757.1	756.2	755.2
172.5°	763.0	763.9	763.9	762.9	762.0	761.0	760.1
175°	768.5	769.3	769.3	768.3	767.4	766.5	765.5
177.5°	770.9	771.5	771.4	770.7	769.9	769.2	768.4
180°	770.4	770.4	770.4	770.4	770.4	770.4	770.4

(END OF REPORT)