

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332449-930

Luminaire Tested: **S123RDIW-S775D1535U930-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332449-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S775D1535U930-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1535 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6718.8 lumens
Efficiency: N/A
Efficacy: 98.7 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 68.1
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332449-930

CATALOG NUMBER: S123RDIW-S775D1535U930-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

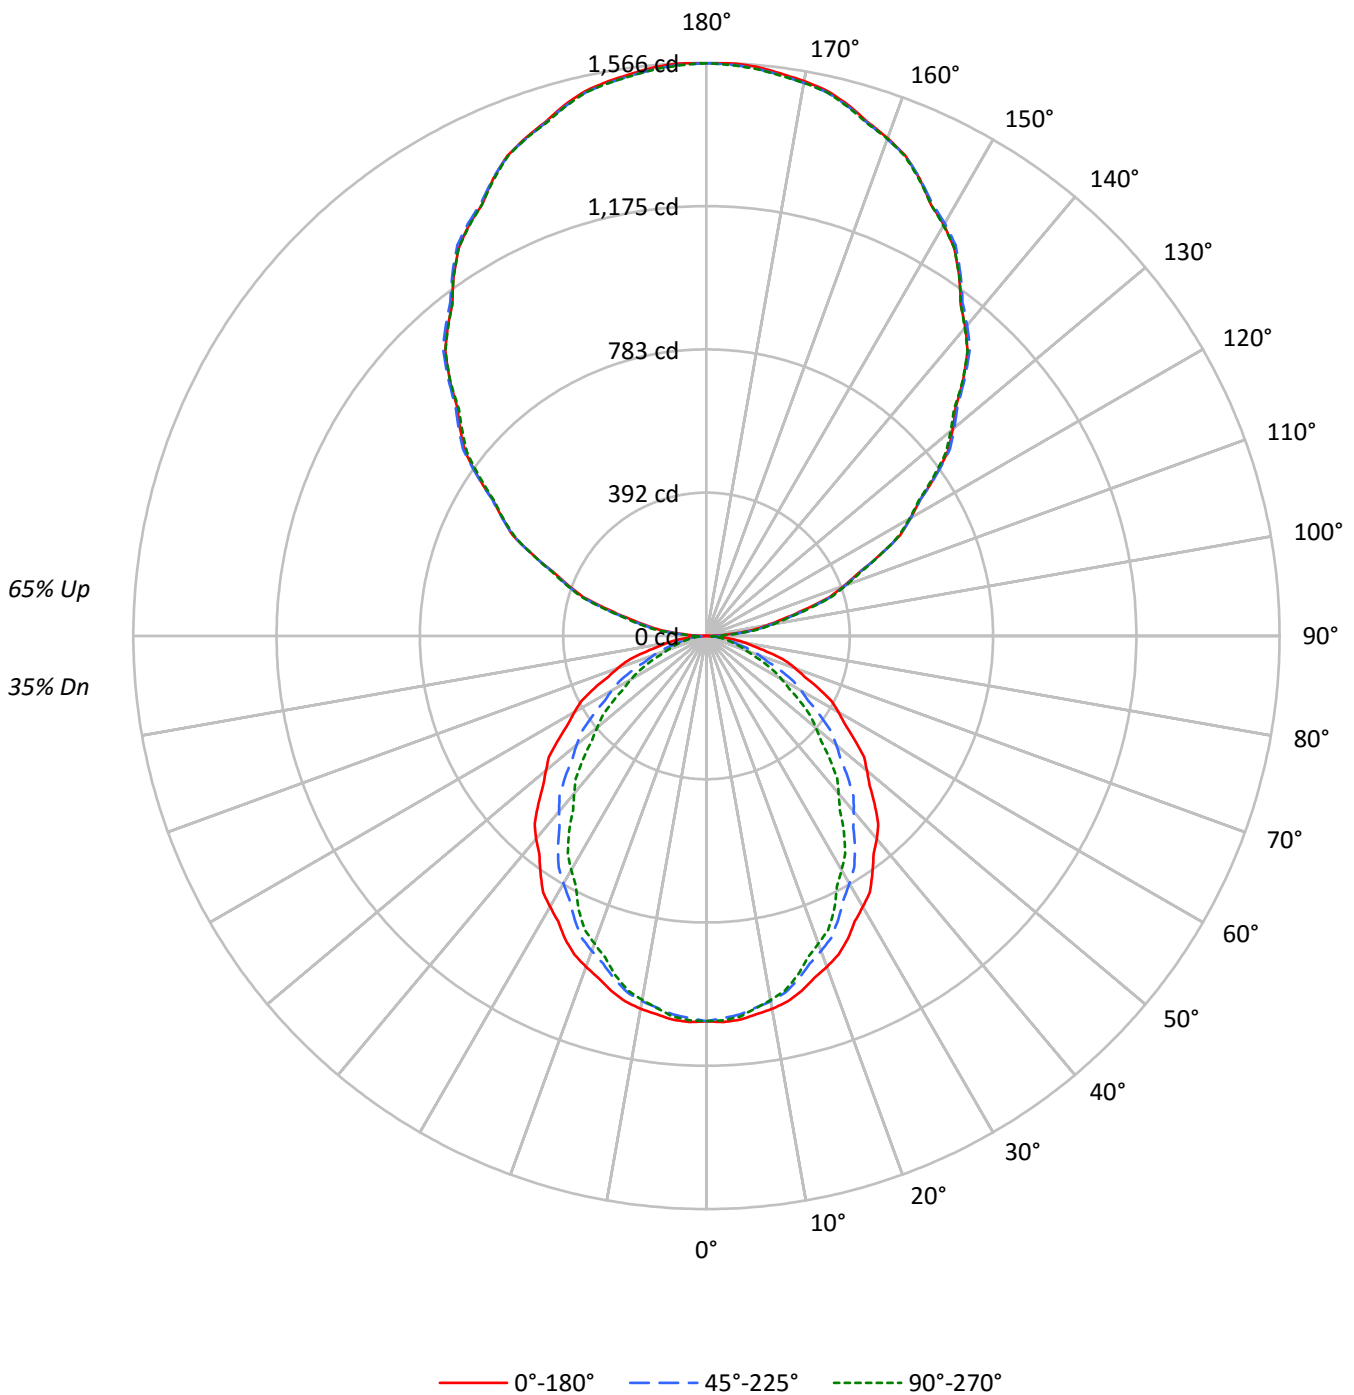



TEST NUMBER: P332449-930

CATALOG NUMBER: S123RDIW-S775D1535U930-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	75	75	75	58	58	58	43	43	43	35
1	95	91	87	84	86	82	79	76	66	64	62	52	50	49	38	37	37	30
2	86	79	73	69	78	72	67	63	58	55	52	46	43	41	34	32	31	26
3	79	70	63	57	71	64	58	53	52	47	44	40	37	35	30	28	27	22
4	72	62	54	49	65	56	50	45	46	41	37	36	33	30	27	25	23	19
5	66	55	47	42	60	50	43	38	41	36	32	32	29	26	24	22	20	17
6	61	49	42	36	55	45	38	33	37	32	28	29	26	23	22	20	18	15
7	56	45	37	32	51	41	34	29	34	28	25	27	23	20	20	18	16	13
8	52	40	33	28	47	37	30	26	31	26	22	24	21	18	19	16	14	12
9	49	37	30	25	44	34	27	23	28	23	20	22	19	16	17	15	13	11
10	45	34	27	22	41	31	25	21	26	21	18	21	17	15	16	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11330	11330	11330
5°	11373	11217	11282
10°	11309	11075	11038
15°	11188	10816	10702
20°	11021	10493	10247
25°	10849	10128	9804
30°	10621	9708	9178
35°	10387	9289	8604
40°	10172	8792	7893
45°	9889	8304	7252
50°	9577	7748	6532
55°	9259	7112	5863
60°	8968	6433	5126
65°	8588	5695	4391
70°	8113	4784	3547
75°	7419	3764	3335
80°	6614	3335	3068
85°	5582	2952	2742



TEST NUMBER: P332449-930

CATALOG NUMBER: S123RDIW-S775D1535U930-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	98.8	1.5
10°-20°	275.0	4.1
20°-30°	396.0	5.9
30°-40°	446.1	6.6
40°-50°	426.7	6.4
50°-60°	349.5	5.2
60°-70°	235.8	3.5
70°-80°	118.6	1.8
80°-90°	36.0	0.5
90°-100°	102.0	1.5
100°-110°	305.2	4.5
110°-120°	519.0	7.7
120°-130°	682.7	10.2
130°-140°	767.4	11.4
140°-150°	754.3	11.2
150°-160°	635.0	9.5
160°-170°	422.7	6.3
170°-180°	148.0	2.2
0°-30°	769.9	11.5
0°-40°	1215.9	18.1
0°-60°	1992.1	29.7
0°-90°	2382.5	35.5
90°-120°	926.2	13.8
90°-150°	3130.5	46.6
90°-180°	4336.0	64.5
0°-180°	6718.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1053	1053	1053	1053	1053	
5°	1053	1048	1038	1045	1044	100
15°	1004	994	971	966	960	283
25°	914	891	853	835	826	420
35°	790	759	707	671	655	495
45°	650	610	546	498	476	501
55°	493	450	379	331	312	442
65°	337	289	224	184	172	334
75°	178	137	90	82	80	190
85°	45	27	24	22	22	51
90°	1	14	30	34	37	7
95°	73	81	91	96	96	82
105°	277	280	290	290	293	296
115°	522	526	524	525	524	517
125°	765	768	766	761	756	682
135°	992	999	998	994	991	764
145°	1204	1206	1210	1208	1204	752
155°	1378	1378	1379	1384	1376	634
165°	1501	1498	1498	1504	1496	423
175°	1561	1557	1556	1563	1555	148
180°	1565	1565	1565	1565	1565	



TEST NUMBER: P332449-930

CATALOG NUMBER: S123RDIW-S775D1535U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6
2.5°	1056.0	1055.4	1054.8	1054.2	1053.6	1052.4	1050.5	1048.7	1046.9	1045.1	1046.8
5°	1052.6	1051.7	1050.7	1049.8	1048.8	1047.2	1044.9	1042.6	1040.3	1038.1	1039.8
7.5°	1042.8	1041.9	1040.8	1039.8	1038.8	1036.7	1033.8	1030.9	1027.9	1024.9	1025.9
10°	1034.7	1033.3	1032.0	1030.7	1029.3	1027.0	1023.5	1020.2	1016.8	1013.3	1013.5
12.5°	1023.0	1021.6	1020.1	1018.6	1017.2	1014.3	1010.2	1006.0	1001.8	997.6	997.5
15°	1004.0	1001.8	999.7	997.7	995.6	991.9	986.6	981.3	975.9	970.6	969.7
17.5°	979.8	977.5	975.0	972.6	970.1	965.6	958.8	952.0	945.3	938.6	936.5
20°	962.1	959.0	956.0	953.0	950.0	944.9	937.6	930.4	923.2	916.0	913.5
22.5°	942.3	938.8	935.3	931.8	928.3	922.8	915.1	907.4	899.8	892.1	889.0
25°	913.5	908.7	903.9	899.2	894.5	887.7	879.0	870.3	861.5	852.8	848.8
27.5°	878.4	873.2	868.0	862.7	857.5	850.0	840.3	830.6	820.8	811.1	805.6
30°	854.5	848.8	843.2	837.5	831.8	823.6	813.0	802.3	791.7	781.1	774.7
32.5°	830.6	824.2	817.7	811.3	804.9	796.0	784.7	773.6	762.3	751.1	744.0
35°	790.5	783.7	776.8	770.1	763.2	753.9	742.2	730.3	718.6	706.9	698.7
37.5°	749.9	742.2	734.7	727.1	719.5	709.5	696.9	684.4	671.8	659.3	650.0
40°	723.9	715.6	707.2	698.9	690.6	679.6	666.2	652.7	639.2	625.7	615.9
42.5°	694.6	686.2	677.8	669.5	661.2	650.0	636.1	622.2	608.3	594.4	583.6
45°	649.6	641.2	632.6	624.0	615.5	604.0	589.3	574.7	560.1	545.5	534.7
47.5°	604.8	595.4	586.0	576.7	567.3	555.3	540.7	526.0	511.4	496.8	485.1
50°	571.9	563.0	554.2	545.2	536.3	524.2	508.8	493.4	478.1	462.7	450.9
52.5°	542.6	533.0	523.3	513.6	503.9	491.5	476.2	461.1	445.8	430.6	418.4
55°	493.4	484.1	474.8	465.5	456.2	443.5	427.4	411.3	395.2	379.0	368.0
57.5°	448.0	437.9	427.8	417.6	407.5	394.4	378.1	361.9	345.7	329.5	319.1
60°	416.6	406.2	395.7	385.3	374.9	361.7	346.0	330.3	314.5	298.8	288.5
62.5°	385.1	374.7	364.3	353.8	343.5	330.4	314.6	298.9	283.2	267.3	257.7
65°	337.2	326.8	316.3	305.9	295.5	282.8	268.1	253.2	238.5	223.6	214.3
67.5°	289.3	278.7	268.2	257.6	247.0	234.6	220.5	206.3	192.1	177.9	171.0
70°	257.8	247.6	237.3	227.1	216.9	205.0	191.8	178.6	165.3	152.0	145.3
72.5°	226.4	216.3	206.2	196.1	186.1	175.0	162.9	150.8	138.8	126.7	121.2
75°	178.4	169.3	160.2	151.1	142.0	132.2	121.8	111.4	100.9	90.5	88.6
77.5°	134.7	126.5	118.2	110.0	101.7	94.3	87.6	80.9	74.2	67.4	66.4
80°	106.7	98.9	91.2	83.4	75.6	69.7	65.7	61.7	57.8	53.8	53.2
82.5°	80.1	73.4	66.6	59.9	53.2	48.9	47.0	45.2	43.4	41.5	40.9
85°	45.2	41.1	36.9	32.7	28.5	26.2	25.6	25.0	24.5	23.9	23.6
87.5°	16.6	15.5	14.4	13.3	12.1	11.9	12.6	13.4	14.1	14.8	14.8
90°	1.2	4.0	6.7	9.5	12.1	15.3	18.8	22.4	25.9	29.5	30.6
92.5°	29.8	31.6	33.4	35.3	37.2	39.1	41.2	43.1	45.2	47.2	48.1
95°	72.6	74.4	76.4	78.3	80.2	82.3	84.4	86.6	88.8	91.0	92.0
97.5°	128.8	130.3	131.7	133.1	134.5	136.0	137.6	139.2	140.8	142.4	143.7
100°	167.2	168.8	170.5	172.1	173.7	175.3	176.6	178.0	179.4	180.8	181.6
102.5°	211.5	212.5	213.4	214.4	215.4	216.8	218.6	220.4	222.2	224.0	224.9
105°	276.6	277.2	277.7	278.3	278.8	280.3	282.7	285.2	287.7	290.2	290.2
107.5°	352.4	352.7	353.0	353.4	353.7	354.3	355.3	356.3	357.3	358.2	359.1
110°	399.6	400.1	400.6	401.2	401.8	402.3	402.8	403.4	403.9	404.5	405.6



TEST NUMBER: P332449-930

CATALOG NUMBER: S123RDIW-S775D1535U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	448.7	449.1	449.4	449.7	450.0	450.3	450.4	450.5	450.6	450.7	452.0
115°	522.5	523.3	524.2	525.0	525.8	525.9	525.4	524.8	524.3	523.7	524.0
117.5°	596.8	597.3	597.9	598.4	598.9	598.8	598.2	597.5	596.7	596.1	596.0
120°	643.0	644.7	646.3	647.9	649.5	649.7	648.3	646.9	645.6	644.2	643.9
122.5°	691.2	692.4	693.6	694.8	696.0	696.3	695.5	694.8	694.1	693.4	692.7
125°	764.7	765.5	766.4	767.2	768.0	768.1	767.6	767.0	766.5	766.0	764.8
127.5°	832.6	834.3	836.1	837.8	839.6	840.2	839.5	838.9	838.4	837.7	836.2
130°	877.8	880.0	882.2	884.4	886.6	887.2	886.4	885.6	884.8	883.9	882.9
132.5°	923.1	925.2	927.4	929.6	931.8	932.6	932.0	931.4	930.7	930.2	928.9
135°	992.1	993.8	995.4	997.0	998.7	999.4	999.1	998.8	998.6	998.3	997.2
137.5°	1056.1	1057.4	1058.8	1060.2	1061.5	1062.6	1063.3	1064.0	1064.7	1065.4	1064.3
140°	1100.3	1101.7	1103.1	1104.4	1105.8	1106.6	1106.9	1107.2	1107.4	1107.7	1107.4
142.5°	1140.7	1142.0	1143.4	1144.8	1146.1	1147.0	1147.5	1148.0	1148.5	1149.0	1148.8
145°	1203.6	1204.2	1204.7	1205.3	1205.8	1206.5	1207.3	1208.1	1208.9	1209.7	1209.5
147.5°	1258.7	1259.6	1260.6	1261.7	1262.7	1263.5	1264.3	1265.0	1265.8	1266.6	1266.6
150°	1297.1	1297.6	1298.1	1298.7	1299.3	1299.8	1300.3	1300.9	1301.4	1302.0	1302.0
152.5°	1328.5	1329.3	1330.1	1330.8	1331.5	1332.1	1332.4	1332.8	1333.1	1333.4	1333.9
155°	1378.2	1378.2	1378.2	1378.2	1378.2	1378.3	1378.6	1378.8	1379.2	1379.4	1380.5
157.5°	1420.5	1420.2	1419.8	1419.5	1419.2	1419.1	1419.4	1419.5	1419.8	1420.0	1421.1
160°	1447.1	1446.5	1445.9	1445.4	1444.9	1444.5	1444.5	1444.5	1444.5	1444.5	1445.9
162.5°	1470.6	1469.9	1469.1	1468.4	1467.6	1467.3	1467.5	1467.8	1467.9	1468.2	1469.6
165°	1501.1	1500.3	1499.5	1498.7	1497.9	1497.5	1497.5	1497.5	1497.5	1497.5	1499.1
167.5°	1525.5	1524.4	1523.3	1522.2	1521.1	1520.7	1520.9	1521.1	1521.3	1521.5	1523.2
170°	1539.2	1538.1	1537.1	1535.9	1534.9	1534.3	1534.3	1534.3	1534.3	1534.3	1536.3
172.5°	1550.0	1549.0	1547.8	1546.8	1545.7	1545.2	1545.2	1545.2	1545.2	1545.2	1546.9
175°	1561.4	1560.3	1559.2	1558.1	1557.0	1556.5	1556.5	1556.5	1556.5	1556.5	1558.1
177.5°	1566.0	1565.2	1564.3	1563.4	1562.5	1562.1	1562.1	1562.1	1562.1	1562.1	1563.4
180°	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0



TEST NUMBER: P332449-930

CATALOG NUMBER: S123RDIW-S775D1535U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6
2.5°	1048.4	1050.1	1051.7	1052.5	1052.1	1051.8	1051.5	1051.2
5°	1041.5	1043.2	1044.9	1045.5	1045.2	1044.8	1044.4	1044.1
7.5°	1026.9	1027.8	1028.7	1028.9	1028.3	1027.6	1027.0	1026.3
10°	1013.7	1013.9	1014.1	1013.7	1012.8	1011.8	1010.9	1009.9
12.5°	997.4	997.3	997.2	996.5	995.5	994.3	993.3	992.1
15°	968.7	967.8	966.9	965.7	964.4	963.0	961.7	960.4
17.5°	934.5	932.5	930.5	928.5	926.5	924.5	922.6	920.6
20°	911.1	908.6	906.1	903.8	901.5	899.2	896.9	894.6
22.5°	886.0	882.9	879.8	877.2	875.1	872.9	870.8	868.7
25°	844.9	840.9	836.9	833.9	831.8	829.6	827.6	825.5
27.5°	800.1	794.6	789.0	784.6	781.5	778.3	775.1	771.9
30°	768.3	761.7	755.3	750.6	747.5	744.5	741.4	738.4
32.5°	736.9	729.9	722.8	717.7	714.5	711.3	708.2	705.0
35°	690.6	682.4	674.3	668.5	665.0	661.6	658.2	654.8
37.5°	640.7	631.4	622.2	615.5	611.2	607.0	602.8	598.6
40°	606.0	596.1	586.3	579.2	574.8	570.5	566.1	561.7
42.5°	572.7	562.0	551.2	543.9	540.0	536.1	532.1	528.2
45°	523.9	513.1	502.2	494.6	490.0	485.4	480.9	476.4
47.5°	473.3	461.5	449.8	441.9	437.8	433.7	429.7	425.7
50°	439.2	427.4	415.6	407.6	403.2	398.8	394.5	390.1
52.5°	406.2	394.0	381.7	373.7	369.7	365.8	361.9	358.0
55°	357.0	346.0	335.0	327.6	323.8	320.0	316.3	312.4
57.5°	308.8	298.3	288.0	281.1	277.9	274.7	271.4	268.2
60°	278.3	268.1	257.8	251.1	247.9	244.6	241.4	238.1
62.5°	248.1	238.5	228.9	222.3	218.9	215.6	212.2	208.8
65°	205.0	195.8	186.5	180.8	178.7	176.6	174.6	172.4
67.5°	164.0	157.1	150.1	145.5	143.3	141.0	138.8	136.6
70°	138.7	132.0	125.4	121.1	119.0	116.8	114.8	112.7
72.5°	115.9	110.4	105.0	101.8	100.9	100.1	99.2	98.3
75°	86.7	84.8	82.9	81.8	81.4	81.0	80.6	80.2
77.5°	65.4	64.3	63.3	62.6	62.3	61.9	61.5	61.1
80°	52.7	52.1	51.5	51.0	50.6	50.3	49.9	49.5
82.5°	40.4	39.8	39.2	38.9	38.8	38.7	38.6	38.6
85°	23.2	22.7	22.4	22.2	22.2	22.2	22.2	22.2
87.5°	14.9	15.0	15.1	15.1	15.0	15.0	14.9	14.9
90°	31.7	32.8	33.9	34.7	35.2	35.8	36.4	36.9
92.5°	48.9	49.8	50.7	51.0	50.6	50.3	50.0	49.7
95°	93.2	94.2	95.3	95.9	95.9	95.9	95.9	95.9
97.5°	144.9	146.1	147.4	148.0	147.9	147.7	147.7	147.6
100°	182.4	183.2	184.0	184.7	185.2	185.8	186.3	186.9
102.5°	225.7	226.5	227.3	227.6	227.6	227.4	227.3	227.2
105°	290.2	290.2	290.2	290.4	291.0	291.6	292.0	292.6
107.5°	360.0	360.9	361.7	362.0	361.7	361.3	361.0	360.7
110°	406.7	407.7	408.9	409.1	408.5	408.1	407.5	406.9



TEST NUMBER: P332449-930

CATALOG NUMBER: S123RDIW-S775D1535U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	453.3	454.6	455.9	456.6	456.5	456.3	456.2	456.1
115°	524.3	524.6	524.8	524.8	524.6	524.3	524.0	523.7
117.5°	595.9	595.9	595.8	595.4	594.6	593.9	593.1	592.3
120°	643.7	643.4	643.1	642.7	642.2	641.6	641.1	640.5
122.5°	691.9	691.3	690.6	689.8	689.1	688.3	687.5	686.7
125°	763.8	762.6	761.6	760.4	759.4	758.3	757.2	756.1
127.5°	834.7	833.2	831.6	830.2	829.0	827.7	826.5	825.2
130°	881.7	880.7	879.6	878.1	876.2	874.2	872.4	870.4
132.5°	927.6	926.3	925.0	923.6	922.1	920.6	919.1	917.6
135°	996.1	995.0	993.9	993.1	992.5	992.0	991.5	990.9
137.5°	1063.2	1062.0	1060.9	1059.7	1058.7	1057.7	1056.6	1055.6
140°	1107.2	1106.9	1106.6	1105.5	1103.6	1101.7	1099.8	1097.9
142.5°	1148.5	1148.2	1147.9	1147.0	1145.6	1144.1	1142.6	1141.2
145°	1209.2	1208.9	1208.7	1207.9	1206.9	1205.8	1204.7	1203.6
147.5°	1266.6	1266.6	1266.6	1265.8	1264.1	1262.5	1260.8	1259.1
150°	1302.0	1302.0	1302.0	1301.1	1299.5	1297.9	1296.2	1294.6
152.5°	1334.3	1334.7	1335.2	1334.7	1333.3	1331.9	1330.4	1329.0
155°	1381.6	1382.7	1383.8	1383.4	1381.4	1379.6	1377.6	1375.7
157.5°	1422.3	1423.4	1424.6	1424.4	1422.9	1421.3	1419.8	1418.3
160°	1447.3	1448.7	1450.0	1450.2	1449.1	1448.0	1446.9	1445.8
162.5°	1470.9	1472.3	1473.7	1473.5	1471.7	1470.0	1468.2	1466.5
165°	1500.7	1502.4	1504.0	1503.9	1501.9	1500.1	1498.1	1496.2
167.5°	1524.9	1526.6	1528.3	1528.3	1526.6	1524.9	1523.2	1521.5
170°	1538.1	1540.1	1542.0	1542.0	1540.1	1538.1	1536.3	1534.3
172.5°	1548.5	1550.2	1551.9	1551.8	1549.9	1548.0	1546.1	1544.2
175°	1559.7	1561.4	1563.0	1562.8	1561.0	1559.0	1557.1	1555.3
177.5°	1564.7	1566.0	1567.3	1567.2	1565.7	1564.2	1562.7	1561.1
180°	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0	1565.0

(END OF REPORT)