

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332197

Luminaire Tested: **S123DIW-S1000D1030U835-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332197
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S1000D1030U835-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1030 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7695.9 lumens
Efficiency: N/A
Efficacy: 125.8 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 61.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332197

CATALOG NUMBER: S123DIW-S1000D1030U835-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

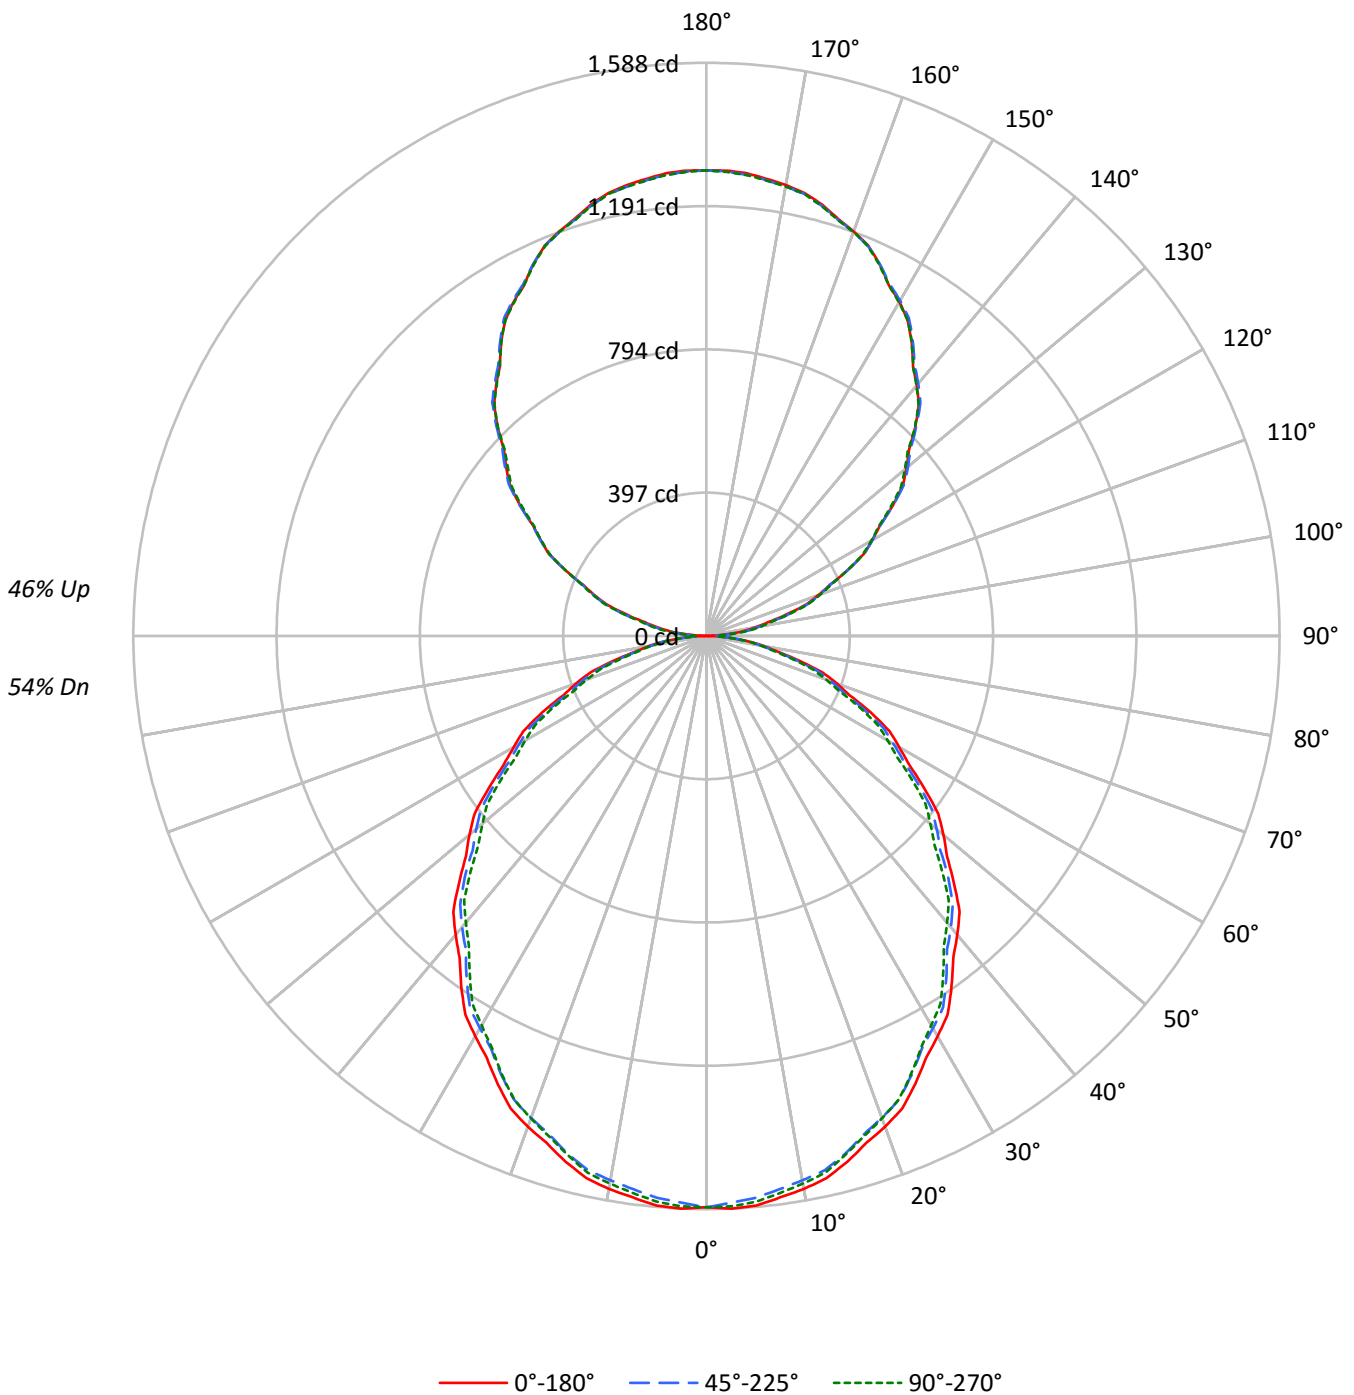



TEST NUMBER: P332197

CATALOG NUMBER: S123DIW-S1000D1030U835-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	59	59	59	54				
1	99	94	90	87	91	87	84	81	75	72	70	63	61	60	52	51	50	45				
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42	38				
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36	32				
4	75	64	56	50	69	60	52	47	51	46	41	44	39	36	36	33	31	27				
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	30	27	24				
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24	21				
7	59	46	38	32	54	43	36	31	37	32	27	32	28	24	27	24	21	18				
8	54	42	34	29	50	39	32	27	34	28	24	29	25	22	25	21	19	16				
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17	15				
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15	13				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17038	17038	17038
5°	17117	16883	17001
10°	17004	16736	16840
15°	16805	16547	16577
20°	16573	16276	16292
25°	16262	15954	15922
30°	15918	15597	15478
35°	15559	15219	15023
40°	15185	14802	14573
45°	14772	14420	14067
50°	14359	13949	13561
55°	13818	13461	13052
60°	13272	12893	12482
65°	12791	12271	11889
70°	12079	11566	11050
75°	11038	10643	10189
80°	9955	9534	9447
85°	8744	8410	8065



TEST NUMBER: P332197

CATALOG NUMBER: S123DIW-S1000D1030U835-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	149.1	1.9
10°-20°	421.0	5.5
20°-30°	621.9	8.1
30°-40°	726.5	9.4
40°-50°	730.4	9.5
50°-60°	641.5	8.3
60°-70°	478.0	6.2
70°-80°	272.3	3.5
80°-90°	82.0	1.1
90°-100°	84.0	1.1
100°-110°	251.5	3.3
110°-120°	427.7	5.6
120°-130°	562.6	7.3
130°-140°	632.3	8.2
140°-150°	621.6	8.1
150°-160°	523.3	6.8
160°-170°	348.3	4.5
170°-180°	122.0	1.6
0°-30°	1192.0	15.5
0°-40°	1918.5	24.9
0°-60°	3290.4	42.8
0°-90°	4122.6	53.6
90°-120°	763.2	9.9
90°-150°	2579.7	33.5
90°-180°	3573.0	46.4
0°-180°	7695.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1583	1583	1583	1583	1583	
5°	1584	1577	1562	1575	1573	150
15°	1508	1502	1485	1495	1488	425
25°	1369	1360	1343	1344	1341	630
35°	1184	1175	1158	1150	1143	740
45°	970	964	947	932	924	749
55°	736	734	717	703	696	659
65°	502	495	482	471	467	495
75°	265	260	256	249	245	284
85°	71	68	68	65	65	78
90°	1	11	24	28	30	8
95°	60	67	75	79	79	67
105°	228	230	239	239	241	244
115°	431	433	432	432	432	426
125°	630	633	631	627	623	562
135°	818	823	823	819	817	630
145°	992	994	997	996	992	619
155°	1136	1136	1137	1140	1134	523
165°	1237	1234	1234	1239	1233	349
175°	1287	1283	1283	1288	1282	122
180°	1290	1290	1290	1290	1290	



TEST NUMBER: P332197

CATALOG NUMBER: S123DIW-S1000D1030U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9
2.5°	1588.3	1587.4	1586.4	1585.4	1584.5	1582.6	1580.0	1577.3	1574.7	1572.0	1574.4
5°	1584.2	1582.7	1581.2	1579.7	1578.2	1575.8	1572.5	1569.1	1565.8	1562.5	1565.5
7.5°	1568.7	1567.2	1565.7	1564.2	1562.7	1560.2	1556.8	1553.3	1549.9	1546.4	1549.1
10°	1555.7	1554.2	1552.6	1551.1	1549.6	1546.9	1543.0	1539.0	1535.1	1531.2	1533.9
12.5°	1538.2	1537.0	1535.7	1534.4	1533.2	1530.7	1527.0	1523.3	1519.6	1515.9	1517.9
15°	1508.0	1506.8	1505.6	1504.4	1503.2	1500.6	1496.7	1492.8	1488.8	1484.9	1487.3
17.5°	1472.9	1471.3	1469.8	1468.2	1466.6	1463.9	1459.9	1456.0	1452.1	1448.1	1449.8
20°	1446.8	1445.0	1443.2	1441.3	1439.5	1436.6	1432.7	1428.8	1424.9	1420.9	1422.1
22.5°	1417.4	1415.6	1413.8	1411.9	1410.1	1407.3	1403.3	1399.4	1395.5	1391.5	1392.5
25°	1369.2	1367.4	1365.6	1363.8	1361.9	1359.1	1355.1	1351.2	1347.3	1343.3	1343.6
27.5°	1317.8	1316.0	1314.2	1312.5	1310.7	1307.7	1303.5	1299.3	1295.0	1290.8	1291.0
30°	1280.7	1279.2	1277.7	1276.2	1274.7	1271.8	1267.6	1263.3	1259.1	1254.9	1254.9
32.5°	1243.7	1241.7	1239.7	1237.7	1235.7	1233.1	1229.8	1226.6	1223.3	1220.0	1218.3
35°	1184.1	1182.3	1180.5	1178.7	1176.8	1174.0	1170.0	1166.1	1162.2	1158.2	1156.4
37.5°	1123.1	1120.8	1118.5	1116.2	1113.9	1110.8	1106.8	1102.8	1098.8	1094.8	1092.6
40°	1080.7	1078.8	1077.0	1075.2	1073.4	1070.4	1066.1	1061.9	1057.7	1053.4	1051.0
42.5°	1038.2	1036.1	1034.1	1032.0	1030.0	1026.8	1022.6	1018.4	1014.1	1009.9	1007.5
45°	970.4	969.2	968.0	966.8	965.6	963.0	959.1	955.1	951.2	947.3	943.7
47.5°	903.2	901.4	899.7	897.9	896.2	893.4	889.8	886.1	882.4	878.7	875.1
50°	857.5	855.9	854.4	852.9	851.4	848.7	844.7	840.8	836.9	833.0	829.6
52.5°	809.5	808.5	807.5	806.5	805.4	802.8	798.7	794.5	790.3	786.1	783.3
55°	736.3	736.0	735.7	735.4	735.1	733.0	729.1	725.1	721.2	717.3	713.9
57.5°	666.6	665.6	664.6	663.6	662.5	660.4	657.3	654.1	651.0	647.9	644.9
60°	616.5	616.2	615.9	615.6	615.3	613.4	609.7	606.1	602.5	598.9	596.1
62.5°	571.9	571.1	570.3	569.5	568.8	566.6	562.9	559.3	555.7	552.0	549.3
65°	502.2	500.7	499.2	497.7	496.2	493.9	490.9	487.9	484.8	481.8	479.4
67.5°	428.5	427.1	425.8	424.5	423.1	421.3	419.0	416.7	414.4	412.1	410.0
70°	383.8	382.0	380.2	378.4	376.6	374.7	372.9	371.1	369.3	367.5	365.4
72.5°	337.0	335.7	334.3	333.0	331.7	330.0	327.9	325.9	323.8	321.7	319.9
75°	265.4	264.2	263.0	261.8	260.6	259.5	258.6	257.7	256.8	255.9	254.4
77.5°	202.0	201.3	200.6	200.0	199.3	198.4	197.4	196.3	195.2	194.1	193.1
80°	160.6	159.7	158.8	157.9	157.0	156.2	155.6	155.0	154.4	153.8	153.5
82.5°	120.3	120.1	120.0	119.8	119.6	119.4	119.3	119.2	119.1	119.0	118.4
85°	70.8	70.2	69.6	69.0	68.4	68.1	68.1	68.1	68.1	68.1	67.4
87.5°	28.5	28.2	28.0	27.7	27.4	27.4	27.8	28.1	28.5	28.8	28.8
90°	1.0	3.3	5.5	7.8	10.0	12.6	15.5	18.5	21.4	24.3	25.2
92.5°	24.5	26.0	27.6	29.1	30.6	32.2	33.9	35.6	37.2	38.9	39.6
95°	59.8	61.3	62.9	64.5	66.1	67.8	69.6	71.4	73.2	75.0	75.9
97.5°	106.2	107.3	108.5	109.7	110.9	112.1	113.4	114.7	116.0	117.3	118.4
100°	137.8	139.1	140.5	141.8	143.2	144.4	145.6	146.7	147.8	148.9	149.6
102.5°	174.3	175.1	175.9	176.7	177.5	178.6	180.1	181.6	183.1	184.6	185.3
105°	228.0	228.4	228.9	229.3	229.8	231.0	233.0	235.0	237.1	239.1	239.1
107.5°	290.4	290.6	290.9	291.2	291.4	292.0	292.8	293.6	294.4	295.2	295.9
110°	329.3	329.7	330.2	330.6	331.1	331.5	332.0	332.4	332.9	333.3	334.2



TEST NUMBER: P332197

CATALOG NUMBER: S123DIW-S1000D1030U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	369.8	370.1	370.3	370.6	370.9	371.0	371.1	371.2	371.3	371.4	372.5
115°	430.6	431.2	431.9	432.6	433.3	433.4	432.9	432.5	432.0	431.6	431.8
117.5°	491.8	492.2	492.7	493.1	493.6	493.5	492.9	492.3	491.7	491.2	491.1
120°	529.9	531.2	532.6	533.9	535.3	535.4	534.2	533.1	532.0	530.9	530.6
122.5°	569.6	570.6	571.6	572.5	573.5	573.7	573.2	572.6	572.0	571.4	570.8
125°	630.2	630.8	631.5	632.2	632.9	633.0	632.5	632.1	631.6	631.2	630.3
127.5°	686.1	687.5	689.0	690.4	691.8	692.3	691.8	691.3	690.8	690.3	689.1
130°	723.4	725.2	727.0	728.8	730.6	731.1	730.5	729.8	729.1	728.4	727.5
132.5°	760.6	762.4	764.2	766.1	767.9	768.5	768.0	767.5	767.0	766.5	765.4
135°	817.6	818.9	820.3	821.6	823.0	823.5	823.3	823.1	822.9	822.6	821.7
137.5°	870.3	871.4	872.5	873.6	874.8	875.6	876.2	876.8	877.4	878.0	877.0
140°	906.7	907.9	909.0	910.1	911.2	911.9	912.1	912.4	912.6	912.8	912.6
142.5°	940.0	941.1	942.2	943.3	944.5	945.2	945.6	946.0	946.5	946.9	946.6
145°	991.8	992.3	992.7	993.2	993.6	994.2	994.9	995.6	996.2	996.9	996.7
147.5°	1037.2	1038.0	1038.8	1039.7	1040.5	1041.2	1041.8	1042.5	1043.1	1043.7	1043.7
150°	1068.8	1069.3	1069.7	1070.2	1070.6	1071.1	1071.5	1072.0	1072.4	1072.9	1072.9
152.5°	1094.8	1095.4	1096.0	1096.7	1097.3	1097.7	1098.0	1098.3	1098.6	1098.8	1099.2
155°	1135.7	1135.7	1135.7	1135.7	1135.7	1135.8	1136.0	1136.3	1136.5	1136.7	1137.6
157.5°	1170.6	1170.3	1170.0	1169.7	1169.5	1169.4	1169.6	1169.8	1170.0	1170.1	1171.1
160°	1192.4	1192.0	1191.5	1191.1	1190.6	1190.4	1190.4	1190.4	1190.4	1190.4	1191.5
162.5°	1211.9	1211.3	1210.6	1210.0	1209.4	1209.1	1209.3	1209.5	1209.7	1209.9	1211.0
165°	1237.0	1236.3	1235.7	1235.0	1234.3	1234.0	1234.0	1234.0	1234.0	1234.0	1235.3
167.5°	1257.1	1256.2	1255.3	1254.4	1253.5	1253.1	1253.3	1253.5	1253.7	1253.8	1255.2
170°	1268.4	1267.5	1266.6	1265.7	1264.8	1264.4	1264.4	1264.4	1264.4	1264.4	1265.9
172.5°	1277.3	1276.4	1275.5	1274.6	1273.7	1273.3	1273.3	1273.3	1273.3	1273.3	1274.7
175°	1286.7	1285.8	1284.9	1284.0	1283.1	1282.6	1282.6	1282.6	1282.6	1282.6	1284.0
177.5°	1290.5	1289.8	1289.1	1288.3	1287.6	1287.3	1287.3	1287.3	1287.3	1287.3	1288.3
180°	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7



TEST NUMBER: P332197

CATALOG NUMBER: S123DIW-S1000D1030U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9
2.5°	1576.8	1579.3	1581.7	1582.8	1582.5	1582.3	1582.0	1581.8
5°	1568.5	1571.5	1574.6	1575.8	1575.2	1574.6	1574.0	1573.4
7.5°	1551.9	1554.6	1557.3	1558.5	1558.1	1557.8	1557.4	1557.0
10°	1536.6	1539.3	1542.1	1543.1	1542.5	1541.9	1541.3	1540.7
12.5°	1519.9	1521.9	1523.9	1524.7	1524.4	1524.0	1523.6	1523.3
15°	1489.7	1492.1	1494.6	1494.9	1493.1	1491.2	1489.4	1487.6
17.5°	1451.5	1453.2	1454.9	1455.4	1454.8	1454.1	1453.4	1452.8
20°	1423.3	1424.6	1425.8	1425.9	1425.0	1424.1	1423.2	1422.3
22.5°	1393.5	1394.4	1395.4	1395.3	1394.2	1393.0	1391.9	1390.7
25°	1343.9	1344.3	1344.6	1344.3	1343.3	1342.4	1341.5	1340.6
27.5°	1291.3	1291.5	1291.8	1291.3	1290.2	1289.0	1287.9	1286.7
30°	1254.9	1254.9	1254.9	1253.8	1251.7	1249.6	1247.5	1245.3
32.5°	1216.6	1215.0	1213.3	1211.8	1210.7	1209.5	1208.4	1207.2
35°	1154.6	1152.8	1151.0	1149.3	1147.8	1146.3	1144.8	1143.3
37.5°	1090.5	1088.3	1086.1	1084.5	1083.6	1082.6	1081.6	1080.7
40°	1048.6	1046.2	1043.8	1041.9	1040.7	1039.5	1038.3	1037.1
42.5°	1005.0	1002.6	1000.2	998.4	997.2	996.0	994.8	993.6
45°	940.0	936.4	932.8	930.2	928.7	927.2	925.7	924.1
47.5°	871.5	868.0	864.4	862.0	860.6	859.3	858.0	856.6
50°	826.3	823.0	819.6	817.1	815.3	813.4	811.6	809.8
52.5°	780.4	777.6	774.8	772.4	770.6	768.8	767.0	765.2
55°	710.6	707.3	704.0	701.5	700.0	698.5	697.0	695.5
57.5°	641.9	639.0	636.0	633.6	631.9	630.1	628.4	626.6
60°	593.4	590.7	588.0	585.9	584.3	582.8	581.3	579.8
62.5°	546.6	543.9	541.1	539.3	538.2	537.2	536.2	535.2
65°	477.0	474.5	472.1	470.5	469.6	468.7	467.7	466.8
67.5°	407.9	405.8	403.7	402.0	400.7	399.4	398.1	396.9
70°	363.2	361.1	359.0	357.2	355.7	354.2	352.7	351.1
72.5°	318.0	316.1	314.2	312.9	312.1	311.3	310.6	309.8
75°	252.9	251.3	249.8	248.6	247.7	246.8	245.9	245.0
77.5°	192.0	191.0	190.0	189.5	189.5	189.5	189.5	189.5
80°	153.2	152.9	152.6	152.4	152.4	152.4	152.4	152.4
82.5°	117.9	117.3	116.8	116.4	116.1	115.9	115.7	115.4
85°	66.8	66.2	65.6	65.3	65.3	65.3	65.3	65.3
87.5°	28.7	28.6	28.6	28.6	28.7	28.8	28.9	28.9
90°	26.1	27.0	27.9	28.6	29.0	29.5	29.9	30.4
92.5°	40.3	41.1	41.8	42.0	41.7	41.5	41.2	40.9
95°	76.8	77.7	78.6	79.0	79.0	79.0	79.0	79.0
97.5°	119.4	120.4	121.5	121.9	121.8	121.8	121.7	121.6
100°	150.3	151.0	151.6	152.2	152.6	153.1	153.5	154.0
102.5°	185.9	186.6	187.3	187.6	187.5	187.4	187.3	187.2
105°	239.1	239.1	239.1	239.3	239.8	240.2	240.7	241.1
107.5°	296.7	297.4	298.1	298.3	298.1	297.8	297.5	297.2
110°	335.1	336.0	336.9	337.1	336.7	336.2	335.8	335.3



TEST NUMBER: P332197

CATALOG NUMBER: S123DIW-S1000D1030U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	373.6	374.6	375.7	376.2	376.1	376.0	376.0	375.9
115°	432.0	432.3	432.5	432.5	432.3	432.0	431.8	431.6
117.5°	491.1	491.0	491.0	490.6	490.0	489.4	488.7	488.1
120°	530.4	530.2	530.0	529.6	529.2	528.7	528.3	527.8
122.5°	570.2	569.6	569.1	568.4	567.8	567.2	566.6	565.9
125°	629.4	628.5	627.6	626.7	625.8	624.9	624.0	623.1
127.5°	687.8	686.6	685.3	684.1	683.1	682.1	681.0	680.0
130°	726.6	725.7	724.8	723.6	722.0	720.4	718.9	717.3
132.5°	764.4	763.3	762.2	761.1	759.8	758.6	757.4	756.2
135°	820.8	819.9	819.0	818.4	817.9	817.5	817.0	816.6
137.5°	876.1	875.1	874.2	873.3	872.4	871.6	870.7	869.9
140°	912.4	912.1	911.9	911.0	909.4	907.9	906.3	904.7
142.5°	946.4	946.2	946.0	945.2	944.0	942.8	941.6	940.4
145°	996.5	996.2	996.0	995.4	994.5	993.6	992.7	991.8
147.5°	1043.7	1043.7	1043.7	1043.0	1041.7	1040.3	1039.0	1037.6
150°	1072.9	1072.9	1072.9	1072.2	1070.9	1069.5	1068.2	1066.8
152.5°	1099.5	1099.9	1100.3	1099.9	1098.7	1097.5	1096.3	1095.2
155°	1138.5	1139.4	1140.3	1140.0	1138.4	1136.8	1135.3	1133.7
157.5°	1172.0	1173.0	1173.9	1173.8	1172.5	1171.3	1170.0	1168.7
160°	1192.7	1193.8	1194.9	1195.0	1194.1	1193.2	1192.3	1191.4
162.5°	1212.1	1213.2	1214.4	1214.2	1212.8	1211.3	1209.9	1208.4
165°	1236.7	1238.0	1239.4	1239.3	1237.7	1236.1	1234.5	1233.0
167.5°	1256.6	1258.0	1259.4	1259.4	1258.0	1256.6	1255.2	1253.8
170°	1267.5	1269.1	1270.7	1270.7	1269.1	1267.5	1265.9	1264.4
172.5°	1276.1	1277.5	1278.9	1278.8	1277.2	1275.6	1274.0	1272.5
175°	1285.3	1286.7	1288.0	1287.9	1286.3	1284.7	1283.2	1281.6
177.5°	1289.4	1290.5	1291.6	1291.5	1290.2	1289.0	1287.7	1286.5
180°	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7

(END OF REPORT)