

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332191

Luminaire Tested: **S123DIW-S1000D755U835-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332191
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S1000D755U835-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 755 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6739.5 lumens
Efficiency: N/A
Efficacy: 125.7 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 53.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332191

CATALOG NUMBER: S123DIW-S1000D755U835-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

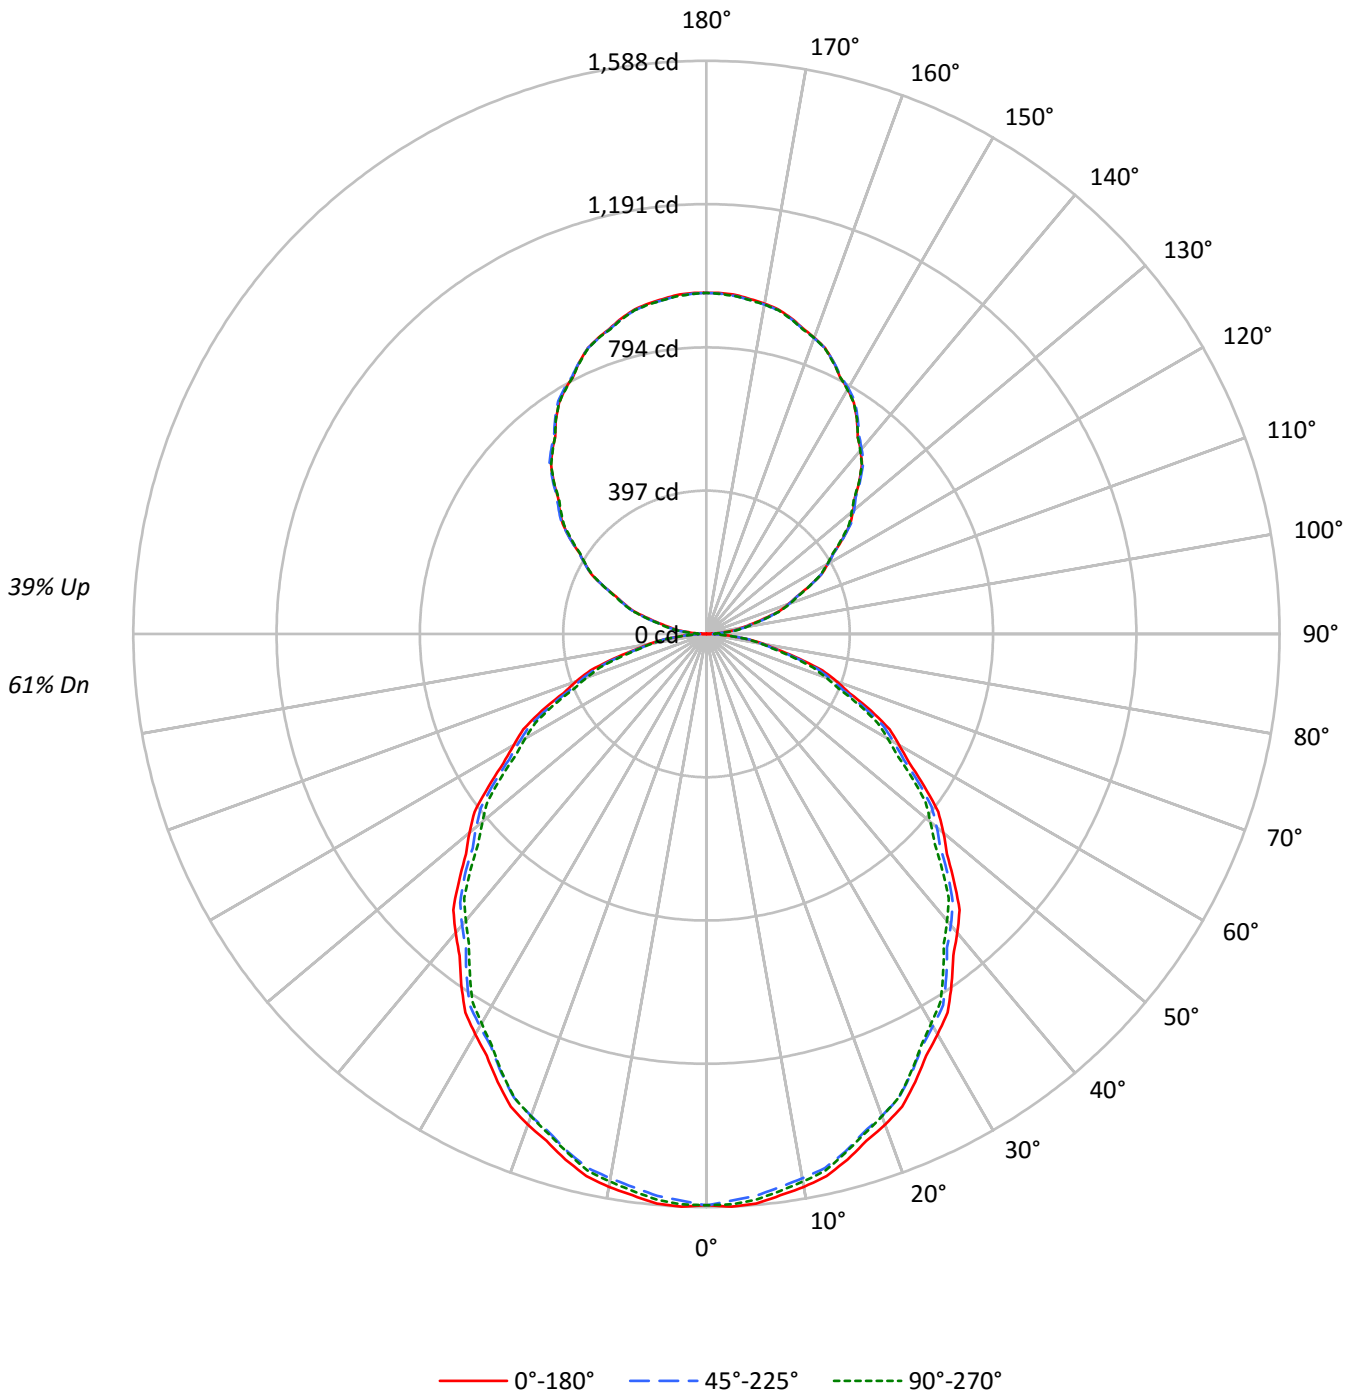



TEST NUMBER: P332191

CATALOG NUMBER: S123DIW-S1000D755U835-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	77	77	77	66	66	66	61
1	100	96	92	88	94	90	86	83	78	76	73	68	66	64	59	57	56	51
2	91	84	77	72	85	78	73	68	69	64	61	60	57	54	51	49	47	43
3	83	73	66	60	78	69	62	57	61	55	51	53	49	45	46	43	40	36
4	76	65	57	51	71	61	54	48	54	48	44	47	43	39	41	37	34	31
5	70	58	50	44	65	55	47	42	48	42	38	42	38	34	37	33	30	27
6	64	52	44	38	60	49	42	36	44	37	33	38	33	30	33	29	26	24
7	60	47	39	33	56	44	37	32	39	33	29	35	30	26	30	27	24	21
8	55	43	35	29	52	41	33	28	36	30	26	32	27	23	28	24	21	19
9	52	39	32	26	48	37	30	25	33	27	23	29	25	21	26	22	19	17
10	48	36	29	24	45	34	27	23	31	25	21	27	22	19	24	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17038	17038	17038
5°	17117	16883	17001
10°	17004	16736	16840
15°	16805	16547	16577
20°	16573	16276	16292
25°	16262	15954	15922
30°	15918	15597	15478
35°	15559	15219	15023
40°	15185	14802	14573
45°	14772	14420	14067
50°	14359	13949	13561
55°	13818	13461	13052
60°	13272	12893	12482
65°	12791	12271	11889
70°	12079	11566	11050
75°	11038	10643	10189
80°	9955	9534	9447
85°	8744	8410	8065



TEST NUMBER: P332191

CATALOG NUMBER: S123DIW-S1000D755U835-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	149.1	2.2
10°-20°	421.0	6.2
20°-30°	621.9	9.2
30°-40°	726.5	10.8
40°-50°	730.4	10.8
50°-60°	641.5	9.5
60°-70°	478.0	7.1
70°-80°	272.3	4.0
80°-90°	81.0	1.2
90°-100°	61.6	0.9
100°-110°	184.2	2.7
110°-120°	313.4	4.6
120°-130°	412.2	6.1
130°-140°	463.3	6.9
140°-150°	455.4	6.8
150°-160°	383.4	5.7
160°-170°	255.2	3.8
170°-180°	89.4	1.3
0°-30°	1192.0	17.7
0°-40°	1918.5	28.5
0°-60°	3290.4	48.8
0°-90°	4121.6	61.2
90°-120°	559.2	8.3
90°-150°	1890.0	28.0
90°-180°	2618.0	38.8
0°-180°	6739.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1583	1583	1583	1583	1583	
5°	1584	1577	1562	1575	1573	150
15°	1508	1502	1485	1495	1488	425
25°	1369	1360	1343	1344	1341	630
35°	1184	1175	1158	1150	1143	740
45°	970	964	947	932	924	749
55°	736	734	717	703	696	659
65°	502	495	482	471	467	495
75°	265	260	256	249	245	284
85°	71	68	68	65	65	78
90°	1	8	18	21	22	7
95°	44	49	55	58	58	49
105°	167	169	175	175	177	179
115°	316	317	316	317	316	312
125°	462	464	462	459	456	412
135°	599	603	603	600	598	461
145°	727	728	730	730	727	454
155°	832	832	833	835	831	383
165°	906	904	904	908	903	255
175°	943	940	940	944	939	89
180°	945	945	945	945	945	



TEST NUMBER: P332191

CATALOG NUMBER: S123DIW-S1000D755U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9
2.5°	1588.3	1587.4	1586.4	1585.4	1584.5	1582.6	1580.0	1577.3	1574.7	1572.0	1574.4
5°	1584.2	1582.7	1581.2	1579.7	1578.2	1575.8	1572.5	1569.1	1565.8	1562.5	1565.5
7.5°	1568.7	1567.2	1565.7	1564.2	1562.7	1560.2	1556.8	1553.3	1549.9	1546.4	1549.1
10°	1555.7	1554.2	1552.6	1551.1	1549.6	1546.9	1543.0	1539.0	1535.1	1531.2	1533.9
12.5°	1538.2	1537.0	1535.7	1534.4	1533.2	1530.7	1527.0	1523.3	1519.6	1515.9	1517.9
15°	1508.0	1506.8	1505.6	1504.4	1503.2	1500.6	1496.7	1492.8	1488.8	1484.9	1487.3
17.5°	1472.9	1471.3	1469.8	1468.2	1466.6	1463.9	1459.9	1456.0	1452.1	1448.1	1449.8
20°	1446.8	1445.0	1443.2	1441.3	1439.5	1436.6	1432.7	1428.8	1424.9	1420.9	1422.1
22.5°	1417.4	1415.6	1413.8	1411.9	1410.1	1407.3	1403.3	1399.4	1395.5	1391.5	1392.5
25°	1369.2	1367.4	1365.6	1363.8	1361.9	1359.1	1355.1	1351.2	1347.3	1343.3	1343.6
27.5°	1317.8	1316.0	1314.2	1312.5	1310.7	1307.7	1303.5	1299.3	1295.0	1290.8	1291.0
30°	1280.7	1279.2	1277.7	1276.2	1274.7	1271.8	1267.6	1263.3	1259.1	1254.9	1254.9
32.5°	1243.7	1241.7	1239.7	1237.7	1235.7	1233.1	1229.8	1226.6	1223.3	1220.0	1218.3
35°	1184.1	1182.3	1180.5	1178.7	1176.8	1174.0	1170.0	1166.1	1162.2	1158.2	1156.4
37.5°	1123.1	1120.8	1118.5	1116.2	1113.9	1110.8	1106.8	1102.8	1098.8	1094.8	1092.6
40°	1080.7	1078.8	1077.0	1075.2	1073.4	1070.4	1066.1	1061.9	1057.7	1053.4	1051.0
42.5°	1038.2	1036.1	1034.1	1032.0	1030.0	1026.8	1022.6	1018.4	1014.1	1009.9	1007.5
45°	970.4	969.2	968.0	966.8	965.6	963.0	959.1	955.1	951.2	947.3	943.7
47.5°	903.2	901.4	899.7	897.9	896.2	893.4	889.8	886.1	882.4	878.7	875.1
50°	857.5	855.9	854.4	852.9	851.4	848.7	844.7	840.8	836.9	833.0	829.6
52.5°	809.5	808.5	807.5	806.5	805.4	802.8	798.7	794.5	790.3	786.1	783.3
55°	736.3	736.0	735.7	735.4	735.1	733.0	729.1	725.1	721.2	717.3	713.9
57.5°	666.6	665.6	664.6	663.6	662.5	660.4	657.3	654.1	651.0	647.9	644.9
60°	616.5	616.2	615.9	615.6	615.3	613.4	609.7	606.1	602.5	598.9	596.1
62.5°	571.9	571.1	570.3	569.5	568.8	566.6	562.9	559.3	555.7	552.0	549.3
65°	502.2	500.7	499.2	497.7	496.2	493.9	490.9	487.9	484.8	481.8	479.4
67.5°	428.5	427.1	425.8	424.5	423.1	421.3	419.0	416.7	414.4	412.1	410.0
70°	383.8	382.0	380.2	378.4	376.6	374.7	372.9	371.1	369.3	367.5	365.4
72.5°	337.0	335.7	334.3	333.0	331.7	330.0	327.9	325.9	323.8	321.7	319.9
75°	265.4	264.2	263.0	261.8	260.6	259.5	258.6	257.7	256.8	255.9	254.4
77.5°	202.0	201.3	200.6	200.0	199.3	198.4	197.4	196.3	195.2	194.1	193.1
80°	160.6	159.7	158.8	157.9	157.0	156.2	155.6	155.0	154.4	153.8	153.5
82.5°	120.3	120.1	120.0	119.8	119.6	119.4	119.3	119.2	119.1	119.0	118.4
85°	70.8	70.2	69.6	69.0	68.4	68.1	68.1	68.1	68.1	68.1	67.4
87.5°	28.5	28.1	27.7	27.3	26.9	26.8	27.0	27.1	27.3	27.5	27.4
90°	0.7	2.4	4.0	5.7	7.3	9.2	11.4	13.5	15.7	17.8	18.5
92.5°	18.0	19.1	20.2	21.3	22.4	23.6	24.8	26.1	27.3	28.5	29.0
95°	43.8	44.9	46.1	47.3	48.4	49.6	51.0	52.3	53.6	54.9	55.6
97.5°	77.8	78.6	79.5	80.4	81.2	82.1	83.1	84.0	85.0	86.0	86.7
100°	100.9	101.9	102.9	103.9	104.9	105.8	106.6	107.5	108.3	109.1	109.6
102.5°	127.7	128.3	128.9	129.4	130.0	130.9	132.0	133.1	134.1	135.2	135.7
105°	167.0	167.3	167.7	168.0	168.3	169.2	170.7	172.2	173.7	175.2	175.2
107.5°	212.7	212.9	213.1	213.3	213.5	213.9	214.5	215.1	215.7	216.3	216.8
110°	241.2	241.6	241.9	242.2	242.5	242.9	243.2	243.5	243.9	244.2	244.9



TEST NUMBER: P332191

CATALOG NUMBER: S123DIW-S1000D755U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	270.9	271.1	271.3	271.5	271.7	271.8	271.9	272.0	272.0	272.1	272.9
115°	315.5	315.9	316.4	316.9	317.4	317.5	317.2	316.9	316.5	316.2	316.4
117.5°	360.3	360.6	360.9	361.3	361.6	361.6	361.1	360.7	360.3	359.8	359.8
120°	388.2	389.2	390.2	391.2	392.2	392.2	391.4	390.6	389.8	388.9	388.8
122.5°	417.3	418.0	418.7	419.5	420.2	420.3	419.9	419.5	419.1	418.6	418.2
125°	461.7	462.2	462.7	463.2	463.7	463.7	463.4	463.1	462.7	462.4	461.8
127.5°	502.6	503.7	504.8	505.8	506.9	507.2	506.9	506.5	506.1	505.8	504.8
130°	530.0	531.3	532.6	533.9	535.2	535.7	535.2	534.7	534.2	533.7	533.0
132.5°	557.3	558.6	559.9	561.2	562.6	563.0	562.7	562.3	561.9	561.6	560.8
135°	599.0	600.0	601.0	602.0	602.9	603.4	603.2	603.0	602.9	602.7	602.0
137.5°	637.6	638.4	639.2	640.1	640.9	641.5	641.9	642.4	642.8	643.2	642.5
140°	664.3	665.1	666.0	666.8	667.6	668.1	668.3	668.4	668.6	668.8	668.6
142.5°	688.7	689.5	690.3	691.1	691.9	692.5	692.8	693.1	693.4	693.7	693.5
145°	726.7	727.0	727.3	727.6	728.0	728.4	728.9	729.4	729.9	730.4	730.2
147.5°	759.9	760.5	761.1	761.7	762.3	762.8	763.3	763.7	764.2	764.7	764.7
150°	783.1	783.4	783.7	784.1	784.4	784.7	785.0	785.4	785.7	786.0	786.0
152.5°	802.1	802.5	803.0	803.5	803.9	804.2	804.4	804.6	804.8	805.0	805.3
155°	832.1	832.1	832.1	832.1	832.1	832.1	832.3	832.5	832.6	832.8	833.5
157.5°	857.6	857.4	857.2	857.0	856.8	856.8	856.9	857.0	857.2	857.3	858.0
160°	873.6	873.3	873.0	872.6	872.3	872.1	872.1	872.1	872.1	872.1	873.0
162.5°	887.9	887.4	886.9	886.5	886.0	885.9	886.0	886.1	886.3	886.4	887.2
165°	906.3	905.8	905.3	904.8	904.3	904.0	904.0	904.0	904.0	904.0	905.0
167.5°	921.0	920.3	919.7	919.0	918.3	918.1	918.2	918.3	918.5	918.6	919.6
170°	929.3	928.6	928.0	927.3	926.6	926.3	926.3	926.3	926.3	926.3	927.5
172.5°	935.8	935.2	934.5	933.8	933.2	932.8	932.8	932.8	932.8	932.8	933.9
175°	942.6	942.0	941.3	940.7	940.0	939.7	939.7	939.7	939.7	939.7	940.7
177.5°	945.5	944.9	944.4	943.9	943.4	943.1	943.1	943.1	943.1	943.1	943.9
180°	944.9	944.9	944.9	944.9	944.9	944.9	944.9	944.9	944.9	944.9	944.9



TEST NUMBER: P332191

CATALOG NUMBER: S123DIW-S1000D755U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9
2.5°	1576.8	1579.3	1581.7	1582.8	1582.5	1582.3	1582.0	1581.8
5°	1568.5	1571.5	1574.6	1575.8	1575.2	1574.6	1574.0	1573.4
7.5°	1551.9	1554.6	1557.3	1558.5	1558.1	1557.8	1557.4	1557.0
10°	1536.6	1539.3	1542.1	1543.1	1542.5	1541.9	1541.3	1540.7
12.5°	1519.9	1521.9	1523.9	1524.7	1524.4	1524.0	1523.6	1523.3
15°	1489.7	1492.1	1494.6	1494.9	1493.1	1491.2	1489.4	1487.6
17.5°	1451.5	1453.2	1454.9	1455.4	1454.8	1454.1	1453.4	1452.8
20°	1423.3	1424.6	1425.8	1425.9	1425.0	1424.1	1423.2	1422.3
22.5°	1393.5	1394.4	1395.4	1395.3	1394.2	1393.0	1391.9	1390.7
25°	1343.9	1344.3	1344.6	1344.3	1343.3	1342.4	1341.5	1340.6
27.5°	1291.3	1291.5	1291.8	1291.3	1290.2	1289.0	1287.9	1286.7
30°	1254.9	1254.9	1254.9	1253.8	1251.7	1249.6	1247.5	1245.3
32.5°	1216.6	1215.0	1213.3	1211.8	1210.7	1209.5	1208.4	1207.2
35°	1154.6	1152.8	1151.0	1149.3	1147.8	1146.3	1144.8	1143.3
37.5°	1090.5	1088.3	1086.1	1084.5	1083.6	1082.6	1081.6	1080.7
40°	1048.6	1046.2	1043.8	1041.9	1040.7	1039.5	1038.3	1037.1
42.5°	1005.0	1002.6	1000.2	998.4	997.2	996.0	994.8	993.6
45°	940.0	936.4	932.8	930.2	928.7	927.2	925.7	924.1
47.5°	871.5	868.0	864.4	862.0	860.6	859.3	858.0	856.6
50°	826.3	823.0	819.6	817.1	815.3	813.4	811.6	809.8
52.5°	780.4	777.6	774.8	772.4	770.6	768.8	767.0	765.2
55°	710.6	707.3	704.0	701.5	700.0	698.5	697.0	695.5
57.5°	641.9	639.0	636.0	633.6	631.9	630.1	628.4	626.6
60°	593.4	590.7	588.0	585.9	584.3	582.8	581.3	579.8
62.5°	546.6	543.9	541.1	539.3	538.2	537.2	536.2	535.2
65°	477.0	474.5	472.1	470.5	469.6	468.7	467.7	466.8
67.5°	407.9	405.8	403.7	402.0	400.7	399.4	398.1	396.9
70°	363.2	361.1	359.0	357.2	355.7	354.2	352.7	351.1
72.5°	318.0	316.1	314.2	312.9	312.1	311.3	310.6	309.8
75°	252.9	251.3	249.8	248.6	247.7	246.8	245.9	245.0
77.5°	192.0	191.0	190.0	189.5	189.5	189.5	189.5	189.5
80°	153.2	152.9	152.6	152.4	152.4	152.4	152.4	152.4
82.5°	117.9	117.3	116.8	116.4	116.1	115.9	115.7	115.4
85°	66.8	66.2	65.6	65.3	65.3	65.3	65.3	65.3
87.5°	27.3	27.2	27.1	27.1	27.1	27.2	27.3	27.3
90°	19.1	19.8	20.5	20.9	21.3	21.6	21.9	22.3
92.5°	29.6	30.1	30.6	30.8	30.6	30.4	30.2	30.0
95°	56.2	56.9	57.6	57.9	57.9	57.9	57.9	57.9
97.5°	87.5	88.2	89.0	89.3	89.3	89.2	89.1	89.1
100°	110.1	110.6	111.1	111.5	111.8	112.2	112.5	112.8
102.5°	136.2	136.7	137.2	137.4	137.4	137.3	137.2	137.2
105°	175.2	175.2	175.2	175.3	175.7	176.0	176.3	176.7
107.5°	217.3	217.9	218.4	218.6	218.4	218.2	218.0	217.8
110°	245.5	246.2	246.8	247.0	246.7	246.3	246.0	245.7



TEST NUMBER: P332191

CATALOG NUMBER: S123DIW-S1000D755U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	273.7	274.5	275.3	275.6	275.6	275.5	275.4	275.4
115°	316.5	316.7	316.9	316.9	316.7	316.5	316.4	316.2
117.5°	359.8	359.7	359.7	359.5	359.0	358.5	358.1	357.6
120°	388.6	388.4	388.3	388.0	387.7	387.4	387.0	386.7
122.5°	417.8	417.3	416.9	416.5	416.0	415.5	415.1	414.6
125°	461.1	460.4	459.8	459.1	458.5	457.8	457.1	456.5
127.5°	503.9	503.0	502.1	501.2	500.5	499.7	499.0	498.2
130°	532.4	531.7	531.0	530.1	529.0	527.8	526.7	525.5
132.5°	560.0	559.2	558.4	557.6	556.7	555.8	554.9	554.0
135°	601.4	600.7	600.1	599.6	599.2	598.9	598.6	598.2
137.5°	641.8	641.1	640.5	639.8	639.2	638.5	637.9	637.3
140°	668.4	668.3	668.1	667.4	666.3	665.1	664.0	662.8
142.5°	693.4	693.2	693.0	692.5	691.6	690.7	689.8	688.9
145°	730.0	729.9	729.7	729.3	728.6	728.0	727.3	726.7
147.5°	764.7	764.7	764.7	764.2	763.2	762.2	761.2	760.2
150°	786.0	786.0	786.0	785.5	784.5	783.6	782.6	781.6
152.5°	805.6	805.8	806.1	805.8	804.9	804.1	803.2	802.4
155°	834.1	834.8	835.4	835.2	834.0	832.9	831.7	830.6
157.5°	858.7	859.4	860.1	859.9	859.0	858.1	857.2	856.2
160°	873.8	874.6	875.4	875.5	874.9	874.2	873.5	872.9
162.5°	888.0	888.9	889.7	889.6	888.5	887.5	886.4	885.3
165°	906.0	907.0	908.0	907.9	906.8	905.6	904.5	903.3
167.5°	920.6	921.7	922.7	922.7	921.7	920.6	919.6	918.6
170°	928.6	929.8	930.9	930.9	929.8	928.6	927.5	926.3
172.5°	934.9	935.9	936.9	936.9	935.7	934.6	933.4	932.3
175°	941.7	942.6	943.6	943.6	942.4	941.2	940.1	938.9
177.5°	944.7	945.5	946.3	946.2	945.3	944.3	943.4	942.5
180°	944.9	944.9	944.9	944.9	944.9	944.9	944.9	944.9

(END OF REPORT)