

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332232

Luminaire Tested: **S123DIW-S1165D1320U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332232
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S1165D1320U835-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1320 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10039.7 lumens
Efficiency: N/A
Efficacy: 131.8 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 76.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332232

CATALOG NUMBER: S123DIW-S1165D1320U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

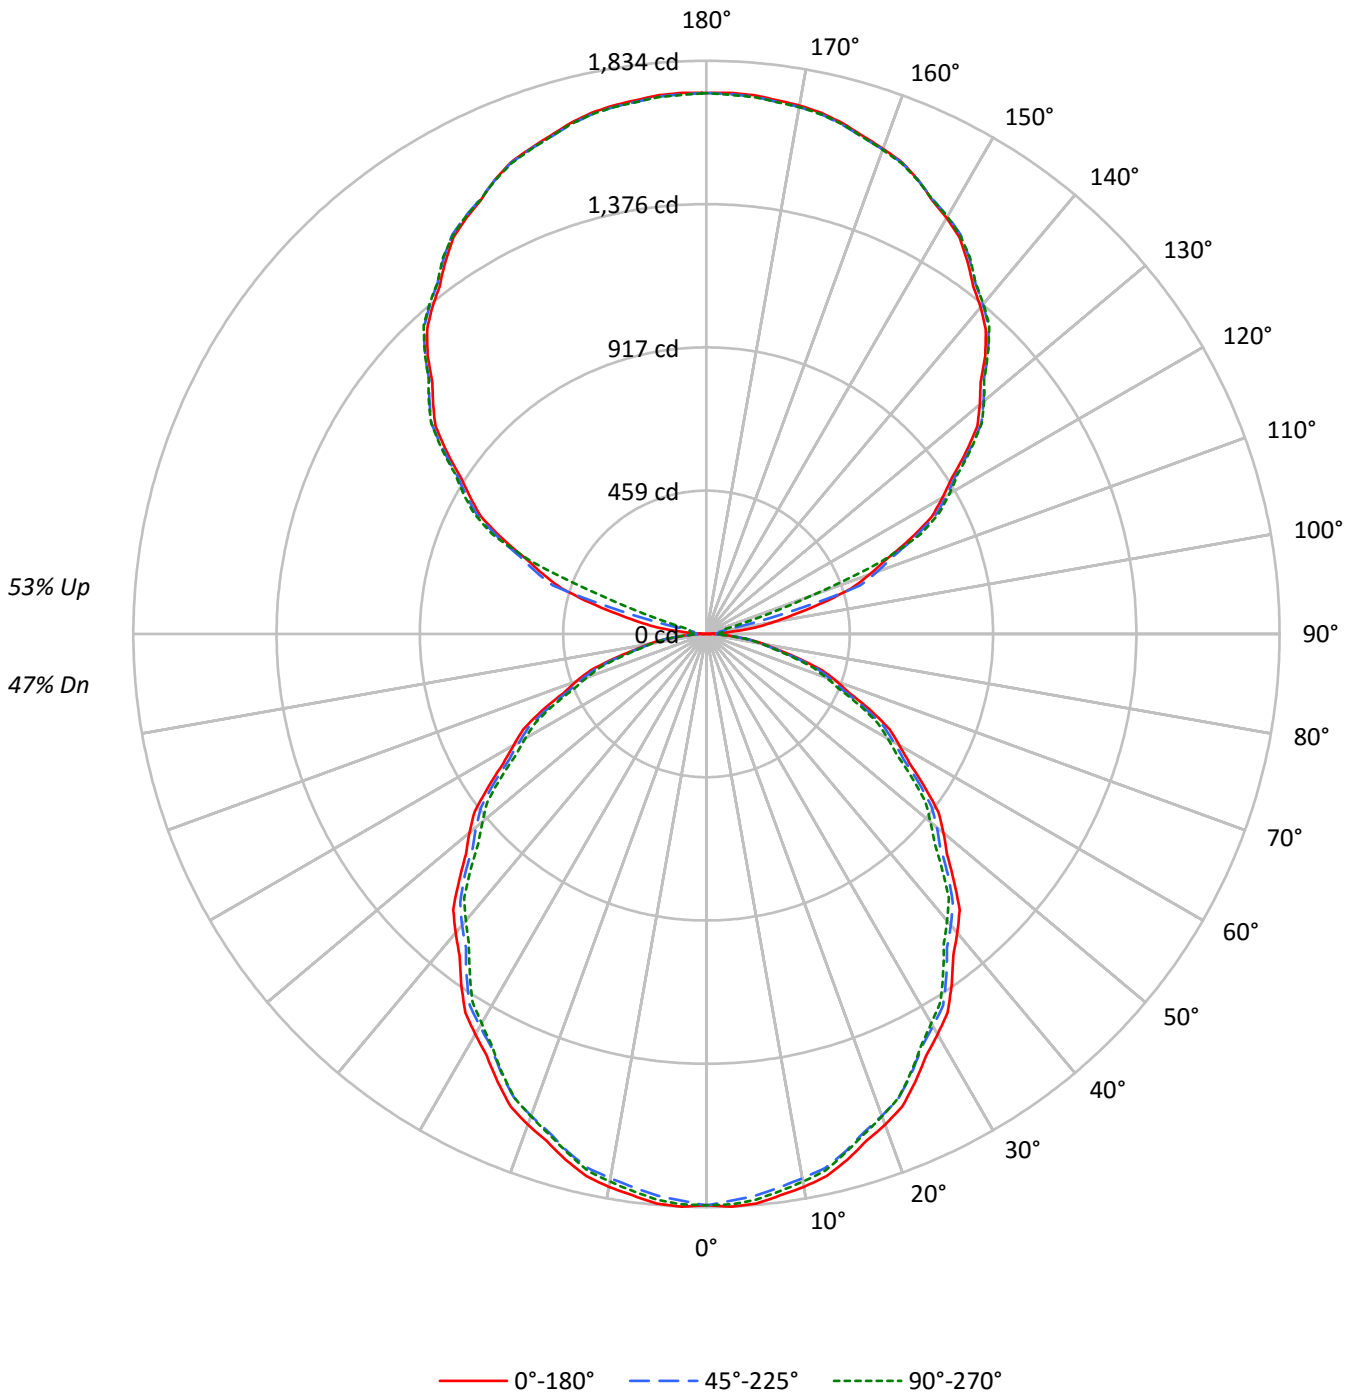



TEST NUMBER: P332232

CATALOG NUMBER: S123DIW-S1165D1320U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	107	107	107	107	98	98	98	98	82	82	82	67	67	67	54	54	54	47	47	47	47	47	47	47		
1	97	93	89	85	89	85	82	79	72	69	67	59	57	56	47	46	45	40	40	40	40	40	40	40		
2	88	81	75	70	81	75	69	65	63	59	55	52	49	47	42	40	38	33	33	33	33	33	33	33		
3	81	71	64	58	74	66	59	54	55	51	47	46	42	39	37	34	32	28	28	28	28	28	28	28		
4	74	63	55	49	67	58	51	46	49	44	40	41	37	34	33	30	28	24	24	24	24	24	24	24		
5	68	56	48	42	62	52	45	39	44	38	34	37	32	29	30	27	24	21	21	21	21	21	21	21		
6	62	50	42	36	57	47	39	34	40	34	30	33	29	26	27	24	21	18	18	18	18	18	18	18		
7	58	45	37	32	53	42	35	30	36	30	26	30	26	23	25	21	19	16	16	16	16	16	16	16		
8	53	41	33	28	49	38	31	26	33	27	23	27	23	20	23	19	17	15	15	15	15	15	15	15		
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	15	13	13	13	13	13	13	13		
10	46	34	27	22	43	32	26	21	28	22	19	23	19	16	19	16	14	12	12	12	12	12	12	12		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	19678	19678	19678
5°	19770	19498	19634
10°	19638	19329	19449
15°	19409	19110	19146
20°	19140	18798	18816
25°	18781	18427	18389
30°	18385	18013	17877
35°	17971	17578	17350
40°	17537	17096	16831
45°	17061	16653	16247
50°	16583	16109	15662
55°	15959	15546	15073
60°	15330	14889	14415
65°	14772	14174	13733
70°	13951	13357	12765
75°	12747	12289	11765
80°	11499	11009	10916
85°	10090	9707	9324



TEST NUMBER: P332232

CATALOG NUMBER: S123DIW-S1165D1320U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	172.2	1.7
10°-20°	486.2	4.8
20°-30°	718.3	7.2
30°-40°	839.0	8.4
40°-50°	843.5	8.4
50°-60°	740.9	7.4
60°-70°	552.0	5.5
70°-80°	314.5	3.1
80°-90°	95.1	0.9
90°-100°	62.9	0.6
100°-110°	299.9	3.0
110°-120°	720.3	7.2
120°-130°	917.3	9.1
130°-140°	980.1	9.8
140°-150°	916.5	9.1
150°-160°	739.3	7.4
160°-170°	477.1	4.8
170°-180°	164.4	1.6
0°-30°	1376.7	13.7
0°-40°	2215.7	22.1
0°-60°	3800.2	37.9
0°-90°	4761.8	47.4
90°-120°	1083.2	10.8
90°-150°	3897.1	38.8
90°-180°	5278.0	52.6
0°-180°	10039.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1828	1828	1828	1828	1828	
5°	1830	1821	1804	1819	1817	173
15°	1742	1735	1715	1726	1718	491
25°	1581	1571	1552	1553	1548	728
35°	1368	1358	1338	1328	1320	855
45°	1121	1114	1094	1076	1067	865
55°	850	848	828	812	803	761
65°	580	572	556	544	539	572
75°	306	300	296	288	283	328
85°	82	79	79	76	76	90
90°	1	14	31	36	39	8
95°	78	29	40	48	49	97
105°	383	390	282	67	57	406
115°	719	727	738	750	756	709
125°	1013	1023	1029	1031	1034	905
135°	1261	1269	1274	1278	1274	971
145°	1456	1464	1467	1470	1470	911
155°	1603	1601	1602	1608	1601	738
165°	1691	1687	1686	1695	1687	478
175°	1731	1725	1726	1734	1724	165
180°	1731	1731	1731	1731	1731	



TEST NUMBER: P332232

CATALOG NUMBER: S123DIW-S1165D1320U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1
2.5°	1834.4	1833.3	1832.2	1831.1	1829.9	1827.8	1824.8	1821.7	1818.6	1815.5	1818.3
5°	1829.7	1828.0	1826.2	1824.5	1822.7	1819.9	1816.1	1812.2	1808.4	1804.5	1808.0
7.5°	1811.8	1810.0	1808.3	1806.5	1804.8	1801.9	1797.9	1794.0	1790.0	1786.0	1789.1
10°	1796.7	1794.9	1793.2	1791.4	1789.7	1786.6	1782.0	1777.5	1772.9	1768.4	1771.5
12.5°	1776.6	1775.1	1773.6	1772.2	1770.7	1767.8	1763.6	1759.3	1755.0	1750.8	1753.1
15°	1741.7	1740.3	1738.9	1737.5	1736.1	1733.1	1728.6	1724.0	1719.5	1714.9	1717.7
17.5°	1701.1	1699.3	1697.5	1695.7	1693.8	1690.7	1686.1	1681.6	1677.0	1672.5	1674.5
20°	1670.9	1668.8	1666.7	1664.6	1662.6	1659.2	1654.7	1650.2	1645.6	1641.1	1642.5
22.5°	1637.0	1634.9	1632.8	1630.7	1628.6	1625.3	1620.7	1616.2	1611.7	1607.1	1608.2
25°	1581.3	1579.2	1577.1	1575.0	1573.0	1569.6	1565.1	1560.6	1556.0	1551.5	1551.8
27.5°	1521.9	1519.9	1517.9	1515.8	1513.8	1510.4	1505.5	1500.6	1495.7	1490.8	1491.1
30°	1479.2	1477.4	1475.7	1473.9	1472.2	1468.9	1464.0	1459.1	1454.2	1449.3	1449.3
32.5°	1436.4	1434.1	1431.8	1429.5	1427.2	1424.1	1420.4	1416.6	1412.8	1409.1	1407.1
35°	1367.6	1365.5	1363.4	1361.3	1359.2	1355.9	1351.3	1346.8	1342.2	1337.7	1335.6
37.5°	1297.1	1294.5	1291.8	1289.2	1286.5	1282.9	1278.3	1273.7	1269.1	1264.4	1261.9
40°	1248.1	1246.0	1243.9	1241.8	1239.7	1236.2	1231.3	1226.4	1221.5	1216.7	1213.9
42.5°	1199.0	1196.7	1194.3	1191.9	1189.5	1185.9	1181.0	1176.1	1171.2	1166.4	1163.6
45°	1120.8	1119.4	1118.0	1116.6	1115.2	1112.2	1107.7	1103.1	1098.6	1094.0	1089.9
47.5°	1043.1	1041.1	1039.1	1037.0	1035.0	1031.9	1027.6	1023.3	1019.1	1014.8	1010.7
50°	990.3	988.6	986.8	985.1	983.3	980.2	975.6	971.1	966.5	962.0	958.2
52.5°	935.0	933.8	932.6	931.4	930.2	927.2	922.4	917.6	912.8	907.9	904.6
55°	850.4	850.1	849.7	849.4	849.0	846.6	842.0	837.5	832.9	828.4	824.6
57.5°	769.9	768.7	767.5	766.4	765.2	762.8	759.1	755.5	751.9	748.2	744.8
60°	712.1	711.7	711.4	711.0	710.7	708.4	704.2	700.0	695.8	691.6	688.5
62.5°	660.5	659.6	658.7	657.8	656.9	654.3	650.1	645.9	641.8	637.6	634.4
65°	580.0	578.3	576.5	574.8	573.0	570.4	566.9	563.4	559.9	556.5	553.7
67.5°	494.8	493.3	491.8	490.2	488.7	486.6	483.9	481.3	478.6	476.0	473.5
70°	443.3	441.2	439.1	437.0	434.9	432.8	430.7	428.6	426.5	424.4	422.0
72.5°	389.2	387.7	386.1	384.6	383.1	381.1	378.7	376.3	374.0	371.6	369.4
75°	306.5	305.1	303.7	302.3	300.9	299.7	298.7	297.6	296.6	295.5	293.8
77.5°	233.3	232.5	231.7	231.0	230.2	229.2	227.9	226.7	225.4	224.2	223.0
80°	185.5	184.4	183.4	182.3	181.3	180.4	179.7	179.0	178.3	177.6	177.3
82.5°	139.0	138.7	138.5	138.3	138.1	137.9	137.8	137.7	137.5	137.4	136.8
85°	81.7	81.0	80.3	79.6	78.9	78.6	78.6	78.6	78.6	78.6	77.9
87.5°	33.0	32.7	32.4	32.2	31.9	32.0	32.4	32.9	33.4	33.8	33.8
90°	1.3	4.1	7.0	9.9	12.7	16.0	19.7	23.4	27.1	30.9	32.0
92.5°	23.9	23.1	22.3	21.5	20.7	21.7	24.5	27.3	30.1	32.9	34.7
95°	78.4	66.7	55.0	43.3	31.6	27.3	30.4	33.6	36.7	39.9	41.9
97.5°	157.6	152.4	147.1	141.9	136.6	123.7	103.1	82.6	62.0	41.4	43.7
100°	217.3	223.0	228.7	234.4	240.2	220.7	176.2	131.6	87.0	42.4	44.7
102.5°	285.2	289.3	293.4	297.5	301.7	279.4	230.7	182.0	133.3	84.6	77.5
105°	383.2	386.3	389.5	392.6	395.7	384.5	358.7	333.0	307.3	281.6	231.0
107.5°	486.6	489.1	491.6	494.1	496.6	499.9	504.0	508.0	512.1	516.1	479.0
110°	555.5	557.8	560.0	562.3	564.6	567.3	570.5	573.6	576.8	579.9	570.5



TEST NUMBER: P332232

CATALOG NUMBER: S123DIW-S1165D1320U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	621.3	623.4	625.4	627.5	629.5	632.1	635.3	638.4	641.6	644.7	644.9
115°	718.8	720.5	722.2	723.9	725.6	727.8	730.3	732.9	735.5	738.1	740.9
117.5°	813.2	815.3	817.4	819.5	821.6	823.3	824.6	826.0	827.3	828.6	830.9
120°	871.8	874.4	876.9	879.5	882.1	883.8	884.6	885.5	886.4	887.2	889.5
122.5°	931.5	933.6	935.7	937.8	939.9	941.5	942.6	943.7	944.8	945.9	947.5
125°	1013.2	1015.5	1017.8	1020.1	1022.4	1024.1	1025.2	1026.4	1027.5	1028.7	1029.2
127.5°	1092.4	1094.7	1097.0	1099.3	1101.6	1103.4	1104.8	1106.2	1107.5	1108.9	1109.8
130°	1141.8	1144.1	1146.4	1148.7	1151.0	1152.7	1153.8	1155.0	1156.1	1157.2	1158.4
132.5°	1189.1	1191.4	1193.7	1196.0	1198.3	1199.9	1200.8	1201.7	1202.6	1203.5	1204.7
135°	1261.4	1263.1	1264.8	1266.5	1268.3	1269.7	1270.8	1272.0	1273.1	1274.3	1275.1
137.5°	1323.1	1325.3	1327.5	1329.6	1331.8	1333.2	1333.8	1334.5	1335.1	1335.7	1337.1
140°	1364.3	1366.0	1367.7	1369.4	1371.1	1372.4	1373.3	1374.1	1375.0	1375.8	1377.0
142.5°	1402.3	1404.0	1405.8	1407.5	1409.2	1410.5	1411.3	1412.2	1413.0	1413.9	1414.8
145°	1455.6	1457.6	1459.6	1461.6	1463.6	1464.8	1465.4	1466.0	1466.6	1467.1	1467.7
147.5°	1505.7	1507.0	1508.3	1509.6	1511.0	1511.9	1512.5	1513.0	1513.6	1514.2	1514.8
150°	1536.6	1537.4	1538.3	1539.1	1540.0	1540.7	1541.3	1541.8	1542.4	1543.0	1543.6
152.5°	1564.3	1564.7	1565.1	1565.5	1565.9	1566.3	1566.7	1567.0	1567.3	1567.7	1568.7
155°	1603.4	1602.9	1602.3	1601.7	1601.1	1601.0	1601.3	1601.6	1601.9	1602.1	1603.6
157.5°	1633.8	1633.7	1633.7	1633.6	1633.5	1633.4	1633.1	1632.8	1632.5	1632.2	1633.9
160°	1652.3	1652.0	1651.7	1651.4	1651.1	1650.9	1650.6	1650.3	1650.0	1649.7	1651.4
162.5°	1669.8	1669.0	1668.3	1667.5	1666.8	1666.3	1666.0	1665.7	1665.4	1665.1	1667.1
165°	1690.9	1690.0	1689.1	1688.3	1687.4	1686.9	1686.6	1686.3	1686.0	1685.7	1688.0
167.5°	1707.3	1706.2	1705.0	1703.9	1702.7	1702.2	1702.2	1702.2	1702.2	1702.2	1704.5
170°	1716.6	1715.4	1714.3	1713.2	1712.0	1711.4	1711.4	1711.4	1711.4	1711.4	1713.7
172.5°	1722.8	1721.4	1720.0	1718.6	1717.3	1716.7	1716.9	1717.2	1717.4	1717.6	1719.9
175°	1730.7	1729.3	1727.9	1726.4	1725.0	1724.4	1724.7	1725.0	1725.3	1725.6	1727.6
177.5°	1732.8	1731.6	1730.5	1729.4	1728.2	1727.8	1728.0	1728.2	1728.4	1728.7	1730.5
180°	1730.7	1730.7	1730.7	1730.7	1730.7	1730.7	1730.7	1730.7	1730.7	1730.7	1730.7



TEST NUMBER: P332232

CATALOG NUMBER: S123DIW-S1165D1320U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1
2.5°	1821.1	1823.9	1826.7	1828.0	1827.7	1827.4	1827.1	1826.9
5°	1811.5	1815.0	1818.5	1819.9	1819.2	1818.5	1817.8	1817.1
7.5°	1792.3	1795.4	1798.6	1799.9	1799.5	1799.1	1798.7	1798.3
10°	1774.7	1777.8	1781.0	1782.2	1781.5	1780.8	1780.1	1779.4
12.5°	1755.4	1757.7	1760.0	1761.0	1760.5	1760.1	1759.7	1759.3
15°	1720.5	1723.3	1726.1	1726.5	1724.4	1722.3	1720.2	1718.1
17.5°	1676.4	1678.4	1680.3	1680.9	1680.2	1679.4	1678.6	1677.9
20°	1643.9	1645.3	1646.7	1646.8	1645.8	1644.7	1643.7	1642.6
22.5°	1609.4	1610.5	1611.6	1611.5	1610.2	1608.8	1607.5	1606.2
25°	1552.2	1552.5	1552.9	1552.5	1551.5	1550.4	1549.4	1548.3
27.5°	1491.4	1491.6	1491.9	1491.4	1490.1	1488.7	1487.4	1486.1
30°	1449.3	1449.3	1449.3	1448.1	1445.6	1443.2	1440.7	1438.3
32.5°	1405.1	1403.2	1401.2	1399.6	1398.3	1396.9	1395.6	1394.3
35°	1333.5	1331.4	1329.3	1327.4	1325.6	1323.9	1322.1	1320.4
37.5°	1259.4	1256.9	1254.4	1252.6	1251.4	1250.3	1249.2	1248.1
40°	1211.1	1208.3	1205.5	1203.4	1202.0	1200.6	1199.2	1197.8
42.5°	1160.8	1158.0	1155.2	1153.1	1151.7	1150.3	1148.9	1147.5
45°	1085.7	1081.5	1077.3	1074.3	1072.6	1070.8	1069.1	1067.3
47.5°	1006.6	1002.5	998.3	995.5	994.0	992.4	990.9	989.4
50°	954.3	950.5	946.6	943.7	941.6	939.5	937.4	935.3
52.5°	901.4	898.1	894.8	892.1	890.0	887.9	885.8	883.7
55°	820.7	816.9	813.0	810.2	808.5	806.7	805.0	803.2
57.5°	741.4	738.0	734.5	731.8	729.8	727.8	725.7	723.7
60°	685.4	682.2	679.1	676.6	674.9	673.1	671.4	669.6
62.5°	631.3	628.1	625.0	622.8	621.6	620.4	619.3	618.1
65°	550.9	548.1	545.3	543.4	542.3	541.3	540.2	539.2
67.5°	471.1	468.6	466.2	464.2	462.8	461.3	459.8	458.4
70°	419.5	417.1	414.6	412.5	410.8	409.0	407.3	405.6
72.5°	367.3	365.1	362.9	361.4	360.5	359.6	358.7	357.8
75°	292.0	290.3	288.5	287.1	286.1	285.0	284.0	282.9
77.5°	221.8	220.6	219.4	218.8	218.8	218.8	218.8	218.8
80°	176.9	176.6	176.2	176.1	176.1	176.1	176.1	176.1
82.5°	136.1	135.5	134.9	134.4	134.1	133.9	133.6	133.3
85°	77.2	76.5	75.8	75.5	75.5	75.5	75.5	75.5
87.5°	33.7	33.7	33.6	33.7	33.8	33.9	34.0	34.1
90°	33.1	34.3	35.4	36.3	36.9	37.4	38.0	38.6
92.5°	36.6	38.4	40.2	41.3	41.7	42.0	42.3	42.7
95°	43.9	45.9	47.9	48.9	48.9	48.9	48.9	48.9
97.5°	46.0	48.3	50.5	51.8	52.1	52.4	52.7	53.0
100°	47.0	49.3	51.6	52.9	53.1	53.4	53.7	54.0
102.5°	70.4	63.3	56.3	53.0	53.5	54.0	54.5	55.0
105°	180.4	129.9	79.3	54.3	54.9	55.4	56.0	56.6
107.5°	442.0	404.9	367.8	330.2	292.1	253.9	215.8	177.7
110°	561.0	551.6	542.2	517.0	476.2	435.3	394.5	353.6



TEST NUMBER: P332232

CATALOG NUMBER: S123DIW-S1165D1320U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	645.1	645.2	645.4	641.2	632.5	623.9	615.3	606.7
115°	743.8	746.6	749.5	751.5	752.6	753.8	754.9	756.1
117.5°	833.2	835.4	837.7	839.0	839.2	839.4	839.7	839.9
120°	891.8	894.1	896.4	897.5	897.5	897.5	897.5	897.5
122.5°	949.1	950.7	952.3	953.2	953.4	953.6	953.9	954.1
125°	1029.8	1030.4	1030.9	1031.5	1032.1	1032.7	1033.2	1033.8
127.5°	1110.7	1111.6	1112.6	1112.7	1112.2	1111.6	1111.0	1110.4
130°	1159.5	1160.7	1161.8	1162.1	1161.5	1161.0	1160.4	1159.8
132.5°	1205.8	1207.0	1208.1	1208.3	1207.5	1206.7	1205.9	1205.1
135°	1276.0	1276.8	1277.7	1277.7	1276.8	1276.0	1275.1	1274.3
137.5°	1338.5	1339.8	1341.2	1341.6	1341.0	1340.5	1339.9	1339.3
140°	1378.1	1379.3	1380.4	1380.7	1380.1	1379.5	1379.0	1378.4
142.5°	1415.7	1416.6	1417.6	1417.6	1416.8	1416.0	1415.2	1414.4
145°	1468.3	1468.8	1469.4	1469.7	1469.7	1469.7	1469.7	1469.7
147.5°	1515.3	1515.9	1516.5	1516.1	1514.8	1513.5	1512.2	1510.8
150°	1544.1	1544.7	1545.3	1545.1	1544.3	1543.4	1542.6	1541.7
152.5°	1569.7	1570.8	1571.8	1571.7	1570.3	1569.0	1567.7	1566.4
155°	1605.0	1606.4	1607.9	1607.7	1606.0	1604.3	1602.6	1600.9
157.5°	1635.7	1637.4	1639.1	1638.8	1636.6	1634.4	1632.1	1629.9
160°	1653.1	1654.9	1656.6	1656.4	1654.4	1652.4	1650.4	1648.4
162.5°	1669.0	1671.0	1672.9	1673.0	1671.2	1669.5	1667.7	1665.9
165°	1690.3	1692.6	1694.9	1695.0	1693.0	1691.0	1689.0	1687.0
167.5°	1706.8	1709.0	1711.3	1711.3	1709.0	1706.8	1704.5	1702.2
170°	1716.0	1718.3	1720.6	1720.6	1718.3	1716.0	1713.7	1711.4
172.5°	1722.2	1724.5	1726.8	1726.6	1724.1	1721.6	1719.1	1716.6
175°	1729.6	1731.6	1733.6	1733.4	1731.2	1728.9	1726.6	1724.3
177.5°	1732.3	1734.2	1736.0	1735.8	1733.5	1731.2	1728.9	1726.6
180°	1730.7	1730.7	1730.7	1730.7	1730.7	1730.7	1730.7	1730.7

(END OF REPORT)