

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332235

Luminaire Tested: **S123DIW-S1165D1535U835-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332235
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S1165D1535U835-4F0-1E-UDD-A1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1535 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10220.2 lumens
Efficiency: N/A
Efficacy: 123.3 lumens/watt
Spacing Criteria (0/90/45): 1.37 / 1.23 / 1.49
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 82.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332235

CATALOG NUMBER: S123DIW-S1165D1535U835-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

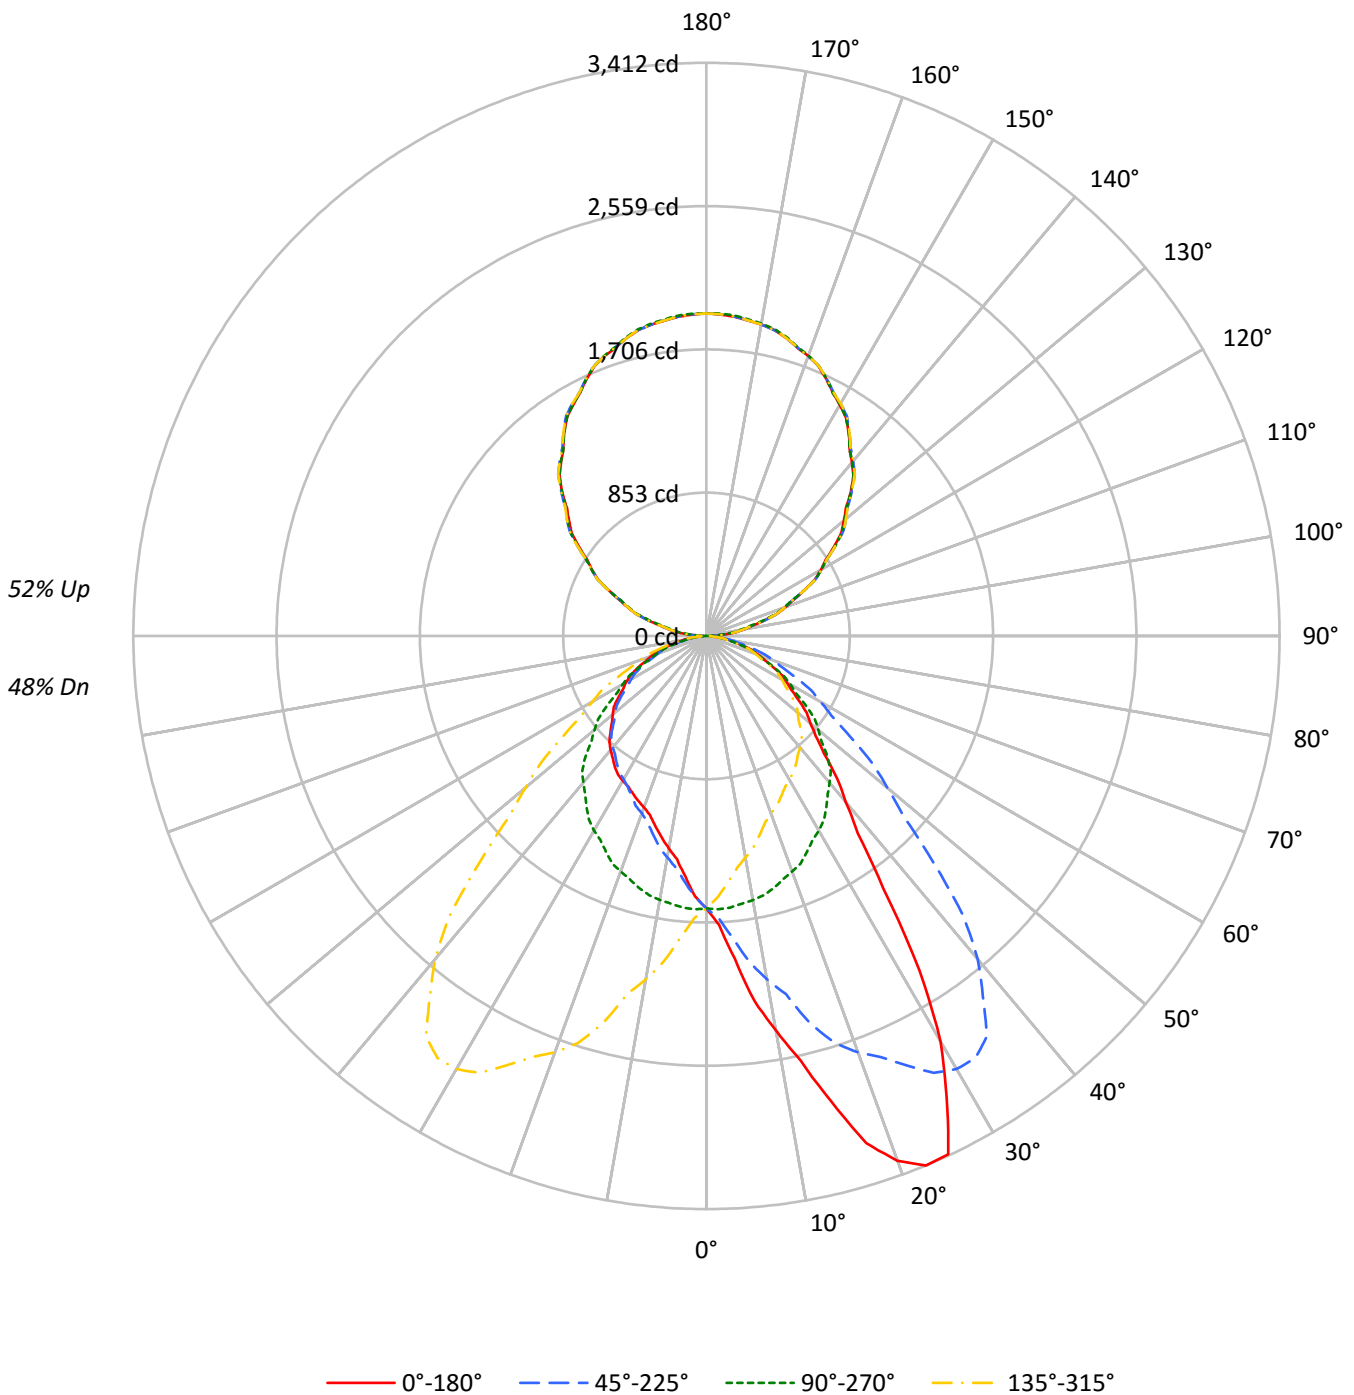



TEST NUMBER: P332235

CATALOG NUMBER: S123DIW-S1165D1535U835-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	98	98	98	98	82	82	82	68	68	68	54	54	54	48
1	98	93	90	86	90	86	83	80	72	70	68	60	58	57	48	47	46	41
2	89	82	76	71	82	76	70	66	64	60	57	53	50	48	43	41	39	35
3	81	72	65	59	75	67	60	55	56	52	48	47	44	41	38	36	34	30
4	75	64	56	50	68	59	52	47	50	45	41	42	38	35	34	31	29	26
5	68	57	49	43	63	53	46	41	45	40	35	38	34	30	31	28	26	22
6	63	51	43	37	58	48	40	35	41	35	31	34	30	27	28	25	23	20
7	58	46	38	33	54	43	36	31	37	31	27	31	27	24	26	22	20	17
8	54	42	34	29	50	39	32	27	34	28	24	28	24	21	24	20	18	16
9	50	38	31	26	46	36	29	24	31	25	22	26	22	19	22	19	16	14
10	47	35	28	23	43	33	26	22	28	23	20	24	20	17	20	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	17460	17460	17460	17460
5°	20822	17535	15540	17535
10°	26063	17446	14036	17446
15°	31967	17306	13067	17306
20°	38080	17087	12441	17087
25°	40435	16820	12302	16820
30°	34657	16625	12367	16625
35°	24103	16348	12496	16348
40°	18156	16024	12456	16024
45°	15075	15541	12298	15541
50°	13504	14555	12188	14555
55°	12624	13495	12035	13495
60°	11842	12385	11911	12385
65°	11130	11291	11530	11291
70°	10439	10043	10980	10043
75°	9349	8792	10069	8792
80°	8182	7209	8672	7209
85°	6410	5236	5829	5236



TEST NUMBER: P332235

CATALOG NUMBER: S123DIW-S1165D1535U835-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	159.8	1.6
10°-20°	512.4	5.0
20°-30°	859.9	8.4
30°-40°	973.7	9.5
40°-50°	873.2	8.5
50°-60°	704.7	6.9
60°-70°	491.0	4.8
70°-80°	258.1	2.5
80°-90°	68.8	0.7
90°-100°	125.1	1.2
100°-110°	374.3	3.7
110°-120°	636.6	6.2
120°-130°	837.4	8.2
130°-140°	941.2	9.2
140°-150°	925.2	9.1
150°-160°	778.9	7.6
160°-170°	518.5	5.1
170°-180°	181.6	1.8
0°-30°	1532.1	15.0
0°-40°	2505.8	24.5
0°-60°	4083.7	40.0
0°-90°	4901.6	48.0
90°-120°	1136.0	11.1
90°-150°	3839.7	37.6
90°-180°	5319.0	52.0
0°-180°	10220.2	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1622	1622	1622	1622	1622	
5°	1927	1623	1438	1623	1927	200
15°	2869	1553	1173	1553	2869	828
25°	3405	1416	1036	1416	3405	1493
35°	1834	1244	951	1244	1834	1192
45°	990	1021	808	1021	990	784
55°	673	719	641	719	673	604
65°	437	443	453	443	437	435
75°	225	211	242	211	225	241
85°	52	42	47	42	52	63
90°	45	2	45	2	45	25
95°	118	89	118	89	118	121
105°	359	339	359	339	359	381
115°	642	641	642	641	642	636
125°	927	938	927	938	927	829
135°	1215	1217	1215	1217	1215	934
145°	1476	1476	1476	1476	1476	921
155°	1687	1690	1687	1690	1687	777
165°	1835	1841	1835	1841	1835	518
175°	1908	1915	1908	1915	1908	181
180°	1920	1920	1920	1920	1920	



TEST NUMBER: P332235

CATALOG NUMBER: S123DIW-S1165D1535U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1
2.5°	1721.5	1720.2	1717.1	1719.6	1714.6	1707.6	1707.0	1700.7	1682.5	1681.2	1676.2
5°	1927.1	1920.8	1920.0	1919.2	1908.2	1893.3	1865.0	1862.6	1824.9	1806.0	1783.3
7.5°	2193.3	2196.6	2185.2	2175.1	2141.5	2119.3	2089.0	2050.2	2003.8	1956.8	1925.5
10°	2384.5	2410.4	2378.2	2356.2	2335.8	2297.2	2252.5	2196.6	2140.8	2075.6	2026.1
12.5°	2589.5	2602.2	2595.7	2575.0	2543.2	2484.6	2405.2	2343.8	2292.4	2183.8	2139.9
15°	2868.6	2916.6	2885.9	2815.2	2816.7	2760.9	2657.2	2543.2	2482.7	2387.6	2258.0
17.5°	3166.0	3172.0	3158.9	3100.0	3060.7	2984.0	2888.3	2779.0	2656.4	2541.4	2403.8
20°	3324.4	3319.7	3292.2	3261.6	3194.0	3134.3	3029.7	2907.9	2750.7	2637.6	2487.4
22.5°	3412.5	3404.6	3391.6	3365.9	3309.7	3245.5	3151.7	3018.6	2868.9	2713.0	2539.6
25°	3404.6	3414.8	3416.4	3409.3	3389.7	3351.2	3277.3	3171.2	3021.9	2821.5	2640.7
27.5°	3096.5	3111.0	3153.0	3190.2	3231.9	3274.3	3268.6	3216.0	3105.5	2932.4	2711.4
30°	2788.4	2757.0	2834.8	2933.1	2999.9	3117.7	3183.8	3187.7	3125.6	2977.1	2761.7
32.5°	2360.9	2395.5	2429.9	2550.8	2696.8	2829.2	2960.6	3066.4	3078.5	2979.6	2791.3
35°	1834.3	1877.6	1940.4	2003.3	2160.5	2295.7	2526.7	2727.9	2888.3	2909.5	2793.9
37.5°	1478.2	1499.5	1539.3	1602.3	1705.1	1865.5	2044.2	2298.5	2530.8	2703.6	2711.1
40°	1292.1	1298.3	1343.1	1391.1	1474.4	1606.4	1767.5	1992.3	2270.5	2511.8	2612.4
42.5°	1152.5	1166.3	1185.3	1231.4	1297.7	1397.1	1546.9	1732.6	1987.6	2265.3	2462.1
45°	990.3	1006.0	1017.8	1048.4	1095.6	1162.4	1266.9	1436.7	1630.8	1917.6	2182.5
47.5°	883.1	884.3	893.1	916.2	948.3	998.4	1072.3	1181.4	1359.6	1592.3	1864.2
50°	806.4	818.9	822.1	840.1	865.3	902.2	963.5	1056.3	1202.5	1406.8	1656.7
52.5°	752.3	756.1	764.9	777.9	799.9	828.7	881.8	954.4	1069.2	1243.3	1473.1
55°	672.7	672.7	681.4	691.6	704.2	730.1	765.5	818.9	906.2	1041.3	1231.5
57.5°	599.2	603.1	609.2	612.4	623.1	640.2	669.8	710.3	775.4	879.4	1030.7
60°	550.1	557.2	556.4	562.7	572.2	585.5	610.7	643.7	701.8	785.1	912.5
62.5°	507.4	506.9	506.8	514.3	523.7	536.5	552.8	581.4	630.8	704.7	813.1
65°	437.0	435.4	440.9	445.6	448.8	458.2	470.8	495.9	528.9	583.9	668.0
67.5°	374.4	369.9	372.8	374.4	379.8	387.1	398.9	414.5	440.7	484.9	548.3
70°	331.7	327.7	326.9	328.5	333.2	338.7	347.4	362.3	386.7	422.0	468.4
72.5°	287.6	285.0	284.8	288.3	290.5	294.1	300.2	313.9	333.2	359.8	403.0
75°	224.8	224.8	224.8	225.6	227.9	231.1	235.8	242.8	257.8	276.6	305.7
77.5°	168.5	168.3	167.4	167.2	170.7	172.1	173.2	179.8	188.1	200.9	222.1
80°	132.0	128.1	129.7	132.0	133.6	134.4	136.8	138.3	145.4	152.5	167.4
82.5°	98.1	94.8	95.1	98.7	99.0	99.8	102.2	104.4	107.0	113.5	121.5
85°	51.9	51.9	52.7	52.7	53.4	52.7	55.0	55.8	55.8	59.7	64.4
87.5°	27.9	26.5	27.0	27.5	26.7	27.2	27.5	27.9	28.3	28.6	28.4
90°	45.2	44.6	43.9	43.2	42.6	41.6	40.2	38.9	37.5	36.2	31.8
92.5°	60.9	61.3	61.7	62.1	62.5	62.2	61.1	60.0	59.0	57.9	55.4
95°	117.6	117.6	117.6	117.6	117.6	116.9	115.6	114.3	112.9	111.6	108.9
97.5°	181.0	181.1	181.2	181.4	181.5	180.8	179.2	177.7	176.2	174.6	172.7
100°	229.2	228.5	227.9	227.2	226.5	225.7	224.7	223.7	222.7	221.7	220.0
102.5°	278.7	278.8	278.9	279.1	279.2	278.8	277.8	276.8	275.8	274.7	272.5
105°	358.9	358.2	357.6	356.9	356.2	355.9	355.9	355.9	355.9	355.9	352.9
107.5°	442.4	442.8	443.2	443.6	444.0	443.7	442.6	441.6	440.5	439.4	438.2
110°	499.1	499.8	500.5	501.1	501.8	501.5	500.1	498.8	497.5	496.1	495.4



TEST NUMBER: P332235

CATALOG NUMBER: S123DIW-S1165D1535U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	559.4	559.6	559.7	559.9	560.0	559.2	557.6	556.0	554.4	552.8	552.7
115°	642.4	642.7	643.1	643.4	643.7	643.7	643.4	643.1	642.7	642.4	643.1
117.5°	726.5	727.5	728.4	729.3	730.3	730.8	730.9	730.9	731.0	731.1	731.9
120°	785.6	786.3	787.0	787.7	788.3	788.8	789.2	789.5	789.8	790.2	791.8
122.5°	842.3	843.3	844.2	845.2	846.1	847.0	847.9	848.7	849.6	850.5	851.4
125°	927.4	928.7	930.1	931.4	932.7	934.1	935.4	936.8	938.1	939.5	940.1
127.5°	1012.1	1013.7	1015.2	1016.8	1018.3	1020.0	1021.9	1023.8	1025.6	1027.5	1028.3
130°	1067.6	1070.0	1072.3	1074.7	1077.0	1078.9	1080.2	1081.5	1082.9	1084.2	1085.2
132.5°	1125.5	1127.3	1129.2	1131.0	1132.8	1134.5	1136.1	1137.7	1139.3	1140.9	1141.6
135°	1215.4	1216.1	1216.7	1217.4	1218.1	1219.1	1220.4	1221.8	1223.1	1224.5	1224.8
137.5°	1294.7	1296.0	1297.3	1298.5	1299.8	1301.2	1302.6	1304.0	1305.4	1306.8	1305.9
140°	1346.6	1348.9	1351.3	1353.6	1356.0	1357.3	1357.7	1358.0	1358.3	1358.7	1358.3
142.5°	1399.7	1401.5	1403.3	1405.1	1406.9	1408.0	1408.3	1408.7	1409.0	1409.3	1408.7
145°	1476.3	1477.6	1479.0	1480.3	1481.6	1482.5	1482.8	1483.1	1483.5	1483.8	1482.8
147.5°	1544.4	1546.4	1548.5	1550.5	1552.5	1553.5	1553.5	1553.5	1553.5	1553.5	1552.5
150°	1587.9	1589.9	1591.9	1593.9	1595.9	1596.9	1596.9	1596.9	1596.9	1596.9	1596.2
152.5°	1630.1	1631.8	1633.6	1635.3	1637.1	1637.7	1637.1	1636.6	1636.1	1635.5	1635.1
155°	1687.4	1689.7	1692.1	1694.4	1696.8	1697.3	1695.9	1694.6	1693.3	1691.9	1691.6
157.5°	1739.6	1741.4	1743.3	1745.2	1747.1	1747.3	1745.9	1744.5	1743.1	1741.7	1741.4
160°	1773.3	1774.7	1776.0	1777.4	1778.7	1778.5	1776.9	1775.2	1773.5	1771.8	1771.8
162.5°	1798.7	1800.8	1803.0	1805.1	1807.3	1807.5	1805.8	1804.1	1802.5	1800.8	1800.5
165°	1835.2	1837.5	1839.9	1842.2	1844.6	1844.7	1842.7	1840.7	1838.7	1836.7	1836.7
167.5°	1866.2	1868.3	1870.4	1872.5	1874.5	1874.5	1872.5	1870.4	1868.3	1866.2	1866.0
170°	1881.9	1884.3	1886.6	1889.0	1891.3	1891.3	1889.0	1886.6	1884.3	1881.9	1881.9
172.5°	1894.0	1896.3	1898.7	1901.0	1903.4	1903.5	1901.4	1899.3	1897.3	1895.2	1895.2
175°	1907.6	1909.9	1912.2	1914.6	1916.9	1917.1	1915.1	1913.1	1911.1	1909.1	1909.1
177.5°	1914.8	1916.7	1918.5	1920.4	1922.3	1922.4	1920.8	1919.2	1917.6	1916.0	1916.0
180°	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6



TEST NUMBER: P332235

CATALOG NUMBER: S123DIW-S1165D1535U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1
2.5°	1672.4	1667.4	1662.4	1653.6	1646.0	1635.3	1632.2	1628.4	1617.1	1607.1	1599.5
5°	1774.6	1755.7	1728.2	1703.1	1682.7	1655.2	1639.4	1622.9	1599.3	1578.1	1560.8
7.5°	1881.5	1844.4	1801.6	1755.4	1712.4	1670.9	1637.4	1607.5	1574.5	1543.2	1518.9
10°	1966.4	1912.9	1853.2	1788.8	1733.7	1680.3	1635.5	1596.2	1553.8	1516.8	1486.2
12.5°	2063.2	1984.0	1901.6	1823.3	1758.3	1684.1	1629.8	1579.9	1531.8	1487.3	1452.9
15°	2177.8	2077.2	1979.7	1872.1	1773.0	1680.3	1615.9	1553.0	1497.2	1451.6	1407.6
17.5°	2282.2	2168.2	2039.8	1908.8	1789.4	1679.4	1589.1	1518.1	1448.3	1392.5	1348.6
20°	2341.3	2211.6	2066.2	1930.2	1798.2	1675.6	1576.6	1491.7	1416.2	1357.3	1307.8
22.5°	2392.2	2240.5	2090.1	1944.7	1797.6	1665.5	1553.3	1465.9	1384.2	1326.5	1273.8
25°	2445.0	2263.5	2112.6	1942.0	1777.8	1641.0	1515.3	1416.2	1334.5	1266.9	1212.7
27.5°	2490.3	2261.9	2082.8	1899.4	1746.6	1609.6	1475.3	1369.1	1282.3	1208.9	1153.9
30°	2520.4	2265.0	2052.0	1870.5	1716.5	1575.0	1444.5	1337.6	1246.5	1171.8	1119.9
32.5°	2539.3	2263.1	2023.7	1830.3	1668.7	1543.5	1411.2	1300.5	1206.9	1133.5	1083.5
35°	2550.3	2249.3	1975.0	1747.1	1591.5	1469.7	1358.9	1244.1	1145.9	1077.5	1020.9
37.5°	2528.3	2220.2	1918.4	1666.9	1496.6	1376.6	1283.4	1185.6	1091.6	1016.4	967.6
40°	2493.7	2201.4	1874.4	1610.4	1431.2	1315.6	1236.3	1140.4	1047.6	976.1	930.5
42.5°	2427.7	2163.0	1826.0	1547.5	1363.3	1247.7	1174.6	1094.5	1006.8	939.6	894.1
45°	2266.6	2079.5	1753.4	1453.2	1263.0	1143.5	1079.1	1020.9	941.5	876.3	837.0
47.5°	2043.1	1954.0	1648.4	1353.7	1158.3	1043.4	976.4	929.6	871.6	818.9	781.2
50°	1887.8	1850.8	1577.3	1285.8	1088.5	976.1	911.7	869.2	827.6	774.9	740.3
52.5°	1708.6	1731.4	1494.4	1215.3	1017.5	907.0	846.3	812.6	774.8	731.5	701.4
55°	1456.3	1538.8	1351.0	1097.1	911.7	806.4	749.0	719.1	697.1	664.9	639.0
57.5°	1220.1	1325.1	1196.0	975.3	807.8	716.9	661.9	629.4	615.2	598.4	578.0
60°	1079.9	1183.6	1085.4	893.6	738.0	651.5	602.8	575.3	561.1	549.4	532.1
62.5°	954.7	1059.7	977.2	810.6	669.4	589.3	546.8	520.0	509.0	502.8	488.1
65°	782.8	873.2	818.1	681.4	571.4	500.6	462.1	443.3	433.0	430.7	421.3
67.5°	637.1	705.9	665.8	565.2	478.6	417.5	384.8	368.8	360.9	360.1	353.0
70°	541.5	605.9	575.3	484.1	409.5	361.5	333.2	319.1	314.4	313.6	309.7
72.5°	467.3	512.3	487.9	411.8	354.1	310.6	289.8	275.1	269.7	270.8	268.2
75°	345.8	379.6	365.5	312.8	266.4	238.1	220.8	211.4	206.7	209.1	205.9
77.5°	248.8	270.2	257.5	221.0	192.4	172.0	159.2	153.4	149.2	149.0	147.6
80°	187.8	200.4	193.3	171.3	147.8	130.5	120.2	116.3	114.0	113.2	112.4
82.5°	133.8	144.5	136.1	121.0	105.0	94.6	88.8	83.6	81.9	82.4	81.6
85°	67.6	71.5	68.4	58.9	52.7	47.9	44.8	42.4	40.9	41.7	40.1
87.5°	28.8	28.5	25.8	22.5	20.5	18.0	17.3	15.4	14.8	15.5	15.5
90°	27.5	23.1	18.8	14.9	11.6	8.2	4.9	1.5	4.9	8.2	11.6
92.5°	52.9	50.5	48.0	45.6	43.3	41.0	38.8	36.5	38.8	41.0	43.3
95°	106.2	103.5	100.9	98.4	96.0	93.7	91.3	89.0	91.3	93.7	96.0
97.5°	170.7	168.8	166.8	165.0	163.3	161.5	159.8	158.0	159.8	161.5	163.3
100°	218.3	216.6	215.0	213.1	211.1	209.1	207.1	205.1	207.1	209.1	211.1
102.5°	270.3	268.1	265.9	264.2	263.0	261.8	260.6	259.4	260.6	261.8	263.0
105°	349.8	346.8	343.8	342.0	341.3	340.6	340.0	339.3	340.0	340.6	341.3
107.5°	437.0	435.8	434.6	433.8	433.4	433.0	432.6	432.2	432.6	433.0	433.4
110°	494.8	494.1	493.4	492.8	492.1	491.4	490.8	490.1	490.8	491.4	492.1



TEST NUMBER: P332235

CATALOG NUMBER: S123DIW-S1165D1535U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	552.5	552.4	552.3	552.0	551.6	551.2	550.8	550.4	550.8	551.2	551.6
115°	643.7	644.4	645.1	644.9	643.9	642.9	641.9	640.9	641.9	642.9	643.9
117.5°	732.8	733.7	734.5	734.6	734.0	733.3	732.6	732.0	732.6	733.3	734.0
120°	793.5	795.2	796.9	796.7	794.7	792.7	790.7	788.7	790.7	792.7	794.7
122.5°	852.2	853.1	854.0	853.7	852.2	850.7	849.2	847.8	849.2	850.7	852.2
125°	940.8	941.5	942.1	942.0	941.0	940.0	938.9	937.9	938.9	940.0	941.0
127.5°	1029.0	1029.7	1030.5	1029.8	1027.6	1025.5	1023.3	1021.2	1023.3	1025.5	1027.6
130°	1086.2	1087.2	1088.2	1087.4	1084.7	1082.0	1079.4	1076.7	1079.4	1082.0	1084.7
132.5°	1142.4	1143.1	1143.9	1142.9	1140.2	1137.5	1134.8	1132.2	1134.8	1137.5	1140.2
135°	1225.1	1225.5	1225.8	1225.0	1222.9	1220.9	1218.9	1216.9	1218.9	1220.9	1222.9
137.5°	1305.0	1304.2	1303.3	1302.0	1300.4	1298.7	1297.0	1295.3	1297.0	1298.7	1300.4
140°	1358.0	1357.7	1357.3	1356.3	1354.6	1353.0	1351.3	1349.6	1351.3	1353.0	1354.6
142.5°	1408.1	1407.5	1406.9	1405.8	1404.1	1402.4	1400.7	1399.1	1400.7	1402.4	1404.1
145°	1481.8	1480.8	1479.8	1479.0	1478.3	1477.6	1477.0	1476.3	1477.0	1477.6	1478.3
147.5°	1551.6	1550.7	1549.7	1548.7	1547.5	1546.2	1545.0	1543.8	1545.0	1546.2	1547.5
150°	1595.6	1594.9	1594.2	1593.6	1592.9	1592.2	1591.6	1590.9	1591.6	1592.2	1592.9
152.5°	1634.7	1634.3	1633.9	1633.2	1632.3	1631.4	1630.4	1629.5	1630.4	1631.4	1632.3
155°	1691.2	1690.9	1690.6	1690.4	1690.4	1690.4	1690.4	1690.4	1690.4	1690.4	1690.4
157.5°	1741.1	1740.9	1740.6	1740.7	1741.1	1741.5	1741.9	1742.3	1741.9	1741.5	1741.1
160°	1771.8	1771.8	1771.8	1772.2	1772.8	1773.5	1774.2	1774.9	1774.2	1773.5	1772.8
162.5°	1800.3	1800.0	1799.7	1800.1	1801.0	1801.9	1802.9	1803.8	1802.9	1801.9	1801.0
165°	1836.7	1836.7	1836.7	1837.2	1838.2	1839.2	1840.2	1841.2	1840.2	1839.2	1838.2
167.5°	1865.7	1865.4	1865.2	1865.7	1867.0	1868.4	1869.7	1871.1	1869.7	1868.4	1867.0
170°	1881.9	1881.9	1881.9	1882.6	1883.9	1885.3	1886.6	1887.9	1886.6	1885.3	1883.9
172.5°	1895.2	1895.2	1895.2	1895.9	1897.2	1898.5	1899.9	1901.2	1899.9	1898.5	1897.2
175°	1909.1	1909.1	1909.1	1909.7	1911.1	1912.4	1913.8	1915.1	1913.8	1912.4	1911.1
177.5°	1916.0	1916.0	1916.0	1916.5	1917.6	1918.7	1919.8	1920.8	1919.8	1918.7	1917.6
180°	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6



TEST NUMBER: P332235

CATALOG NUMBER: S123DIW-S1165D1535U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1
2.5°	1595.1	1590.7	1584.4	1575.0	1567.4	1555.5	1555.5	1557.4	1557.4	1556.8	1555.5
5°	1546.7	1534.9	1520.8	1504.3	1487.0	1469.7	1466.5	1460.2	1455.5	1452.4	1448.5
7.5°	1495.6	1474.7	1454.1	1431.0	1409.9	1392.5	1380.4	1370.3	1363.9	1357.0	1351.9
10°	1461.0	1435.1	1410.7	1386.4	1359.6	1338.4	1325.1	1315.6	1308.6	1302.3	1299.1
12.5°	1420.2	1390.5	1363.6	1340.5	1311.2	1289.4	1276.7	1272.2	1263.9	1250.7	1243.8
15°	1360.4	1332.9	1300.7	1265.3	1251.2	1224.5	1209.5	1202.5	1197.7	1187.5	1184.4
17.5°	1309.3	1273.3	1237.2	1210.8	1184.5	1162.8	1154.5	1145.7	1139.4	1131.1	1128.6
20°	1268.5	1236.3	1203.2	1175.0	1147.4	1123.9	1116.8	1110.5	1104.2	1100.3	1097.1
22.5°	1227.0	1194.8	1167.4	1141.0	1111.6	1096.2	1088.5	1081.6	1077.2	1074.5	1071.4
25°	1168.7	1140.4	1109.7	1086.1	1062.6	1052.3	1047.6	1043.7	1040.6	1036.6	1035.8
27.5°	1116.5	1085.7	1060.8	1038.8	1021.9	1013.4	1008.8	1006.9	1007.6	1009.0	1009.9
30°	1077.5	1049.2	1028.8	1009.9	994.2	986.3	985.5	985.5	988.7	989.5	991.0
32.5°	1041.7	1018.4	998.0	979.7	967.8	962.4	965.4	965.4	967.9	970.0	972.8
35°	989.5	969.0	953.3	937.6	927.4	929.7	931.3	932.9	936.8	941.5	944.7
37.5°	939.6	921.9	905.5	893.3	888.6	892.8	896.6	899.9	904.4	908.1	911.2
40°	903.8	890.4	874.7	863.7	865.3	867.7	870.8	874.7	878.7	881.0	884.2
42.5°	870.5	856.5	844.6	835.4	837.6	840.6	842.5	844.6	849.1	853.4	855.2
45°	819.7	808.7	797.7	792.2	793.8	795.4	796.9	799.3	803.2	806.4	807.1
47.5°	762.7	755.0	747.6	742.2	744.7	744.1	746.2	751.2	752.4	754.3	758.7
50°	726.2	719.1	710.5	708.9	708.9	708.9	709.7	716.0	716.0	719.1	722.3
52.5°	686.0	681.4	675.9	673.1	671.8	671.8	675.1	678.3	679.5	683.9	687.1
55°	626.4	621.7	616.9	614.6	613.0	614.6	620.9	622.4	626.4	628.7	631.1
57.5°	564.3	560.7	556.9	555.6	555.3	557.4	560.8	565.5	566.5	573.7	577.3
60°	523.4	517.9	514.8	514.8	513.2	520.3	518.7	526.6	528.1	532.9	538.4
62.5°	481.3	473.9	472.7	472.7	474.9	476.9	479.1	482.6	486.6	492.6	496.9
65°	413.4	409.5	415.0	414.2	412.6	417.3	417.3	421.3	426.0	431.5	440.1
67.5°	349.1	347.1	347.5	347.5	349.9	352.6	354.8	358.2	363.9	369.7	375.4
70°	305.7	308.1	304.2	307.3	309.7	310.4	312.0	316.7	323.0	326.9	333.2
72.5°	263.6	263.4	263.9	265.2	267.5	268.9	270.5	275.9	282.8	286.1	291.1
75°	202.8	202.0	204.3	204.3	208.3	209.8	211.4	213.8	220.1	224.8	228.7
77.5°	148.1	149.0	148.5	151.2	150.1	150.4	155.3	157.7	158.3	167.6	169.6
80°	111.6	113.2	114.0	114.7	115.5	114.0	119.5	121.8	121.8	127.3	131.2
82.5°	80.2	81.1	83.2	83.9	84.1	85.7	86.1	87.9	89.8	92.1	97.3
85°	40.1	42.4	43.2	42.4	43.2	41.7	44.0	44.8	45.6	45.6	45.6
87.5°	15.6	17.0	17.2	18.7	18.9	20.4	20.7	19.7	20.0	22.1	19.8
90°	14.9	18.8	23.1	27.5	31.8	36.2	37.5	38.9	40.2	41.6	42.6
92.5°	45.6	48.0	50.5	52.9	55.4	57.9	59.0	60.0	61.1	62.2	62.5
95°	98.4	100.9	103.5	106.2	108.9	111.6	112.9	114.3	115.6	116.9	117.6
97.5°	165.0	166.8	168.8	170.7	172.7	174.6	176.2	177.7	179.2	180.8	181.5
100°	213.1	215.0	216.6	218.3	220.0	221.7	222.7	223.7	224.7	225.7	226.5
102.5°	264.2	265.9	268.1	270.3	272.5	274.7	275.8	276.8	277.8	278.8	279.2
105°	342.0	343.8	346.8	349.8	352.9	355.9	355.9	355.9	355.9	355.9	356.2
107.5°	433.8	434.6	435.8	437.0	438.2	439.4	440.5	441.6	442.6	443.7	444.0
110°	492.8	493.4	494.1	494.8	495.4	496.1	497.5	498.8	500.1	501.5	501.8



TEST NUMBER: P332235

CATALOG NUMBER: S123DIW-S1165D1535U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	552.0	552.3	552.4	552.5	552.7	552.8	554.4	556.0	557.6	559.2	560.0
115°	644.9	645.1	644.4	643.7	643.1	642.4	642.7	643.1	643.4	643.7	643.7
117.5°	734.6	734.5	733.7	732.8	731.9	731.1	731.0	730.9	730.9	730.8	730.3
120°	796.7	796.9	795.2	793.5	791.8	790.2	789.8	789.5	789.2	788.8	788.3
122.5°	853.7	854.0	853.1	852.2	851.4	850.5	849.6	848.7	847.9	847.0	846.1
125°	942.0	942.1	941.5	940.8	940.1	939.5	938.1	936.8	935.4	934.1	932.7
127.5°	1029.8	1030.5	1029.7	1029.0	1028.3	1027.5	1025.6	1023.8	1021.9	1020.0	1018.3
130°	1087.4	1088.2	1087.2	1086.2	1085.2	1084.2	1082.9	1081.5	1080.2	1078.9	1077.0
132.5°	1142.9	1143.9	1143.1	1142.4	1141.6	1140.9	1139.3	1137.7	1136.1	1134.5	1132.8
135°	1225.0	1225.8	1225.5	1225.1	1224.8	1224.5	1223.1	1221.8	1220.4	1219.1	1218.1
137.5°	1302.0	1303.3	1304.2	1305.0	1305.9	1306.8	1305.4	1304.0	1302.6	1301.2	1299.8
140°	1356.3	1357.3	1357.7	1358.0	1358.3	1358.7	1358.3	1358.0	1357.7	1357.3	1356.0
142.5°	1405.8	1406.9	1407.5	1408.1	1408.7	1409.3	1409.0	1408.7	1408.3	1408.0	1406.9
145°	1479.0	1479.8	1480.8	1481.8	1482.8	1483.8	1483.5	1483.1	1482.8	1482.5	1481.6
147.5°	1548.7	1549.7	1550.7	1551.6	1552.5	1553.5	1553.5	1553.5	1553.5	1553.5	1552.5
150°	1593.6	1594.2	1594.9	1595.6	1596.2	1596.9	1596.9	1596.9	1596.9	1596.9	1595.9
152.5°	1633.2	1633.9	1634.3	1634.7	1635.1	1635.5	1636.1	1636.6	1637.1	1637.7	1637.1
155°	1690.4	1690.6	1690.9	1691.2	1691.6	1691.9	1693.3	1694.6	1695.9	1697.3	1696.8
157.5°	1740.7	1740.6	1740.9	1741.1	1741.4	1741.7	1743.1	1744.5	1745.9	1747.3	1747.1
160°	1772.2	1771.8	1771.8	1771.8	1771.8	1771.8	1773.5	1775.2	1776.9	1778.5	1778.7
162.5°	1800.1	1799.7	1800.0	1800.3	1800.5	1800.8	1802.5	1804.1	1805.8	1807.5	1807.3
165°	1837.2	1836.7	1836.7	1836.7	1836.7	1836.7	1838.7	1840.7	1842.7	1844.7	1844.6
167.5°	1865.7	1865.2	1865.4	1865.7	1866.0	1866.2	1868.3	1870.4	1872.5	1874.5	1874.5
170°	1882.6	1881.9	1881.9	1881.9	1881.9	1881.9	1884.3	1886.6	1889.0	1891.3	1891.3
172.5°	1895.9	1895.2	1895.2	1895.2	1895.2	1895.2	1897.3	1899.3	1901.4	1903.5	1903.4
175°	1909.7	1909.1	1909.1	1909.1	1909.1	1909.1	1911.1	1913.1	1915.1	1917.1	1916.9
177.5°	1916.5	1916.0	1916.0	1916.0	1916.0	1916.0	1917.6	1919.2	1920.8	1922.4	1922.3
180°	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6



TEST NUMBER: P332235

CATALOG NUMBER: S123DIW-S1165D1535U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1
2.5°	1551.1	1550.5	1554.9	1551.7	1554.9	1550.5	1551.1	1555.5	1556.8	1557.4	1557.4
5°	1443.7	1446.1	1438.2	1438.2	1438.2	1446.1	1443.7	1448.5	1452.4	1455.5	1460.2
7.5°	1348.2	1344.7	1345.0	1340.8	1345.0	1344.7	1348.2	1351.9	1357.0	1363.9	1370.3
10°	1289.7	1285.0	1283.4	1284.2	1283.4	1285.0	1289.7	1299.1	1302.3	1308.6	1315.6
12.5°	1241.3	1240.3	1230.0	1230.1	1230.0	1240.3	1241.3	1243.8	1250.7	1263.9	1272.2
15°	1184.4	1169.5	1167.9	1172.6	1167.9	1169.5	1184.4	1184.4	1187.5	1197.7	1202.5
17.5°	1127.3	1119.5	1119.9	1117.6	1119.9	1119.5	1127.3	1128.6	1131.1	1139.4	1145.7
20°	1097.1	1092.4	1091.6	1086.1	1091.6	1092.4	1097.1	1097.1	1100.3	1104.2	1110.5
22.5°	1069.5	1067.9	1068.4	1062.3	1068.4	1067.9	1069.5	1071.4	1074.5	1077.2	1081.6
25°	1035.1	1039.0	1035.8	1035.8	1035.8	1039.0	1035.1	1035.8	1036.6	1040.6	1043.7
27.5°	1011.8	1011.6	1010.1	1010.1	1010.1	1011.6	1011.8	1009.9	1009.0	1007.6	1006.9
30°	994.2	993.4	995.0	995.0	995.0	993.4	994.2	991.0	989.5	988.7	985.5
32.5°	976.6	977.7	978.0	978.6	978.0	977.7	976.6	972.8	970.0	967.9	965.4
35°	949.4	950.2	952.5	951.0	952.5	950.2	949.4	944.7	941.5	936.8	932.9
37.5°	912.6	916.2	915.4	916.7	915.4	916.2	912.6	911.2	908.1	904.4	899.9
40°	884.9	887.3	886.5	886.5	886.5	887.3	884.9	884.2	881.0	878.7	874.7
42.5°	856.7	858.4	856.3	855.1	856.3	858.4	856.7	855.2	853.4	849.1	844.6
45°	810.3	808.7	811.1	807.9	811.1	808.7	810.3	807.1	806.4	803.2	799.3
47.5°	758.4	760.0	760.6	763.0	760.6	760.0	758.4	758.7	754.3	752.4	751.2
50°	723.8	728.5	728.5	727.8	728.5	728.5	723.8	722.3	719.1	716.0	716.0
52.5°	689.9	692.1	695.2	695.1	695.2	692.1	689.9	687.1	683.9	679.5	678.3
55°	637.4	639.0	640.5	641.3	640.5	639.0	637.4	631.1	628.7	626.4	622.4
57.5°	583.0	582.4	586.1	587.2	586.1	582.4	583.0	577.3	573.7	566.5	565.5
60°	544.6	544.6	550.9	553.3	550.9	544.6	544.6	538.4	532.9	528.1	526.6
62.5°	503.8	506.3	512.6	509.3	512.6	506.3	503.8	496.9	492.6	486.6	482.6
65°	444.0	450.3	449.5	452.7	449.5	450.3	444.0	440.1	431.5	426.0	421.3
67.5°	381.6	385.6	391.2	391.7	391.2	385.6	381.6	375.4	369.7	363.9	358.2
70°	339.5	343.4	346.6	348.9	346.6	343.4	339.5	333.2	326.9	323.0	316.7
72.5°	298.7	300.7	308.2	304.9	308.2	300.7	298.7	291.1	286.1	282.8	275.9
75°	234.2	239.7	244.4	242.1	244.4	239.7	234.2	228.7	224.8	220.1	213.8
77.5°	173.2	178.7	180.9	178.9	180.9	178.7	173.2	169.6	167.6	158.3	157.7
80°	136.8	136.0	140.7	139.9	140.7	136.0	136.8	131.2	127.3	121.8	121.8
82.5°	100.3	99.5	101.7	102.2	101.7	99.5	100.3	97.3	92.1	89.8	87.9
85°	48.7	51.1	47.9	47.2	47.9	51.1	48.7	45.6	45.6	45.6	44.8
87.5°	20.0	20.1	19.6	19.1	19.6	20.1	20.0	19.8	22.1	20.0	19.7
90°	43.2	43.9	44.6	45.2	44.6	43.9	43.2	42.6	41.6	40.2	38.9
92.5°	62.1	61.7	61.3	60.9	61.3	61.7	62.1	62.5	62.2	61.1	60.0
95°	117.6	117.6	117.6	117.6	117.6	117.6	117.6	117.6	116.9	115.6	114.3
97.5°	181.4	181.2	181.1	181.0	181.1	181.2	181.4	181.5	180.8	179.2	177.7
100°	227.2	227.9	228.5	229.2	228.5	227.9	227.2	226.5	225.7	224.7	223.7
102.5°	279.1	278.9	278.8	278.7	278.8	278.9	279.1	279.2	278.8	277.8	276.8
105°	356.9	357.6	358.2	358.9	358.2	357.6	356.9	356.2	355.9	355.9	355.9
107.5°	443.6	443.2	442.8	442.4	442.8	443.2	443.6	444.0	443.7	442.6	441.6
110°	501.1	500.5	499.8	499.1	499.8	500.5	501.1	501.8	501.5	500.1	498.8



TEST NUMBER: P332235

CATALOG NUMBER: S123DIW-S1165D1535U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	559.9	559.7	559.6	559.4	559.6	559.7	559.9	560.0	559.2	557.6	556.0
115°	643.4	643.1	642.7	642.4	642.7	643.1	643.4	643.7	643.7	643.4	643.1
117.5°	729.3	728.4	727.5	726.5	727.5	728.4	729.3	730.3	730.8	730.9	730.9
120°	787.7	787.0	786.3	785.6	786.3	787.0	787.7	788.3	788.8	789.2	789.5
122.5°	845.2	844.2	843.3	842.3	843.3	844.2	845.2	846.1	847.0	847.9	848.7
125°	931.4	930.1	928.7	927.4	928.7	930.1	931.4	932.7	934.1	935.4	936.8
127.5°	1016.8	1015.2	1013.7	1012.1	1013.7	1015.2	1016.8	1018.3	1020.0	1021.9	1023.8
130°	1074.7	1072.3	1070.0	1067.6	1070.0	1072.3	1074.7	1077.0	1078.9	1080.2	1081.5
132.5°	1131.0	1129.2	1127.3	1125.5	1127.3	1129.2	1131.0	1132.8	1134.5	1136.1	1137.7
135°	1217.4	1216.7	1216.1	1215.4	1216.1	1216.7	1217.4	1218.1	1219.1	1220.4	1221.8
137.5°	1298.5	1297.3	1296.0	1294.7	1296.0	1297.3	1298.5	1299.8	1301.2	1302.6	1304.0
140°	1353.6	1351.3	1348.9	1346.6	1348.9	1351.3	1353.6	1356.0	1357.3	1357.7	1358.0
142.5°	1405.1	1403.3	1401.5	1399.7	1401.5	1403.3	1405.1	1406.9	1408.0	1408.3	1408.7
145°	1480.3	1479.0	1477.6	1476.3	1477.6	1479.0	1480.3	1481.6	1482.5	1482.8	1483.1
147.5°	1550.5	1548.5	1546.4	1544.4	1546.4	1548.5	1550.5	1552.5	1553.5	1553.5	1553.5
150°	1593.9	1591.9	1589.9	1587.9	1589.9	1591.9	1593.9	1595.9	1596.9	1596.9	1596.9
152.5°	1635.3	1633.6	1631.8	1630.1	1631.8	1633.6	1635.3	1637.1	1637.7	1637.1	1636.6
155°	1694.4	1692.1	1689.7	1687.4	1689.7	1692.1	1694.4	1696.8	1697.3	1695.9	1694.6
157.5°	1745.2	1743.3	1741.4	1739.6	1741.4	1743.3	1745.2	1747.1	1747.3	1745.9	1744.5
160°	1777.4	1776.0	1774.7	1773.3	1774.7	1776.0	1777.4	1778.7	1778.5	1776.9	1775.2
162.5°	1805.1	1803.0	1800.8	1798.7	1800.8	1803.0	1805.1	1807.3	1807.5	1805.8	1804.1
165°	1842.2	1839.9	1837.5	1835.2	1837.5	1839.9	1842.2	1844.6	1844.7	1842.7	1840.7
167.5°	1872.5	1870.4	1868.3	1866.2	1868.3	1870.4	1872.5	1874.5	1874.5	1872.5	1870.4
170°	1889.0	1886.6	1884.3	1881.9	1884.3	1886.6	1889.0	1891.3	1891.3	1889.0	1886.6
172.5°	1901.0	1898.7	1896.3	1894.0	1896.3	1898.7	1901.0	1903.4	1903.5	1901.4	1899.3
175°	1914.6	1912.2	1909.9	1907.6	1909.9	1912.2	1914.6	1916.9	1917.1	1915.1	1913.1
177.5°	1920.4	1918.5	1916.7	1914.8	1916.7	1918.5	1920.4	1922.3	1922.4	1920.8	1919.2
180°	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6



TEST NUMBER: P332235

CATALOG NUMBER: S123DIW-S1165D1535U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1
2.5°	1555.5	1555.5	1567.4	1575.0	1584.4	1590.7	1595.1	1599.5	1607.1	1617.1	1628.4
5°	1466.5	1469.7	1487.0	1504.3	1520.8	1534.9	1546.7	1560.8	1578.1	1599.3	1622.9
7.5°	1380.4	1392.5	1409.9	1431.0	1454.1	1474.7	1495.6	1518.9	1543.2	1574.5	1607.5
10°	1325.1	1338.4	1359.6	1386.4	1410.7	1435.1	1461.0	1486.2	1516.8	1553.8	1596.2
12.5°	1276.7	1289.4	1311.2	1340.5	1363.6	1390.5	1420.2	1452.9	1487.3	1531.8	1579.9
15°	1209.5	1224.5	1251.2	1265.3	1300.7	1332.9	1360.4	1407.6	1451.6	1497.2	1553.0
17.5°	1154.5	1162.8	1184.5	1210.8	1237.2	1273.3	1309.3	1348.6	1392.5	1448.3	1518.1
20°	1116.8	1123.9	1147.4	1175.0	1203.2	1236.3	1268.5	1307.8	1357.3	1416.2	1491.7
22.5°	1088.5	1096.2	1111.6	1141.0	1167.4	1194.8	1227.0	1273.8	1326.5	1384.2	1465.9
25°	1047.6	1052.3	1062.6	1086.1	1109.7	1140.4	1168.7	1212.7	1266.9	1334.5	1416.2
27.5°	1008.8	1013.4	1021.9	1038.8	1060.8	1085.7	1116.5	1153.9	1208.9	1282.3	1369.1
30°	985.5	986.3	994.2	1009.9	1028.8	1049.2	1077.5	1119.9	1171.8	1246.5	1337.6
32.5°	965.4	962.4	967.8	979.7	998.0	1018.4	1041.7	1083.5	1133.5	1206.9	1300.5
35°	931.3	929.7	927.4	937.6	953.3	969.0	989.5	1020.9	1077.5	1145.9	1244.1
37.5°	896.6	892.8	888.6	893.3	905.5	921.9	939.6	967.6	1016.4	1091.6	1185.6
40°	870.8	867.7	865.3	863.7	874.7	890.4	903.8	930.5	976.1	1047.6	1140.4
42.5°	842.5	840.6	837.6	835.4	844.6	856.5	870.5	894.1	939.6	1006.8	1094.5
45°	796.9	795.4	793.8	792.2	797.7	808.7	819.7	837.0	876.3	941.5	1020.9
47.5°	746.2	744.1	744.7	742.2	747.6	755.0	762.7	781.2	818.9	871.6	929.6
50°	709.7	708.9	708.9	708.9	710.5	719.1	726.2	740.3	774.9	827.6	869.2
52.5°	675.1	671.8	671.8	673.1	675.9	681.4	686.0	701.4	731.5	774.8	812.6
55°	620.9	614.6	613.0	614.6	616.9	621.7	626.4	639.0	664.9	697.1	719.1
57.5°	560.8	557.4	555.3	555.6	556.9	560.7	564.3	578.0	598.4	615.2	629.4
60°	518.7	520.3	513.2	514.8	514.8	517.9	523.4	532.1	549.4	561.1	575.3
62.5°	479.1	476.9	474.9	472.7	472.7	473.9	481.3	488.1	502.8	509.0	520.0
65°	417.3	417.3	412.6	414.2	415.0	409.5	413.4	421.3	430.7	433.0	443.3
67.5°	354.8	352.6	349.9	347.5	347.5	347.1	349.1	353.0	360.1	360.9	368.8
70°	312.0	310.4	309.7	307.3	304.2	308.1	305.7	309.7	313.6	314.4	319.1
72.5°	270.5	268.9	267.5	265.2	263.9	263.4	263.6	268.2	270.8	269.7	275.1
75°	211.4	209.8	208.3	204.3	204.3	202.0	202.8	205.9	209.1	206.7	211.4
77.5°	155.3	150.4	150.1	151.2	148.5	149.0	148.1	147.6	149.0	149.2	153.4
80°	119.5	114.0	115.5	114.7	114.0	113.2	111.6	112.4	113.2	114.0	116.3
82.5°	86.1	85.7	84.1	83.9	83.2	81.1	80.2	81.6	82.4	81.9	83.6
85°	44.0	41.7	43.2	42.4	43.2	42.4	40.1	40.1	41.7	40.9	42.4
87.5°	20.7	20.4	18.9	18.7	17.2	17.0	15.6	15.5	15.5	14.8	15.4
90°	37.5	36.2	31.8	27.5	23.1	18.8	14.9	11.6	8.2	4.9	1.5
92.5°	59.0	57.9	55.4	52.9	50.5	48.0	45.6	43.3	41.0	38.8	36.5
95°	112.9	111.6	108.9	106.2	103.5	100.9	98.4	96.0	93.7	91.3	89.0
97.5°	176.2	174.6	172.7	170.7	168.8	166.8	165.0	163.3	161.5	159.8	158.0
100°	222.7	221.7	220.0	218.3	216.6	215.0	213.1	211.1	209.1	207.1	205.1
102.5°	275.8	274.7	272.5	270.3	268.1	265.9	264.2	263.0	261.8	260.6	259.4
105°	355.9	355.9	352.9	349.8	346.8	343.8	342.0	341.3	340.6	340.0	339.3
107.5°	440.5	439.4	438.2	437.0	435.8	434.6	433.8	433.4	433.0	432.6	432.2
110°	497.5	496.1	495.4	494.8	494.1	493.4	492.8	492.1	491.4	490.8	490.1



TEST NUMBER: P332235

CATALOG NUMBER: S123DIW-S1165D1535U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	554.4	552.8	552.7	552.5	552.4	552.3	552.0	551.6	551.2	550.8	550.4
115°	642.7	642.4	643.1	643.7	644.4	645.1	644.9	643.9	642.9	641.9	640.9
117.5°	731.0	731.1	731.9	732.8	733.7	734.5	734.6	734.0	733.3	732.6	732.0
120°	789.8	790.2	791.8	793.5	795.2	796.9	796.7	794.7	792.7	790.7	788.7
122.5°	849.6	850.5	851.4	852.2	853.1	854.0	853.7	852.2	850.7	849.2	847.8
125°	938.1	939.5	940.1	940.8	941.5	942.1	942.0	941.0	940.0	938.9	937.9
127.5°	1025.6	1027.5	1028.3	1029.0	1029.7	1030.5	1029.8	1027.6	1025.5	1023.3	1021.2
130°	1082.9	1084.2	1085.2	1086.2	1087.2	1088.2	1087.4	1084.7	1082.0	1079.4	1076.7
132.5°	1139.3	1140.9	1141.6	1142.4	1143.1	1143.9	1142.9	1140.2	1137.5	1134.8	1132.2
135°	1223.1	1224.5	1224.8	1225.1	1225.5	1225.8	1225.0	1222.9	1220.9	1218.9	1216.9
137.5°	1305.4	1306.8	1305.9	1305.0	1304.2	1303.3	1302.0	1300.4	1298.7	1297.0	1295.3
140°	1358.3	1358.7	1358.3	1358.0	1357.7	1357.3	1356.3	1354.6	1353.0	1351.3	1349.6
142.5°	1409.0	1409.3	1408.7	1408.1	1407.5	1406.9	1405.8	1404.1	1402.4	1400.7	1399.1
145°	1483.5	1483.8	1482.8	1481.8	1480.8	1479.8	1479.0	1478.3	1477.6	1477.0	1476.3
147.5°	1553.5	1553.5	1552.5	1551.6	1550.7	1549.7	1548.7	1547.5	1546.2	1545.0	1543.8
150°	1596.9	1596.9	1596.2	1595.6	1594.9	1594.2	1593.6	1592.9	1592.2	1591.6	1590.9
152.5°	1636.1	1635.5	1635.1	1634.7	1634.3	1633.9	1633.2	1632.3	1631.4	1630.4	1629.5
155°	1693.3	1691.9	1691.6	1691.2	1690.9	1690.6	1690.4	1690.4	1690.4	1690.4	1690.4
157.5°	1743.1	1741.7	1741.4	1741.1	1740.9	1740.6	1740.7	1741.1	1741.5	1741.9	1742.3
160°	1773.5	1771.8	1771.8	1771.8	1771.8	1771.8	1772.2	1772.8	1773.5	1774.2	1774.9
162.5°	1802.5	1800.8	1800.5	1800.3	1800.0	1799.7	1800.1	1801.0	1801.9	1802.9	1803.8
165°	1838.7	1836.7	1836.7	1836.7	1836.7	1836.7	1837.2	1838.2	1839.2	1840.2	1841.2
167.5°	1868.3	1866.2	1866.0	1865.7	1865.4	1865.2	1865.7	1867.0	1868.4	1869.7	1871.1
170°	1884.3	1881.9	1881.9	1881.9	1881.9	1881.9	1882.6	1883.9	1885.3	1886.6	1887.9
172.5°	1897.3	1895.2	1895.2	1895.2	1895.2	1895.2	1895.9	1897.2	1898.5	1899.9	1901.2
175°	1911.1	1909.1	1909.1	1909.1	1909.1	1909.1	1909.7	1911.1	1912.4	1913.8	1915.1
177.5°	1917.6	1916.0	1916.0	1916.0	1916.0	1916.0	1916.5	1917.6	1918.7	1919.8	1920.8
180°	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6



TEST NUMBER: P332235

CATALOG NUMBER: S123DIW-S1165D1535U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1
2.5°	1632.2	1635.3	1646.0	1653.6	1662.4	1667.4	1672.4	1676.2	1681.2	1682.5	1700.7
5°	1639.4	1655.2	1682.7	1703.1	1728.2	1755.7	1774.6	1783.3	1806.0	1824.9	1862.6
7.5°	1637.4	1670.9	1712.4	1755.4	1801.6	1844.4	1881.5	1925.5	1956.8	2003.8	2050.2
10°	1635.5	1680.3	1733.7	1788.8	1853.2	1912.9	1966.4	2026.1	2075.6	2140.8	2196.6
12.5°	1629.8	1684.1	1758.3	1823.3	1901.6	1984.0	2063.2	2139.9	2183.8	2292.4	2343.8
15°	1615.9	1680.3	1773.0	1872.1	1979.7	2077.2	2177.8	2258.0	2387.6	2482.7	2543.2
17.5°	1589.1	1679.4	1789.4	1908.8	2039.8	2168.2	2282.2	2403.8	2541.4	2656.4	2779.0
20°	1576.6	1675.6	1798.2	1930.2	2066.2	2211.6	2341.3	2487.4	2637.6	2750.7	2907.9
22.5°	1553.3	1665.5	1797.6	1944.7	2090.1	2240.5	2392.2	2539.6	2713.0	2868.9	3018.6
25°	1515.3	1641.0	1777.8	1942.0	2112.6	2263.5	2445.0	2640.7	2821.5	3021.9	3171.2
27.5°	1475.3	1609.6	1746.6	1899.4	2082.8	2261.9	2490.3	2711.4	2932.4	3105.5	3216.0
30°	1444.5	1575.0	1716.5	1870.5	2052.0	2265.0	2520.4	2761.7	2977.1	3125.6	3187.7
32.5°	1411.2	1543.5	1668.7	1830.3	2023.7	2263.1	2539.3	2791.3	2979.6	3078.5	3066.4
35°	1358.9	1469.7	1591.5	1747.1	1975.0	2249.3	2550.3	2793.9	2909.5	2888.3	2727.9
37.5°	1283.4	1376.6	1496.6	1666.9	1918.4	2220.2	2528.3	2711.1	2703.6	2530.8	2298.5
40°	1236.3	1315.6	1431.2	1610.4	1874.4	2201.4	2493.7	2612.4	2511.8	2270.5	1992.3
42.5°	1174.6	1247.7	1363.3	1547.5	1826.0	2163.0	2427.7	2462.1	2265.3	1987.6	1732.6
45°	1079.1	1143.5	1263.0	1453.2	1753.4	2079.5	2266.6	2182.5	1917.6	1630.8	1436.7
47.5°	976.4	1043.4	1158.3	1353.7	1648.4	1954.0	2043.1	1864.2	1592.3	1359.6	1181.4
50°	911.7	976.1	1088.5	1285.8	1577.3	1850.8	1887.8	1656.7	1406.8	1202.5	1056.3
52.5°	846.3	907.0	1017.5	1215.3	1494.4	1731.4	1708.6	1473.1	1243.3	1069.2	954.4
55°	749.0	806.4	911.7	1097.1	1351.0	1538.8	1456.3	1231.5	1041.3	906.2	818.9
57.5°	661.9	716.9	807.8	975.3	1196.0	1325.1	1220.1	1030.7	879.4	775.4	710.3
60°	602.8	651.5	738.0	893.6	1085.4	1183.6	1079.9	912.5	785.1	701.8	643.7
62.5°	546.8	589.3	669.4	810.6	977.2	1059.7	954.7	813.1	704.7	630.8	581.4
65°	462.1	500.6	571.4	681.4	818.1	873.2	782.8	668.0	583.9	528.9	495.9
67.5°	384.8	417.5	478.6	565.2	665.8	705.9	637.1	548.3	484.9	440.7	414.5
70°	333.2	361.5	409.5	484.1	575.3	605.9	541.5	468.4	422.0	386.7	362.3
72.5°	289.8	310.6	354.1	411.8	487.9	512.3	467.3	403.0	359.8	333.2	313.9
75°	220.8	238.1	266.4	312.8	365.5	379.6	345.8	305.7	276.6	257.8	242.8
77.5°	159.2	172.0	192.4	221.0	257.5	270.2	248.8	222.1	200.9	188.1	179.8
80°	120.2	130.5	147.8	171.3	193.3	200.4	187.8	167.4	152.5	145.4	138.3
82.5°	88.8	94.6	105.0	121.0	136.1	144.5	133.8	121.5	113.5	107.0	104.4
85°	44.8	47.9	52.7	58.9	68.4	71.5	67.6	64.4	59.7	55.8	55.8
87.5°	17.3	18.0	20.5	22.5	25.8	28.5	28.8	28.4	28.6	28.3	27.9
90°	4.9	8.2	11.6	14.9	18.8	23.1	27.5	31.8	36.2	37.5	38.9
92.5°	38.8	41.0	43.3	45.6	48.0	50.5	52.9	55.4	57.9	59.0	60.0
95°	91.3	93.7	96.0	98.4	100.9	103.5	106.2	108.9	111.6	112.9	114.3
97.5°	159.8	161.5	163.3	165.0	166.8	168.8	170.7	172.7	174.6	176.2	177.7
100°	207.1	209.1	211.1	213.1	215.0	216.6	218.3	220.0	221.7	222.7	223.7
102.5°	260.6	261.8	263.0	264.2	265.9	268.1	270.3	272.5	274.7	275.8	276.8
105°	340.0	340.6	341.3	342.0	343.8	346.8	349.8	352.9	355.9	355.9	355.9
107.5°	432.6	433.0	433.4	433.8	434.6	435.8	437.0	438.2	439.4	440.5	441.6
110°	490.8	491.4	492.1	492.8	493.4	494.1	494.8	495.4	496.1	497.5	498.8



TEST NUMBER: P332235

CATALOG NUMBER: S123DIW-S1165D1535U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	550.8	551.2	551.6	552.0	552.3	552.4	552.5	552.7	552.8	554.4	556.0
115°	641.9	642.9	643.9	644.9	645.1	644.4	643.7	643.1	642.4	642.7	643.1
117.5°	732.6	733.3	734.0	734.6	734.5	733.7	732.8	731.9	731.1	731.0	730.9
120°	790.7	792.7	794.7	796.7	796.9	795.2	793.5	791.8	790.2	789.8	789.5
122.5°	849.2	850.7	852.2	853.7	854.0	853.1	852.2	851.4	850.5	849.6	848.7
125°	938.9	940.0	941.0	942.0	942.1	941.5	940.8	940.1	939.5	938.1	936.8
127.5°	1023.3	1025.5	1027.6	1029.8	1030.5	1029.7	1029.0	1028.3	1027.5	1025.6	1023.8
130°	1079.4	1082.0	1084.7	1087.4	1088.2	1087.2	1086.2	1085.2	1084.2	1082.9	1081.5
132.5°	1134.8	1137.5	1140.2	1142.9	1143.9	1143.1	1142.4	1141.6	1140.9	1139.3	1137.7
135°	1218.9	1220.9	1222.9	1225.0	1225.8	1225.5	1225.1	1224.8	1224.5	1223.1	1221.8
137.5°	1297.0	1298.7	1300.4	1302.0	1303.3	1304.2	1305.0	1305.9	1306.8	1305.4	1304.0
140°	1351.3	1353.0	1354.6	1356.3	1357.3	1357.7	1358.0	1358.3	1358.7	1358.3	1358.0
142.5°	1400.7	1402.4	1404.1	1405.8	1406.9	1407.5	1408.1	1408.7	1409.3	1409.0	1408.7
145°	1477.0	1477.6	1478.3	1479.0	1479.8	1480.8	1481.8	1482.8	1483.8	1483.5	1483.1
147.5°	1545.0	1546.2	1547.5	1548.7	1549.7	1550.7	1551.6	1552.5	1553.5	1553.5	1553.5
150°	1591.6	1592.2	1592.9	1593.6	1594.2	1594.9	1595.6	1596.2	1596.9	1596.9	1596.9
152.5°	1630.4	1631.4	1632.3	1633.2	1633.9	1634.3	1634.7	1635.1	1635.5	1636.1	1636.6
155°	1690.4	1690.4	1690.4	1690.4	1690.6	1690.9	1691.2	1691.6	1691.9	1693.3	1694.6
157.5°	1741.9	1741.5	1741.1	1740.7	1740.6	1740.9	1741.1	1741.4	1741.7	1743.1	1744.5
160°	1774.2	1773.5	1772.8	1772.2	1771.8	1771.8	1771.8	1771.8	1771.8	1773.5	1775.2
162.5°	1802.9	1801.9	1801.0	1800.1	1799.7	1800.0	1800.3	1800.5	1800.8	1802.5	1804.1
165°	1840.2	1839.2	1838.2	1837.2	1836.7	1836.7	1836.7	1836.7	1836.7	1838.7	1840.7
167.5°	1869.7	1868.4	1867.0	1865.7	1865.2	1865.4	1865.7	1866.0	1866.2	1868.3	1870.4
170°	1886.6	1885.3	1883.9	1882.6	1881.9	1881.9	1881.9	1881.9	1881.9	1884.3	1886.6
172.5°	1899.9	1898.5	1897.2	1895.9	1895.2	1895.2	1895.2	1895.2	1895.2	1897.3	1899.3
175°	1913.8	1912.4	1911.1	1909.7	1909.1	1909.1	1909.1	1909.1	1909.1	1911.1	1913.1
177.5°	1919.8	1918.7	1917.6	1916.5	1916.0	1916.0	1916.0	1916.0	1916.0	1917.6	1919.2
180°	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6



TEST NUMBER: P332235

CATALOG NUMBER: S123DIW-S1165D1535U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1
2.5°	1707.0	1707.6	1714.6	1719.6	1717.1	1720.2	1721.5
5°	1865.0	1893.3	1908.2	1919.2	1920.0	1920.8	1927.1
7.5°	2089.0	2119.3	2141.5	2175.1	2185.2	2196.6	2193.3
10°	2252.5	2297.2	2335.8	2356.2	2378.2	2410.4	2384.5
12.5°	2405.2	2484.6	2543.2	2575.0	2595.7	2602.2	2589.5
15°	2657.2	2760.9	2816.7	2815.2	2885.9	2916.6	2868.6
17.5°	2888.3	2984.0	3060.7	3100.0	3158.9	3172.0	3166.0
20°	3029.7	3134.3	3194.0	3261.6	3292.2	3319.7	3324.4
22.5°	3151.7	3245.5	3309.7	3365.9	3391.6	3404.6	3412.5
25°	3277.3	3351.2	3389.7	3409.3	3416.4	3414.8	3404.6
27.5°	3268.6	3274.3	3231.9	3190.2	3153.0	3111.0	3096.5
30°	3183.8	3117.7	2999.9	2933.1	2834.8	2757.0	2788.4
32.5°	2960.6	2829.2	2696.8	2550.8	2429.9	2395.5	2360.9
35°	2526.7	2295.7	2160.5	2003.3	1940.4	1877.6	1834.3
37.5°	2044.2	1865.5	1705.1	1602.3	1539.3	1499.5	1478.2
40°	1767.5	1606.4	1474.4	1391.1	1343.1	1298.3	1292.1
42.5°	1546.9	1397.1	1297.7	1231.4	1185.3	1166.3	1152.5
45°	1266.9	1162.4	1095.6	1048.4	1017.8	1006.0	990.3
47.5°	1072.3	998.4	948.3	916.2	893.1	884.3	883.1
50°	963.5	902.2	865.3	840.1	822.1	818.9	806.4
52.5°	881.8	828.7	799.9	777.9	764.9	756.1	752.3
55°	765.5	730.1	704.2	691.6	681.4	672.7	672.7
57.5°	669.8	640.2	623.1	612.4	609.2	603.1	599.2
60°	610.7	585.5	572.2	562.7	556.4	557.2	550.1
62.5°	552.8	536.5	523.7	514.3	506.8	506.9	507.4
65°	470.8	458.2	448.8	445.6	440.9	435.4	437.0
67.5°	398.9	387.1	379.8	374.4	372.8	369.9	374.4
70°	347.4	338.7	333.2	328.5	326.9	327.7	331.7
72.5°	300.2	294.1	290.5	288.3	284.8	285.0	287.6
75°	235.8	231.1	227.9	225.6	224.8	224.8	224.8
77.5°	173.2	172.1	170.7	167.2	167.4	168.3	168.5
80°	136.8	134.4	133.6	132.0	129.7	128.1	132.0
82.5°	102.2	99.8	99.0	98.7	95.1	94.8	98.1
85°	55.0	52.7	53.4	52.7	52.7	51.9	51.9
87.5°	27.5	27.2	26.7	27.5	27.0	26.5	27.9
90°	40.2	41.6	42.6	43.2	43.9	44.6	45.2
92.5°	61.1	62.2	62.5	62.1	61.7	61.3	60.9
95°	115.6	116.9	117.6	117.6	117.6	117.6	117.6
97.5°	179.2	180.8	181.5	181.4	181.2	181.1	181.0
100°	224.7	225.7	226.5	227.2	227.9	228.5	229.2
102.5°	277.8	278.8	279.2	279.1	278.9	278.8	278.7
105°	355.9	355.9	356.2	356.9	357.6	358.2	358.9
107.5°	442.6	443.7	444.0	443.6	443.2	442.8	442.4
110°	500.1	501.5	501.8	501.1	500.5	499.8	499.1



TEST NUMBER: P332235

CATALOG NUMBER: S123DIW-S1165D1535U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	557.6	559.2	560.0	559.9	559.7	559.6	559.4
115°	643.4	643.7	643.7	643.4	643.1	642.7	642.4
117.5°	730.9	730.8	730.3	729.3	728.4	727.5	726.5
120°	789.2	788.8	788.3	787.7	787.0	786.3	785.6
122.5°	847.9	847.0	846.1	845.2	844.2	843.3	842.3
125°	935.4	934.1	932.7	931.4	930.1	928.7	927.4
127.5°	1021.9	1020.0	1018.3	1016.8	1015.2	1013.7	1012.1
130°	1080.2	1078.9	1077.0	1074.7	1072.3	1070.0	1067.6
132.5°	1136.1	1134.5	1132.8	1131.0	1129.2	1127.3	1125.5
135°	1220.4	1219.1	1218.1	1217.4	1216.7	1216.1	1215.4
137.5°	1302.6	1301.2	1299.8	1298.5	1297.3	1296.0	1294.7
140°	1357.7	1357.3	1356.0	1353.6	1351.3	1348.9	1346.6
142.5°	1408.3	1408.0	1406.9	1405.1	1403.3	1401.5	1399.7
145°	1482.8	1482.5	1481.6	1480.3	1479.0	1477.6	1476.3
147.5°	1553.5	1553.5	1552.5	1550.5	1548.5	1546.4	1544.4
150°	1596.9	1596.9	1595.9	1593.9	1591.9	1589.9	1587.9
152.5°	1637.1	1637.7	1637.1	1635.3	1633.6	1631.8	1630.1
155°	1695.9	1697.3	1696.8	1694.4	1692.1	1689.7	1687.4
157.5°	1745.9	1747.3	1747.1	1745.2	1743.3	1741.4	1739.6
160°	1776.9	1778.5	1778.7	1777.4	1776.0	1774.7	1773.3
162.5°	1805.8	1807.5	1807.3	1805.1	1803.0	1800.8	1798.7
165°	1842.7	1844.7	1844.6	1842.2	1839.9	1837.5	1835.2
167.5°	1872.5	1874.5	1874.5	1872.5	1870.4	1868.3	1866.2
170°	1889.0	1891.3	1891.3	1889.0	1886.6	1884.3	1881.9
172.5°	1901.4	1903.5	1903.4	1901.0	1898.7	1896.3	1894.0
175°	1915.1	1917.1	1916.9	1914.6	1912.2	1909.9	1907.6
177.5°	1920.8	1922.4	1922.3	1920.4	1918.5	1916.7	1914.8
180°	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6	1919.6

(END OF REPORT)