

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332215

Luminaire Tested: **S123DIW-S1165D460U835-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332215
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S1165D460U835-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 460 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6357.0 lumens
Efficiency: N/A
Efficacy: 121.3 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 52.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332215

CATALOG NUMBER: S123DIW-S1165D460U835-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

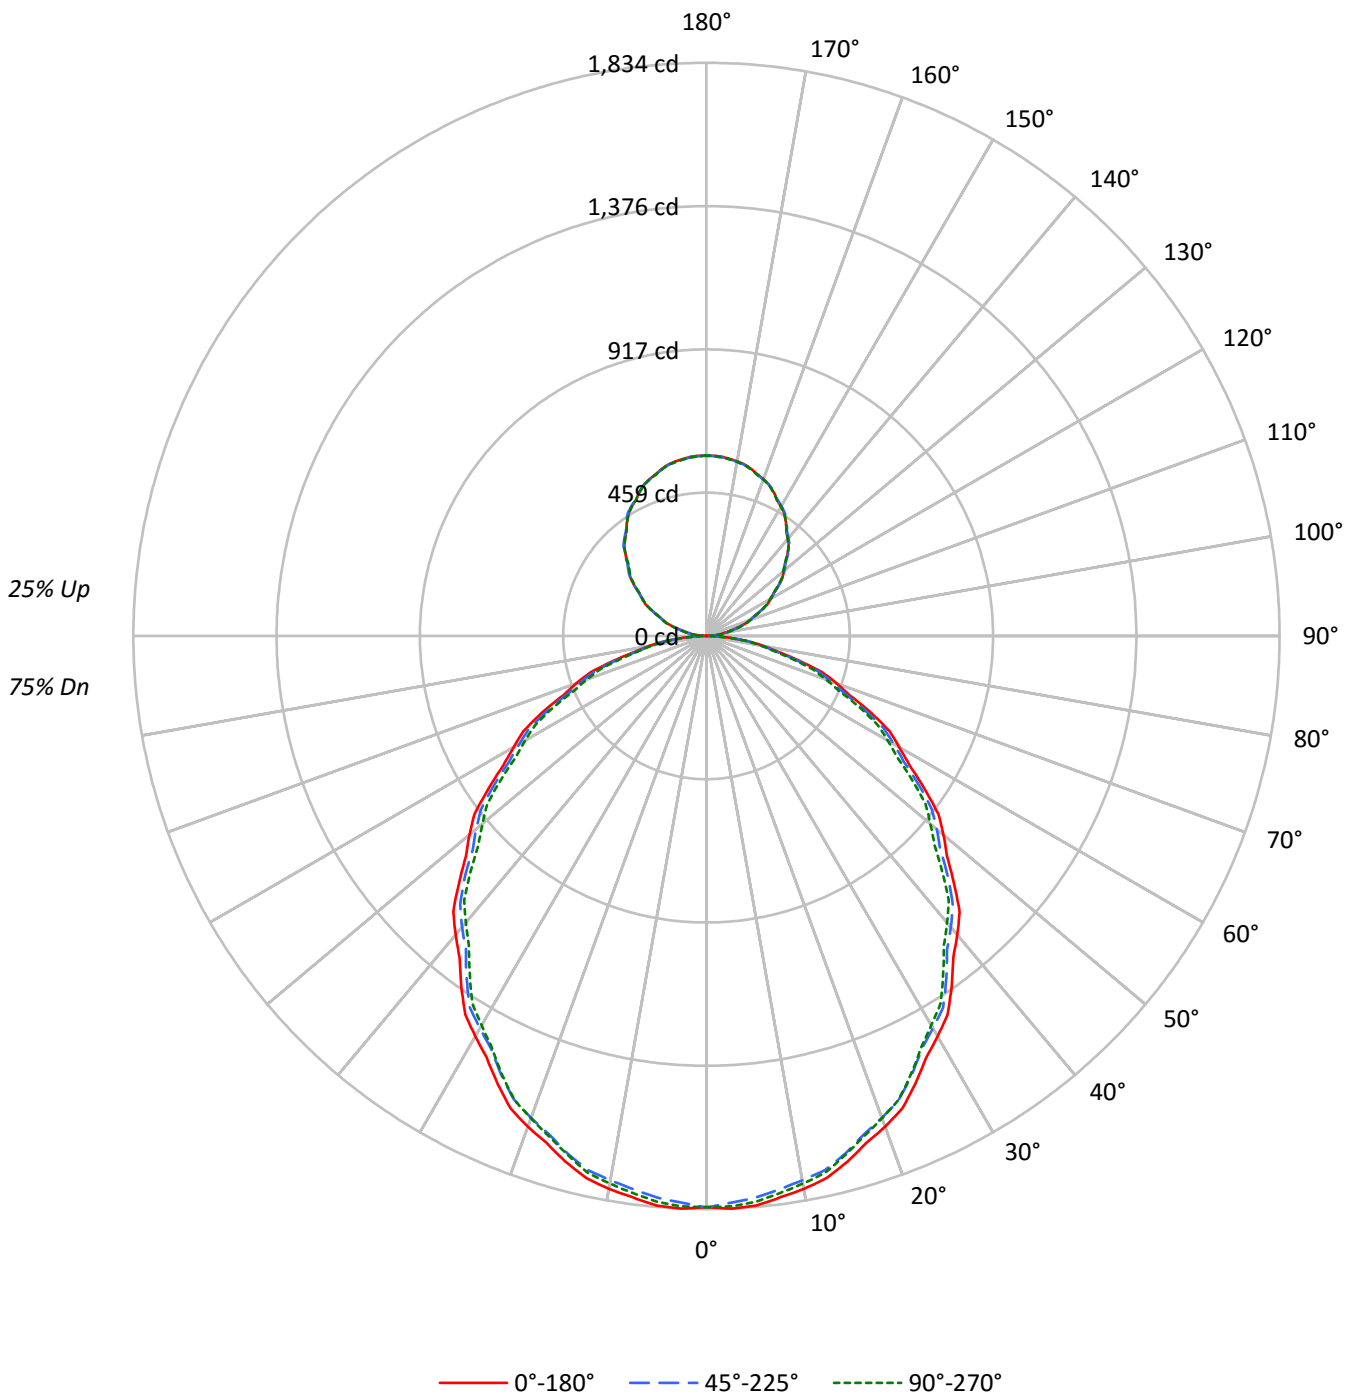



TEST NUMBER: P332215

CATALOG NUMBER: S123DIW-S1165D460U835-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	113	113	113	113	108	108	108	108	97	97	97	88	88	88	79	79	79	75
1	103	99	95	91	98	94	90	87	85	82	80	77	75	73	70	68	67	63
2	94	86	80	74	89	82	76	72	75	70	66	68	64	61	61	58	56	53
3	86	76	68	62	81	72	65	60	66	60	56	60	55	52	54	51	48	44
4	79	67	59	53	74	64	57	51	59	52	47	53	48	44	49	44	41	38
5	72	60	51	45	68	57	50	44	53	46	41	48	43	38	44	39	36	33
6	67	54	45	39	63	52	44	38	47	41	36	43	38	34	40	35	32	29
7	62	49	41	35	59	47	39	34	43	37	32	40	34	30	36	32	28	26
8	57	45	36	31	54	43	35	30	39	33	28	36	31	27	33	29	25	23
9	54	41	33	28	51	39	32	27	36	30	26	33	28	24	31	26	23	21
10	50	38	30	25	48	36	29	24	34	27	23	31	26	22	29	24	21	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	19678	19678	19678
5°	19770	19498	19634
10°	19638	19329	19449
15°	19409	19110	19146
20°	19140	18798	18816
25°	18781	18427	18389
30°	18385	18013	17877
35°	17971	17578	17350
40°	17537	17096	16831
45°	17061	16653	16247
50°	16583	16109	15662
55°	15959	15546	15073
60°	15330	14889	14415
65°	14772	14174	13733
70°	13951	13357	12765
75°	12747	12289	11765
80°	11499	11009	10916
85°	10090	9707	9324



TEST NUMBER: P332215

CATALOG NUMBER: S123DIW-S1165D460U835-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	172.2	2.7
10°-20°	486.2	7.6
20°-30°	718.3	11.3
30°-40°	839.0	13.2
40°-50°	843.5	13.3
50°-60°	740.9	11.7
60°-70°	552.0	8.7
70°-80°	314.5	4.9
80°-90°	92.0	1.4
90°-100°	37.6	0.6
100°-110°	112.5	1.8
110°-120°	191.3	3.0
120°-130°	251.7	4.0
130°-140°	282.9	4.4
140°-150°	278.0	4.4
150°-160°	234.1	3.7
160°-170°	155.8	2.5
170°-180°	54.6	0.9
0°-30°	1376.7	21.7
0°-40°	2215.7	34.9
0°-60°	3800.2	59.8
0°-90°	4758.7	74.9
90°-120°	341.4	5.4
90°-150°	1153.9	18.2
90°-180°	1598.0	25.1
0°-180°	6357.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1828	1828	1828	1828	1828	
5°	1830	1821	1804	1819	1817	173
15°	1742	1735	1715	1726	1718	491
25°	1581	1571	1552	1553	1548	728
35°	1368	1358	1338	1328	1320	855
45°	1121	1114	1094	1076	1067	865
55°	850	848	828	812	803	761
65°	580	572	556	544	539	572
75°	306	300	296	288	283	328
85°	82	79	79	76	76	90
90°	0	5	11	13	14	6
95°	27	30	34	35	35	30
105°	102	103	107	107	108	109
115°	193	194	193	194	193	191
125°	282	283	282	280	279	251
135°	366	368	368	366	365	282
145°	444	445	446	445	444	277
155°	508	508	508	510	507	234
165°	553	552	552	554	552	156
175°	576	574	574	576	573	55
180°	577	577	577	577	577	



TEST NUMBER: P332215

CATALOG NUMBER: S123DIW-S1165D460U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1
2.5°	1834.4	1833.3	1832.2	1831.1	1829.9	1827.8	1824.8	1821.7	1818.6	1815.5	1818.3
5°	1829.7	1828.0	1826.2	1824.5	1822.7	1819.9	1816.1	1812.2	1808.4	1804.5	1808.0
7.5°	1811.8	1810.0	1808.3	1806.5	1804.8	1801.9	1797.9	1794.0	1790.0	1786.0	1789.1
10°	1796.7	1794.9	1793.2	1791.4	1789.7	1786.6	1782.0	1777.5	1772.9	1768.4	1771.5
12.5°	1776.6	1775.1	1773.6	1772.2	1770.7	1767.8	1763.6	1759.3	1755.0	1750.8	1753.1
15°	1741.7	1740.3	1738.9	1737.5	1736.1	1733.1	1728.6	1724.0	1719.5	1714.9	1717.7
17.5°	1701.1	1699.3	1697.5	1695.7	1693.8	1690.7	1686.1	1681.6	1677.0	1672.5	1674.5
20°	1670.9	1668.8	1666.7	1664.6	1662.6	1659.2	1654.7	1650.2	1645.6	1641.1	1642.5
22.5°	1637.0	1634.9	1632.8	1630.7	1628.6	1625.3	1620.7	1616.2	1611.7	1607.1	1608.2
25°	1581.3	1579.2	1577.1	1575.0	1573.0	1569.6	1565.1	1560.6	1556.0	1551.5	1551.8
27.5°	1521.9	1519.9	1517.9	1515.8	1513.8	1510.4	1505.5	1500.6	1495.7	1490.8	1491.1
30°	1479.2	1477.4	1475.7	1473.9	1472.2	1468.9	1464.0	1459.1	1454.2	1449.3	1449.3
32.5°	1436.4	1434.1	1431.8	1429.5	1427.2	1424.1	1420.4	1416.6	1412.8	1409.1	1407.1
35°	1367.6	1365.5	1363.4	1361.3	1359.2	1355.9	1351.3	1346.8	1342.2	1337.7	1335.6
37.5°	1297.1	1294.5	1291.8	1289.2	1286.5	1282.9	1278.3	1273.7	1269.1	1264.4	1261.9
40°	1248.1	1246.0	1243.9	1241.8	1239.7	1236.2	1231.3	1226.4	1221.5	1216.7	1213.9
42.5°	1199.0	1196.7	1194.3	1191.9	1189.5	1185.9	1181.0	1176.1	1171.2	1166.4	1163.6
45°	1120.8	1119.4	1118.0	1116.6	1115.2	1112.2	1107.7	1103.1	1098.6	1094.0	1089.9
47.5°	1043.1	1041.1	1039.1	1037.0	1035.0	1031.9	1027.6	1023.3	1019.1	1014.8	1010.7
50°	990.3	988.6	986.8	985.1	983.3	980.2	975.6	971.1	966.5	962.0	958.2
52.5°	935.0	933.8	932.6	931.4	930.2	927.2	922.4	917.6	912.8	907.9	904.6
55°	850.4	850.1	849.7	849.4	849.0	846.6	842.0	837.5	832.9	828.4	824.6
57.5°	769.9	768.7	767.5	766.4	765.2	762.8	759.1	755.5	751.9	748.2	744.8
60°	712.1	711.7	711.4	711.0	710.7	708.4	704.2	700.0	695.8	691.6	688.5
62.5°	660.5	659.6	658.7	657.8	656.9	654.3	650.1	645.9	641.8	637.6	634.4
65°	580.0	578.3	576.5	574.8	573.0	570.4	566.9	563.4	559.9	556.5	553.7
67.5°	494.8	493.3	491.8	490.2	488.7	486.6	483.9	481.3	478.6	476.0	473.5
70°	443.3	441.2	439.1	437.0	434.9	432.8	430.7	428.6	426.5	424.4	422.0
72.5°	389.2	387.7	386.1	384.6	383.1	381.1	378.7	376.3	374.0	371.6	369.4
75°	306.5	305.1	303.7	302.3	300.9	299.7	298.7	297.6	296.6	295.5	293.8
77.5°	233.3	232.5	231.7	231.0	230.2	229.2	227.9	226.7	225.4	224.2	223.0
80°	185.5	184.4	183.4	182.3	181.3	180.4	179.7	179.0	178.3	177.6	177.3
82.5°	139.0	138.7	138.5	138.3	138.1	137.9	137.8	137.7	137.5	137.4	136.8
85°	81.7	81.0	80.3	79.6	78.9	78.6	78.6	78.6	78.6	78.6	77.9
87.5°	32.8	32.1	31.5	30.9	30.2	29.9	29.9	29.9	29.9	29.8	29.6
90°	0.5	1.5	2.5	3.5	4.5	5.6	6.9	8.3	9.6	10.9	11.3
92.5°	11.0	11.7	12.3	13.0	13.7	14.4	15.2	15.9	16.7	17.4	17.7
95°	26.7	27.4	28.1	28.9	29.6	30.3	31.1	31.9	32.7	33.5	33.9
97.5°	47.5	48.0	48.5	49.1	49.6	50.1	50.7	51.3	51.9	52.5	52.9
100°	61.6	62.2	62.8	63.4	64.0	64.6	65.1	65.6	66.1	66.6	66.9
102.5°	77.9	78.3	78.7	79.0	79.4	79.9	80.6	81.2	81.9	82.6	82.9
105°	102.0	102.2	102.4	102.6	102.8	103.3	104.2	105.1	106.0	106.9	106.9
107.5°	129.9	130.0	130.1	130.2	130.4	130.6	131.0	131.3	131.7	132.1	132.4
110°	147.3	147.5	147.7	147.9	148.1	148.3	148.5	148.7	148.9	149.1	149.5



TEST NUMBER: P332215

CATALOG NUMBER: S123DIW-S1165D460U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	165.4	165.5	165.7	165.8	165.9	166.0	166.0	166.1	166.1	166.1	166.6
115°	192.6	192.9	193.2	193.5	193.8	193.9	193.7	193.5	193.3	193.1	193.2
117.5°	220.0	220.2	220.4	220.6	220.8	220.7	220.5	220.2	220.0	219.7	219.7
120°	237.0	237.6	238.2	238.8	239.4	239.5	239.0	238.5	238.0	237.5	237.4
122.5°	254.8	255.2	255.7	256.1	256.5	256.6	256.4	256.1	255.9	255.6	255.3
125°	281.9	282.2	282.5	282.8	283.1	283.1	282.9	282.7	282.5	282.3	281.9
127.5°	306.9	307.5	308.2	308.8	309.5	309.7	309.5	309.2	309.0	308.8	308.2
130°	323.6	324.4	325.2	326.0	326.8	327.0	326.7	326.4	326.1	325.8	325.4
132.5°	340.2	341.0	341.9	342.7	343.5	343.8	343.5	343.3	343.1	342.9	342.4
135°	365.7	366.3	366.9	367.5	368.1	368.4	368.3	368.2	368.1	368.0	367.6
137.5°	389.3	389.8	390.3	390.8	391.3	391.7	391.9	392.2	392.5	392.7	392.3
140°	405.6	406.1	406.6	407.1	407.6	407.9	408.0	408.1	408.2	408.3	408.2
142.5°	420.5	421.0	421.5	422.0	422.5	422.8	423.0	423.2	423.4	423.5	423.4
145°	443.7	443.9	444.1	444.3	444.5	444.7	445.0	445.3	445.6	445.9	445.8
147.5°	464.0	464.3	464.7	465.0	465.4	465.7	466.0	466.3	466.6	466.9	466.9
150°	478.1	478.3	478.5	478.7	478.9	479.1	479.3	479.5	479.7	479.9	479.9
152.5°	489.7	490.0	490.3	490.5	490.8	491.0	491.1	491.3	491.4	491.5	491.7
155°	508.0	508.0	508.0	508.0	508.0	508.1	508.2	508.3	508.4	508.5	508.9
157.5°	523.6	523.5	523.4	523.2	523.1	523.1	523.2	523.3	523.3	523.4	523.8
160°	533.4	533.2	533.0	532.8	532.6	532.5	532.5	532.5	532.5	532.5	533.0
162.5°	542.1	541.8	541.5	541.2	541.0	540.9	540.9	541.0	541.1	541.2	541.7
165°	553.3	553.0	552.7	552.4	552.1	552.0	552.0	552.0	552.0	552.0	552.6
167.5°	562.3	561.9	561.5	561.1	560.7	560.5	560.6	560.7	560.8	560.8	561.5
170°	567.4	567.0	566.6	566.2	565.8	565.6	565.6	565.6	565.6	565.6	566.3
172.5°	571.4	571.0	570.6	570.2	569.7	569.5	569.5	569.5	569.5	569.5	570.2
175°	575.5	575.1	574.7	574.3	573.9	573.7	573.7	573.7	573.7	573.7	574.3
177.5°	577.3	576.9	576.6	576.3	576.0	575.8	575.8	575.8	575.8	575.8	576.3
180°	576.9	576.9	576.9	576.9	576.9	576.9	576.9	576.9	576.9	576.9	576.9



TEST NUMBER: P332215

CATALOG NUMBER: S123DIW-S1165D460U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1
2.5°	1821.1	1823.9	1826.7	1828.0	1827.7	1827.4	1827.1	1826.9
5°	1811.5	1815.0	1818.5	1819.9	1819.2	1818.5	1817.8	1817.1
7.5°	1792.3	1795.4	1798.6	1799.9	1799.5	1799.1	1798.7	1798.3
10°	1774.7	1777.8	1781.0	1782.2	1781.5	1780.8	1780.1	1779.4
12.5°	1755.4	1757.7	1760.0	1761.0	1760.5	1760.1	1759.7	1759.3
15°	1720.5	1723.3	1726.1	1726.5	1724.4	1722.3	1720.2	1718.1
17.5°	1676.4	1678.4	1680.3	1680.9	1680.2	1679.4	1678.6	1677.9
20°	1643.9	1645.3	1646.7	1646.8	1645.8	1644.7	1643.7	1642.6
22.5°	1609.4	1610.5	1611.6	1611.5	1610.2	1608.8	1607.5	1606.2
25°	1552.2	1552.5	1552.9	1552.5	1551.5	1550.4	1549.4	1548.3
27.5°	1491.4	1491.6	1491.9	1491.4	1490.1	1488.7	1487.4	1486.1
30°	1449.3	1449.3	1449.3	1448.1	1445.6	1443.2	1440.7	1438.3
32.5°	1405.1	1403.2	1401.2	1399.6	1398.3	1396.9	1395.6	1394.3
35°	1333.5	1331.4	1329.3	1327.4	1325.6	1323.9	1322.1	1320.4
37.5°	1259.4	1256.9	1254.4	1252.6	1251.4	1250.3	1249.2	1248.1
40°	1211.1	1208.3	1205.5	1203.4	1202.0	1200.6	1199.2	1197.8
42.5°	1160.8	1158.0	1155.2	1153.1	1151.7	1150.3	1148.9	1147.5
45°	1085.7	1081.5	1077.3	1074.3	1072.6	1070.8	1069.1	1067.3
47.5°	1006.6	1002.5	998.3	995.5	994.0	992.4	990.9	989.4
50°	954.3	950.5	946.6	943.7	941.6	939.5	937.4	935.3
52.5°	901.4	898.1	894.8	892.1	890.0	887.9	885.8	883.7
55°	820.7	816.9	813.0	810.2	808.5	806.7	805.0	803.2
57.5°	741.4	738.0	734.5	731.8	729.8	727.8	725.7	723.7
60°	685.4	682.2	679.1	676.6	674.9	673.1	671.4	669.6
62.5°	631.3	628.1	625.0	622.8	621.6	620.4	619.3	618.1
65°	550.9	548.1	545.3	543.4	542.3	541.3	540.2	539.2
67.5°	471.1	468.6	466.2	464.2	462.8	461.3	459.8	458.4
70°	419.5	417.1	414.6	412.5	410.8	409.0	407.3	405.6
72.5°	367.3	365.1	362.9	361.4	360.5	359.6	358.7	357.8
75°	292.0	290.3	288.5	287.1	286.1	285.0	284.0	282.9
77.5°	221.8	220.6	219.4	218.8	218.8	218.8	218.8	218.8
80°	176.9	176.6	176.2	176.1	176.1	176.1	176.1	176.1
82.5°	136.1	135.5	134.9	134.4	134.1	133.9	133.6	133.3
85°	77.2	76.5	75.8	75.5	75.5	75.5	75.5	75.5
87.5°	29.4	29.2	29.0	29.0	29.0	29.0	29.1	29.1
90°	11.7	12.1	12.5	12.8	13.0	13.2	13.4	13.6
92.5°	18.0	18.4	18.7	18.8	18.7	18.5	18.4	18.3
95°	34.3	34.7	35.1	35.3	35.3	35.3	35.3	35.3
97.5°	53.4	53.9	54.3	54.5	54.5	54.5	54.4	54.4
100°	67.2	67.5	67.8	68.1	68.3	68.5	68.7	68.9
102.5°	83.2	83.5	83.8	83.9	83.9	83.8	83.8	83.7
105°	106.9	106.9	106.9	107.0	107.3	107.5	107.7	107.9
107.5°	132.7	133.0	133.3	133.4	133.3	133.2	133.1	133.0
110°	149.9	150.3	150.7	150.8	150.6	150.4	150.2	150.0



TEST NUMBER: P332215

CATALOG NUMBER: S123DIW-S1165D460U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	167.1	167.6	168.1	168.3	168.2	168.2	168.2	168.1
115°	193.3	193.4	193.5	193.5	193.4	193.3	193.2	193.1
117.5°	219.7	219.6	219.6	219.5	219.2	218.9	218.6	218.3
120°	237.3	237.2	237.1	236.9	236.7	236.5	236.3	236.1
122.5°	255.1	254.8	254.5	254.3	254.0	253.7	253.4	253.1
125°	281.5	281.1	280.7	280.3	279.9	279.5	279.1	278.7
127.5°	307.7	307.1	306.5	306.0	305.6	305.1	304.6	304.2
130°	325.0	324.6	324.2	323.7	323.0	322.3	321.6	320.8
132.5°	341.9	341.4	340.9	340.4	339.9	339.3	338.8	338.2
135°	367.2	366.8	366.4	366.1	365.9	365.7	365.5	365.3
137.5°	391.9	391.5	391.0	390.6	390.2	389.9	389.5	389.1
140°	408.1	408.0	407.9	407.5	406.8	406.1	405.4	404.7
142.5°	423.3	423.2	423.1	422.8	422.3	421.7	421.2	420.6
145°	445.7	445.6	445.5	445.3	444.9	444.5	444.1	443.7
147.5°	466.9	466.9	466.9	466.6	466.0	465.3	464.7	464.1
150°	479.9	479.9	479.9	479.6	479.0	478.4	477.8	477.2
152.5°	491.8	492.0	492.2	492.0	491.5	490.9	490.4	489.9
155°	509.3	509.7	510.1	509.9	509.2	508.5	507.8	507.1
157.5°	524.3	524.7	525.1	525.0	524.5	523.9	523.3	522.8
160°	533.5	534.0	534.5	534.5	534.1	533.7	533.3	532.9
162.5°	542.2	542.7	543.2	543.1	542.5	541.8	541.2	540.5
165°	553.2	553.8	554.4	554.3	553.6	552.9	552.2	551.5
167.5°	562.1	562.7	563.3	563.3	562.7	562.1	561.5	560.8
170°	567.0	567.7	568.4	568.4	567.7	567.0	566.3	565.6
172.5°	570.8	571.4	572.0	572.0	571.3	570.6	569.9	569.2
175°	574.9	575.5	576.1	576.1	575.4	574.7	574.0	573.3
177.5°	576.8	577.3	577.7	577.7	577.1	576.6	576.0	575.4
180°	576.9	576.9	576.9	576.9	576.9	576.9	576.9	576.9

(END OF REPORT)