

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332113

Luminaire Tested: **S123DIW-S340D1320U835-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332113
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S340D1320U835-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1320 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5989.4 lumens
Efficiency: N/A
Efficacy: 128.5 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 46.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332113

CATALOG NUMBER: S123DIW-S340D1320U835-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

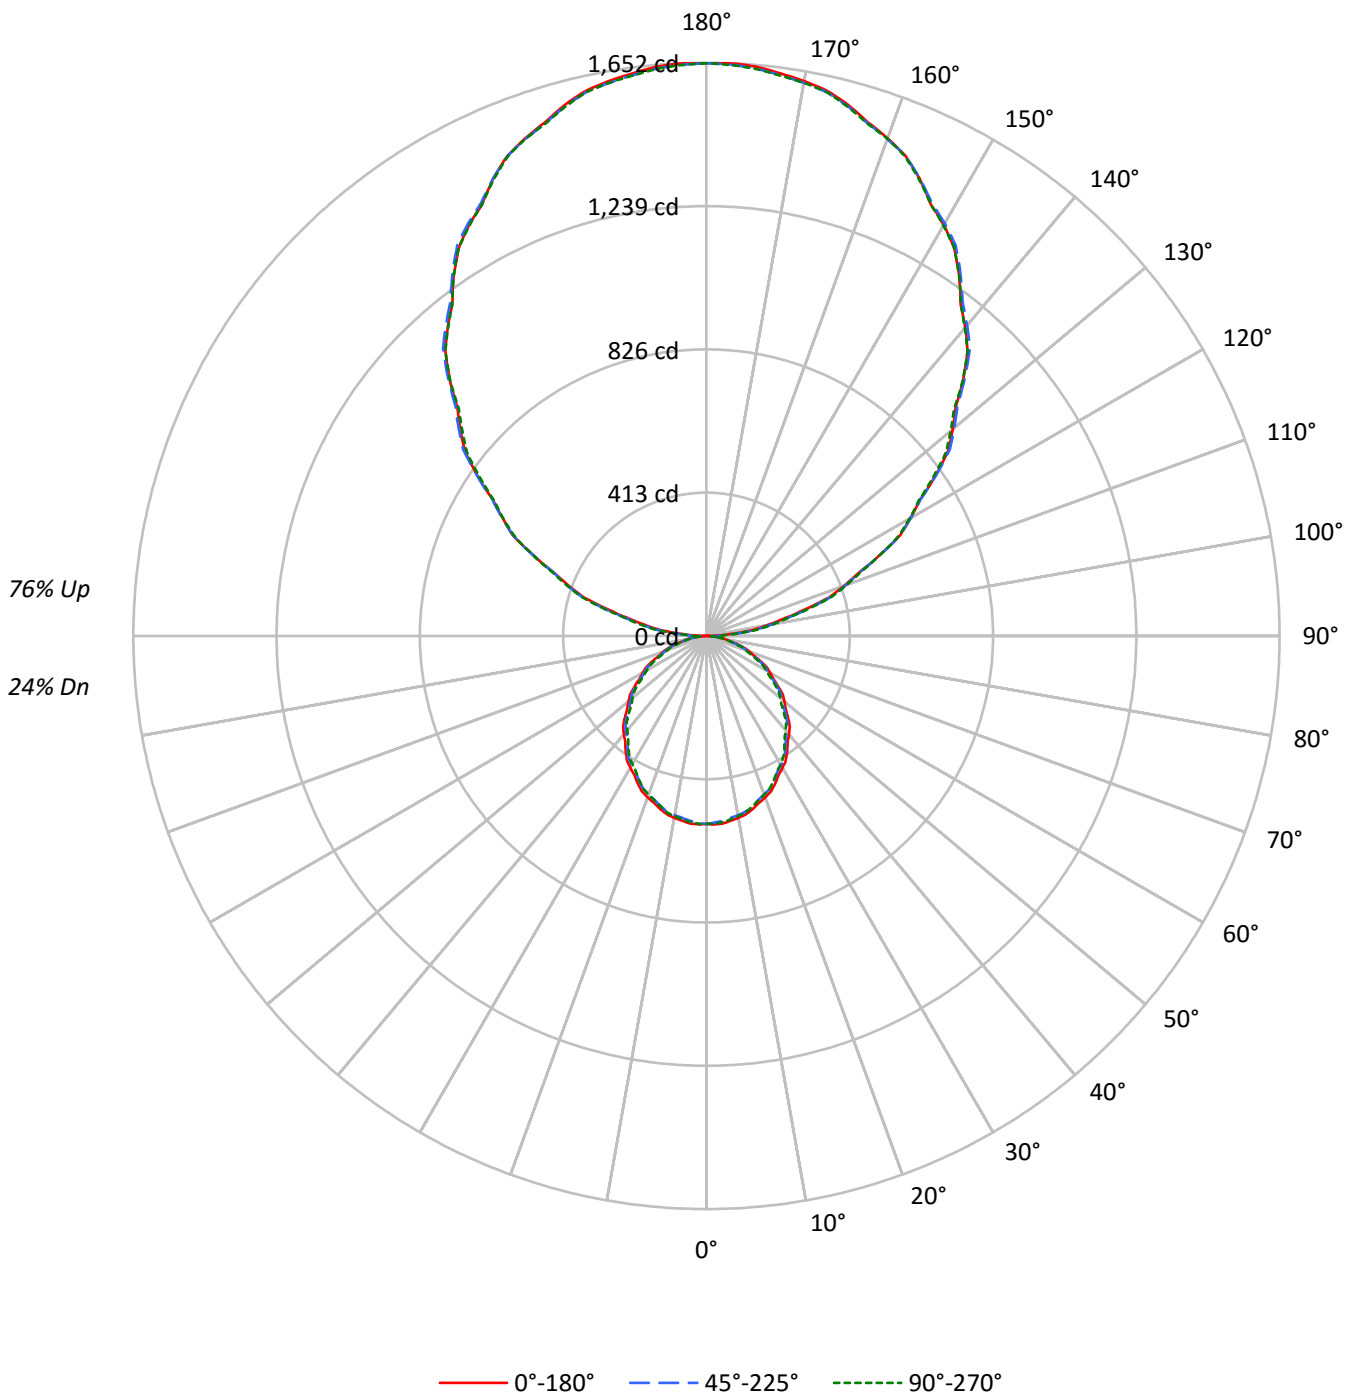



TEST NUMBER: P332113

CATALOG NUMBER: S123DIW-S340D1320U835-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	32	32	32	24
1	92	88	84	81	81	78	75	72	60	58	56	43	42	41	28	27	27	20
2	84	76	71	66	74	68	63	59	52	49	46	38	36	34	25	24	22	17
3	76	67	60	55	67	60	54	49	46	42	39	34	31	29	22	20	19	14
4	70	59	52	46	62	53	46	42	41	36	33	30	27	25	19	18	16	12
5	64	53	45	39	56	47	40	35	36	32	28	27	24	21	17	16	14	10
6	59	47	39	34	52	42	35	31	33	28	24	24	21	18	16	14	12	9
7	54	42	35	29	48	38	31	27	30	25	21	22	19	16	14	13	11	8
8	50	38	31	26	44	34	28	23	27	22	19	20	17	14	13	11	10	7
9	46	35	28	23	41	31	25	21	24	20	17	18	15	13	12	10	9	7
10	43	32	25	20	38	28	22	18	22	18	15	17	14	11	11	9	8	6

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5833	5833	5833
5°	5861	5780	5820
10°	5821	5729	5766
15°	5753	5665	5675
20°	5674	5573	5577
25°	5567	5462	5451
30°	5450	5340	5299
35°	5327	5210	5143
40°	5199	5067	4990
45°	5057	4937	4816
50°	4915	4776	4642
55°	4731	4609	4468
60°	4545	4413	4273
65°	4378	4200	4070
70°	4135	3959	3783
75°	3780	3643	3489
80°	3409	3267	3236
85°	2989	2878	2766



TEST NUMBER: P332113

CATALOG NUMBER: S123DIW-S340D1320U835-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	51.0	0.9
10°-20°	144.1	2.4
20°-30°	212.9	3.6
30°-40°	248.7	4.2
40°-50°	250.0	4.2
50°-60°	219.6	3.7
60°-70°	163.6	2.7
70°-80°	93.2	1.6
80°-90°	31.6	0.5
90°-100°	107.6	1.8
100°-110°	321.9	5.4
110°-120°	547.5	9.1
120°-130°	720.2	12.0
130°-140°	809.5	13.5
140°-150°	795.7	13.3
150°-160°	669.9	11.2
160°-170°	445.9	7.4
170°-180°	156.2	2.6
0°-30°	408.1	6.8
0°-40°	656.8	11.0
0°-60°	1126.5	18.8
0°-90°	1415.0	23.6
90°-120°	977.1	16.3
90°-150°	3302.5	55.1
90°-180°	4574.0	76.4
0°-180°	5989.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	542	542	542	542	542	
5°	542	540	535	539	539	51
15°	516	514	508	512	509	145
25°	469	466	460	460	459	216
35°	405	402	396	394	391	254
45°	332	330	324	319	316	256
55°	252	251	246	241	238	226
65°	172	170	165	161	160	170
75°	91	89	88	85	84	97
85°	24	23	23	22	22	27
90°	1	14	31	36	39	6
95°	76	86	96	101	101	86
105°	292	295	306	306	309	313
115°	551	555	552	554	552	545
125°	807	810	808	803	798	719
135°	1047	1054	1053	1048	1045	806
145°	1270	1272	1276	1275	1270	793
155°	1454	1454	1455	1460	1451	669
165°	1584	1580	1580	1587	1578	446
175°	1647	1642	1642	1649	1641	156
180°	1651	1651	1651	1651	1651	



TEST NUMBER: P332113

CATALOG NUMBER: S123DIW-S340D1320U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	541.9	541.9	541.9	541.9	541.9	541.9	541.9	541.9	541.9	541.9	541.9
2.5°	543.8	543.4	543.1	542.8	542.4	541.8	540.9	540.0	539.1	538.2	539.0
5°	542.4	541.8	541.3	540.8	540.3	539.5	538.3	537.2	536.0	534.9	535.9
7.5°	537.1	536.5	536.0	535.5	535.0	534.1	533.0	531.8	530.6	529.4	530.3
10°	532.6	532.1	531.5	531.0	530.5	529.6	528.2	526.9	525.5	524.2	525.1
12.5°	526.6	526.2	525.7	525.3	524.9	524.0	522.8	521.5	520.2	519.0	519.7
15°	516.3	515.9	515.4	515.0	514.6	513.7	512.4	511.0	509.7	508.4	509.2
17.5°	504.2	503.7	503.2	502.6	502.1	501.2	499.8	498.5	497.1	495.8	496.3
20°	495.3	494.7	494.1	493.4	492.8	491.8	490.5	489.1	487.8	486.5	486.9
22.5°	485.2	484.6	484.0	483.4	482.8	481.8	480.4	479.1	477.7	476.4	476.7
25°	468.7	468.1	467.5	466.9	466.3	465.3	463.9	462.6	461.2	459.9	460.0
27.5°	451.1	450.5	449.9	449.3	448.7	447.7	446.3	444.8	443.4	441.9	442.0
30°	438.5	437.9	437.4	436.9	436.4	435.4	434.0	432.5	431.1	429.6	429.6
32.5°	425.8	425.1	424.4	423.7	423.1	422.1	421.0	419.9	418.8	417.7	417.1
35°	405.4	404.8	404.1	403.5	402.9	401.9	400.6	399.2	397.9	396.5	395.9
37.5°	384.5	383.7	382.9	382.1	381.4	380.3	378.9	377.5	376.2	374.8	374.1
40°	370.0	369.3	368.7	368.1	367.5	366.4	365.0	363.5	362.1	360.6	359.8
42.5°	355.4	354.7	354.0	353.3	352.6	351.5	350.1	348.6	347.2	345.7	344.9
45°	332.2	331.8	331.4	331.0	330.6	329.7	328.3	327.0	325.6	324.3	323.1
47.5°	309.2	308.6	308.0	307.4	306.8	305.9	304.6	303.3	302.1	300.8	299.6
50°	293.5	293.0	292.5	292.0	291.5	290.5	289.2	287.9	286.5	285.2	284.0
52.5°	277.1	276.8	276.4	276.1	275.7	274.8	273.4	272.0	270.6	269.1	268.2
55°	252.1	252.0	251.9	251.8	251.7	250.9	249.6	248.2	246.9	245.6	244.4
57.5°	228.2	227.9	227.5	227.2	226.8	226.1	225.0	223.9	222.9	221.8	220.8
60°	211.1	211.0	210.9	210.8	210.7	210.0	208.7	207.5	206.3	205.0	204.1
62.5°	195.8	195.5	195.3	195.0	194.7	194.0	192.7	191.5	190.2	189.0	188.1
65°	171.9	171.4	170.9	170.4	169.9	169.1	168.1	167.0	166.0	164.9	164.1
67.5°	146.7	146.2	145.8	145.3	144.9	144.2	143.5	142.7	141.9	141.1	140.4
70°	131.4	130.8	130.2	129.5	128.9	128.3	127.7	127.0	126.4	125.8	125.1
72.5°	115.4	114.9	114.5	114.0	113.5	113.0	112.3	111.6	110.9	110.2	109.5
75°	90.9	90.4	90.0	89.6	89.2	88.8	88.5	88.2	87.9	87.6	87.1
77.5°	69.1	68.9	68.7	68.5	68.2	67.9	67.6	67.2	66.8	66.4	66.1
80°	55.0	54.7	54.4	54.1	53.7	53.5	53.3	53.1	52.9	52.7	52.5
82.5°	41.2	41.1	41.1	41.0	40.9	40.9	40.8	40.8	40.8	40.7	40.5
85°	24.2	24.0	23.8	23.6	23.4	23.3	23.3	23.3	23.3	23.3	23.1
87.5°	10.0	10.3	10.6	10.9	11.3	11.8	12.4	13.1	13.8	14.4	14.6
90°	1.3	4.2	7.1	9.9	12.8	16.1	19.9	23.6	27.4	31.1	32.3
92.5°	31.4	33.3	35.3	37.3	39.2	41.3	43.4	45.5	47.7	49.8	50.7
95°	76.5	78.5	80.6	82.6	84.6	86.8	89.1	91.4	93.7	96.0	97.1
97.5°	135.9	137.4	138.9	140.4	141.9	143.5	145.2	146.8	148.5	150.2	151.5
100°	176.4	178.1	179.8	181.6	183.3	184.9	186.3	187.8	189.2	190.7	191.5
102.5°	223.1	224.1	225.2	226.2	227.2	228.7	230.6	232.5	234.4	236.3	237.2
105°	291.8	292.4	293.0	293.5	294.1	295.7	298.3	300.9	303.5	306.1	306.1
107.5°	371.7	372.1	372.4	372.8	373.1	373.8	374.8	375.9	376.9	377.9	378.9
110°	421.5	422.1	422.7	423.2	423.8	424.4	425.0	425.6	426.1	426.7	427.9



TEST NUMBER: P332113

CATALOG NUMBER: S123DIW-S340D1320U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	473.4	473.7	474.1	474.4	474.8	475.0	475.1	475.2	475.4	475.5	476.9
115°	551.2	552.1	552.9	553.8	554.7	554.8	554.2	553.7	553.1	552.5	552.8
117.5°	629.6	630.1	630.7	631.3	631.9	631.8	631.0	630.3	629.5	628.8	628.7
120°	678.3	680.0	681.8	683.5	685.2	685.4	683.9	682.5	681.1	679.6	679.3
122.5°	729.2	730.4	731.7	733.0	734.2	734.5	733.7	733.0	732.2	731.5	730.7
125°	806.7	807.6	808.4	809.3	810.2	810.3	809.7	809.2	808.6	808.0	806.9
127.5°	878.3	880.2	882.0	883.8	885.7	886.3	885.7	885.0	884.4	883.8	882.1
130°	926.0	928.3	930.7	933.0	935.3	936.0	935.1	934.3	933.4	932.5	931.4
132.5°	973.8	976.1	978.4	980.7	983.0	983.8	983.2	982.6	981.9	981.3	979.9
135°	1046.7	1048.4	1050.1	1051.8	1053.6	1054.3	1054.0	1053.7	1053.4	1053.1	1052.0
137.5°	1114.1	1115.5	1117.0	1118.4	1119.9	1121.0	1121.7	1122.5	1123.2	1124.0	1122.7
140°	1160.8	1162.2	1163.7	1165.1	1166.6	1167.4	1167.7	1168.0	1168.3	1168.6	1168.3
142.5°	1203.3	1204.8	1206.2	1207.7	1209.1	1210.1	1210.6	1211.1	1211.6	1212.2	1211.9
145°	1269.7	1270.3	1270.9	1271.5	1272.0	1272.8	1273.6	1274.5	1275.4	1276.2	1275.9
147.5°	1327.8	1328.9	1329.9	1331.0	1332.0	1332.9	1333.7	1334.5	1335.3	1336.1	1336.1
150°	1368.3	1368.9	1369.5	1370.0	1370.6	1371.2	1371.8	1372.3	1372.9	1373.5	1373.5
152.5°	1401.5	1402.3	1403.1	1403.9	1404.7	1405.3	1405.7	1406.0	1406.4	1406.7	1407.2
155°	1453.9	1453.9	1453.9	1453.9	1453.9	1454.1	1454.3	1454.6	1454.9	1455.2	1456.4
157.5°	1498.5	1498.2	1497.8	1497.5	1497.1	1497.1	1497.3	1497.5	1497.8	1498.0	1499.2
160°	1526.5	1526.0	1525.4	1524.8	1524.2	1523.9	1523.9	1523.9	1523.9	1523.9	1525.4
162.5°	1551.4	1550.6	1549.8	1549.0	1548.2	1547.9	1548.2	1548.4	1548.6	1548.8	1550.3
165°	1583.6	1582.7	1581.9	1581.0	1580.2	1579.7	1579.7	1579.7	1579.7	1579.7	1581.4
167.5°	1609.3	1608.1	1607.0	1605.8	1604.7	1604.2	1604.4	1604.7	1604.9	1605.1	1606.9
170°	1623.8	1622.7	1621.5	1620.4	1619.2	1618.6	1618.6	1618.6	1618.6	1618.6	1620.6
172.5°	1635.2	1634.1	1632.9	1631.8	1630.6	1630.0	1630.0	1630.0	1630.0	1630.0	1631.8
175°	1647.2	1646.0	1644.9	1643.7	1642.5	1642.0	1642.0	1642.0	1642.0	1642.0	1643.7
177.5°	1652.1	1651.2	1650.2	1649.3	1648.4	1647.9	1647.9	1647.9	1647.9	1647.9	1649.3
180°	1651.1	1651.1	1651.1	1651.1	1651.1	1651.1	1651.1	1651.1	1651.1	1651.1	1651.1



TEST NUMBER: P332113

CATALOG NUMBER: S123DIW-S340D1320U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	541.9	541.9	541.9	541.9	541.9	541.9	541.9	541.9
2.5°	539.8	540.7	541.5	541.9	541.8	541.7	541.6	541.5
5°	537.0	538.0	539.1	539.5	539.3	539.1	538.8	538.6
7.5°	531.3	532.2	533.1	533.5	533.4	533.3	533.2	533.0
10°	526.1	527.0	527.9	528.3	528.1	527.9	527.7	527.5
12.5°	520.3	521.0	521.7	522.0	521.9	521.7	521.6	521.5
15°	510.0	510.8	511.7	511.8	511.1	510.5	509.9	509.3
17.5°	496.9	497.5	498.1	498.3	498.0	497.8	497.6	497.4
20°	487.3	487.7	488.1	488.2	487.8	487.5	487.2	486.9
22.5°	477.0	477.4	477.7	477.7	477.3	476.9	476.5	476.1
25°	460.1	460.2	460.3	460.2	459.9	459.6	459.3	459.0
27.5°	442.1	442.2	442.2	442.1	441.7	441.3	440.9	440.5
30°	429.6	429.6	429.6	429.2	428.5	427.8	427.1	426.3
32.5°	416.5	415.9	415.4	414.9	414.5	414.1	413.7	413.3
35°	395.3	394.7	394.0	393.5	393.0	392.4	391.9	391.4
37.5°	373.3	372.6	371.8	371.3	371.0	370.6	370.3	370.0
40°	359.0	358.2	357.3	356.7	356.3	355.9	355.5	355.1
42.5°	344.1	343.2	342.4	341.8	341.4	341.0	340.6	340.1
45°	321.8	320.6	319.3	318.5	317.9	317.4	316.9	316.4
47.5°	298.4	297.2	295.9	295.1	294.6	294.2	293.7	293.3
50°	282.9	281.7	280.6	279.7	279.1	278.5	277.9	277.2
52.5°	267.2	266.2	265.2	264.4	263.8	263.2	262.6	262.0
55°	243.3	242.1	241.0	240.2	239.7	239.1	238.6	238.1
57.5°	219.8	218.7	217.7	216.9	216.3	215.7	215.1	214.5
60°	203.2	202.2	201.3	200.6	200.0	199.5	199.0	198.5
62.5°	187.1	186.2	185.3	184.6	184.3	183.9	183.6	183.2
65°	163.3	162.5	161.6	161.1	160.8	160.4	160.1	159.8
67.5°	139.6	138.9	138.2	137.6	137.2	136.7	136.3	135.9
70°	124.4	123.6	122.9	122.3	121.8	121.3	120.7	120.2
72.5°	108.9	108.2	107.6	107.1	106.9	106.6	106.3	106.0
75°	86.6	86.0	85.5	85.1	84.8	84.5	84.2	83.9
77.5°	65.7	65.4	65.0	64.9	64.9	64.9	64.9	64.9
80°	52.4	52.3	52.2	52.2	52.2	52.2	52.2	52.2
82.5°	40.4	40.2	40.0	39.8	39.8	39.7	39.6	39.5
85°	22.9	22.7	22.5	22.4	22.4	22.4	22.4	22.4
87.5°	14.7	14.9	15.0	15.1	15.3	15.4	15.5	15.6
90°	33.4	34.6	35.7	36.6	37.2	37.8	38.3	38.9
92.5°	51.6	52.6	53.5	53.8	53.4	53.1	52.7	52.4
95°	98.3	99.4	100.6	101.2	101.2	101.2	101.2	101.2
97.5°	152.8	154.2	155.5	156.1	156.0	155.9	155.8	155.6
100°	192.4	193.2	194.1	194.8	195.4	196.0	196.6	197.1
102.5°	238.0	238.9	239.8	240.1	240.0	239.9	239.8	239.7
105°	306.1	306.1	306.1	306.4	307.0	307.5	308.1	308.7
107.5°	379.8	380.7	381.6	381.9	381.6	381.2	380.9	380.5
110°	429.0	430.2	431.3	431.6	431.0	430.5	429.9	429.3



TEST NUMBER: P332113

CATALOG NUMBER: S123DIW-S340D1320U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	478.2	479.6	481.0	481.6	481.5	481.4	481.3	481.2
115°	553.1	553.4	553.7	553.7	553.4	553.1	552.8	552.5
117.5°	628.7	628.6	628.5	628.1	627.3	626.5	625.7	624.9
120°	679.0	678.8	678.5	678.0	677.5	676.9	676.3	675.7
122.5°	730.0	729.2	728.5	727.7	726.9	726.1	725.3	724.5
125°	805.7	804.6	803.4	802.3	801.1	799.9	798.8	797.6
127.5°	880.5	878.9	877.3	875.8	874.5	873.2	871.9	870.5
130°	930.2	929.1	927.9	926.3	924.3	922.3	920.3	918.3
132.5°	978.5	977.1	975.8	974.3	972.7	971.2	969.6	968.1
135°	1050.8	1049.7	1048.5	1047.7	1047.1	1046.5	1045.9	1045.4
137.5°	1121.5	1120.3	1119.1	1118.0	1116.9	1115.8	1114.7	1113.6
140°	1168.0	1167.7	1167.4	1166.3	1164.3	1162.2	1160.2	1158.2
142.5°	1211.6	1211.3	1211.0	1210.1	1208.5	1207.0	1205.4	1203.9
145°	1275.6	1275.4	1275.1	1274.4	1273.2	1272.0	1270.9	1269.7
147.5°	1336.1	1336.1	1336.1	1335.3	1333.6	1331.8	1330.1	1328.4
150°	1373.5	1373.5	1373.5	1372.6	1370.9	1369.2	1367.4	1365.7
152.5°	1407.6	1408.1	1408.5	1408.0	1406.5	1405.0	1403.5	1402.0
155°	1457.5	1458.7	1459.8	1459.4	1457.4	1455.4	1453.3	1451.3
157.5°	1500.4	1501.6	1502.9	1502.6	1501.0	1499.4	1497.8	1496.2
160°	1526.8	1528.3	1529.7	1529.9	1528.7	1527.6	1526.4	1525.2
162.5°	1551.7	1553.2	1554.6	1554.4	1552.6	1550.7	1548.9	1547.0
165°	1583.2	1584.9	1586.6	1586.5	1584.5	1582.5	1580.4	1578.4
167.5°	1608.7	1610.5	1612.3	1612.3	1610.5	1608.7	1606.9	1605.1
170°	1622.7	1624.7	1626.7	1626.7	1624.7	1622.7	1620.6	1618.6
172.5°	1633.6	1635.4	1637.2	1637.1	1635.1	1633.0	1631.0	1629.0
175°	1645.4	1647.2	1648.9	1648.7	1646.7	1644.7	1642.7	1640.7
177.5°	1650.7	1652.1	1653.5	1653.4	1651.7	1650.1	1648.5	1646.9
180°	1651.1	1651.1	1651.1	1651.1	1651.1	1651.1	1651.1	1651.1

(END OF REPORT)