

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332143

Luminaire Tested: **S123DIW-S560D1320U835-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332143  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIW-S560D1320U835-4F0-1E-UDD-F1  
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1320 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 6897.5 lumens  
Efficiency: N/A  
Efficacy: 128.2 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Indirect  
  
Input Watts (W): 53.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332143

CATALOG NUMBER: S123DIW-S560D1320U835-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

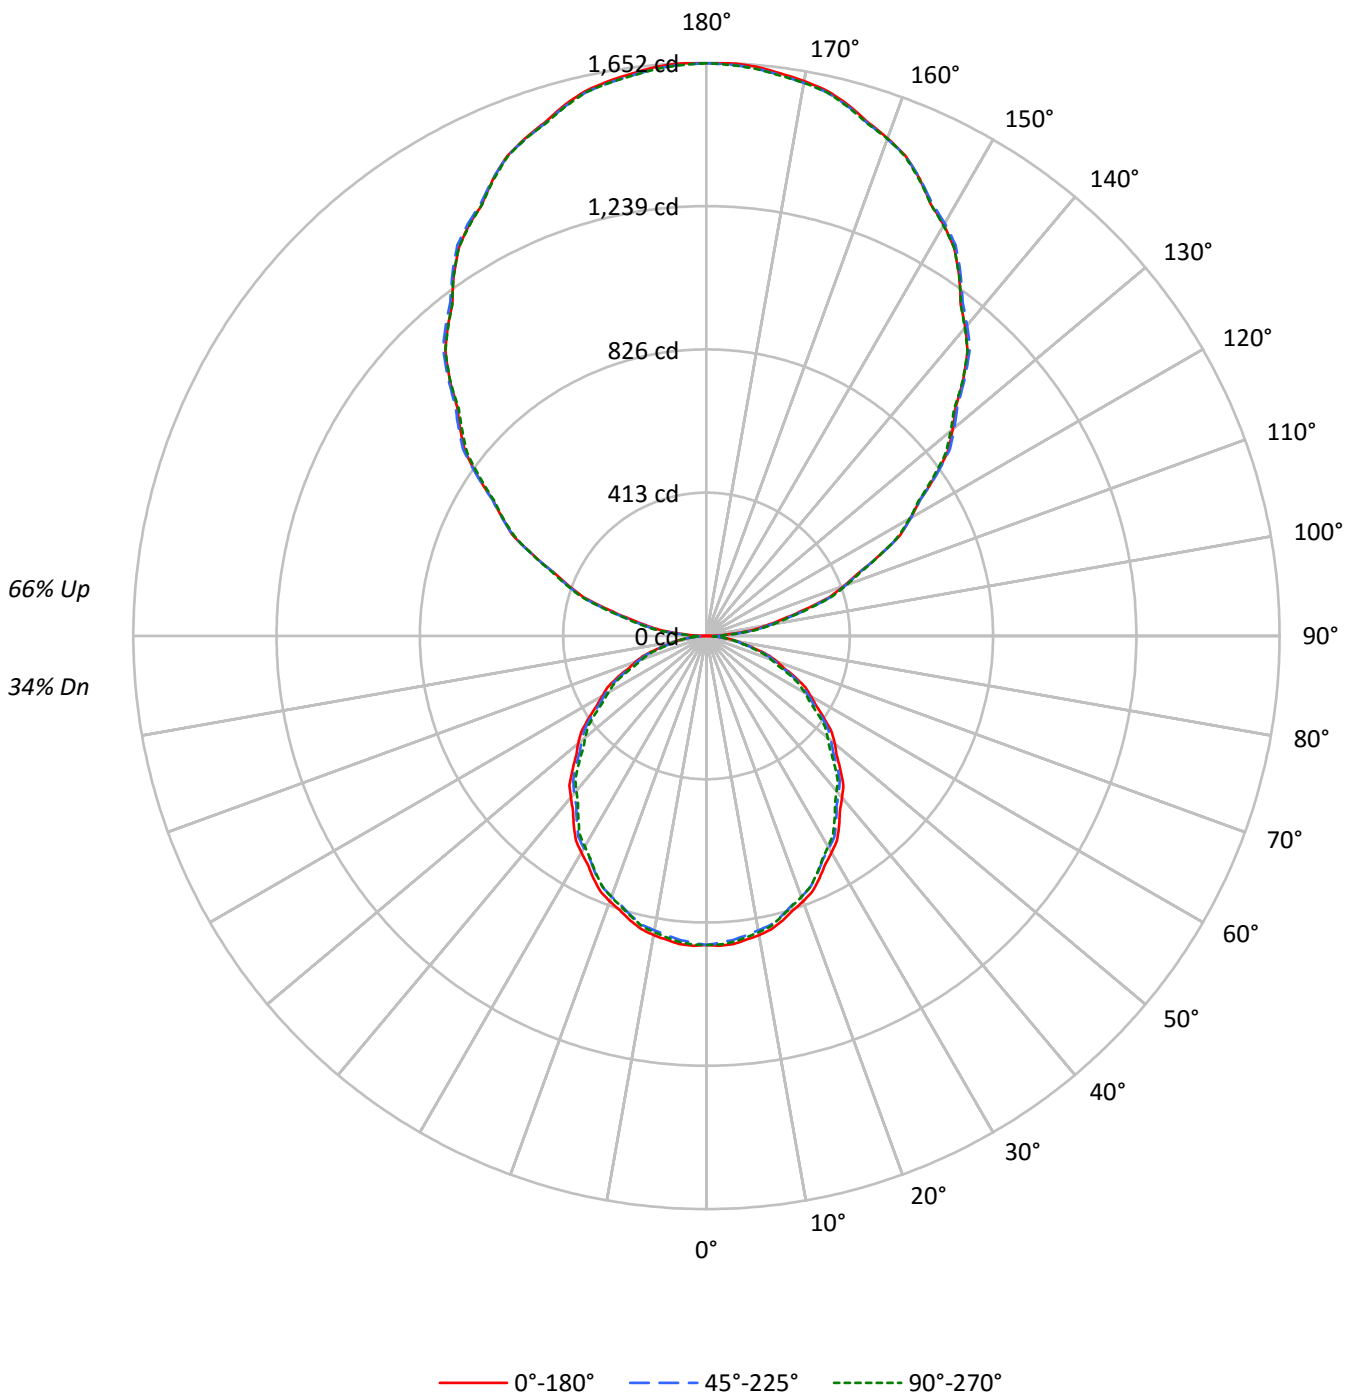



TEST NUMBER: P332143

CATALOG NUMBER: S123DIW-S560D1320U835-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41	34
1	94	90	86	83	85	81	78	75	65	63	61	50	49	47	36	35	35	28
2	86	78	72	67	77	71	66	61	57	53	50	44	41	39	32	30	29	24
3	78	69	62	56	70	62	56	51	50	46	42	39	36	33	28	26	25	20
4	71	61	53	47	64	55	48	43	44	40	36	34	31	28	25	23	21	17
5	65	54	46	40	59	49	42	37	40	35	31	31	27	25	23	20	18	15
6	60	48	40	35	54	44	37	32	36	31	27	28	24	21	21	18	16	13
7	56	44	36	30	50	40	33	28	32	27	23	25	22	19	19	16	14	12
8	51	39	32	27	46	36	29	25	29	24	21	23	19	17	17	15	13	10
9	48	36	29	24	43	33	26	22	27	22	18	21	18	15	16	13	12	9
10	45	33	26	21	40	30	24	20	25	20	17	19	16	13	15	12	11	8

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	9590	9590	9590
5°	9634	9502	9568
10°	9570	9419	9477
15°	9458	9313	9331
20°	9328	9160	9170
25°	9152	8980	8961
30°	8959	8779	8712
35°	8757	8566	8456
40°	8546	8331	8202
45°	8315	8115	7917
50°	8081	7850	7633
55°	7777	7576	7345
60°	7470	7255	7025
65°	7200	6907	6691
70°	6798	6508	6219
75°	6213	5989	5735
80°	5604	5368	5318
85°	4915	4730	4545



TEST NUMBER: P332143

CATALOG NUMBER: S123DIW-S560D1320U835-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	83.9	1.2
10°-20°	237.0	3.4
20°-30°	350.0	5.1
30°-40°	408.9	5.9
40°-50°	411.1	6.0
50°-60°	361.1	5.2
60°-70°	269.0	3.9
70°-80°	153.3	2.2
80°-90°	48.9	0.7
90°-100°	107.6	1.6
100°-110°	321.9	4.7
110°-120°	547.5	7.9
120°-130°	720.2	10.4
130°-140°	809.5	11.7
140°-150°	795.7	11.5
150°-160°	669.9	9.7
160°-170°	445.9	6.5
170°-180°	156.2	2.3
0°-30°	670.9	9.7
0°-40°	1079.8	15.7
0°-60°	1851.9	26.8
0°-90°	2323.0	33.7
90°-120°	977.1	14.2
90°-150°	3302.5	47.9
90°-180°	4574.0	66.3
0°-180°	6897.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	891	891	891	891	891	
5°	892	888	879	887	886	84
15°	849	845	836	841	837	239
25°	771	766	756	757	754	355
35°	666	662	652	647	644	417
45°	546	543	533	524	520	421
55°	414	413	404	396	391	371
65°	283	279	271	265	263	279
75°	149	146	144	140	138	160
85°	40	38	38	37	37	44
90°	1	14	31	36	39	7
95°	76	86	96	101	101	86
105°	292	295	306	306	309	313
115°	551	555	552	554	552	545
125°	807	810	808	803	798	719
135°	1047	1054	1053	1048	1045	806
145°	1270	1272	1276	1275	1270	793
155°	1454	1454	1455	1460	1451	669
165°	1584	1580	1580	1587	1578	446
175°	1647	1642	1642	1649	1641	156
180°	1651	1651	1651	1651	1651	



TEST NUMBER: P332143

CATALOG NUMBER: S123DIW-S560D1320U835-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	890.9	890.9	890.9	890.9	890.9	890.9	890.9	890.9	890.9	890.9	890.9
2.5°	893.9	893.4	892.9	892.3	891.8	890.7	889.2	887.7	886.3	884.8	886.1
5°	891.6	890.8	889.9	889.1	888.2	886.9	885.0	883.1	881.3	879.4	881.1
7.5°	882.9	882.1	881.2	880.4	879.5	878.1	876.2	874.2	872.3	870.4	871.9
10°	875.6	874.7	873.9	873.0	872.2	870.6	868.4	866.2	864.0	861.8	863.3
12.5°	865.8	865.0	864.3	863.6	862.9	861.5	859.4	857.3	855.3	853.2	854.3
15°	848.7	848.1	847.4	846.7	846.0	844.6	842.4	840.2	837.9	835.7	837.1
17.5°	829.0	828.1	827.2	826.3	825.4	823.9	821.7	819.5	817.3	815.0	816.0
20°	814.3	813.3	812.2	811.2	810.2	808.6	806.4	804.2	801.9	799.7	800.4
22.5°	797.7	796.7	795.7	794.7	793.6	792.0	789.8	787.6	785.4	783.2	783.7
25°	770.6	769.6	768.6	767.6	766.5	764.9	762.7	760.5	758.3	756.1	756.2
27.5°	741.7	740.7	739.7	738.7	737.7	736.0	733.6	731.3	728.9	726.5	726.6
30°	720.8	720.0	719.1	718.3	717.4	715.8	713.4	711.0	708.7	706.3	706.3
32.5°	700.0	698.9	697.7	696.6	695.5	694.0	692.2	690.3	688.5	686.7	685.7
35°	666.4	665.4	664.4	663.4	662.4	660.7	658.5	656.3	654.1	651.9	650.9
37.5°	632.1	630.8	629.5	628.2	626.9	625.2	622.9	620.7	618.4	616.2	615.0
40°	608.2	607.2	606.2	605.2	604.1	602.4	600.0	597.7	595.3	592.9	591.5
42.5°	584.3	583.2	582.0	580.8	579.7	577.9	575.5	573.2	570.8	568.4	567.0
45°	546.2	545.5	544.8	544.1	543.4	542.0	539.8	537.6	535.4	533.1	531.1
47.5°	508.3	507.3	506.4	505.4	504.4	502.8	500.8	498.7	496.6	494.5	492.5
50°	482.6	481.7	480.9	480.0	479.2	477.7	475.4	473.2	471.0	468.8	466.9
52.5°	455.6	455.0	454.5	453.9	453.3	451.8	449.5	447.2	444.8	442.5	440.9
55°	414.4	414.2	414.1	413.9	413.7	412.5	410.3	408.1	405.9	403.7	401.8
57.5°	375.2	374.6	374.0	373.5	372.9	371.7	369.9	368.2	366.4	364.6	363.0
60°	347.0	346.8	346.7	346.5	346.3	345.2	343.2	341.1	339.1	337.0	335.5
62.5°	321.9	321.4	321.0	320.6	320.1	318.9	316.8	314.8	312.7	310.7	309.2
65°	282.7	281.8	281.0	280.1	279.3	278.0	276.3	274.6	272.9	271.2	269.8
67.5°	241.1	240.4	239.6	238.9	238.1	237.1	235.8	234.5	233.2	232.0	230.8
70°	216.0	215.0	214.0	213.0	211.9	210.9	209.9	208.9	207.8	206.8	205.6
72.5°	189.7	188.9	188.2	187.4	186.7	185.7	184.6	183.4	182.2	181.1	180.0
75°	149.4	148.7	148.0	147.3	146.7	146.1	145.5	145.0	144.5	144.0	143.2
77.5°	113.7	113.3	112.9	112.6	112.2	111.7	111.1	110.5	109.8	109.2	108.7
80°	90.4	89.9	89.4	88.9	88.3	87.9	87.6	87.2	86.9	86.6	86.4
82.5°	67.7	67.6	67.5	67.4	67.3	67.2	67.2	67.1	67.0	67.0	66.6
85°	39.8	39.5	39.2	38.8	38.5	38.3	38.3	38.3	38.3	38.3	38.0
87.5°	16.2	16.4	16.5	16.7	16.9	17.3	17.9	18.5	19.1	19.7	19.8
90°	1.3	4.2	7.1	9.9	12.8	16.1	19.9	23.6	27.4	31.1	32.3
92.5°	31.4	33.3	35.3	37.3	39.2	41.3	43.4	45.5	47.7	49.8	50.7
95°	76.5	78.5	80.6	82.6	84.6	86.8	89.1	91.4	93.7	96.0	97.1
97.5°	135.9	137.4	138.9	140.4	141.9	143.5	145.2	146.8	148.5	150.2	151.5
100°	176.4	178.1	179.8	181.6	183.3	184.9	186.3	187.8	189.2	190.7	191.5
102.5°	223.1	224.1	225.2	226.2	227.2	228.7	230.6	232.5	234.4	236.3	237.2
105°	291.8	292.4	293.0	293.5	294.1	295.7	298.3	300.9	303.5	306.1	306.1
107.5°	371.7	372.1	372.4	372.8	373.1	373.8	374.8	375.9	376.9	377.9	378.9
110°	421.5	422.1	422.7	423.2	423.8	424.4	425.0	425.6	426.1	426.7	427.9



TEST NUMBER: P332143

CATALOG NUMBER: S123DIW-S560D1320U835-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	473.4	473.7	474.1	474.4	474.8	475.0	475.1	475.2	475.4	475.5	476.9
115°	551.2	552.1	552.9	553.8	554.7	554.8	554.2	553.7	553.1	552.5	552.8
117.5°	629.6	630.1	630.7	631.3	631.9	631.8	631.0	630.3	629.5	628.8	628.7
120°	678.3	680.0	681.8	683.5	685.2	685.4	683.9	682.5	681.1	679.6	679.3
122.5°	729.2	730.4	731.7	733.0	734.2	734.5	733.7	733.0	732.2	731.5	730.7
125°	806.7	807.6	808.4	809.3	810.2	810.3	809.7	809.2	808.6	808.0	806.9
127.5°	878.3	880.2	882.0	883.8	885.7	886.3	885.7	885.0	884.4	883.8	882.1
130°	926.0	928.3	930.7	933.0	935.3	936.0	935.1	934.3	933.4	932.5	931.4
132.5°	973.8	976.1	978.4	980.7	983.0	983.8	983.2	982.6	981.9	981.3	979.9
135°	1046.7	1048.4	1050.1	1051.8	1053.6	1054.3	1054.0	1053.7	1053.4	1053.1	1052.0
137.5°	1114.1	1115.5	1117.0	1118.4	1119.9	1121.0	1121.7	1122.5	1123.2	1124.0	1122.7
140°	1160.8	1162.2	1163.7	1165.1	1166.6	1167.4	1167.7	1168.0	1168.3	1168.6	1168.3
142.5°	1203.3	1204.8	1206.2	1207.7	1209.1	1210.1	1210.6	1211.1	1211.6	1212.2	1211.9
145°	1269.7	1270.3	1270.9	1271.5	1272.0	1272.8	1273.6	1274.5	1275.4	1276.2	1275.9
147.5°	1327.8	1328.9	1329.9	1331.0	1332.0	1332.9	1333.7	1334.5	1335.3	1336.1	1336.1
150°	1368.3	1368.9	1369.5	1370.0	1370.6	1371.2	1371.8	1372.3	1372.9	1373.5	1373.5
152.5°	1401.5	1402.3	1403.1	1403.9	1404.7	1405.3	1405.7	1406.0	1406.4	1406.7	1407.2
155°	1453.9	1453.9	1453.9	1453.9	1453.9	1454.1	1454.3	1454.6	1454.9	1455.2	1456.4
157.5°	1498.5	1498.2	1497.8	1497.5	1497.1	1497.1	1497.3	1497.5	1497.8	1498.0	1499.2
160°	1526.5	1526.0	1525.4	1524.8	1524.2	1523.9	1523.9	1523.9	1523.9	1523.9	1525.4
162.5°	1551.4	1550.6	1549.8	1549.0	1548.2	1547.9	1548.2	1548.4	1548.6	1548.8	1550.3
165°	1583.6	1582.7	1581.9	1581.0	1580.2	1579.7	1579.7	1579.7	1579.7	1579.7	1581.4
167.5°	1609.3	1608.1	1607.0	1605.8	1604.7	1604.2	1604.4	1604.7	1604.9	1605.1	1606.9
170°	1623.8	1622.7	1621.5	1620.4	1619.2	1618.6	1618.6	1618.6	1618.6	1618.6	1620.6
172.5°	1635.2	1634.1	1632.9	1631.8	1630.6	1630.0	1630.0	1630.0	1630.0	1630.0	1631.8
175°	1647.2	1646.0	1644.9	1643.7	1642.5	1642.0	1642.0	1642.0	1642.0	1642.0	1643.7
177.5°	1652.1	1651.2	1650.2	1649.3	1648.4	1647.9	1647.9	1647.9	1647.9	1647.9	1649.3
180°	1651.1	1651.1	1651.1	1651.1	1651.1	1651.1	1651.1	1651.1	1651.1	1651.1	1651.1



TEST NUMBER: P332143

CATALOG NUMBER: S123DIW-S560D1320U835-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	890.9	890.9	890.9	890.9	890.9	890.9	890.9	890.9
2.5°	887.5	888.8	890.2	890.8	890.7	890.5	890.4	890.3
5°	882.8	884.5	886.2	886.9	886.5	886.2	885.9	885.5
7.5°	873.4	874.9	876.5	877.1	876.9	876.7	876.5	876.3
10°	864.8	866.4	867.9	868.5	868.2	867.8	867.5	867.1
12.5°	855.4	856.6	857.7	858.1	857.9	857.7	857.5	857.3
15°	838.5	839.8	841.2	841.3	840.3	839.3	838.3	837.3
17.5°	817.0	817.9	818.9	819.1	818.8	818.4	818.0	817.6
20°	801.1	801.8	802.4	802.5	802.0	801.5	801.0	800.5
22.5°	784.3	784.8	785.4	785.3	784.7	784.0	783.4	782.7
25°	756.4	756.6	756.7	756.6	756.1	755.6	755.0	754.5
27.5°	726.8	726.9	727.0	726.8	726.1	725.5	724.8	724.2
30°	706.3	706.3	706.3	705.7	704.5	703.3	702.1	700.9
32.5°	684.8	683.8	682.8	682.0	681.4	680.8	680.1	679.5
35°	649.8	648.8	647.8	646.9	646.0	645.2	644.3	643.5
37.5°	613.7	612.5	611.3	610.4	609.9	609.3	608.8	608.2
40°	590.2	588.8	587.5	586.4	585.7	585.1	584.4	583.7
42.5°	565.7	564.3	562.9	561.9	561.2	560.6	559.9	559.2
45°	529.1	527.0	525.0	523.5	522.7	521.8	521.0	520.1
47.5°	490.5	488.5	486.5	485.1	484.4	483.6	482.9	482.1
50°	465.1	463.2	461.3	459.9	458.8	457.8	456.8	455.8
52.5°	439.3	437.7	436.1	434.7	433.7	432.7	431.7	430.7
55°	399.9	398.1	396.2	394.8	394.0	393.1	392.3	391.4
57.5°	361.3	359.6	358.0	356.6	355.6	354.7	353.7	352.7
60°	334.0	332.5	330.9	329.7	328.9	328.0	327.2	326.3
62.5°	307.6	306.1	304.6	303.5	302.9	302.4	301.8	301.2
65°	268.4	267.1	265.7	264.8	264.3	263.8	263.3	262.7
67.5°	229.6	228.4	227.2	226.2	225.5	224.8	224.1	223.4
70°	204.4	203.3	202.1	201.0	200.2	199.3	198.5	197.6
72.5°	179.0	177.9	176.9	176.1	175.7	175.2	174.8	174.3
75°	142.3	141.5	140.6	139.9	139.4	138.9	138.4	137.9
77.5°	108.1	107.5	106.9	106.6	106.6	106.6	106.6	106.6
80°	86.2	86.0	85.9	85.8	85.8	85.8	85.8	85.8
82.5°	66.3	66.0	65.7	65.5	65.4	65.2	65.1	65.0
85°	37.6	37.3	36.9	36.8	36.8	36.8	36.8	36.8
87.5°	19.9	20.0	20.1	20.2	20.3	20.4	20.5	20.7
90°	33.4	34.6	35.7	36.6	37.2	37.8	38.3	38.9
92.5°	51.6	52.6	53.5	53.8	53.4	53.1	52.7	52.4
95°	98.3	99.4	100.6	101.2	101.2	101.2	101.2	101.2
97.5°	152.8	154.2	155.5	156.1	156.0	155.9	155.8	155.6
100°	192.4	193.2	194.1	194.8	195.4	196.0	196.6	197.1
102.5°	238.0	238.9	239.8	240.1	240.0	239.9	239.8	239.7
105°	306.1	306.1	306.1	306.4	307.0	307.5	308.1	308.7
107.5°	379.8	380.7	381.6	381.9	381.6	381.2	380.9	380.5
110°	429.0	430.2	431.3	431.6	431.0	430.5	429.9	429.3





TEST NUMBER: P332143

CATALOG NUMBER: S123DIW-S560D1320U835-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	478.2	479.6	481.0	481.6	481.5	481.4	481.3	481.2
115°	553.1	553.4	553.7	553.7	553.4	553.1	552.8	552.5
117.5°	628.7	628.6	628.5	628.1	627.3	626.5	625.7	624.9
120°	679.0	678.8	678.5	678.0	677.5	676.9	676.3	675.7
122.5°	730.0	729.2	728.5	727.7	726.9	726.1	725.3	724.5
125°	805.7	804.6	803.4	802.3	801.1	799.9	798.8	797.6
127.5°	880.5	878.9	877.3	875.8	874.5	873.2	871.9	870.5
130°	930.2	929.1	927.9	926.3	924.3	922.3	920.3	918.3
132.5°	978.5	977.1	975.8	974.3	972.7	971.2	969.6	968.1
135°	1050.8	1049.7	1048.5	1047.7	1047.1	1046.5	1045.9	1045.4
137.5°	1121.5	1120.3	1119.1	1118.0	1116.9	1115.8	1114.7	1113.6
140°	1168.0	1167.7	1167.4	1166.3	1164.3	1162.2	1160.2	1158.2
142.5°	1211.6	1211.3	1211.0	1210.1	1208.5	1207.0	1205.4	1203.9
145°	1275.6	1275.4	1275.1	1274.4	1273.2	1272.0	1270.9	1269.7
147.5°	1336.1	1336.1	1336.1	1335.3	1333.6	1331.8	1330.1	1328.4
150°	1373.5	1373.5	1373.5	1372.6	1370.9	1369.2	1367.4	1365.7
152.5°	1407.6	1408.1	1408.5	1408.0	1406.5	1405.0	1403.5	1402.0
155°	1457.5	1458.7	1459.8	1459.4	1457.4	1455.4	1453.3	1451.3
157.5°	1500.4	1501.6	1502.9	1502.6	1501.0	1499.4	1497.8	1496.2
160°	1526.8	1528.3	1529.7	1529.9	1528.7	1527.6	1526.4	1525.2
162.5°	1551.7	1553.2	1554.6	1554.4	1552.6	1550.7	1548.9	1547.0
165°	1583.2	1584.9	1586.6	1586.5	1584.5	1582.5	1580.4	1578.4
167.5°	1608.7	1610.5	1612.3	1612.3	1610.5	1608.7	1606.9	1605.1
170°	1622.7	1624.7	1626.7	1626.7	1624.7	1622.7	1620.6	1618.6
172.5°	1633.6	1635.4	1637.2	1637.1	1635.1	1633.0	1631.0	1629.0
175°	1645.4	1647.2	1648.9	1648.7	1646.7	1644.7	1642.7	1640.7
177.5°	1650.7	1652.1	1653.5	1653.4	1651.7	1650.1	1648.5	1646.9
180°	1651.1	1651.1	1651.1	1651.1	1651.1	1651.1	1651.1	1651.1

(END OF REPORT)