

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332172

Luminaire Tested: **S123DIW-S775D1320U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332172
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S775D1320U835-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1320 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8451.5 lumens
Efficiency: N/A
Efficacy: 137.6 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 61.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332172

CATALOG NUMBER: S123DIW-S775D1320U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

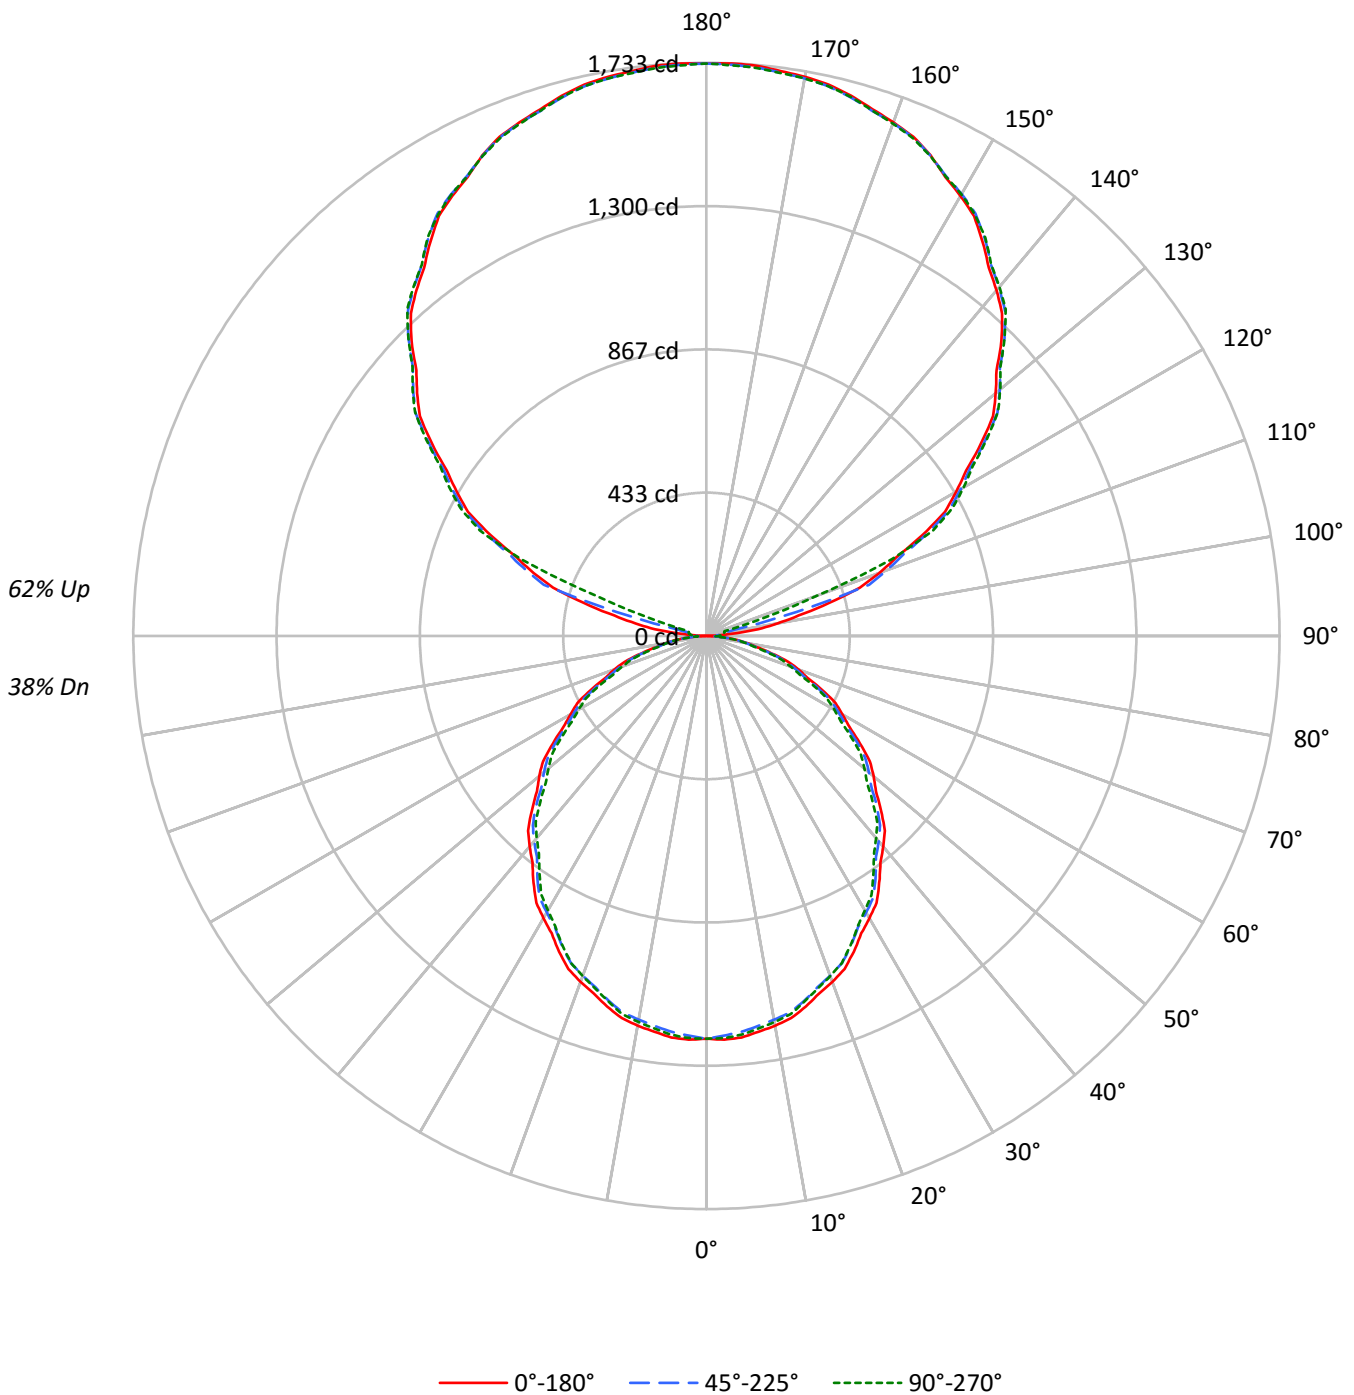



TEST NUMBER: P332172

CATALOG NUMBER: S123DIW-S775D1320U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	76	76	76	60	60	60	45	45	45	38
1	95	91	87	83	86	82	79	76	67	65	63	53	51	50	39	38	38	32
2	86	79	73	68	78	72	67	62	58	55	52	46	44	41	35	33	32	26
3	79	69	62	57	71	63	57	52	52	47	43	41	38	35	31	29	27	22
4	72	61	54	48	65	56	49	44	46	41	37	36	33	30	27	25	23	19
5	66	55	47	41	60	50	43	38	41	36	32	32	29	26	25	22	20	17
6	61	49	41	35	55	45	38	33	37	31	28	29	25	23	22	20	18	15
7	56	44	36	31	51	40	33	29	33	28	24	27	23	20	20	18	16	13
8	52	40	32	27	47	37	30	25	30	25	21	24	20	18	19	16	14	12
9	48	36	29	24	44	33	27	22	28	23	19	22	19	16	17	15	13	10
10	45	33	26	21	41	31	24	20	25	21	17	21	17	14	16	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13108	13108	13108
5°	13169	12988	13078
10°	13081	12875	12955
15°	12929	12730	12754
20°	12749	12521	12534
25°	12511	12275	12250
30°	12246	11999	11908
35°	11971	11709	11557
40°	11682	11387	11212
45°	11365	11094	10823
50°	11047	10731	10433
55°	10631	10355	10042
60°	10211	9918	9604
65°	9841	9442	9146
70°	9294	8897	8500
75°	8492	8189	7839
80°	7662	7333	7271
85°	6719	6472	6212



TEST NUMBER: P332172

CATALOG NUMBER: S123DIW-S775D1320U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	114.7	1.4
10°-20°	323.9	3.8
20°-30°	478.4	5.7
30°-40°	558.9	6.6
40°-50°	561.9	6.6
50°-60°	493.6	5.8
60°-70°	367.7	4.4
70°-80°	209.5	2.5
80°-90°	65.0	0.8
90°-100°	62.9	0.7
100°-110°	299.9	3.5
110°-120°	720.3	8.5
120°-130°	917.3	10.9
130°-140°	980.1	11.6
140°-150°	916.5	10.8
150°-160°	739.3	8.7
160°-170°	477.1	5.6
170°-180°	164.4	1.9
0°-30°	917.1	10.9
0°-40°	1475.9	17.5
0°-60°	2531.4	30.0
0°-90°	3173.6	37.6
90°-120°	1083.2	12.8
90°-150°	3897.1	46.1
90°-180°	5278.0	62.5
0°-180°	8451.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1218	1218	1218	1218	1218	
5°	1219	1213	1202	1212	1210	115
15°	1160	1155	1142	1150	1144	327
25°	1053	1047	1034	1034	1031	485
35°	911	904	891	885	880	570
45°	747	742	729	717	711	576
55°	566	565	552	541	535	507
65°	386	381	371	363	359	381
75°	204	200	197	192	188	218
85°	54	52	52	50	50	60
90°	1	14	31	36	39	7
95°	78	29	40	48	49	97
105°	383	390	282	67	57	406
115°	719	727	738	750	756	709
125°	1013	1023	1029	1031	1034	905
135°	1261	1269	1274	1278	1274	971
145°	1456	1464	1467	1470	1470	911
155°	1603	1601	1602	1608	1601	738
165°	1691	1687	1686	1695	1687	478
175°	1731	1725	1726	1734	1724	165
180°	1731	1731	1731	1731	1731	



TEST NUMBER: P332172

CATALOG NUMBER: S123DIW-S775D1320U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1217.8	1217.8	1217.8	1217.8	1217.8	1217.8	1217.8	1217.8	1217.8	1217.8	1217.8
2.5°	1221.9	1221.2	1220.5	1219.7	1219.0	1217.6	1215.5	1213.5	1211.4	1209.4	1211.2
5°	1218.8	1217.6	1216.5	1215.3	1214.1	1212.3	1209.7	1207.2	1204.6	1202.0	1204.4
7.5°	1206.9	1205.7	1204.5	1203.4	1202.2	1200.3	1197.6	1195.0	1192.3	1189.7	1191.8
10°	1196.8	1195.6	1194.5	1193.3	1192.2	1190.1	1187.0	1184.0	1181.0	1178.0	1180.1
12.5°	1183.4	1182.4	1181.5	1180.5	1179.5	1177.6	1174.8	1171.9	1169.1	1166.2	1167.8
15°	1160.2	1159.2	1158.3	1157.4	1156.4	1154.5	1151.4	1148.4	1145.4	1142.4	1144.2
17.5°	1133.1	1131.9	1130.7	1129.5	1128.3	1126.2	1123.2	1120.1	1117.1	1114.1	1115.4
20°	1113.0	1111.6	1110.3	1108.9	1107.5	1105.2	1102.2	1099.2	1096.2	1093.1	1094.1
22.5°	1090.4	1089.0	1087.6	1086.2	1084.8	1082.6	1079.6	1076.6	1073.6	1070.5	1071.3
25°	1053.4	1052.0	1050.6	1049.2	1047.8	1045.6	1042.5	1039.5	1036.5	1033.5	1033.7
27.5°	1013.8	1012.4	1011.1	1009.7	1008.4	1006.1	1002.8	999.6	996.3	993.0	993.2
30°	985.3	984.1	983.0	981.8	980.6	978.4	975.2	971.9	968.7	965.4	965.4
32.5°	956.8	955.3	953.7	952.2	950.7	948.7	946.1	943.6	941.1	938.6	937.3
35°	911.0	909.6	908.2	906.8	905.4	903.2	900.1	897.1	894.1	891.1	889.7
37.5°	864.0	862.3	860.5	858.7	857.0	854.6	851.5	848.4	845.3	842.3	840.6
40°	831.4	830.0	828.6	827.2	825.8	823.5	820.2	817.0	813.7	810.4	808.6
42.5°	798.7	797.1	795.5	794.0	792.4	790.0	786.7	783.4	780.2	776.9	775.1
45°	746.6	745.6	744.7	743.8	742.8	740.9	737.8	734.8	731.8	728.8	726.0
47.5°	694.8	693.5	692.1	690.8	689.4	687.3	684.5	681.7	678.8	676.0	673.2
50°	659.7	658.5	657.3	656.2	655.0	652.9	649.9	646.9	643.8	640.8	638.3
52.5°	622.8	622.0	621.2	620.4	619.6	617.6	614.4	611.2	608.0	604.8	602.6
55°	566.5	566.2	566.0	565.8	565.5	563.9	560.9	557.9	554.8	551.8	549.3
57.5°	512.9	512.1	511.3	510.5	509.7	508.1	505.7	503.2	500.8	498.4	496.1
60°	474.3	474.1	473.9	473.6	473.4	471.9	469.1	466.3	463.5	460.7	458.6
62.5°	440.0	439.4	438.8	438.2	437.6	435.9	433.1	430.3	427.5	424.7	422.6
65°	386.4	385.2	384.0	382.9	381.7	380.0	377.6	375.3	373.0	370.7	368.8
67.5°	329.6	328.6	327.6	326.5	325.5	324.1	322.4	320.6	318.8	317.1	315.4
70°	295.3	293.9	292.5	291.1	289.7	288.3	286.9	285.5	284.1	282.7	281.1
72.5°	259.3	258.2	257.2	256.2	255.2	253.9	252.3	250.7	249.1	247.5	246.1
75°	204.2	203.2	202.3	201.4	200.5	199.6	198.9	198.2	197.5	196.9	195.7
77.5°	155.4	154.9	154.4	153.9	153.3	152.7	151.8	151.0	150.2	149.3	148.5
80°	123.6	122.9	122.2	121.5	120.8	120.2	119.7	119.3	118.8	118.3	118.1
82.5°	92.6	92.4	92.3	92.1	92.0	91.9	91.8	91.7	91.6	91.5	91.1
85°	54.4	54.0	53.5	53.1	52.6	52.4	52.4	52.4	52.4	52.4	51.9
87.5°	22.0	22.0	22.1	22.1	22.1	22.4	22.9	23.5	24.0	24.6	24.6
90°	1.3	4.1	7.0	9.9	12.7	16.0	19.7	23.4	27.1	30.9	32.0
92.5°	23.9	23.1	22.3	21.5	20.7	21.7	24.5	27.3	30.1	32.9	34.7
95°	78.4	66.7	55.0	43.3	31.6	27.3	30.4	33.6	36.7	39.9	41.9
97.5°	157.6	152.4	147.1	141.9	136.6	123.7	103.1	82.6	62.0	41.4	43.7
100°	217.3	223.0	228.7	234.4	240.2	220.7	176.2	131.6	87.0	42.4	44.7
102.5°	285.2	289.3	293.4	297.5	301.7	279.4	230.7	182.0	133.3	84.6	77.5
105°	383.2	386.3	389.5	392.6	395.7	384.5	358.7	333.0	307.3	281.6	231.0
107.5°	486.6	489.1	491.6	494.1	496.6	499.9	504.0	508.0	512.1	516.1	479.0
110°	555.5	557.8	560.0	562.3	564.6	567.3	570.5	573.6	576.8	579.9	570.5



TEST NUMBER: P332172

CATALOG NUMBER: S123DIW-S775D1320U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	621.3	623.4	625.4	627.5	629.5	632.1	635.3	638.4	641.6	644.7	644.9
115°	718.8	720.5	722.2	723.9	725.6	727.8	730.3	732.9	735.5	738.1	740.9
117.5°	813.2	815.3	817.4	819.5	821.6	823.3	824.6	826.0	827.3	828.6	830.9
120°	871.8	874.4	876.9	879.5	882.1	883.8	884.6	885.5	886.4	887.2	889.5
122.5°	931.5	933.6	935.7	937.8	939.9	941.5	942.6	943.7	944.8	945.9	947.5
125°	1013.2	1015.5	1017.8	1020.1	1022.4	1024.1	1025.2	1026.4	1027.5	1028.7	1029.2
127.5°	1092.4	1094.7	1097.0	1099.3	1101.6	1103.4	1104.8	1106.2	1107.5	1108.9	1109.8
130°	1141.8	1144.1	1146.4	1148.7	1151.0	1152.7	1153.8	1155.0	1156.1	1157.2	1158.4
132.5°	1189.1	1191.4	1193.7	1196.0	1198.3	1199.9	1200.8	1201.7	1202.6	1203.5	1204.7
135°	1261.4	1263.1	1264.8	1266.5	1268.3	1269.7	1270.8	1272.0	1273.1	1274.3	1275.1
137.5°	1323.1	1325.3	1327.5	1329.6	1331.8	1333.2	1333.8	1334.5	1335.1	1335.7	1337.1
140°	1364.3	1366.0	1367.7	1369.4	1371.1	1372.4	1373.3	1374.1	1375.0	1375.8	1377.0
142.5°	1402.3	1404.0	1405.8	1407.5	1409.2	1410.5	1411.3	1412.2	1413.0	1413.9	1414.8
145°	1455.6	1457.6	1459.6	1461.6	1463.6	1464.8	1465.4	1466.0	1466.6	1467.1	1467.7
147.5°	1505.7	1507.0	1508.3	1509.6	1511.0	1511.9	1512.5	1513.0	1513.6	1514.2	1514.8
150°	1536.6	1537.4	1538.3	1539.1	1540.0	1540.7	1541.3	1541.8	1542.4	1543.0	1543.6
152.5°	1564.3	1564.7	1565.1	1565.5	1565.9	1566.3	1566.7	1567.0	1567.3	1567.7	1568.7
155°	1603.4	1602.9	1602.3	1601.7	1601.1	1601.0	1601.3	1601.6	1601.9	1602.1	1603.6
157.5°	1633.8	1633.7	1633.7	1633.6	1633.5	1633.4	1633.1	1632.8	1632.5	1632.2	1633.9
160°	1652.3	1652.0	1651.7	1651.4	1651.1	1650.9	1650.6	1650.3	1650.0	1649.7	1651.4
162.5°	1669.8	1669.0	1668.3	1667.5	1666.8	1666.3	1666.0	1665.7	1665.4	1665.1	1667.1
165°	1690.9	1690.0	1689.1	1688.3	1687.4	1686.9	1686.6	1686.3	1686.0	1685.7	1688.0
167.5°	1707.3	1706.2	1705.0	1703.9	1702.7	1702.2	1702.2	1702.2	1702.2	1702.2	1704.5
170°	1716.6	1715.4	1714.3	1713.2	1712.0	1711.4	1711.4	1711.4	1711.4	1711.4	1713.7
172.5°	1722.8	1721.4	1720.0	1718.6	1717.3	1716.7	1716.9	1717.2	1717.4	1717.6	1719.9
175°	1730.7	1729.3	1727.9	1726.4	1725.0	1724.4	1724.7	1725.0	1725.3	1725.6	1727.6
177.5°	1732.8	1731.6	1730.5	1729.4	1728.2	1727.8	1728.0	1728.2	1728.4	1728.7	1730.5
180°	1730.7	1730.7	1730.7	1730.7	1730.7	1730.7	1730.7	1730.7	1730.7	1730.7	1730.7



TEST NUMBER: P332172

CATALOG NUMBER: S123DIW-S775D1320U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1217.8	1217.8	1217.8	1217.8	1217.8	1217.8	1217.8	1217.8
2.5°	1213.1	1215.0	1216.8	1217.7	1217.5	1217.3	1217.1	1216.9
5°	1206.7	1209.0	1211.4	1212.3	1211.8	1211.4	1210.9	1210.4
7.5°	1193.9	1196.0	1198.1	1199.0	1198.7	1198.4	1198.1	1197.9
10°	1182.2	1184.2	1186.3	1187.2	1186.7	1186.2	1185.8	1185.3
12.5°	1169.3	1170.8	1172.4	1173.0	1172.7	1172.4	1172.2	1171.9
15°	1146.1	1147.9	1149.8	1150.0	1148.6	1147.2	1145.9	1144.5
17.5°	1116.7	1118.0	1119.3	1119.7	1119.2	1118.7	1118.2	1117.7
20°	1095.0	1095.9	1096.9	1097.0	1096.3	1095.6	1094.9	1094.2
22.5°	1072.0	1072.8	1073.5	1073.4	1072.6	1071.7	1070.8	1069.9
25°	1033.9	1034.2	1034.4	1034.2	1033.5	1032.8	1032.1	1031.4
27.5°	993.4	993.6	993.8	993.4	992.6	991.7	990.8	989.9
30°	965.4	965.4	965.4	964.6	963.0	961.3	959.7	958.1
32.5°	936.0	934.7	933.4	932.3	931.4	930.5	929.6	928.8
35°	888.3	886.9	885.5	884.2	883.0	881.9	880.7	879.5
37.5°	838.9	837.2	835.6	834.4	833.6	832.9	832.1	831.4
40°	806.7	804.9	803.0	801.6	800.7	799.7	798.8	797.9
42.5°	773.2	771.3	769.5	768.1	767.2	766.2	765.3	764.4
45°	723.2	720.4	717.6	715.6	714.5	713.3	712.1	711.0
47.5°	670.5	667.8	665.0	663.1	662.1	661.1	660.1	659.0
50°	635.7	633.1	630.6	628.6	627.2	625.8	624.4	623.0
52.5°	600.4	598.2	596.0	594.3	592.9	591.5	590.1	588.7
55°	546.7	544.1	541.6	539.7	538.5	537.4	536.2	535.1
57.5°	493.8	491.6	489.3	487.5	486.1	484.8	483.4	482.1
60°	456.5	454.4	452.3	450.7	449.5	448.4	447.2	446.1
62.5°	420.5	418.4	416.3	414.9	414.1	413.3	412.5	411.7
65°	366.9	365.1	363.2	361.9	361.2	360.5	359.8	359.1
67.5°	313.8	312.2	310.5	309.2	308.3	307.3	306.3	305.3
70°	279.5	277.8	276.2	274.8	273.6	272.5	271.3	270.1
72.5°	244.6	243.2	241.8	240.7	240.1	239.5	238.9	238.3
75°	194.5	193.4	192.2	191.3	190.6	189.9	189.2	188.5
77.5°	147.7	146.9	146.1	145.8	145.8	145.8	145.8	145.8
80°	117.9	117.6	117.4	117.3	117.3	117.3	117.3	117.3
82.5°	90.7	90.3	89.8	89.5	89.4	89.2	89.0	88.8
85°	51.4	51.0	50.5	50.3	50.3	50.3	50.3	50.3
87.5°	24.7	24.7	24.8	24.8	25.0	25.1	25.2	25.3
90°	33.1	34.3	35.4	36.3	36.9	37.4	38.0	38.6
92.5°	36.6	38.4	40.2	41.3	41.7	42.0	42.3	42.7
95°	43.9	45.9	47.9	48.9	48.9	48.9	48.9	48.9
97.5°	46.0	48.3	50.5	51.8	52.1	52.4	52.7	53.0
100°	47.0	49.3	51.6	52.9	53.1	53.4	53.7	54.0
102.5°	70.4	63.3	56.3	53.0	53.5	54.0	54.5	55.0
105°	180.4	129.9	79.3	54.3	54.9	55.4	56.0	56.6
107.5°	442.0	404.9	367.8	330.2	292.1	253.9	215.8	177.7
110°	561.0	551.6	542.2	517.0	476.2	435.3	394.5	353.6



TEST NUMBER: P332172

CATALOG NUMBER: S123DIW-S775D1320U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	645.1	645.2	645.4	641.2	632.5	623.9	615.3	606.7
115°	743.8	746.6	749.5	751.5	752.6	753.8	754.9	756.1
117.5°	833.2	835.4	837.7	839.0	839.2	839.4	839.7	839.9
120°	891.8	894.1	896.4	897.5	897.5	897.5	897.5	897.5
122.5°	949.1	950.7	952.3	953.2	953.4	953.6	953.9	954.1
125°	1029.8	1030.4	1030.9	1031.5	1032.1	1032.7	1033.2	1033.8
127.5°	1110.7	1111.6	1112.6	1112.7	1112.2	1111.6	1111.0	1110.4
130°	1159.5	1160.7	1161.8	1162.1	1161.5	1161.0	1160.4	1159.8
132.5°	1205.8	1207.0	1208.1	1208.3	1207.5	1206.7	1205.9	1205.1
135°	1276.0	1276.8	1277.7	1277.7	1276.8	1276.0	1275.1	1274.3
137.5°	1338.5	1339.8	1341.2	1341.6	1341.0	1340.5	1339.9	1339.3
140°	1378.1	1379.3	1380.4	1380.7	1380.1	1379.5	1379.0	1378.4
142.5°	1415.7	1416.6	1417.6	1417.6	1416.8	1416.0	1415.2	1414.4
145°	1468.3	1468.8	1469.4	1469.7	1469.7	1469.7	1469.7	1469.7
147.5°	1515.3	1515.9	1516.5	1516.1	1514.8	1513.5	1512.2	1510.8
150°	1544.1	1544.7	1545.3	1545.1	1544.3	1543.4	1542.6	1541.7
152.5°	1569.7	1570.8	1571.8	1571.7	1570.3	1569.0	1567.7	1566.4
155°	1605.0	1606.4	1607.9	1607.7	1606.0	1604.3	1602.6	1600.9
157.5°	1635.7	1637.4	1639.1	1638.8	1636.6	1634.4	1632.1	1629.9
160°	1653.1	1654.9	1656.6	1656.4	1654.4	1652.4	1650.4	1648.4
162.5°	1669.0	1671.0	1672.9	1673.0	1671.2	1669.5	1667.7	1665.9
165°	1690.3	1692.6	1694.9	1695.0	1693.0	1691.0	1689.0	1687.0
167.5°	1706.8	1709.0	1711.3	1711.3	1709.0	1706.8	1704.5	1702.2
170°	1716.0	1718.3	1720.6	1720.6	1718.3	1716.0	1713.7	1711.4
172.5°	1722.2	1724.5	1726.8	1726.6	1724.1	1721.6	1719.1	1716.6
175°	1729.6	1731.6	1733.6	1733.4	1731.2	1728.9	1726.6	1724.3
177.5°	1732.3	1734.2	1736.0	1735.8	1733.5	1731.2	1728.9	1726.6
180°	1730.7	1730.7	1730.7	1730.7	1730.7	1730.7	1730.7	1730.7

(END OF REPORT)