

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332178

Luminaire Tested: **S123DIW-S775D1535U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332178
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIW-S775D1535U835-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1535 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9310.8 lumens
Efficiency: N/A
Efficacy: 136.7 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 68.1
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332178

CATALOG NUMBER: S123DIW-S775D1535U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

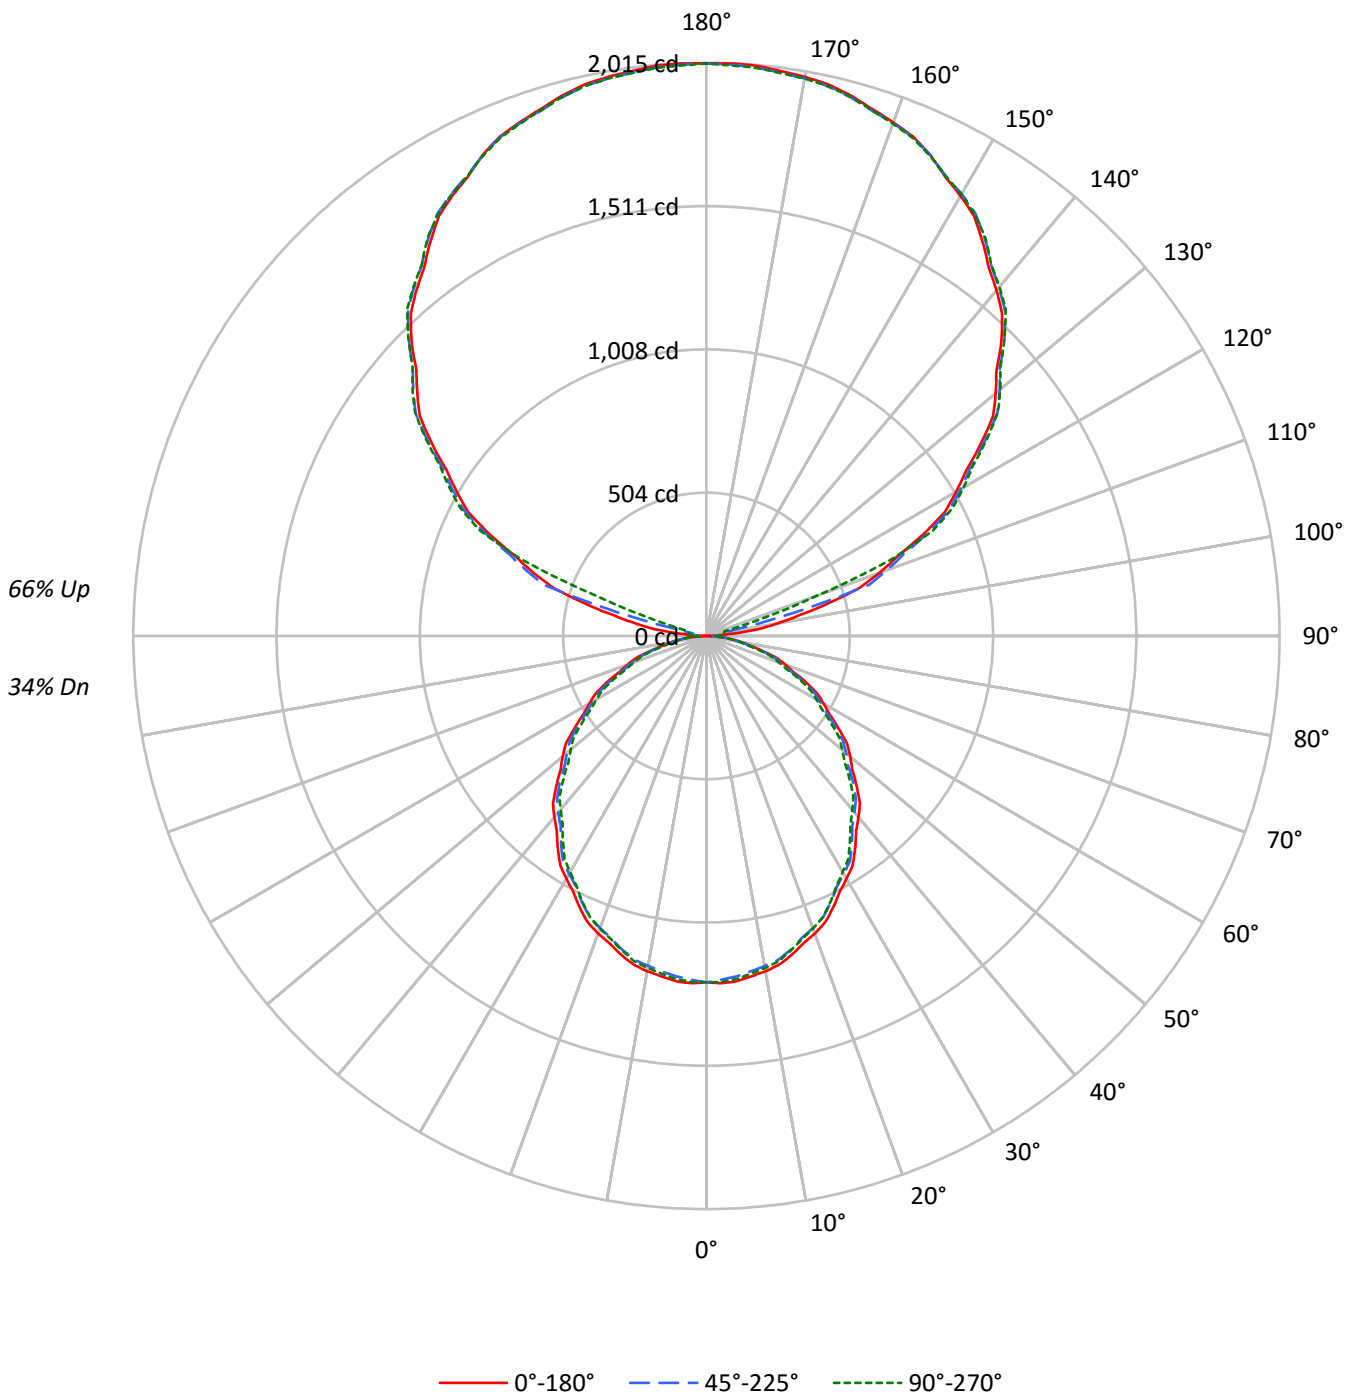



TEST NUMBER: P332178

CATALOG NUMBER: S123DIW-S775D1535U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	42	42	42	34
1	94	90	86	83	85	81	78	75	65	63	61	50	49	48	37	36	35	29
2	86	78	72	67	77	71	66	62	57	53	50	44	42	40	32	31	29	24
3	78	69	62	56	70	62	56	51	50	46	42	39	36	33	28	27	25	20
4	71	61	53	47	64	55	49	43	45	40	36	35	31	29	25	23	21	17
5	65	54	46	40	59	49	42	37	40	35	31	31	27	25	23	21	19	15
6	60	48	41	35	54	44	37	32	36	31	27	28	24	22	21	18	16	13
7	56	44	36	30	50	40	33	28	32	27	24	25	22	19	19	16	15	12
8	51	39	32	27	46	36	29	25	29	24	21	23	20	17	17	15	13	10
9	48	36	29	24	43	33	26	22	27	22	19	21	18	15	16	14	12	9
10	45	33	26	21	40	30	24	20	25	20	17	20	16	14	15	12	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13108	13108	13108
5°	13169	12988	13078
10°	13081	12875	12955
15°	12929	12730	12754
20°	12749	12521	12534
25°	12511	12275	12250
30°	12246	11999	11908
35°	11971	11709	11557
40°	11682	11387	11212
45°	11365	11094	10823
50°	11047	10731	10433
55°	10631	10355	10042
60°	10211	9918	9604
65°	9841	9442	9146
70°	9294	8897	8500
75°	8492	8189	7839
80°	7662	7333	7271
85°	6719	6472	6212



TEST NUMBER: P332178

CATALOG NUMBER: S123DIW-S775D1535U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	114.7	1.2
10°-20°	323.9	3.5
20°-30°	478.4	5.1
30°-40°	558.9	6.0
40°-50°	561.9	6.0
50°-60°	493.6	5.3
60°-70°	367.7	3.9
70°-80°	209.5	2.3
80°-90°	65.8	0.7
90°-100°	73.2	0.8
100°-110°	348.7	3.7
110°-120°	837.5	9.0
120°-130°	1066.5	11.5
130°-140°	1139.5	12.2
140°-150°	1065.6	11.4
150°-160°	859.5	9.2
160°-170°	554.7	6.0
170°-180°	191.2	2.1
0°-30°	917.1	9.8
0°-40°	1475.9	15.9
0°-60°	2531.4	27.2
0°-90°	3174.3	34.1
90°-120°	1259.4	13.5
90°-150°	4531.0	48.7
90°-180°	6136.0	65.9
0°-180°	9310.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1218	1218	1218	1218	1218	
5°	1219	1213	1202	1212	1210	115
15°	1160	1155	1142	1150	1144	327
25°	1053	1047	1034	1034	1031	485
35°	911	904	891	885	880	570
45°	747	742	729	717	711	576
55°	566	565	552	541	535	507
65°	386	381	371	363	359	381
75°	204	200	197	192	188	218
85°	54	52	52	50	50	60
90°	2	17	36	42	45	7
95°	91	34	46	56	57	113
105°	446	454	327	78	66	472
115°	836	845	858	873	879	825
125°	1178	1190	1196	1199	1202	1052
135°	1467	1475	1482	1486	1482	1129
145°	1692	1702	1706	1709	1709	1059
155°	1864	1862	1863	1869	1861	859
165°	1966	1962	1960	1971	1961	555
175°	2012	2005	2006	2016	2005	191
180°	2012	2012	2012	2012	2012	



TEST NUMBER: P332178

CATALOG NUMBER: S123DIW-S775D1535U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1217.8	1217.8	1217.8	1217.8	1217.8	1217.8	1217.8	1217.8	1217.8	1217.8	1217.8
2.5°	1221.9	1221.2	1220.5	1219.7	1219.0	1217.6	1215.5	1213.5	1211.4	1209.4	1211.2
5°	1218.8	1217.6	1216.5	1215.3	1214.1	1212.3	1209.7	1207.2	1204.6	1202.0	1204.4
7.5°	1206.9	1205.7	1204.5	1203.4	1202.2	1200.3	1197.6	1195.0	1192.3	1189.7	1191.8
10°	1196.8	1195.6	1194.5	1193.3	1192.2	1190.1	1187.0	1184.0	1181.0	1178.0	1180.1
12.5°	1183.4	1182.4	1181.5	1180.5	1179.5	1177.6	1174.8	1171.9	1169.1	1166.2	1167.8
15°	1160.2	1159.2	1158.3	1157.4	1156.4	1154.5	1151.4	1148.4	1145.4	1142.4	1144.2
17.5°	1133.1	1131.9	1130.7	1129.5	1128.3	1126.2	1123.2	1120.1	1117.1	1114.1	1115.4
20°	1113.0	1111.6	1110.3	1108.9	1107.5	1105.2	1102.2	1099.2	1096.2	1093.1	1094.1
22.5°	1090.4	1089.0	1087.6	1086.2	1084.8	1082.6	1079.6	1076.6	1073.6	1070.5	1071.3
25°	1053.4	1052.0	1050.6	1049.2	1047.8	1045.6	1042.5	1039.5	1036.5	1033.5	1033.7
27.5°	1013.8	1012.4	1011.1	1009.7	1008.4	1006.1	1002.8	999.6	996.3	993.0	993.2
30°	985.3	984.1	983.0	981.8	980.6	978.4	975.2	971.9	968.7	965.4	965.4
32.5°	956.8	955.3	953.7	952.2	950.7	948.7	946.1	943.6	941.1	938.6	937.3
35°	911.0	909.6	908.2	906.8	905.4	903.2	900.1	897.1	894.1	891.1	889.7
37.5°	864.0	862.3	860.5	858.7	857.0	854.6	851.5	848.4	845.3	842.3	840.6
40°	831.4	830.0	828.6	827.2	825.8	823.5	820.2	817.0	813.7	810.4	808.6
42.5°	798.7	797.1	795.5	794.0	792.4	790.0	786.7	783.4	780.2	776.9	775.1
45°	746.6	745.6	744.7	743.8	742.8	740.9	737.8	734.8	731.8	728.8	726.0
47.5°	694.8	693.5	692.1	690.8	689.4	687.3	684.5	681.7	678.8	676.0	673.2
50°	659.7	658.5	657.3	656.2	655.0	652.9	649.9	646.9	643.8	640.8	638.3
52.5°	622.8	622.0	621.2	620.4	619.6	617.6	614.4	611.2	608.0	604.8	602.6
55°	566.5	566.2	566.0	565.8	565.5	563.9	560.9	557.9	554.8	551.8	549.3
57.5°	512.9	512.1	511.3	510.5	509.7	508.1	505.7	503.2	500.8	498.4	496.1
60°	474.3	474.1	473.9	473.6	473.4	471.9	469.1	466.3	463.5	460.7	458.6
62.5°	440.0	439.4	438.8	438.2	437.6	435.9	433.1	430.3	427.5	424.7	422.6
65°	386.4	385.2	384.0	382.9	381.7	380.0	377.6	375.3	373.0	370.7	368.8
67.5°	329.6	328.6	327.6	326.5	325.5	324.1	322.4	320.6	318.8	317.1	315.4
70°	295.3	293.9	292.5	291.1	289.7	288.3	286.9	285.5	284.1	282.7	281.1
72.5°	259.3	258.2	257.2	256.2	255.2	253.9	252.3	250.7	249.1	247.5	246.1
75°	204.2	203.2	202.3	201.4	200.5	199.6	198.9	198.2	197.5	196.9	195.7
77.5°	155.4	154.9	154.4	153.9	153.3	152.7	151.8	151.0	150.2	149.3	148.5
80°	123.6	122.9	122.2	121.5	120.8	120.2	119.7	119.3	118.8	118.3	118.1
82.5°	92.6	92.4	92.3	92.1	92.0	91.9	91.8	91.7	91.6	91.5	91.1
85°	54.4	54.0	53.5	53.1	52.6	52.4	52.4	52.4	52.4	52.4	51.9
87.5°	22.1	22.2	22.3	22.4	22.5	22.9	23.6	24.2	24.9	25.6	25.7
90°	1.5	4.8	8.1	11.5	14.8	18.6	22.9	27.2	31.6	35.9	37.2
92.5°	27.8	26.9	25.9	25.0	24.1	25.2	28.5	31.8	35.0	38.3	40.4
95°	91.2	77.6	64.0	50.3	36.7	31.7	35.4	39.0	42.7	46.3	48.7
97.5°	183.3	177.2	171.1	164.9	158.8	143.8	119.9	96.0	72.1	48.1	50.8
100°	252.7	259.3	265.9	272.6	279.2	256.6	204.8	153.0	101.2	49.3	52.0
102.5°	331.6	336.4	341.2	345.9	350.7	324.8	268.2	211.6	155.0	98.4	90.1
105°	445.5	449.2	452.8	456.5	460.1	447.0	417.1	387.2	357.3	327.4	268.6
107.5°	565.7	568.6	571.5	574.5	577.4	581.2	585.9	590.7	595.4	600.1	557.0
110°	645.8	648.5	651.1	653.8	656.5	659.6	663.3	666.9	670.6	674.2	663.3



TEST NUMBER: P332178

CATALOG NUMBER: S123DIW-S775D1535U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	722.4	724.8	727.2	729.6	731.9	735.0	738.6	742.3	745.9	749.6	749.8
115°	835.7	837.7	839.7	841.7	843.7	846.2	849.2	852.1	855.1	858.1	861.4
117.5°	945.4	947.9	950.3	952.8	955.3	957.3	958.8	960.3	961.8	963.4	966.0
120°	1013.6	1016.6	1019.6	1022.6	1025.6	1027.6	1028.5	1029.5	1030.5	1031.5	1034.2
122.5°	1083.0	1085.4	1087.9	1090.3	1092.8	1094.7	1095.9	1097.2	1098.4	1099.7	1101.6
125°	1178.0	1180.7	1183.4	1186.0	1188.7	1190.7	1192.0	1193.3	1194.7	1196.0	1196.7
127.5°	1270.1	1272.8	1275.5	1278.1	1280.8	1282.9	1284.5	1286.1	1287.7	1289.3	1290.3
130°	1327.5	1330.2	1332.9	1335.5	1338.2	1340.2	1341.5	1342.8	1344.2	1345.5	1346.8
132.5°	1382.6	1385.2	1387.9	1390.5	1393.2	1395.1	1396.1	1397.2	1398.2	1399.3	1400.6
135°	1466.6	1468.6	1470.6	1472.6	1474.6	1476.2	1477.5	1478.9	1480.2	1481.5	1482.5
137.5°	1538.3	1540.9	1543.4	1545.9	1548.4	1550.1	1550.8	1551.5	1552.3	1553.0	1554.6
140°	1586.2	1588.2	1590.2	1592.2	1594.2	1595.6	1596.6	1597.6	1598.6	1599.6	1601.0
142.5°	1630.4	1632.4	1634.4	1636.4	1638.4	1639.9	1640.9	1641.9	1642.9	1643.9	1644.9
145°	1692.3	1694.6	1697.0	1699.3	1701.6	1703.1	1703.8	1704.4	1705.1	1705.8	1706.4
147.5°	1750.6	1752.2	1753.7	1755.2	1756.7	1757.8	1758.5	1759.2	1759.8	1760.5	1761.2
150°	1786.5	1787.5	1788.5	1789.5	1790.5	1791.3	1792.0	1792.7	1793.3	1794.0	1794.6
152.5°	1818.8	1819.3	1819.7	1820.2	1820.7	1821.1	1821.5	1821.9	1822.3	1822.7	1823.9
155°	1864.2	1863.6	1862.9	1862.3	1861.6	1861.4	1861.8	1862.1	1862.4	1862.7	1864.4
157.5°	1899.5	1899.5	1899.4	1899.3	1899.3	1899.1	1898.7	1898.4	1898.1	1897.7	1899.7
160°	1921.1	1920.7	1920.4	1920.1	1919.7	1919.4	1919.1	1918.7	1918.4	1918.1	1920.1
162.5°	1941.4	1940.5	1939.7	1938.8	1937.9	1937.3	1937.0	1936.7	1936.3	1936.0	1938.3
165°	1965.9	1964.9	1963.9	1962.9	1961.9	1961.3	1960.9	1960.6	1960.3	1959.9	1962.6
167.5°	1985.0	1983.7	1982.4	1981.1	1979.7	1979.1	1979.1	1979.1	1979.1	1979.1	1981.7
170°	1995.8	1994.5	1993.1	1991.8	1990.5	1989.8	1989.8	1989.8	1989.8	1989.8	1992.5
172.5°	2003.0	2001.4	1999.8	1998.2	1996.6	1995.9	1996.2	1996.5	1996.7	1997.0	1999.7
175°	2012.2	2010.6	2008.9	2007.3	2005.6	2004.9	2005.3	2005.6	2005.9	2006.3	2008.6
177.5°	2014.6	2013.3	2012.0	2010.7	2009.3	2008.8	2009.1	2009.3	2009.6	2009.9	2012.0
180°	2012.2	2012.2	2012.2	2012.2	2012.2	2012.2	2012.2	2012.2	2012.2	2012.2	2012.2



TEST NUMBER: P332178

CATALOG NUMBER: S123DIW-S775D1535U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1217.8	1217.8	1217.8	1217.8	1217.8	1217.8	1217.8	1217.8
2.5°	1213.1	1215.0	1216.8	1217.7	1217.5	1217.3	1217.1	1216.9
5°	1206.7	1209.0	1211.4	1212.3	1211.8	1211.4	1210.9	1210.4
7.5°	1193.9	1196.0	1198.1	1199.0	1198.7	1198.4	1198.1	1197.9
10°	1182.2	1184.2	1186.3	1187.2	1186.7	1186.2	1185.8	1185.3
12.5°	1169.3	1170.8	1172.4	1173.0	1172.7	1172.4	1172.2	1171.9
15°	1146.1	1147.9	1149.8	1150.0	1148.6	1147.2	1145.9	1144.5
17.5°	1116.7	1118.0	1119.3	1119.7	1119.2	1118.7	1118.2	1117.7
20°	1095.0	1095.9	1096.9	1097.0	1096.3	1095.6	1094.9	1094.2
22.5°	1072.0	1072.8	1073.5	1073.4	1072.6	1071.7	1070.8	1069.9
25°	1033.9	1034.2	1034.4	1034.2	1033.5	1032.8	1032.1	1031.4
27.5°	993.4	993.6	993.8	993.4	992.6	991.7	990.8	989.9
30°	965.4	965.4	965.4	964.6	963.0	961.3	959.7	958.1
32.5°	936.0	934.7	933.4	932.3	931.4	930.5	929.6	928.8
35°	888.3	886.9	885.5	884.2	883.0	881.9	880.7	879.5
37.5°	838.9	837.2	835.6	834.4	833.6	832.9	832.1	831.4
40°	806.7	804.9	803.0	801.6	800.7	799.7	798.8	797.9
42.5°	773.2	771.3	769.5	768.1	767.2	766.2	765.3	764.4
45°	723.2	720.4	717.6	715.6	714.5	713.3	712.1	711.0
47.5°	670.5	667.8	665.0	663.1	662.1	661.1	660.1	659.0
50°	635.7	633.1	630.6	628.6	627.2	625.8	624.4	623.0
52.5°	600.4	598.2	596.0	594.3	592.9	591.5	590.1	588.7
55°	546.7	544.1	541.6	539.7	538.5	537.4	536.2	535.1
57.5°	493.8	491.6	489.3	487.5	486.1	484.8	483.4	482.1
60°	456.5	454.4	452.3	450.7	449.5	448.4	447.2	446.1
62.5°	420.5	418.4	416.3	414.9	414.1	413.3	412.5	411.7
65°	366.9	365.1	363.2	361.9	361.2	360.5	359.8	359.1
67.5°	313.8	312.2	310.5	309.2	308.3	307.3	306.3	305.3
70°	279.5	277.8	276.2	274.8	273.6	272.5	271.3	270.1
72.5°	244.6	243.2	241.8	240.7	240.1	239.5	238.9	238.3
75°	194.5	193.4	192.2	191.3	190.6	189.9	189.2	188.5
77.5°	147.7	146.9	146.1	145.8	145.8	145.8	145.8	145.8
80°	117.9	117.6	117.4	117.3	117.3	117.3	117.3	117.3
82.5°	90.7	90.3	89.8	89.5	89.4	89.2	89.0	88.8
85°	51.4	51.0	50.5	50.3	50.3	50.3	50.3	50.3
87.5°	25.8	25.8	25.9	26.0	26.2	26.3	26.4	26.6
90°	38.5	39.9	41.2	42.2	42.9	43.5	44.2	44.8
92.5°	42.5	44.7	46.8	48.0	48.4	48.8	49.2	49.6
95°	51.0	53.3	55.6	56.8	56.8	56.8	56.8	56.8
97.5°	53.5	56.1	58.8	60.3	60.6	60.9	61.3	61.6
100°	54.6	57.3	60.0	61.5	61.8	62.1	62.5	62.8
102.5°	81.9	73.7	65.4	61.6	62.2	62.8	63.4	64.0
105°	209.8	151.0	92.2	63.1	63.8	64.5	65.1	65.8
107.5°	513.8	470.7	427.6	383.9	339.6	295.2	250.9	206.6
110°	652.3	641.3	630.4	601.1	553.6	506.1	458.6	411.1



TEST NUMBER: P332178

CATALOG NUMBER: S123DIW-S775D1535U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	750.0	750.2	750.4	745.5	735.4	725.4	715.4	705.3
115°	864.8	868.1	871.4	873.7	875.1	876.4	877.7	879.1
117.5°	968.7	971.3	974.0	975.5	975.7	976.0	976.3	976.5
120°	1036.9	1039.5	1042.2	1043.5	1043.5	1043.5	1043.5	1043.5
122.5°	1103.4	1105.3	1107.2	1108.2	1108.5	1108.7	1109.0	1109.3
125°	1197.3	1198.0	1198.6	1199.3	1200.0	1200.6	1201.3	1202.0
127.5°	1291.4	1292.5	1293.5	1293.7	1293.1	1292.4	1291.7	1291.1
130°	1348.1	1349.5	1350.8	1351.1	1350.5	1349.8	1349.1	1348.5
132.5°	1402.0	1403.3	1404.6	1404.8	1403.9	1403.0	1402.0	1401.1
135°	1483.5	1484.5	1485.5	1485.5	1484.5	1483.5	1482.5	1481.5
137.5°	1556.2	1557.8	1559.4	1559.8	1559.2	1558.5	1557.8	1557.2
140°	1602.3	1603.6	1604.9	1605.3	1604.6	1604.0	1603.3	1602.6
142.5°	1646.0	1647.1	1648.1	1648.2	1647.3	1646.3	1645.4	1644.5
145°	1707.1	1707.8	1708.4	1708.8	1708.8	1708.8	1708.8	1708.8
147.5°	1761.8	1762.5	1763.2	1762.7	1761.2	1759.7	1758.1	1756.6
150°	1795.3	1796.0	1796.6	1796.5	1795.5	1794.5	1793.5	1792.5
152.5°	1825.1	1826.3	1827.5	1827.3	1825.8	1824.2	1822.7	1821.2
155°	1866.1	1867.7	1869.4	1869.2	1867.2	1865.2	1863.2	1861.3
157.5°	1901.7	1903.7	1905.7	1905.4	1902.8	1900.2	1897.6	1895.0
160°	1922.1	1924.0	1926.0	1925.9	1923.5	1921.2	1918.9	1916.6
162.5°	1940.5	1942.8	1945.0	1945.1	1943.1	1941.0	1939.0	1936.9
165°	1965.2	1967.9	1970.6	1970.7	1968.4	1966.1	1963.7	1961.4
167.5°	1984.4	1987.0	1989.7	1989.7	1987.0	1984.4	1981.7	1979.1
170°	1995.1	1997.8	2000.5	2000.5	1997.8	1995.1	1992.5	1989.8
172.5°	2002.3	2005.0	2007.6	2007.5	2004.6	2001.7	1998.7	1995.8
175°	2010.9	2013.2	2015.6	2015.4	2012.7	2010.1	2007.4	2004.8
177.5°	2014.1	2016.2	2018.4	2018.1	2015.4	2012.8	2010.1	2007.5
180°	2012.2	2012.2	2012.2	2012.2	2012.2	2012.2	2012.2	2012.2

(END OF REPORT)