

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: NEO-RAY

Report Number: P332399

Luminaire Tested: **S123RDIW-S340D1030U835-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332399
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S340D1030U835-4F0-1E-UDD-A1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 340 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 1030 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4932.2 lumens
Efficiency: N/A
Efficacy: 129.8 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.22 / 1.36
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 38
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332399

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

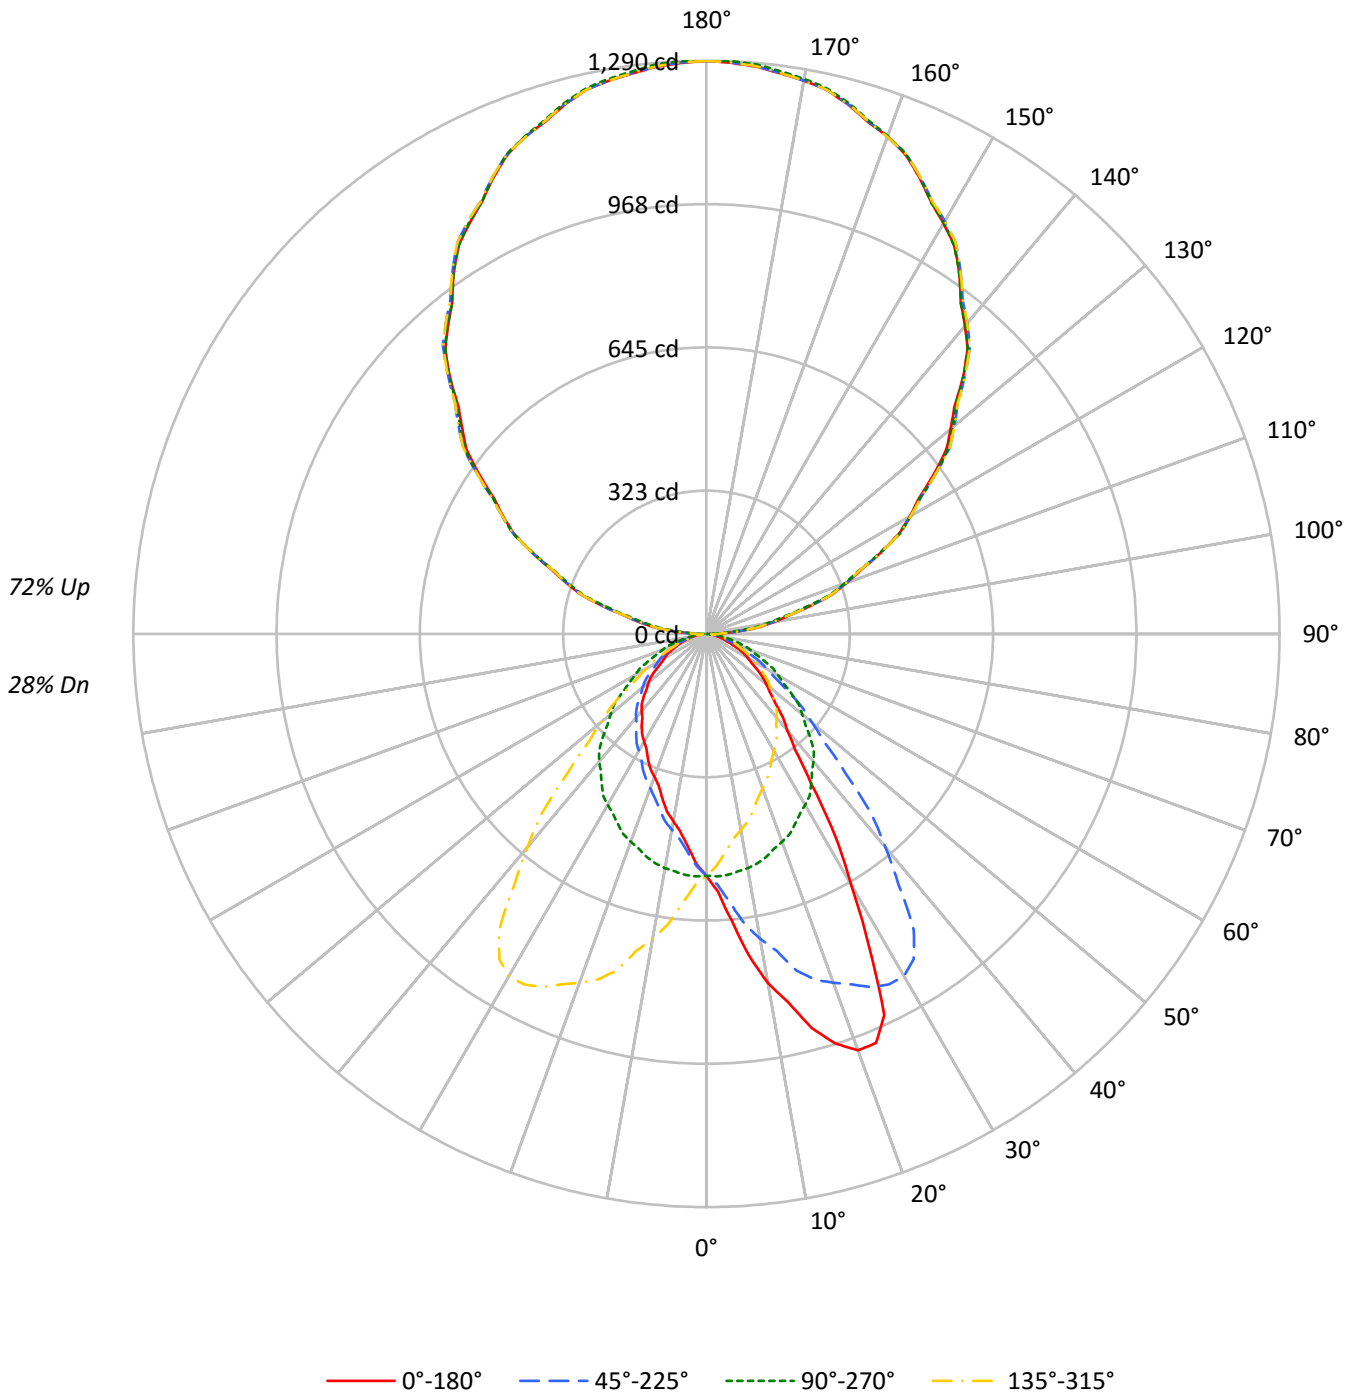



TEST NUMBER: P332399

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	102	102	102	102	91	91	91	91	71	71	71	52	52	52	36	36	36	28																				
1	93	89	85	82	83	80	77	74	62	60	59	46	45	44	32	31	31	24																				
2	85	78	72	67	76	70	65	61	55	52	49	41	39	37	28	27	26	20																				
3	78	69	62	56	69	62	56	51	49	45	41	37	34	32	25	24	23	18																				
4	71	61	54	48	63	55	49	44	43	39	35	33	30	27	23	21	20	15																				
5	65	54	47	41	58	49	42	38	39	34	31	29	26	24	21	19	17	14																				
6	60	49	41	36	54	44	37	33	35	30	27	27	23	21	19	17	15	12																				
7	55	44	36	31	50	40	33	29	32	27	24	24	21	19	17	15	14	11																				
8	51	40	32	27	46	36	30	25	29	24	21	22	19	17	16	14	12	10																				
9	48	36	29	24	43	33	27	22	26	22	19	20	17	15	15	13	11	9																				
10	45	33	26	22	40	30	24	20	24	20	17	19	16	13	14	12	10	8																				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	5858	5858	5858	5858
5°	6983	5883	5181	5883
10°	8719	5850	4680	5850
15°	10234	5789	4268	5789
20°	11423	5700	3918	5700
25°	11240	5606	3702	5606
30°	8079	5520	3480	5520
35°	5394	5406	3336	5406
40°	3974	5271	3188	5271
45°	3334	5033	3043	5033
50°	2942	4721	2840	4721
55°	2580	4363	2562	4363
60°	2297	4021	2347	4021
65°	2017	3655	2183	3655
70°	1583	3330	1995	3330
75°	1393	2907	1822	2907
80°	1215	2467	1791	2467
85°	976	1988	1902	1988



TEST NUMBER: P332399

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	53.5	1.1
10°-20°	167.2	3.4
20°-30°	262.7	5.3
30°-40°	274.1	5.6
40°-50°	234.5	4.8
50°-60°	178.8	3.6
60°-70°	114.6	2.3
70°-80°	55.1	1.1
80°-90°	18.4	0.4
90°-100°	84.0	1.7
100°-110°	251.5	5.1
110°-120°	427.7	8.7
120°-130°	562.6	11.4
130°-140°	632.3	12.8
140°-150°	621.6	12.6
150°-160°	523.3	10.6
160°-170°	348.3	7.1
170°-180°	122.0	2.5
0°-30°	483.4	9.8
0°-40°	757.5	15.4
0°-60°	1170.8	23.7
0°-90°	1358.9	27.6
90°-120°	763.2	15.5
90°-150°	2579.7	52.3
90°-180°	3573.0	72.4
0°-180°	4932.2	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	544	544	544	544	544	
5°	646	544	480	544	646	67
15°	918	520	383	520	918	260
25°	946	472	312	472	946	407
35°	410	411	254	411	410	269
45°	219	331	200	331	219	172
55°	138	232	136	232	138	124
65°	79	144	86	144	79	78
75°	34	70	44	70	34	36
85°	8	16	15	16	8	10
90°	30	1	30	1	30	15
95°	79	60	79	60	79	81
105°	241	228	241	228	241	256
115°	432	431	432	431	432	427
125°	623	630	623	630	623	557
135°	817	818	817	818	817	628
145°	992	992	992	992	992	619
155°	1134	1136	1134	1136	1134	522
165°	1233	1237	1233	1237	1233	348
175°	1282	1287	1282	1287	1282	122
180°	1290	1290	1290	1290	1290	



TEST NUMBER: P332399

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2
2.5°	579.7	580.4	578.0	577.6	574.8	574.1	574.1	570.1	567.7	564.6	562.7
5°	646.3	650.0	648.1	644.0	637.0	635.3	630.9	623.9	616.0	606.2	601.6
7.5°	729.5	734.6	732.6	726.2	718.8	712.9	700.4	688.8	672.6	658.3	646.1
10°	797.7	792.4	788.2	781.9	775.1	764.2	751.1	733.2	712.5	696.1	678.0
12.5°	848.8	847.9	842.6	836.1	826.6	816.2	800.1	778.3	754.2	730.6	709.8
15°	918.4	919.8	916.3	909.6	896.0	877.6	853.4	844.3	809.8	784.2	758.6
17.5°	966.6	966.3	965.8	956.5	942.7	929.6	907.1	883.2	852.0	815.9	781.4
20°	997.2	994.8	995.3	984.8	974.6	959.4	937.5	902.8	877.2	835.5	799.8
22.5°	996.4	995.9	997.7	994.1	986.7	975.1	957.8	928.5	895.8	853.7	813.6
25°	946.4	944.5	955.4	958.5	970.4	972.5	967.3	951.3	920.3	876.9	827.3
27.5°	792.0	791.0	811.3	836.8	869.0	894.1	918.3	930.0	920.3	889.2	839.5
30°	650.0	671.9	682.2	719.0	760.0	808.9	851.8	892.5	902.6	889.0	848.3
32.5°	539.7	558.8	567.4	598.9	637.2	694.5	758.8	816.5	857.3	867.6	843.1
35°	410.5	410.7	430.3	444.3	479.7	538.6	601.1	678.4	755.3	813.6	819.6
37.5°	327.6	328.7	340.6	354.5	381.1	412.2	467.2	531.5	620.3	709.7	762.2
40°	282.8	284.9	293.8	307.5	326.6	350.2	393.0	453.6	527.7	627.2	708.5
42.5°	254.1	257.5	262.1	272.7	284.5	306.6	341.2	388.0	455.4	549.5	643.3
45°	219.0	220.9	224.4	229.3	240.0	255.3	278.6	310.1	366.0	441.7	535.6
47.5°	193.2	192.2	195.9	199.8	207.0	217.5	233.1	258.7	298.6	359.4	439.0
50°	175.7	175.4	178.0	181.0	187.8	195.5	208.3	227.6	259.3	309.6	382.6
52.5°	159.3	160.1	162.0	165.7	170.6	176.8	188.3	202.3	229.5	272.9	333.7
55°	137.5	138.2	140.7	142.8	146.3	152.6	159.8	171.5	190.1	220.4	270.5
57.5°	119.0	118.7	121.1	121.7	125.6	130.7	136.3	145.4	158.9	181.4	215.1
60°	106.7	106.0	108.1	109.7	111.8	116.0	120.7	129.5	140.3	156.8	185.7
62.5°	95.5	95.2	96.7	98.4	100.1	103.9	107.8	114.6	123.1	137.0	160.0
65°	79.2	79.9	80.6	81.3	82.2	84.6	88.3	93.0	98.8	108.6	125.1
67.5°	62.3	63.0	63.2	64.6	66.6	68.1	70.4	74.5	78.6	86.8	96.2
70°	50.3	50.1	50.3	51.0	53.6	56.1	59.2	62.2	64.8	70.6	78.5
72.5°	43.2	42.8	43.4	43.6	44.8	45.5	47.4	50.3	53.6	57.5	63.2
75°	33.5	33.5	33.5	33.5	34.5	34.9	35.6	36.3	37.5	39.4	43.6
77.5°	24.8	24.8	25.2	25.4	25.6	25.9	26.3	27.0	27.4	28.4	30.2
80°	19.6	19.8	19.6	19.8	19.8	20.3	20.5	21.2	21.4	22.6	23.3
82.5°	14.7	14.6	14.7	15.0	15.0	15.4	15.5	16.0	16.0	16.6	17.3
85°	7.9	7.5	7.9	7.7	8.2	7.7	7.9	8.4	8.4	8.6	9.6
87.5°	7.9	8.2	7.8	7.9	7.8	7.8	7.6	7.5	7.7	7.3	6.9
90°	30.4	29.9	29.5	29.0	28.6	27.9	27.0	26.1	25.2	24.3	21.4
92.5°	40.9	41.2	41.5	41.7	42.0	41.8	41.1	40.3	39.6	38.9	37.2
95°	79.0	79.0	79.0	79.0	79.0	78.6	77.7	76.8	75.9	75.0	73.2
97.5°	121.6	121.7	121.8	121.8	121.9	121.5	120.4	119.4	118.4	117.3	116.0
100°	154.0	153.5	153.1	152.6	152.2	151.6	151.0	150.3	149.6	148.9	147.8
102.5°	187.2	187.3	187.4	187.5	187.6	187.3	186.6	185.9	185.3	184.6	183.1
105°	241.1	240.7	240.2	239.8	239.3	239.1	239.1	239.1	239.1	239.1	237.1
107.5°	297.2	297.5	297.8	298.1	298.3	298.1	297.4	296.7	295.9	295.2	294.4
110°	335.3	335.8	336.2	336.7	337.1	336.9	336.0	335.1	334.2	333.3	332.9



TEST NUMBER: P332399

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	375.9	376.0	376.0	376.1	376.2	375.7	374.6	373.6	372.5	371.4	371.3
115°	431.6	431.8	432.0	432.3	432.5	432.5	432.3	432.0	431.8	431.6	432.0
117.5°	488.1	488.7	489.4	490.0	490.6	491.0	491.0	491.1	491.1	491.2	491.7
120°	527.8	528.3	528.7	529.2	529.6	530.0	530.2	530.4	530.6	530.9	532.0
122.5°	565.9	566.6	567.2	567.8	568.4	569.1	569.6	570.2	570.8	571.4	572.0
125°	623.1	624.0	624.9	625.8	626.7	627.6	628.5	629.4	630.3	631.2	631.6
127.5°	680.0	681.0	682.1	683.1	684.1	685.3	686.6	687.8	689.1	690.3	690.8
130°	717.3	718.9	720.4	722.0	723.6	724.8	725.7	726.6	727.5	728.4	729.1
132.5°	756.2	757.4	758.6	759.8	761.1	762.2	763.3	764.4	765.4	766.5	767.0
135°	816.6	817.0	817.5	817.9	818.4	819.0	819.9	820.8	821.7	822.6	822.9
137.5°	869.9	870.7	871.6	872.4	873.3	874.2	875.1	876.1	877.0	878.0	877.4
140°	904.7	906.3	907.9	909.4	911.0	911.9	912.1	912.4	912.6	912.8	912.6
142.5°	940.4	941.6	942.8	944.0	945.2	946.0	946.2	946.4	946.6	946.9	946.5
145°	991.8	992.7	993.6	994.5	995.4	996.0	996.2	996.5	996.7	996.9	996.2
147.5°	1037.6	1039.0	1040.3	1041.7	1043.0	1043.7	1043.7	1043.7	1043.7	1043.7	1043.1
150°	1066.8	1068.2	1069.5	1070.9	1072.2	1072.9	1072.9	1072.9	1072.9	1072.9	1072.4
152.5°	1095.2	1096.3	1097.5	1098.7	1099.9	1100.3	1099.9	1099.5	1099.2	1098.8	1098.6
155°	1133.7	1135.3	1136.8	1138.4	1140.0	1140.3	1139.4	1138.5	1137.6	1136.7	1136.5
157.5°	1168.7	1170.0	1171.3	1172.5	1173.8	1173.9	1173.0	1172.0	1171.1	1170.1	1170.0
160°	1191.4	1192.3	1193.2	1194.1	1195.0	1194.9	1193.8	1192.7	1191.5	1190.4	1190.4
162.5°	1208.4	1209.9	1211.3	1212.8	1214.2	1214.4	1213.2	1212.1	1211.0	1209.9	1209.7
165°	1233.0	1234.5	1236.1	1237.7	1239.3	1239.4	1238.0	1236.7	1235.3	1234.0	1234.0
167.5°	1253.8	1255.2	1256.6	1258.0	1259.4	1259.4	1258.0	1256.6	1255.2	1253.8	1253.7
170°	1264.4	1265.9	1267.5	1269.1	1270.7	1270.7	1269.1	1267.5	1265.9	1264.4	1264.4
172.5°	1272.5	1274.0	1275.6	1277.2	1278.8	1278.9	1277.5	1276.1	1274.7	1273.3	1273.3
175°	1281.6	1283.2	1284.7	1286.3	1287.9	1288.0	1286.7	1285.3	1284.0	1282.6	1282.6
177.5°	1286.5	1287.7	1289.0	1290.2	1291.5	1291.6	1290.5	1289.4	1288.3	1287.3	1287.3
180°	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7



TEST NUMBER: P332399

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2
2.5°	561.9	561.4	558.8	555.8	551.9	549.3	547.2	546.1	542.7	538.6	535.9
5°	596.7	589.7	582.2	573.1	564.7	556.1	550.8	544.5	536.8	528.2	522.1
7.5°	633.8	620.1	605.4	590.1	575.1	561.6	549.6	539.4	527.2	514.8	506.2
10°	662.4	642.3	621.6	600.4	581.1	562.9	548.9	535.2	520.5	506.3	495.5
12.5°	688.3	661.9	638.0	611.9	587.2	565.5	545.4	529.2	511.5	496.4	484.2
15°	721.1	694.0	665.2	625.5	592.7	565.2	540.7	519.5	498.1	479.5	467.6
17.5°	751.7	711.1	672.2	639.2	596.5	562.2	532.3	507.0	483.4	463.7	449.0
20°	764.4	725.0	682.9	640.7	598.8	560.3	525.6	497.6	473.2	450.8	437.3
22.5°	772.0	727.5	683.0	637.7	593.2	553.2	518.9	488.1	461.6	440.4	423.7
25°	780.9	727.8	678.9	634.2	588.7	545.4	504.6	472.0	443.4	420.8	403.1
27.5°	786.8	724.3	666.5	616.8	570.7	527.6	490.2	455.6	426.5	402.6	383.6
30°	787.9	721.5	657.0	603.2	556.4	516.7	477.1	444.1	413.3	387.9	370.2
32.5°	789.4	714.6	644.1	587.0	539.0	499.8	463.9	432.3	400.8	375.8	357.7
35°	783.3	710.8	624.6	558.9	510.9	472.9	440.6	411.4	380.5	356.2	337.8
37.5°	756.8	695.7	604.4	527.3	477.1	442.0	415.6	390.2	361.8	335.6	318.3
40°	730.2	680.8	588.7	508.1	455.7	419.6	395.8	375.1	347.6	323.1	304.5
42.5°	690.5	660.4	573.8	488.0	431.5	396.7	376.6	357.2	333.1	308.2	290.7
45°	617.6	621.6	543.3	455.9	397.9	363.0	344.1	330.6	309.2	288.7	270.7
47.5°	526.3	563.3	507.5	421.8	362.6	329.8	313.3	301.5	287.0	266.9	250.5
50°	466.7	519.5	478.8	398.9	340.4	307.8	291.5	281.9	269.3	253.5	237.9
52.5°	411.7	468.5	444.1	373.3	316.3	286.5	270.6	262.7	252.7	237.8	223.7
55°	335.7	393.3	387.7	334.8	280.3	253.5	241.4	232.5	225.8	214.6	203.4
57.5°	271.6	326.1	329.0	291.9	248.5	222.0	211.6	204.9	200.5	192.1	181.7
60°	231.1	281.2	291.0	263.0	225.8	202.5	192.2	186.8	183.4	176.6	168.7
62.5°	197.6	240.2	251.3	231.2	204.0	182.1	174.1	169.0	166.6	160.8	153.8
65°	151.2	186.6	197.3	186.2	171.9	154.5	147.9	143.5	141.4	138.2	133.0
67.5°	113.7	139.5	151.3	143.4	138.2	127.2	123.1	120.7	118.8	116.6	112.3
70°	91.3	110.4	122.5	120.5	116.3	110.4	107.4	105.8	103.9	102.0	98.3
72.5°	73.4	86.6	97.9	99.0	95.6	94.4	91.7	91.0	89.9	87.7	85.6
75°	48.7	57.8	65.7	68.7	70.1	71.3	70.1	69.9	69.7	67.8	66.6
77.5°	31.9	36.8	41.8	47.0	49.2	50.7	51.1	52.0	51.3	50.4	49.8
80°	24.5	25.6	29.1	33.5	37.0	38.4	39.4	39.8	39.6	39.4	38.4
82.5°	17.8	18.7	20.4	23.5	26.4	28.7	29.3	29.2	29.7	29.9	29.1
85°	9.6	9.8	10.3	10.7	12.3	14.9	15.6	16.1	16.5	16.5	15.1
87.5°	6.7	5.9	5.7	5.2	5.3	5.0	5.7	6.2	6.8	6.5	7.0
90°	18.5	15.5	12.6	10.0	7.8	5.5	3.3	1.0	3.3	5.5	7.8
92.5°	35.6	33.9	32.2	30.6	29.1	27.6	26.0	24.5	26.0	27.6	29.1
95°	71.4	69.6	67.8	66.1	64.5	62.9	61.3	59.8	61.3	62.9	64.5
97.5°	114.7	113.4	112.1	110.9	109.7	108.5	107.3	106.2	107.3	108.5	109.7
100°	146.7	145.6	144.4	143.2	141.8	140.5	139.1	137.8	139.1	140.5	141.8
102.5°	181.6	180.1	178.6	177.5	176.7	175.9	175.1	174.3	175.1	175.9	176.7
105°	235.0	233.0	231.0	229.8	229.3	228.9	228.4	228.0	228.4	228.9	229.3
107.5°	293.6	292.8	292.0	291.4	291.2	290.9	290.6	290.4	290.6	290.9	291.2
110°	332.4	332.0	331.5	331.1	330.6	330.2	329.7	329.3	329.7	330.2	330.6



TEST NUMBER: P332399

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	371.2	371.1	371.0	370.9	370.6	370.3	370.1	369.8	370.1	370.3	370.6
115°	432.5	432.9	433.4	433.3	432.6	431.9	431.2	430.6	431.2	431.9	432.6
117.5°	492.3	492.9	493.5	493.6	493.1	492.7	492.2	491.8	492.2	492.7	493.1
120°	533.1	534.2	535.4	535.3	533.9	532.6	531.2	529.9	531.2	532.6	533.9
122.5°	572.6	573.2	573.7	573.5	572.5	571.6	570.6	569.6	570.6	571.6	572.5
125°	632.1	632.5	633.0	632.9	632.2	631.5	630.8	630.2	630.8	631.5	632.2
127.5°	691.3	691.8	692.3	691.8	690.4	689.0	687.5	686.1	687.5	689.0	690.4
130°	729.8	730.5	731.1	730.6	728.8	727.0	725.2	723.4	725.2	727.0	728.8
132.5°	767.5	768.0	768.5	767.9	766.1	764.2	762.4	760.6	762.4	764.2	766.1
135°	823.1	823.3	823.5	823.0	821.6	820.3	818.9	817.6	818.9	820.3	821.6
137.5°	876.8	876.2	875.6	874.8	873.6	872.5	871.4	870.3	871.4	872.5	873.6
140°	912.4	912.1	911.9	911.2	910.1	909.0	907.9	906.7	907.9	909.0	910.1
142.5°	946.0	945.6	945.2	944.5	943.3	942.2	941.1	940.0	941.1	942.2	943.3
145°	995.6	994.9	994.2	993.6	993.2	992.7	992.3	991.8	992.3	992.7	993.2
147.5°	1042.5	1041.8	1041.2	1040.5	1039.7	1038.8	1038.0	1037.2	1038.0	1038.8	1039.7
150°	1072.0	1071.5	1071.1	1070.6	1070.2	1069.7	1069.3	1068.8	1069.3	1069.7	1070.2
152.5°	1098.3	1098.0	1097.7	1097.3	1096.7	1096.0	1095.4	1094.8	1095.4	1096.0	1096.7
155°	1136.3	1136.0	1135.8	1135.7	1135.7	1135.7	1135.7	1135.7	1135.7	1135.7	1135.7
157.5°	1169.8	1169.6	1169.4	1169.5	1169.7	1170.0	1170.3	1170.6	1170.3	1170.0	1169.7
160°	1190.4	1190.4	1190.4	1190.6	1191.1	1191.5	1192.0	1192.4	1192.0	1191.5	1191.1
162.5°	1209.5	1209.3	1209.1	1209.4	1210.0	1210.6	1211.3	1211.9	1211.3	1210.6	1210.0
165°	1234.0	1234.0	1234.0	1234.3	1235.0	1235.7	1236.3	1237.0	1236.3	1235.7	1235.0
167.5°	1253.5	1253.3	1253.1	1253.5	1254.4	1255.3	1256.2	1257.1	1256.2	1255.3	1254.4
170°	1264.4	1264.4	1264.4	1264.8	1265.7	1266.6	1267.5	1268.4	1267.5	1266.6	1265.7
172.5°	1273.3	1273.3	1273.3	1273.7	1274.6	1275.5	1276.4	1277.3	1276.4	1275.5	1274.6
175°	1282.6	1282.6	1282.6	1283.1	1284.0	1284.9	1285.8	1286.7	1285.8	1284.9	1284.0
177.5°	1287.3	1287.3	1287.3	1287.6	1288.3	1289.1	1289.8	1290.5	1289.8	1289.1	1288.3
180°	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7



TEST NUMBER: P332399

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2
2.5°	534.9	532.5	530.8	527.1	524.7	522.1	519.5	521.1	520.9	520.8	520.8
5°	517.0	511.6	506.7	500.4	496.5	491.6	487.9	487.4	488.3	485.1	483.2
7.5°	499.2	491.9	484.9	478.0	470.6	464.7	461.1	459.3	457.0	455.0	452.9
10°	486.7	478.1	471.3	462.7	454.8	447.8	443.4	440.3	438.7	437.1	434.0
12.5°	473.8	465.4	456.8	447.0	439.5	431.4	428.1	424.7	421.6	419.7	415.6
15°	455.0	444.1	435.0	424.7	416.3	408.4	403.8	397.0	396.1	393.7	389.5
17.5°	436.1	424.3	411.7	404.1	394.7	386.4	379.3	377.1	370.4	367.9	364.2
20°	421.2	410.3	400.7	390.7	377.0	369.3	363.7	360.7	355.3	352.0	349.7
22.5°	408.4	397.2	386.2	374.5	363.2	354.5	350.4	345.7	342.8	338.2	335.7
25°	390.0	377.9	364.6	352.0	343.9	337.4	330.8	326.6	322.4	320.3	315.7
27.5°	368.7	356.0	343.6	334.0	324.0	317.6	311.7	308.0	302.9	299.4	296.8
30°	356.9	342.0	331.3	322.7	309.9	303.8	299.4	294.7	291.0	287.3	284.7
32.5°	343.3	329.7	319.6	308.9	299.1	292.4	286.7	282.6	279.4	275.9	273.3
35°	322.0	310.6	300.1	289.4	282.1	275.4	268.6	265.1	262.1	258.8	256.5
37.5°	302.7	292.0	282.0	271.9	262.9	257.4	252.0	249.3	245.2	243.0	240.7
40°	290.8	280.3	269.6	259.8	250.5	246.3	241.4	237.4	233.7	232.0	229.5
42.5°	277.7	267.2	258.2	247.7	240.0	234.3	229.8	225.5	222.7	220.3	218.9
45°	258.4	249.1	240.2	229.7	222.5	217.6	212.5	208.5	206.0	204.3	201.8
47.5°	239.6	230.3	221.3	212.2	205.2	199.6	194.4	191.7	188.3	186.3	184.6
50°	226.0	217.6	208.1	199.7	192.7	187.1	182.9	179.4	176.4	173.8	172.6
52.5°	213.5	204.6	196.3	188.5	181.1	174.8	171.0	167.3	165.0	162.1	160.7
55°	192.9	184.3	177.3	169.6	162.4	157.0	152.4	149.1	146.8	143.5	141.7
57.5°	173.6	165.8	157.5	150.8	143.4	138.9	135.0	130.6	127.7	125.2	123.3
60°	160.5	151.7	144.4	138.2	131.6	125.8	122.3	118.8	115.8	113.2	111.6
62.5°	146.9	139.2	132.3	125.5	119.5	114.4	110.4	107.5	104.8	103.2	101.5
65°	126.0	120.0	113.0	107.4	101.8	98.1	94.8	92.3	90.4	89.2	87.8
67.5°	106.8	101.0	94.9	89.4	85.6	82.8	80.7	78.5	77.5	76.0	75.1
70°	94.4	88.3	82.9	78.7	75.0	72.9	71.5	69.9	69.0	67.1	66.2
72.5°	80.8	76.4	72.5	69.1	66.1	64.2	62.4	60.4	58.9	56.8	55.9
75°	63.6	59.6	56.6	54.3	52.4	49.9	47.3	45.2	44.5	43.8	43.6
77.5°	47.1	44.6	42.4	40.4	38.1	36.3	35.7	35.2	35.1	34.7	34.7
80°	37.0	34.7	33.1	30.8	29.4	29.4	29.4	28.9	29.1	29.1	29.1
82.5°	27.5	25.4	24.5	23.7	23.4	23.6	23.6	23.7	23.5	23.9	23.7
85°	14.2	14.4	14.9	14.7	14.9	14.9	15.4	15.1	15.4	14.9	15.4
87.5°	7.2	8.3	9.1	9.8	10.6	11.0	11.4	11.6	11.9	12.1	12.2
90°	10.0	12.6	15.5	18.5	21.4	24.3	25.2	26.1	27.0	27.9	28.6
92.5°	30.6	32.2	33.9	35.6	37.2	38.9	39.6	40.3	41.1	41.8	42.0
95°	66.1	67.8	69.6	71.4	73.2	75.0	75.9	76.8	77.7	78.6	79.0
97.5°	110.9	112.1	113.4	114.7	116.0	117.3	118.4	119.4	120.4	121.5	121.9
100°	143.2	144.4	145.6	146.7	147.8	148.9	149.6	150.3	151.0	151.6	152.2
102.5°	177.5	178.6	180.1	181.6	183.1	184.6	185.3	185.9	186.6	187.3	187.6
105°	229.8	231.0	233.0	235.0	237.1	239.1	239.1	239.1	239.1	239.1	239.3
107.5°	291.4	292.0	292.8	293.6	294.4	295.2	295.9	296.7	297.4	298.1	298.3
110°	331.1	331.5	332.0	332.4	332.9	333.3	334.2	335.1	336.0	336.9	337.1



TEST NUMBER: P332399

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	370.9	371.0	371.1	371.2	371.3	371.4	372.5	373.6	374.6	375.7	376.2
115°	433.3	433.4	432.9	432.5	432.0	431.6	431.8	432.0	432.3	432.5	432.5
117.5°	493.6	493.5	492.9	492.3	491.7	491.2	491.1	491.1	491.0	491.0	490.6
120°	535.3	535.4	534.2	533.1	532.0	530.9	530.6	530.4	530.2	530.0	529.6
122.5°	573.5	573.7	573.2	572.6	572.0	571.4	570.8	570.2	569.6	569.1	568.4
125°	632.9	633.0	632.5	632.1	631.6	631.2	630.3	629.4	628.5	627.6	626.7
127.5°	691.8	692.3	691.8	691.3	690.8	690.3	689.1	687.8	686.6	685.3	684.1
130°	730.6	731.1	730.5	729.8	729.1	728.4	727.5	726.6	725.7	724.8	723.6
132.5°	767.9	768.5	768.0	767.5	767.0	766.5	765.4	764.4	763.3	762.2	761.1
135°	823.0	823.5	823.3	823.1	822.9	822.6	821.7	820.8	819.9	819.0	818.4
137.5°	874.8	875.6	876.2	876.8	877.4	878.0	877.0	876.1	875.1	874.2	873.3
140°	911.2	911.9	912.1	912.4	912.6	912.8	912.6	912.4	912.1	911.9	911.0
142.5°	944.5	945.2	945.6	946.0	946.5	946.9	946.6	946.4	946.2	946.0	945.2
145°	993.6	994.2	994.9	995.6	996.2	996.9	996.7	996.5	996.2	996.0	995.4
147.5°	1040.5	1041.2	1041.8	1042.5	1043.1	1043.7	1043.7	1043.7	1043.7	1043.7	1043.0
150°	1070.6	1071.1	1071.5	1072.0	1072.4	1072.9	1072.9	1072.9	1072.9	1072.9	1072.2
152.5°	1097.3	1097.7	1098.0	1098.3	1098.6	1098.8	1099.2	1099.5	1099.9	1100.3	1099.9
155°	1135.7	1135.8	1136.0	1136.3	1136.5	1136.7	1137.6	1138.5	1139.4	1140.3	1140.0
157.5°	1169.5	1169.4	1169.6	1169.8	1170.0	1170.1	1171.1	1172.0	1173.0	1173.9	1173.8
160°	1190.6	1190.4	1190.4	1190.4	1190.4	1190.4	1191.5	1192.7	1193.8	1194.9	1195.0
162.5°	1209.4	1209.1	1209.3	1209.5	1209.7	1209.9	1211.0	1212.1	1213.2	1214.4	1214.2
165°	1234.3	1234.0	1234.0	1234.0	1234.0	1234.0	1235.3	1236.7	1238.0	1239.4	1239.3
167.5°	1253.5	1253.1	1253.3	1253.5	1253.7	1253.8	1255.2	1256.6	1258.0	1259.4	1259.4
170°	1264.8	1264.4	1264.4	1264.4	1264.4	1264.4	1265.9	1267.5	1269.1	1270.7	1270.7
172.5°	1273.7	1273.3	1273.3	1273.3	1273.3	1273.3	1274.7	1276.1	1277.5	1278.9	1278.8
175°	1283.1	1282.6	1282.6	1282.6	1282.6	1282.6	1284.0	1285.3	1286.7	1288.0	1287.9
177.5°	1287.6	1287.3	1287.3	1287.3	1287.3	1287.3	1288.3	1289.4	1290.5	1291.6	1291.5
180°	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7



TEST NUMBER: P332399

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2
2.5°	518.5	518.3	518.5	517.8	518.5	518.3	518.5	520.8	520.8	520.9	521.1
5°	482.5	482.3	481.6	479.5	481.6	482.3	482.5	483.2	485.1	488.3	487.4
7.5°	451.0	450.7	448.7	448.7	448.7	450.7	451.0	452.9	455.0	457.0	459.3
10°	432.4	432.6	429.8	428.2	429.8	432.6	432.4	434.0	437.1	438.7	440.3
12.5°	414.3	413.3	411.0	409.2	411.0	413.3	414.3	415.6	419.7	421.6	424.7
15°	390.5	388.1	382.6	383.0	382.6	388.1	390.5	389.5	393.7	396.1	397.0
17.5°	362.4	360.7	360.6	357.3	360.6	360.7	362.4	364.2	367.9	370.4	377.1
20°	346.0	344.8	345.3	342.0	345.3	344.8	346.0	349.7	352.0	355.3	360.7
22.5°	333.1	331.9	330.0	329.0	330.0	331.9	333.1	335.7	338.2	342.8	345.7
25°	314.3	312.4	310.6	311.7	310.6	312.4	314.3	315.7	320.3	322.4	326.6
27.5°	295.5	294.1	292.2	292.0	292.2	294.1	295.5	296.8	299.4	302.9	308.0
30°	283.5	282.1	281.2	280.0	281.2	282.1	283.5	284.7	287.3	291.0	294.7
32.5°	271.4	271.1	269.5	269.2	269.5	271.1	271.4	273.3	275.9	279.4	282.6
35°	255.6	254.2	253.7	253.9	253.7	254.2	255.6	256.5	258.8	262.1	265.1
37.5°	240.5	238.7	237.8	237.0	237.8	238.7	240.5	240.7	243.0	245.2	249.3
40°	229.7	227.9	227.4	226.9	227.4	227.9	229.7	229.5	232.0	233.7	237.4
42.5°	217.6	216.9	216.6	215.7	216.6	216.9	217.6	218.9	220.3	222.7	225.5
45°	201.1	200.8	199.4	199.9	199.4	200.8	201.1	201.8	204.3	206.0	208.5
47.5°	183.6	182.6	181.6	182.3	181.6	182.6	183.6	184.6	186.3	188.3	191.7
50°	171.7	171.2	169.1	169.6	169.1	171.2	171.7	172.6	173.8	176.4	179.4
52.5°	159.8	158.0	157.2	156.9	157.2	158.0	159.8	160.7	162.1	165.0	167.3
55°	140.0	137.9	137.0	136.5	137.0	137.9	140.0	141.7	143.5	146.8	149.1
57.5°	120.6	120.1	119.3	119.8	119.3	120.1	120.6	123.3	125.2	127.7	130.6
60°	109.3	109.3	109.3	109.0	109.3	109.3	109.3	111.6	113.2	115.8	118.8
62.5°	100.5	99.9	99.8	100.1	99.8	99.9	100.5	101.5	103.2	104.8	107.5
65°	87.1	86.9	86.0	85.7	86.0	86.9	87.1	87.8	89.2	90.4	92.3
67.5°	74.5	73.7	73.4	73.1	73.4	73.7	74.5	75.1	76.0	77.5	78.5
70°	65.0	64.5	63.1	63.4	63.1	64.5	65.0	66.2	67.1	69.0	69.9
72.5°	54.8	54.3	54.0	53.7	54.0	54.3	54.8	55.9	56.8	58.9	60.4
75°	43.3	43.1	42.9	43.8	42.9	43.1	43.3	43.6	43.8	44.5	45.2
77.5°	34.7	34.7	34.9	34.5	34.9	34.7	34.7	34.7	34.7	35.1	35.2
80°	29.1	29.1	28.9	28.9	28.9	29.1	29.1	29.1	29.1	29.1	28.9
82.5°	23.3	23.5	23.7	23.3	23.7	23.5	23.3	23.7	23.9	23.5	23.7
85°	15.4	15.1	15.6	15.4	15.6	15.1	15.4	15.4	14.9	15.4	15.1
87.5°	12.7	12.4	12.5	12.8	12.5	12.4	12.7	12.2	12.1	11.9	11.6
90°	29.0	29.5	29.9	30.4	29.9	29.5	29.0	28.6	27.9	27.0	26.1
92.5°	41.7	41.5	41.2	40.9	41.2	41.5	41.7	42.0	41.8	41.1	40.3
95°	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	78.6	77.7	76.8
97.5°	121.8	121.8	121.7	121.6	121.7	121.8	121.8	121.9	121.5	120.4	119.4
100°	152.6	153.1	153.5	154.0	153.5	153.1	152.6	152.2	151.6	151.0	150.3
102.5°	187.5	187.4	187.3	187.2	187.3	187.4	187.5	187.6	187.3	186.6	185.9
105°	239.8	240.2	240.7	241.1	240.7	240.2	239.8	239.3	239.1	239.1	239.1
107.5°	298.1	297.8	297.5	297.2	297.5	297.8	298.1	298.3	298.1	297.4	296.7
110°	336.7	336.2	335.8	335.3	335.8	336.2	336.7	337.1	336.9	336.0	335.1



TEST NUMBER: P332399

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	376.1	376.0	376.0	375.9	376.0	376.0	376.1	376.2	375.7	374.6	373.6
115°	432.3	432.0	431.8	431.6	431.8	432.0	432.3	432.5	432.5	432.3	432.0
117.5°	490.0	489.4	488.7	488.1	488.7	489.4	490.0	490.6	491.0	491.0	491.1
120°	529.2	528.7	528.3	527.8	528.3	528.7	529.2	529.6	530.0	530.2	530.4
122.5°	567.8	567.2	566.6	565.9	566.6	567.2	567.8	568.4	569.1	569.6	570.2
125°	625.8	624.9	624.0	623.1	624.0	624.9	625.8	626.7	627.6	628.5	629.4
127.5°	683.1	682.1	681.0	680.0	681.0	682.1	683.1	684.1	685.3	686.6	687.8
130°	722.0	720.4	718.9	717.3	718.9	720.4	722.0	723.6	724.8	725.7	726.6
132.5°	759.8	758.6	757.4	756.2	757.4	758.6	759.8	761.1	762.2	763.3	764.4
135°	817.9	817.5	817.0	816.6	817.0	817.5	817.9	818.4	819.0	819.9	820.8
137.5°	872.4	871.6	870.7	869.9	870.7	871.6	872.4	873.3	874.2	875.1	876.1
140°	909.4	907.9	906.3	904.7	906.3	907.9	909.4	911.0	911.9	912.1	912.4
142.5°	944.0	942.8	941.6	940.4	941.6	942.8	944.0	945.2	946.0	946.2	946.4
145°	994.5	993.6	992.7	991.8	992.7	993.6	994.5	995.4	996.0	996.2	996.5
147.5°	1041.7	1040.3	1039.0	1037.6	1039.0	1040.3	1041.7	1043.0	1043.7	1043.7	1043.7
150°	1070.9	1069.5	1068.2	1066.8	1068.2	1069.5	1070.9	1072.2	1072.9	1072.9	1072.9
152.5°	1098.7	1097.5	1096.3	1095.2	1096.3	1097.5	1098.7	1099.9	1100.3	1099.9	1099.5
155°	1138.4	1136.8	1135.3	1133.7	1135.3	1136.8	1138.4	1140.0	1140.3	1139.4	1138.5
157.5°	1172.5	1171.3	1170.0	1168.7	1170.0	1171.3	1172.5	1173.8	1173.9	1173.0	1172.0
160°	1194.1	1193.2	1192.3	1191.4	1192.3	1193.2	1194.1	1195.0	1194.9	1193.8	1192.7
162.5°	1212.8	1211.3	1209.9	1208.4	1209.9	1211.3	1212.8	1214.2	1214.4	1213.2	1212.1
165°	1237.7	1236.1	1234.5	1233.0	1234.5	1236.1	1237.7	1239.3	1239.4	1238.0	1236.7
167.5°	1258.0	1256.6	1255.2	1253.8	1255.2	1256.6	1258.0	1259.4	1259.4	1258.0	1256.6
170°	1269.1	1267.5	1265.9	1264.4	1265.9	1267.5	1269.1	1270.7	1270.7	1269.1	1267.5
172.5°	1277.2	1275.6	1274.0	1272.5	1274.0	1275.6	1277.2	1278.8	1278.9	1277.5	1276.1
175°	1286.3	1284.7	1283.2	1281.6	1283.2	1284.7	1286.3	1287.9	1288.0	1286.7	1285.3
177.5°	1290.2	1289.0	1287.7	1286.5	1287.7	1289.0	1290.2	1291.5	1291.6	1290.5	1289.4
180°	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7



TEST NUMBER: P332399

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2
2.5°	519.5	522.1	524.7	527.1	530.8	532.5	534.9	535.9	538.6	542.7	546.1
5°	487.9	491.6	496.5	500.4	506.7	511.6	517.0	522.1	528.2	536.8	544.5
7.5°	461.1	464.7	470.6	478.0	484.9	491.9	499.2	506.2	514.8	527.2	539.4
10°	443.4	447.8	454.8	462.7	471.3	478.1	486.7	495.5	506.3	520.5	535.2
12.5°	428.1	431.4	439.5	447.0	456.8	465.4	473.8	484.2	496.4	511.5	529.2
15°	403.8	408.4	416.3	424.7	435.0	444.1	455.0	467.6	479.5	498.1	519.5
17.5°	379.3	386.4	394.7	404.1	411.7	424.3	436.1	449.0	463.7	483.4	507.0
20°	363.7	369.3	377.0	390.7	400.7	410.3	421.2	437.3	450.8	473.2	497.6
22.5°	350.4	354.5	363.2	374.5	386.2	397.2	408.4	423.7	440.4	461.6	488.1
25°	330.8	337.4	343.9	352.0	364.6	377.9	390.0	403.1	420.8	443.4	472.0
27.5°	311.7	317.6	324.0	334.0	343.6	356.0	368.7	383.6	402.6	426.5	455.6
30°	299.4	303.8	309.9	322.7	331.3	342.0	356.9	370.2	387.9	413.3	444.1
32.5°	286.7	292.4	299.1	308.9	319.6	329.7	343.3	357.7	375.8	400.8	432.3
35°	268.6	275.4	282.1	289.4	300.1	310.6	322.0	337.8	356.2	380.5	411.4
37.5°	252.0	257.4	262.9	271.9	282.0	292.0	302.7	318.3	335.6	361.8	390.2
40°	241.4	246.3	250.5	259.8	269.6	280.3	290.8	304.5	323.1	347.6	375.1
42.5°	229.8	234.3	240.0	247.7	258.2	267.2	277.7	290.7	308.2	333.1	357.2
45°	212.5	217.6	222.5	229.7	240.2	249.1	258.4	270.7	288.7	309.2	330.6
47.5°	194.4	199.6	205.2	212.2	221.3	230.3	239.6	250.5	266.9	287.0	301.5
50°	182.9	187.1	192.7	199.7	208.1	217.6	226.0	237.9	253.5	269.3	281.9
52.5°	171.0	174.8	181.1	188.5	196.3	204.6	213.5	223.7	237.8	252.7	262.7
55°	152.4	157.0	162.4	169.6	177.3	184.3	192.9	203.4	214.6	225.8	232.5
57.5°	135.0	138.9	143.4	150.8	157.5	165.8	173.6	181.7	192.1	200.5	204.9
60°	122.3	125.8	131.6	138.2	144.4	151.7	160.5	168.7	176.6	183.4	186.8
62.5°	110.4	114.4	119.5	125.5	132.3	139.2	146.9	153.8	160.8	166.6	169.0
65°	94.8	98.1	101.8	107.4	113.0	120.0	126.0	133.0	138.2	141.4	143.5
67.5°	80.7	82.8	85.6	89.4	94.9	101.0	106.8	112.3	116.6	118.8	120.7
70°	71.5	72.9	75.0	78.7	82.9	88.3	94.4	98.3	102.0	103.9	105.8
72.5°	62.4	64.2	66.1	69.1	72.5	76.4	80.8	85.6	87.7	89.9	91.0
75°	47.3	49.9	52.4	54.3	56.6	59.6	63.6	66.6	67.8	69.7	69.9
77.5°	35.7	36.3	38.1	40.4	42.4	44.6	47.1	49.8	50.4	51.3	52.0
80°	29.4	29.4	29.4	30.8	33.1	34.7	37.0	38.4	39.4	39.6	39.8
82.5°	23.6	23.6	23.4	23.7	24.5	25.4	27.5	29.1	29.9	29.7	29.2
85°	15.4	14.9	14.9	14.7	14.9	14.4	14.2	15.1	16.5	16.5	16.1
87.5°	11.4	11.0	10.6	9.8	9.1	8.3	7.2	7.0	6.5	6.8	6.2
90°	25.2	24.3	21.4	18.5	15.5	12.6	10.0	7.8	5.5	3.3	1.0
92.5°	39.6	38.9	37.2	35.6	33.9	32.2	30.6	29.1	27.6	26.0	24.5
95°	75.9	75.0	73.2	71.4	69.6	67.8	66.1	64.5	62.9	61.3	59.8
97.5°	118.4	117.3	116.0	114.7	113.4	112.1	110.9	109.7	108.5	107.3	106.2
100°	149.6	148.9	147.8	146.7	145.6	144.4	143.2	141.8	140.5	139.1	137.8
102.5°	185.3	184.6	183.1	181.6	180.1	178.6	177.5	176.7	175.9	175.1	174.3
105°	239.1	239.1	237.1	235.0	233.0	231.0	229.8	229.3	228.9	228.4	228.0
107.5°	295.9	295.2	294.4	293.6	292.8	292.0	291.4	291.2	290.9	290.6	290.4
110°	334.2	333.3	332.9	332.4	332.0	331.5	331.1	330.6	330.2	329.7	329.3



TEST NUMBER: P332399

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	372.5	371.4	371.3	371.2	371.1	371.0	370.9	370.6	370.3	370.1	369.8
115°	431.8	431.6	432.0	432.5	432.9	433.4	433.3	432.6	431.9	431.2	430.6
117.5°	491.1	491.2	491.7	492.3	492.9	493.5	493.6	493.1	492.7	492.2	491.8
120°	530.6	530.9	532.0	533.1	534.2	535.4	535.3	533.9	532.6	531.2	529.9
122.5°	570.8	571.4	572.0	572.6	573.2	573.7	573.5	572.5	571.6	570.6	569.6
125°	630.3	631.2	631.6	632.1	632.5	633.0	632.9	632.2	631.5	630.8	630.2
127.5°	689.1	690.3	690.8	691.3	691.8	692.3	691.8	690.4	689.0	687.5	686.1
130°	727.5	728.4	729.1	729.8	730.5	731.1	730.6	728.8	727.0	725.2	723.4
132.5°	765.4	766.5	767.0	767.5	768.0	768.5	767.9	766.1	764.2	762.4	760.6
135°	821.7	822.6	822.9	823.1	823.3	823.5	823.0	821.6	820.3	818.9	817.6
137.5°	877.0	878.0	877.4	876.8	876.2	875.6	874.8	873.6	872.5	871.4	870.3
140°	912.6	912.8	912.6	912.4	912.1	911.9	911.2	910.1	909.0	907.9	906.7
142.5°	946.6	946.9	946.5	946.0	945.6	945.2	944.5	943.3	942.2	941.1	940.0
145°	996.7	996.9	996.2	995.6	994.9	994.2	993.6	993.2	992.7	992.3	991.8
147.5°	1043.7	1043.7	1043.1	1042.5	1041.8	1041.2	1040.5	1039.7	1038.8	1038.0	1037.2
150°	1072.9	1072.9	1072.4	1072.0	1071.5	1071.1	1070.6	1070.2	1069.7	1069.3	1068.8
152.5°	1099.2	1098.8	1098.6	1098.3	1098.0	1097.7	1097.3	1096.7	1096.0	1095.4	1094.8
155°	1137.6	1136.7	1136.5	1136.3	1136.0	1135.8	1135.7	1135.7	1135.7	1135.7	1135.7
157.5°	1171.1	1170.1	1170.0	1169.8	1169.6	1169.4	1169.5	1169.7	1170.0	1170.3	1170.6
160°	1191.5	1190.4	1190.4	1190.4	1190.4	1190.4	1190.6	1191.1	1191.5	1192.0	1192.4
162.5°	1211.0	1209.9	1209.7	1209.5	1209.3	1209.1	1209.4	1210.0	1210.6	1211.3	1211.9
165°	1235.3	1234.0	1234.0	1234.0	1234.0	1234.0	1234.3	1235.0	1235.7	1236.3	1237.0
167.5°	1255.2	1253.8	1253.7	1253.5	1253.3	1253.1	1253.5	1254.4	1255.3	1256.2	1257.1
170°	1265.9	1264.4	1264.4	1264.4	1264.4	1264.4	1264.8	1265.7	1266.6	1267.5	1268.4
172.5°	1274.7	1273.3	1273.3	1273.3	1273.3	1273.3	1273.7	1274.6	1275.5	1276.4	1277.3
175°	1284.0	1282.6	1282.6	1282.6	1282.6	1282.6	1283.1	1284.0	1284.9	1285.8	1286.7
177.5°	1288.3	1287.3	1287.3	1287.3	1287.3	1287.3	1287.6	1288.3	1289.1	1289.8	1290.5
180°	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7



TEST NUMBER: P332399

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2
2.5°	547.2	549.3	551.9	555.8	558.8	561.4	561.9	562.7	564.6	567.7	570.1
5°	550.8	556.1	564.7	573.1	582.2	589.7	596.7	601.6	606.2	616.0	623.9
7.5°	549.6	561.6	575.1	590.1	605.4	620.1	633.8	646.1	658.3	672.6	688.8
10°	548.9	562.9	581.1	600.4	621.6	642.3	662.4	678.0	696.1	712.5	733.2
12.5°	545.4	565.5	587.2	611.9	638.0	661.9	688.3	709.8	730.6	754.2	778.3
15°	540.7	565.2	592.7	625.5	665.2	694.0	721.1	758.6	784.2	809.8	844.3
17.5°	532.3	562.2	596.5	639.2	672.2	711.1	751.7	781.4	815.9	852.0	883.2
20°	525.6	560.3	598.8	640.7	682.9	725.0	764.4	799.8	835.5	877.2	902.8
22.5°	518.9	553.2	593.2	637.7	683.0	727.5	772.0	813.6	853.7	895.8	928.5
25°	504.6	545.4	588.7	634.2	678.9	727.8	780.9	827.3	876.9	920.3	951.3
27.5°	490.2	527.6	570.7	616.8	666.5	724.3	786.8	839.5	889.2	920.3	930.0
30°	477.1	516.7	556.4	603.2	657.0	721.5	787.9	848.3	889.0	902.6	892.5
32.5°	463.9	499.8	539.0	587.0	644.1	714.6	789.4	843.1	867.6	857.3	816.5
35°	440.6	472.9	510.9	558.9	624.6	710.8	783.3	819.6	813.6	755.3	678.4
37.5°	415.6	442.0	477.1	527.3	604.4	695.7	756.8	762.2	709.7	620.3	531.5
40°	395.8	419.6	455.7	508.1	588.7	680.8	730.2	708.5	627.2	527.7	453.6
42.5°	376.6	396.7	431.5	488.0	573.8	660.4	690.5	643.3	549.5	455.4	388.0
45°	344.1	363.0	397.9	455.9	543.3	621.6	617.6	535.6	441.7	366.0	310.1
47.5°	313.3	329.8	362.6	421.8	507.5	563.3	526.3	439.0	359.4	298.6	258.7
50°	291.5	307.8	340.4	398.9	478.8	519.5	466.7	382.6	309.6	259.3	227.6
52.5°	270.6	286.5	316.3	373.3	444.1	468.5	411.7	333.7	272.9	229.5	202.3
55°	241.4	253.5	280.3	334.8	387.7	393.3	335.7	270.5	220.4	190.1	171.5
57.5°	211.6	222.0	248.5	291.9	329.0	326.1	271.6	215.1	181.4	158.9	145.4
60°	192.2	202.5	225.8	263.0	291.0	281.2	231.1	185.7	156.8	140.3	129.5
62.5°	174.1	182.1	204.0	231.2	251.3	240.2	197.6	160.0	137.0	123.1	114.6
65°	147.9	154.5	171.9	186.2	197.3	186.6	151.2	125.1	108.6	98.8	93.0
67.5°	123.1	127.2	138.2	143.4	151.3	139.5	113.7	96.2	86.8	78.6	74.5
70°	107.4	110.4	116.3	120.5	122.5	110.4	91.3	78.5	70.6	64.8	62.2
72.5°	91.7	94.4	95.6	99.0	97.9	86.6	73.4	63.2	57.5	53.6	50.3
75°	70.1	71.3	70.1	68.7	65.7	57.8	48.7	43.6	39.4	37.5	36.3
77.5°	51.1	50.7	49.2	47.0	41.8	36.8	31.9	30.2	28.4	27.4	27.0
80°	39.4	38.4	37.0	33.5	29.1	25.6	24.5	23.3	22.6	21.4	21.2
82.5°	29.3	28.7	26.4	23.5	20.4	18.7	17.8	17.3	16.6	16.0	16.0
85°	15.6	14.9	12.3	10.7	10.3	9.8	9.6	9.6	8.6	8.4	8.4
87.5°	5.7	5.0	5.3	5.2	5.7	5.9	6.7	6.9	7.3	7.7	7.5
90°	3.3	5.5	7.8	10.0	12.6	15.5	18.5	21.4	24.3	25.2	26.1
92.5°	26.0	27.6	29.1	30.6	32.2	33.9	35.6	37.2	38.9	39.6	40.3
95°	61.3	62.9	64.5	66.1	67.8	69.6	71.4	73.2	75.0	75.9	76.8
97.5°	107.3	108.5	109.7	110.9	112.1	113.4	114.7	116.0	117.3	118.4	119.4
100°	139.1	140.5	141.8	143.2	144.4	145.6	146.7	147.8	148.9	149.6	150.3
102.5°	175.1	175.9	176.7	177.5	178.6	180.1	181.6	183.1	184.6	185.3	185.9
105°	228.4	228.9	229.3	229.8	231.0	233.0	235.0	237.1	239.1	239.1	239.1
107.5°	290.6	290.9	291.2	291.4	292.0	292.8	293.6	294.4	295.2	295.9	296.7
110°	329.7	330.2	330.6	331.1	331.5	332.0	332.4	332.9	333.3	334.2	335.1



TEST NUMBER: P332399

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	370.1	370.3	370.6	370.9	371.0	371.1	371.2	371.3	371.4	372.5	373.6
115°	431.2	431.9	432.6	433.3	433.4	432.9	432.5	432.0	431.6	431.8	432.0
117.5°	492.2	492.7	493.1	493.6	493.5	492.9	492.3	491.7	491.2	491.1	491.1
120°	531.2	532.6	533.9	535.3	535.4	534.2	533.1	532.0	530.9	530.6	530.4
122.5°	570.6	571.6	572.5	573.5	573.7	573.2	572.6	572.0	571.4	570.8	570.2
125°	630.8	631.5	632.2	632.9	633.0	632.5	632.1	631.6	631.2	630.3	629.4
127.5°	687.5	689.0	690.4	691.8	692.3	691.8	691.3	690.8	690.3	689.1	687.8
130°	725.2	727.0	728.8	730.6	731.1	730.5	729.8	729.1	728.4	727.5	726.6
132.5°	762.4	764.2	766.1	767.9	768.5	768.0	767.5	767.0	766.5	765.4	764.4
135°	818.9	820.3	821.6	823.0	823.5	823.3	823.1	822.9	822.6	821.7	820.8
137.5°	871.4	872.5	873.6	874.8	875.6	876.2	876.8	877.4	878.0	877.0	876.1
140°	907.9	909.0	910.1	911.2	911.9	912.1	912.4	912.6	912.8	912.6	912.4
142.5°	941.1	942.2	943.3	944.5	945.2	945.6	946.0	946.5	946.9	946.6	946.4
145°	992.3	992.7	993.2	993.6	994.2	994.9	995.6	996.2	996.9	996.7	996.5
147.5°	1038.0	1038.8	1039.7	1040.5	1041.2	1041.8	1042.5	1043.1	1043.7	1043.7	1043.7
150°	1069.3	1069.7	1070.2	1070.6	1071.1	1071.5	1072.0	1072.4	1072.9	1072.9	1072.9
152.5°	1095.4	1096.0	1096.7	1097.3	1097.7	1098.0	1098.3	1098.6	1098.8	1099.2	1099.5
155°	1135.7	1135.7	1135.7	1135.7	1135.8	1136.0	1136.3	1136.5	1136.7	1137.6	1138.5
157.5°	1170.3	1170.0	1169.7	1169.5	1169.4	1169.6	1169.8	1170.0	1170.1	1171.1	1172.0
160°	1192.0	1191.5	1191.1	1190.6	1190.4	1190.4	1190.4	1190.4	1190.4	1191.5	1192.7
162.5°	1211.3	1210.6	1210.0	1209.4	1209.1	1209.3	1209.5	1209.7	1209.9	1211.0	1212.1
165°	1236.3	1235.7	1235.0	1234.3	1234.0	1234.0	1234.0	1234.0	1234.0	1235.3	1236.7
167.5°	1256.2	1255.3	1254.4	1253.5	1253.1	1253.3	1253.5	1253.7	1253.8	1255.2	1256.6
170°	1267.5	1266.6	1265.7	1264.8	1264.4	1264.4	1264.4	1264.4	1264.4	1265.9	1267.5
172.5°	1276.4	1275.5	1274.6	1273.7	1273.3	1273.3	1273.3	1273.3	1273.3	1274.7	1276.1
175°	1285.8	1284.9	1284.0	1283.1	1282.6	1282.6	1282.6	1282.6	1282.6	1284.0	1285.3
177.5°	1289.8	1289.1	1288.3	1287.6	1287.3	1287.3	1287.3	1287.3	1287.3	1288.3	1289.4
180°	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7



TEST NUMBER: P332399

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	544.2	544.2	544.2	544.2	544.2	544.2	544.2
2.5°	574.1	574.1	574.8	577.6	578.0	580.4	579.7
5°	630.9	635.3	637.0	644.0	648.1	650.0	646.3
7.5°	700.4	712.9	718.8	726.2	732.6	734.6	729.5
10°	751.1	764.2	775.1	781.9	788.2	792.4	797.7
12.5°	800.1	816.2	826.6	836.1	842.6	847.9	848.8
15°	853.4	877.6	896.0	909.6	916.3	919.8	918.4
17.5°	907.1	929.6	942.7	956.5	965.8	966.3	966.6
20°	937.5	959.4	974.6	984.8	995.3	994.8	997.2
22.5°	957.8	975.1	986.7	994.1	997.7	995.9	996.4
25°	967.3	972.5	970.4	958.5	955.4	944.5	946.4
27.5°	918.3	894.1	869.0	836.8	811.3	791.0	792.0
30°	851.8	808.9	760.0	719.0	682.2	671.9	650.0
32.5°	758.8	694.5	637.2	598.9	567.4	558.8	539.7
35°	601.1	538.6	479.7	444.3	430.3	410.7	410.5
37.5°	467.2	412.2	381.1	354.5	340.6	328.7	327.6
40°	393.0	350.2	326.6	307.5	293.8	284.9	282.8
42.5°	341.2	306.6	284.5	272.7	262.1	257.5	254.1
45°	278.6	255.3	240.0	229.3	224.4	220.9	219.0
47.5°	233.1	217.5	207.0	199.8	195.9	192.2	193.2
50°	208.3	195.5	187.8	181.0	178.0	175.4	175.7
52.5°	188.3	176.8	170.6	165.7	162.0	160.1	159.3
55°	159.8	152.6	146.3	142.8	140.7	138.2	137.5
57.5°	136.3	130.7	125.6	121.7	121.1	118.7	119.0
60°	120.7	116.0	111.8	109.7	108.1	106.0	106.7
62.5°	107.8	103.9	100.1	98.4	96.7	95.2	95.5
65°	88.3	84.6	82.2	81.3	80.6	79.9	79.2
67.5°	70.4	68.1	66.6	64.6	63.2	63.0	62.3
70°	59.2	56.1	53.6	51.0	50.3	50.1	50.3
72.5°	47.4	45.5	44.8	43.6	43.4	42.8	43.2
75°	35.6	34.9	34.5	33.5	33.5	33.5	33.5
77.5°	26.3	25.9	25.6	25.4	25.2	24.8	24.8
80°	20.5	20.3	19.8	19.8	19.6	19.8	19.6
82.5°	15.5	15.4	15.0	15.0	14.7	14.6	14.7
85°	7.9	7.7	8.2	7.7	7.9	7.5	7.9
87.5°	7.6	7.8	7.8	7.9	7.8	8.2	7.9
90°	27.0	27.9	28.6	29.0	29.5	29.9	30.4
92.5°	41.1	41.8	42.0	41.7	41.5	41.2	40.9
95°	77.7	78.6	79.0	79.0	79.0	79.0	79.0
97.5°	120.4	121.5	121.9	121.8	121.8	121.7	121.6
100°	151.0	151.6	152.2	152.6	153.1	153.5	154.0
102.5°	186.6	187.3	187.6	187.5	187.4	187.3	187.2
105°	239.1	239.1	239.3	239.8	240.2	240.7	241.1
107.5°	297.4	298.1	298.3	298.1	297.8	297.5	297.2
110°	336.0	336.9	337.1	336.7	336.2	335.8	335.3



TEST NUMBER: P332399

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	374.6	375.7	376.2	376.1	376.0	376.0	375.9
115°	432.3	432.5	432.5	432.3	432.0	431.8	431.6
117.5°	491.0	491.0	490.6	490.0	489.4	488.7	488.1
120°	530.2	530.0	529.6	529.2	528.7	528.3	527.8
122.5°	569.6	569.1	568.4	567.8	567.2	566.6	565.9
125°	628.5	627.6	626.7	625.8	624.9	624.0	623.1
127.5°	686.6	685.3	684.1	683.1	682.1	681.0	680.0
130°	725.7	724.8	723.6	722.0	720.4	718.9	717.3
132.5°	763.3	762.2	761.1	759.8	758.6	757.4	756.2
135°	819.9	819.0	818.4	817.9	817.5	817.0	816.6
137.5°	875.1	874.2	873.3	872.4	871.6	870.7	869.9
140°	912.1	911.9	911.0	909.4	907.9	906.3	904.7
142.5°	946.2	946.0	945.2	944.0	942.8	941.6	940.4
145°	996.2	996.0	995.4	994.5	993.6	992.7	991.8
147.5°	1043.7	1043.7	1043.0	1041.7	1040.3	1039.0	1037.6
150°	1072.9	1072.9	1072.2	1070.9	1069.5	1068.2	1066.8
152.5°	1099.9	1100.3	1099.9	1098.7	1097.5	1096.3	1095.2
155°	1139.4	1140.3	1140.0	1138.4	1136.8	1135.3	1133.7
157.5°	1173.0	1173.9	1173.8	1172.5	1171.3	1170.0	1168.7
160°	1193.8	1194.9	1195.0	1194.1	1193.2	1192.3	1191.4
162.5°	1213.2	1214.4	1214.2	1212.8	1211.3	1209.9	1208.4
165°	1238.0	1239.4	1239.3	1237.7	1236.1	1234.5	1233.0
167.5°	1258.0	1259.4	1259.4	1258.0	1256.6	1255.2	1253.8
170°	1269.1	1270.7	1270.7	1269.1	1267.5	1265.9	1264.4
172.5°	1277.5	1278.9	1278.8	1277.2	1275.6	1274.0	1272.5
175°	1286.7	1288.0	1287.9	1286.3	1284.7	1283.2	1281.6
177.5°	1290.5	1291.6	1291.5	1290.2	1289.0	1287.7	1286.5
180°	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7

(END OF REPORT)