

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332401

Luminaire Tested: **S123RDIW-S340D1030U835-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332401
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S340D1030U835-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1030 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4875.0 lumens
Efficiency: N/A
Efficacy: 128.3 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 38
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332401

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

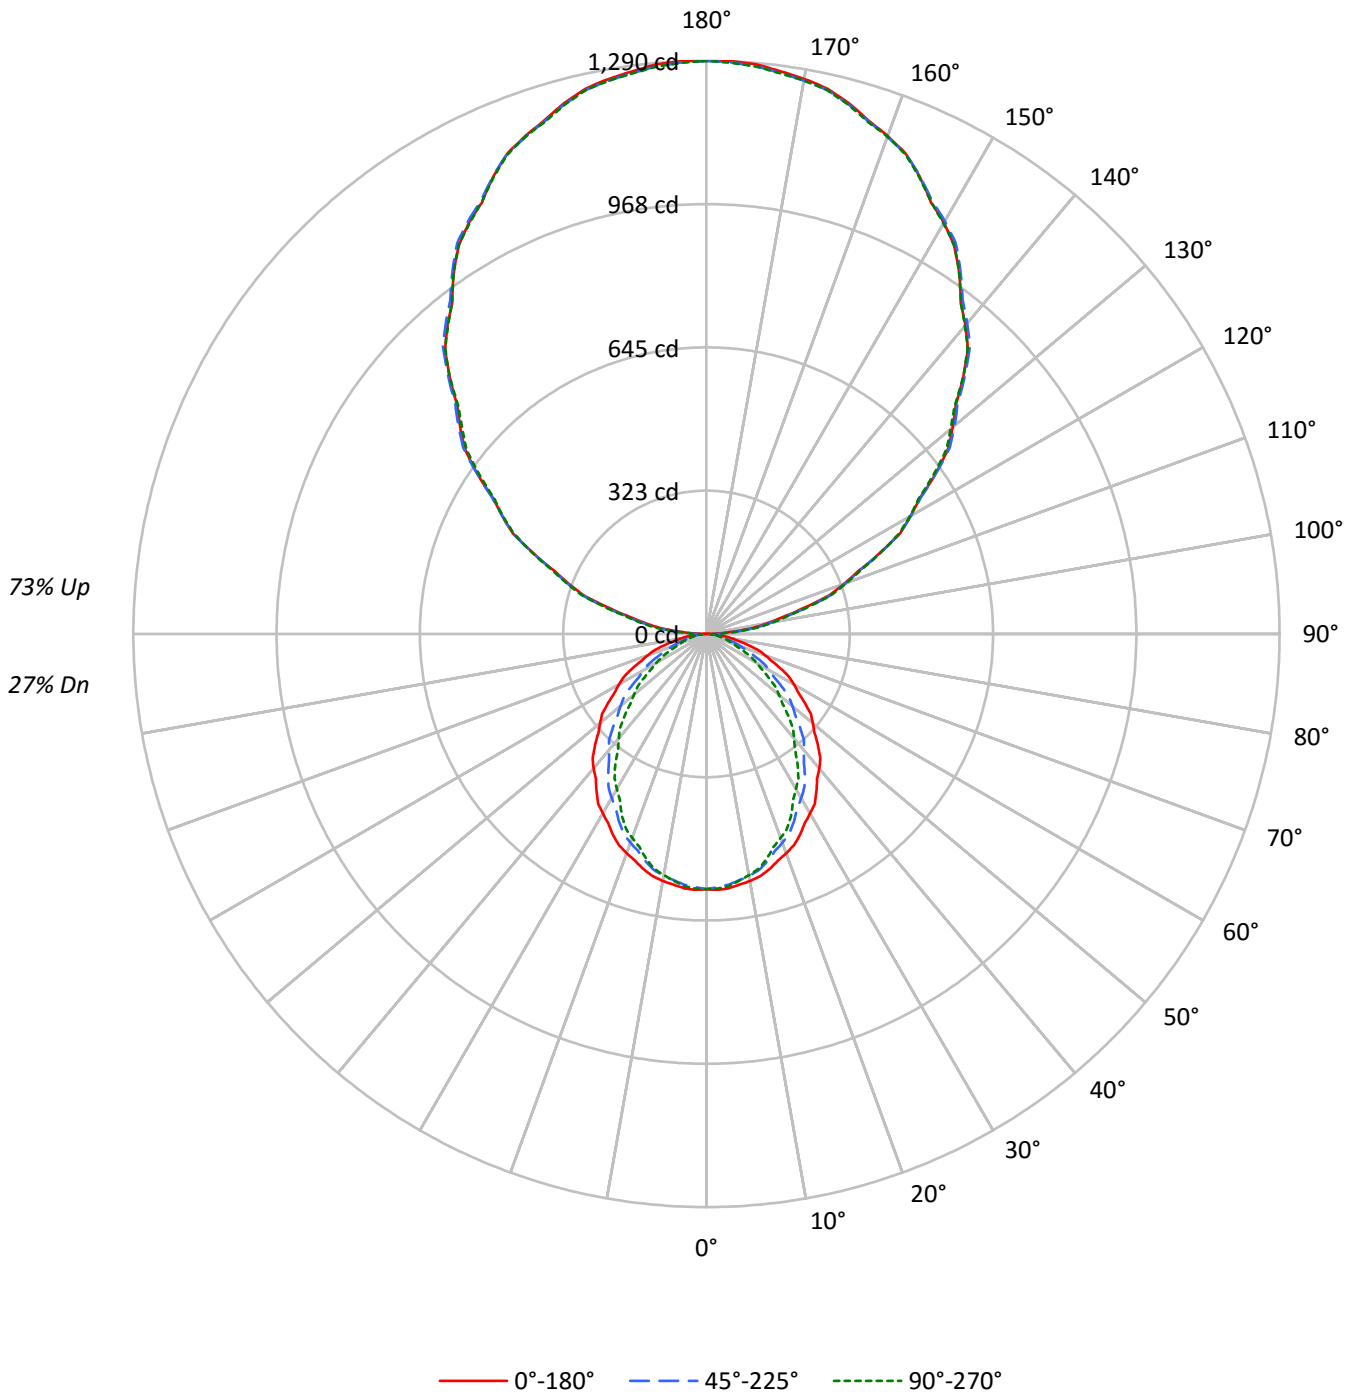



TEST NUMBER: P332401

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	70	70	70	52	52	52	35	35	35	27
1	93	89	85	82	83	79	76	73	62	60	58	46	44	43	31	30	30	23
2	85	78	72	67	75	69	65	60	54	51	48	40	38	36	27	26	25	19
3	77	68	61	56	69	61	55	51	48	44	41	36	33	31	24	23	22	17
4	71	60	53	47	63	54	48	43	43	38	35	32	29	27	22	20	19	14
5	65	54	46	40	58	48	42	37	38	33	30	29	25	23	20	18	16	13
6	60	48	40	35	53	43	37	32	34	29	26	26	23	20	18	16	14	11
7	55	43	36	30	49	39	32	28	31	26	23	23	20	18	16	14	13	10
8	51	39	32	27	45	35	29	24	28	23	20	21	18	16	15	13	11	9
9	47	36	28	24	42	32	26	22	26	21	18	20	16	14	14	12	10	8
10	44	33	26	21	39	30	23	19	24	19	16	18	15	13	13	11	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6184	6184	6184
5°	6207	6122	6158
10°	6172	6045	6025
15°	6107	5904	5841
20°	6015	5727	5593
25°	5922	5529	5352
30°	5797	5299	5009
35°	5670	5070	4696
40°	5552	4799	4308
45°	5398	4532	3958
50°	5228	4228	3565
55°	5054	3883	3200
60°	4895	3511	2799
65°	4689	3110	2397
70°	4428	2609	1936
75°	4051	2054	1822
80°	3608	1822	1674
85°	3051	1606	1494



TEST NUMBER: P332401

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	54.0	1.1
10°-20°	150.1	3.1
20°-30°	216.1	4.4
30°-40°	243.5	5.0
40°-50°	232.9	4.8
50°-60°	190.7	3.9
60°-70°	128.7	2.6
70°-80°	64.7	1.3
80°-90°	20.9	0.4
90°-100°	84.0	1.7
100°-110°	251.5	5.2
110°-120°	427.7	8.8
120°-130°	562.6	11.5
130°-140°	632.3	13.0
140°-150°	621.6	12.8
150°-160°	523.3	10.7
160°-170°	348.3	7.1
170°-180°	122.0	2.5
0°-30°	420.2	8.6
0°-40°	663.7	13.6
0°-60°	1087.3	22.3
0°-90°	1301.7	26.7
90°-120°	763.2	15.7
90°-150°	2579.7	52.9
90°-180°	3573.0	73.3
0°-180°	4875.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	574	574	574	574	574	
5°	574	572	567	570	570	54
15°	548	542	530	527	524	154
25°	499	486	466	456	451	229
35°	432	414	386	366	357	270
45°	355	333	298	272	260	273
55°	269	246	207	181	170	241
65°	184	158	122	100	94	182
75°	97	75	49	45	44	104
85°	25	15	13	12	12	28
90°	1	11	24	28	30	5
95°	60	67	75	79	79	67
105°	228	230	239	239	241	244
115°	431	433	432	432	432	426
125°	630	633	631	627	623	562
135°	818	823	823	819	817	630
145°	992	994	997	996	992	619
155°	1136	1136	1137	1140	1134	523
165°	1237	1234	1234	1239	1233	349
175°	1287	1283	1283	1288	1282	122
180°	1290	1290	1290	1290	1290	



TEST NUMBER: P332401

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	574.5	574.5	574.5	574.5	574.5	574.5	574.5	574.5	574.5	574.5	574.5
2.5°	576.4	576.0	575.7	575.4	575.1	574.4	573.4	572.4	571.4	570.4	571.3
5°	574.5	574.0	573.5	573.0	572.4	571.6	570.3	569.1	567.8	566.6	567.5
7.5°	569.2	568.6	568.1	567.5	567.0	565.9	564.3	562.7	561.0	559.4	559.9
10°	564.7	564.0	563.3	562.6	561.8	560.5	558.7	556.8	554.9	553.1	553.2
12.5°	558.4	557.6	556.8	556.0	555.2	553.6	551.3	549.1	546.8	544.5	544.4
15°	548.0	546.8	545.7	544.5	543.4	541.4	538.5	535.6	532.7	529.8	529.3
17.5°	534.8	533.5	532.2	530.8	529.5	527.0	523.3	519.6	516.0	512.3	511.2
20°	525.1	523.5	521.8	520.2	518.5	515.7	511.8	507.8	503.9	500.0	498.6
22.5°	514.3	512.4	510.5	508.6	506.7	503.7	499.5	495.3	491.1	486.9	485.2
25°	498.6	496.0	493.4	490.8	488.2	484.5	479.8	475.0	470.2	465.5	463.3
27.5°	479.5	476.6	473.7	470.9	468.0	464.0	458.7	453.3	448.0	442.7	439.7
30°	466.4	463.3	460.2	457.1	454.0	449.5	443.7	437.9	432.1	426.3	422.8
32.5°	453.4	449.8	446.3	442.8	439.3	434.5	428.3	422.2	416.1	409.9	406.1
35°	431.5	427.7	424.0	420.3	416.6	411.5	405.1	398.6	392.2	385.8	381.4
37.5°	409.3	405.1	401.0	396.9	392.7	387.2	380.4	373.5	366.7	359.8	354.8
40°	395.1	390.6	386.0	381.5	376.9	370.9	363.6	356.2	348.9	341.5	336.2
42.5°	379.1	374.5	370.0	365.4	360.9	354.8	347.2	339.6	332.0	324.4	318.5
45°	354.6	349.9	345.3	340.6	335.9	329.6	321.7	313.7	305.7	297.7	291.8
47.5°	330.1	325.0	319.8	314.7	309.6	303.1	295.1	287.1	279.2	271.2	264.8
50°	312.2	307.3	302.5	297.6	292.7	286.1	277.7	269.3	260.9	252.5	246.1
52.5°	296.2	290.9	285.6	280.3	275.0	268.2	259.9	251.6	243.3	235.0	228.4
55°	269.3	264.2	259.2	254.1	249.0	242.1	233.3	224.5	215.7	206.9	200.9
57.5°	244.5	239.0	233.5	227.9	222.4	215.2	206.4	197.5	188.7	179.9	174.2
60°	227.4	221.7	216.0	210.3	204.6	197.5	188.9	180.3	171.7	163.1	157.5
62.5°	210.2	204.5	198.8	193.2	187.5	180.3	171.7	163.1	154.5	145.9	140.7
65°	184.1	178.4	172.7	167.0	161.3	154.4	146.3	138.2	130.2	122.1	117.0
67.5°	157.9	152.1	146.3	140.6	134.8	128.1	120.3	112.6	104.8	97.1	93.3
70°	140.7	135.1	129.5	123.9	118.4	111.9	104.7	97.4	90.2	82.9	79.3
72.5°	123.6	118.1	112.6	107.0	101.5	95.5	88.9	82.3	75.7	69.1	66.2
75°	97.4	92.4	87.4	82.5	77.5	72.2	66.5	60.8	55.1	49.4	48.4
77.5°	73.5	69.0	64.5	60.0	55.6	51.5	47.8	44.1	40.5	36.8	36.3
80°	58.2	54.0	49.8	45.5	41.3	38.1	35.9	33.7	31.5	29.4	29.0
82.5°	43.7	40.0	36.4	32.7	29.0	26.7	25.7	24.7	23.7	22.6	22.3
85°	24.7	22.4	20.1	17.9	15.6	14.3	14.0	13.7	13.4	13.0	12.8
87.5°	9.1	8.7	8.2	7.8	7.3	7.4	8.0	8.5	9.1	9.7	9.8
90°	1.0	3.3	5.5	7.8	10.0	12.6	15.5	18.5	21.4	24.3	25.2
92.5°	24.5	26.0	27.6	29.1	30.6	32.2	33.9	35.6	37.2	38.9	39.6
95°	59.8	61.3	62.9	64.5	66.1	67.8	69.6	71.4	73.2	75.0	75.9
97.5°	106.2	107.3	108.5	109.7	110.9	112.1	113.4	114.7	116.0	117.3	118.4
100°	137.8	139.1	140.5	141.8	143.2	144.4	145.6	146.7	147.8	148.9	149.6
102.5°	174.3	175.1	175.9	176.7	177.5	178.6	180.1	181.6	183.1	184.6	185.3
105°	228.0	228.4	228.9	229.3	229.8	231.0	233.0	235.0	237.1	239.1	239.1
107.5°	290.4	290.6	290.9	291.2	291.4	292.0	292.8	293.6	294.4	295.2	295.9
110°	329.3	329.7	330.2	330.6	331.1	331.5	332.0	332.4	332.9	333.3	334.2



TEST NUMBER: P332401

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	369.8	370.1	370.3	370.6	370.9	371.0	371.1	371.2	371.3	371.4	372.5
115°	430.6	431.2	431.9	432.6	433.3	433.4	432.9	432.5	432.0	431.6	431.8
117.5°	491.8	492.2	492.7	493.1	493.6	493.5	492.9	492.3	491.7	491.2	491.1
120°	529.9	531.2	532.6	533.9	535.3	535.4	534.2	533.1	532.0	530.9	530.6
122.5°	569.6	570.6	571.6	572.5	573.5	573.7	573.2	572.6	572.0	571.4	570.8
125°	630.2	630.8	631.5	632.2	632.9	633.0	632.5	632.1	631.6	631.2	630.3
127.5°	686.1	687.5	689.0	690.4	691.8	692.3	691.8	691.3	690.8	690.3	689.1
130°	723.4	725.2	727.0	728.8	730.6	731.1	730.5	729.8	729.1	728.4	727.5
132.5°	760.6	762.4	764.2	766.1	767.9	768.5	768.0	767.5	767.0	766.5	765.4
135°	817.6	818.9	820.3	821.6	823.0	823.5	823.3	823.1	822.9	822.6	821.7
137.5°	870.3	871.4	872.5	873.6	874.8	875.6	876.2	876.8	877.4	878.0	877.0
140°	906.7	907.9	909.0	910.1	911.2	911.9	912.1	912.4	912.6	912.8	912.6
142.5°	940.0	941.1	942.2	943.3	944.5	945.2	945.6	946.0	946.5	946.9	946.6
145°	991.8	992.3	992.7	993.2	993.6	994.2	994.9	995.6	996.2	996.9	996.7
147.5°	1037.2	1038.0	1038.8	1039.7	1040.5	1041.2	1041.8	1042.5	1043.1	1043.7	1043.7
150°	1068.8	1069.3	1069.7	1070.2	1070.6	1071.1	1071.5	1072.0	1072.4	1072.9	1072.9
152.5°	1094.8	1095.4	1096.0	1096.7	1097.3	1097.7	1098.0	1098.3	1098.6	1098.8	1099.2
155°	1135.7	1135.7	1135.7	1135.7	1135.7	1135.8	1136.0	1136.3	1136.5	1136.7	1137.6
157.5°	1170.6	1170.3	1170.0	1169.7	1169.5	1169.4	1169.6	1169.8	1170.0	1170.1	1171.1
160°	1192.4	1192.0	1191.5	1191.1	1190.6	1190.4	1190.4	1190.4	1190.4	1190.4	1191.5
162.5°	1211.9	1211.3	1210.6	1210.0	1209.4	1209.1	1209.3	1209.5	1209.7	1209.9	1211.0
165°	1237.0	1236.3	1235.7	1235.0	1234.3	1234.0	1234.0	1234.0	1234.0	1234.0	1235.3
167.5°	1257.1	1256.2	1255.3	1254.4	1253.5	1253.1	1253.3	1253.5	1253.7	1253.8	1255.2
170°	1268.4	1267.5	1266.6	1265.7	1264.8	1264.4	1264.4	1264.4	1264.4	1264.4	1265.9
172.5°	1277.3	1276.4	1275.5	1274.6	1273.7	1273.3	1273.3	1273.3	1273.3	1273.3	1274.7
175°	1286.7	1285.8	1284.9	1284.0	1283.1	1282.6	1282.6	1282.6	1282.6	1282.6	1284.0
177.5°	1290.5	1289.8	1289.1	1288.3	1287.6	1287.3	1287.3	1287.3	1287.3	1287.3	1288.3
180°	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7



TEST NUMBER: P332401

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	574.5	574.5	574.5	574.5	574.5	574.5	574.5	574.5
2.5°	572.2	573.1	574.1	574.4	574.3	574.1	573.9	573.8
5°	568.5	569.4	570.3	570.7	570.5	570.3	570.1	569.9
7.5°	560.5	561.0	561.5	561.6	561.2	560.9	560.5	560.2
10°	553.3	553.4	553.5	553.3	552.8	552.3	551.7	551.2
12.5°	544.4	544.3	544.3	543.9	543.3	542.7	542.1	541.5
15°	528.7	528.2	527.7	527.1	526.4	525.6	524.9	524.2
17.5°	510.1	509.0	507.9	506.8	505.7	504.6	503.6	502.5
20°	497.3	495.9	494.6	493.3	492.0	490.8	489.6	488.3
22.5°	483.6	481.9	480.2	478.8	477.6	476.5	475.3	474.2
25°	461.1	459.0	456.8	455.1	454.0	452.9	451.7	450.6
27.5°	436.7	433.7	430.7	428.3	426.5	424.8	423.1	421.3
30°	419.3	415.8	412.3	409.7	408.0	406.4	404.7	403.0
32.5°	402.2	398.4	394.5	391.7	390.0	388.3	386.5	384.8
35°	376.9	372.4	368.0	364.8	363.0	361.1	359.2	357.4
37.5°	349.7	344.6	339.6	335.9	333.6	331.3	329.0	326.7
40°	330.8	325.4	320.0	316.1	313.7	311.4	309.0	306.6
42.5°	312.6	306.8	300.9	296.9	294.7	292.6	290.5	288.3
45°	285.9	280.0	274.1	269.9	267.5	265.0	262.5	260.0
47.5°	258.3	251.9	245.5	241.2	239.0	236.8	234.5	232.3
50°	239.7	233.3	226.9	222.5	220.1	217.7	215.3	212.9
52.5°	221.7	215.0	208.4	204.0	201.8	199.7	197.6	195.4
55°	194.9	188.9	182.9	178.8	176.8	174.7	172.6	170.5
57.5°	168.5	162.8	157.2	153.4	151.7	149.9	148.2	146.4
60°	151.9	146.3	140.7	137.0	135.3	133.5	131.8	130.0
62.5°	135.4	130.2	124.9	121.3	119.5	117.7	115.8	114.0
65°	111.9	106.9	101.8	98.7	97.5	96.4	95.3	94.1
67.5°	89.5	85.7	81.9	79.4	78.2	77.0	75.8	74.6
70°	75.7	72.1	68.4	66.1	64.9	63.8	62.6	61.5
72.5°	63.2	60.3	57.3	55.6	55.1	54.6	54.2	53.7
75°	47.3	46.3	45.2	44.6	44.4	44.2	44.0	43.8
77.5°	35.7	35.1	34.6	34.2	34.0	33.8	33.6	33.4
80°	28.7	28.4	28.1	27.9	27.6	27.4	27.2	27.0
82.5°	22.0	21.7	21.4	21.2	21.2	21.1	21.1	21.1
85°	12.6	12.4	12.2	12.1	12.1	12.1	12.1	12.1
87.5°	9.9	10.0	10.1	10.2	10.2	10.2	10.2	10.2
90°	26.1	27.0	27.9	28.6	29.0	29.5	29.9	30.4
92.5°	40.3	41.1	41.8	42.0	41.7	41.5	41.2	40.9
95°	76.8	77.7	78.6	79.0	79.0	79.0	79.0	79.0
97.5°	119.4	120.4	121.5	121.9	121.8	121.8	121.7	121.6
100°	150.3	151.0	151.6	152.2	152.6	153.1	153.5	154.0
102.5°	185.9	186.6	187.3	187.6	187.5	187.4	187.3	187.2
105°	239.1	239.1	239.1	239.3	239.8	240.2	240.7	241.1
107.5°	296.7	297.4	298.1	298.3	298.1	297.8	297.5	297.2
110°	335.1	336.0	336.9	337.1	336.7	336.2	335.8	335.3



TEST NUMBER: P332401

CATALOG NUMBER: S123RDIW-S340D1030U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	373.6	374.6	375.7	376.2	376.1	376.0	376.0	375.9
115°	432.0	432.3	432.5	432.5	432.3	432.0	431.8	431.6
117.5°	491.1	491.0	491.0	490.6	490.0	489.4	488.7	488.1
120°	530.4	530.2	530.0	529.6	529.2	528.7	528.3	527.8
122.5°	570.2	569.6	569.1	568.4	567.8	567.2	566.6	565.9
125°	629.4	628.5	627.6	626.7	625.8	624.9	624.0	623.1
127.5°	687.8	686.6	685.3	684.1	683.1	682.1	681.0	680.0
130°	726.6	725.7	724.8	723.6	722.0	720.4	718.9	717.3
132.5°	764.4	763.3	762.2	761.1	759.8	758.6	757.4	756.2
135°	820.8	819.9	819.0	818.4	817.9	817.5	817.0	816.6
137.5°	876.1	875.1	874.2	873.3	872.4	871.6	870.7	869.9
140°	912.4	912.1	911.9	911.0	909.4	907.9	906.3	904.7
142.5°	946.4	946.2	946.0	945.2	944.0	942.8	941.6	940.4
145°	996.5	996.2	996.0	995.4	994.5	993.6	992.7	991.8
147.5°	1043.7	1043.7	1043.7	1043.0	1041.7	1040.3	1039.0	1037.6
150°	1072.9	1072.9	1072.9	1072.2	1070.9	1069.5	1068.2	1066.8
152.5°	1099.5	1099.9	1100.3	1099.9	1098.7	1097.5	1096.3	1095.2
155°	1138.5	1139.4	1140.3	1140.0	1138.4	1136.8	1135.3	1133.7
157.5°	1172.0	1173.0	1173.9	1173.8	1172.5	1171.3	1170.0	1168.7
160°	1192.7	1193.8	1194.9	1195.0	1194.1	1193.2	1192.3	1191.4
162.5°	1212.1	1213.2	1214.4	1214.2	1212.8	1211.3	1209.9	1208.4
165°	1236.7	1238.0	1239.4	1239.3	1237.7	1236.1	1234.5	1233.0
167.5°	1256.6	1258.0	1259.4	1259.4	1258.0	1256.6	1255.2	1253.8
170°	1267.5	1269.1	1270.7	1270.7	1269.1	1267.5	1265.9	1264.4
172.5°	1276.1	1277.5	1278.9	1278.8	1277.2	1275.6	1274.0	1272.5
175°	1285.3	1286.7	1288.0	1287.9	1286.3	1284.7	1283.2	1281.6
177.5°	1289.4	1290.5	1291.6	1291.5	1290.2	1289.0	1287.7	1286.5
180°	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7	1289.7

(END OF REPORT)