

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332428

Luminaire Tested: **S123RDIW-S560D1535U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332428
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIW-S560D1535U835-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1535 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8275.8 lumens
Efficiency: N/A
Efficacy: 136.6 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 60.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332428

CATALOG NUMBER: S123RDIW-S560D1535U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

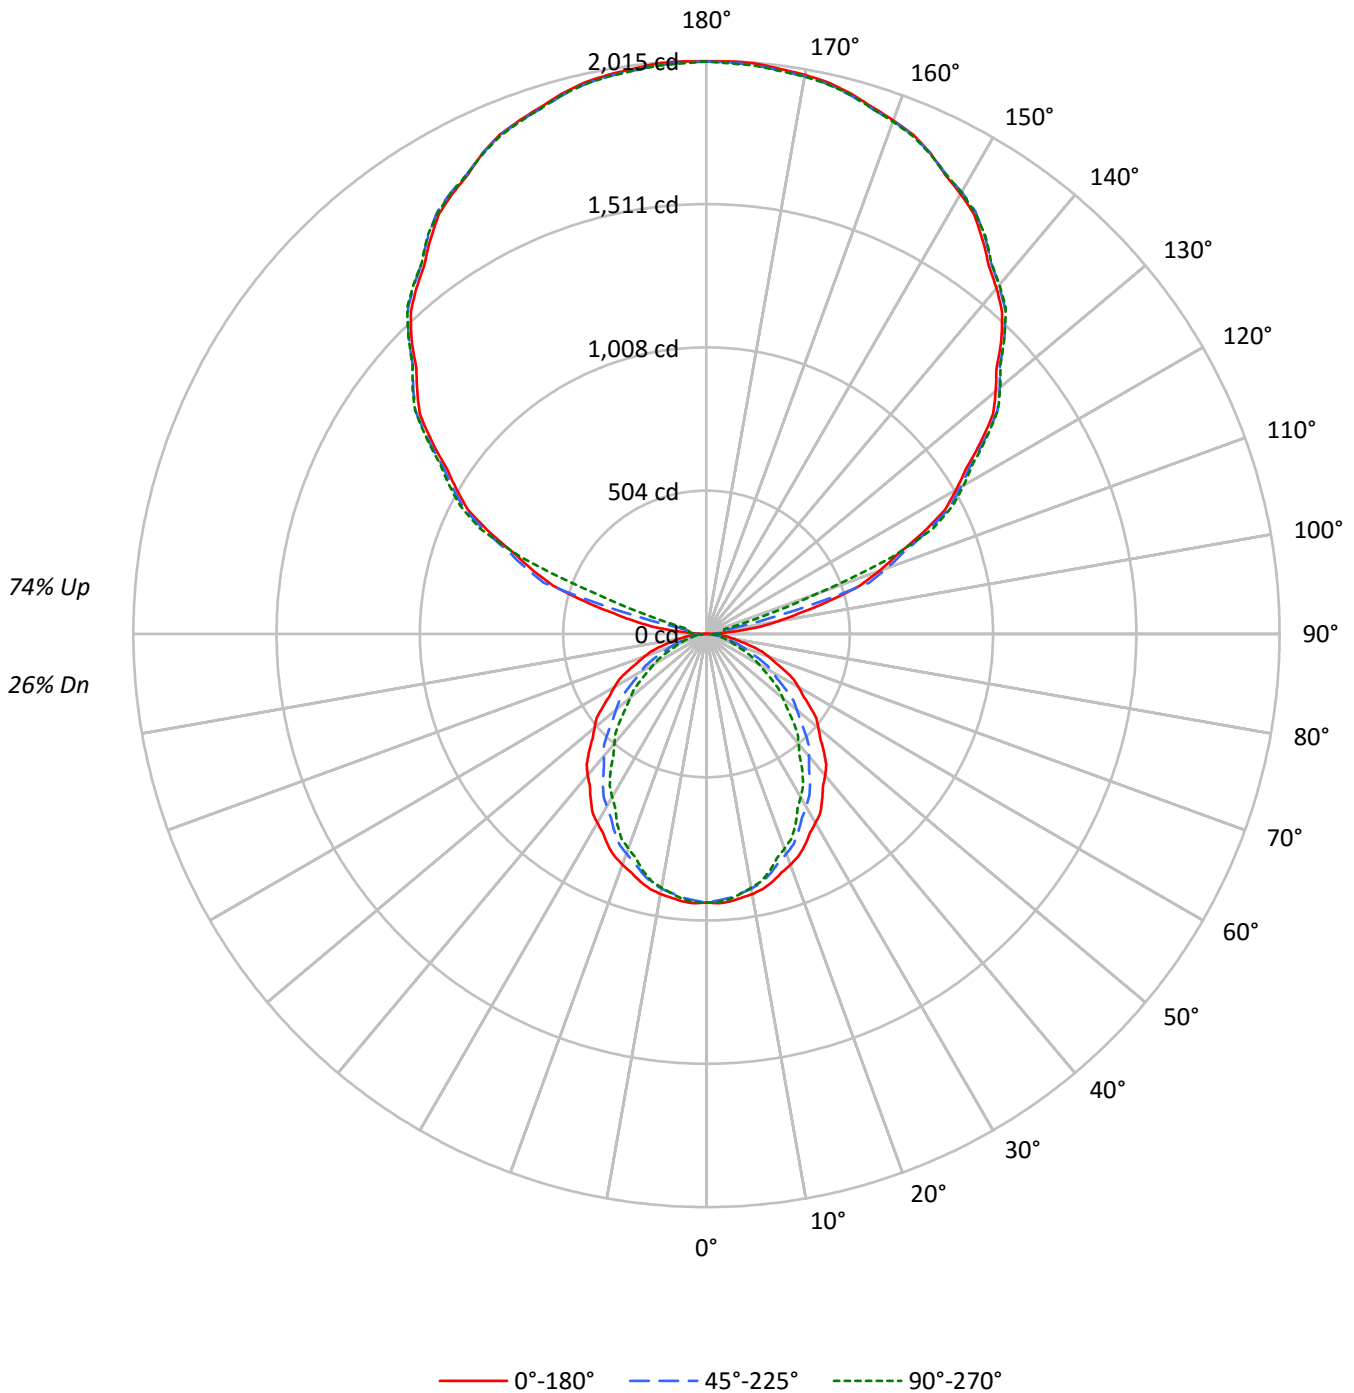



TEST NUMBER: P332428

CATALOG NUMBER: S123RDIW-S560D1535U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	70	70	70	51	51	51	34	34	34	26
1	93	88	85	81	82	79	76	73	61	59	57	45	44	43	30	30	29	22
2	84	77	72	67	75	69	64	60	54	51	48	40	38	36	27	26	25	19
3	77	68	61	56	68	61	55	50	48	44	40	35	33	31	24	22	21	16
4	70	60	53	47	63	54	48	43	42	38	34	31	29	26	21	20	18	14
5	65	54	46	40	57	48	42	37	38	33	30	28	25	23	19	17	16	12
6	59	48	40	35	53	43	36	32	34	29	26	25	22	20	18	16	14	11
7	55	43	36	30	49	39	32	28	31	26	23	23	20	17	16	14	13	10
8	51	39	32	27	45	35	29	24	28	23	20	21	18	16	15	13	11	9
9	47	36	28	24	42	32	26	22	26	21	18	19	16	14	14	12	10	8
10	44	32	26	21	39	29	23	19	23	19	16	18	15	13	13	11	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10167	10167	10167
5°	10205	10065	10122
10°	10147	9939	9905
15°	10038	9706	9604
20°	9889	9415	9196
25°	9734	9089	8797
30°	9531	8712	8236
35°	9320	8335	7720
40°	9128	7890	7082
45°	8873	7451	6506
50°	8594	6953	5863
55°	8310	6382	5262
60°	8047	5772	4600
65°	7707	5112	3940
70°	7279	4293	3182
75°	6658	3377	2994
80°	5938	2994	2752
85°	5014	2643	2458



TEST NUMBER: P332428

CATALOG NUMBER: S123RDIW-S560D1535U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	88.7	1.1
10°-20°	246.8	3.0
20°-30°	355.3	4.3
30°-40°	400.3	4.8
40°-50°	382.9	4.6
50°-60°	313.6	3.8
60°-70°	211.6	2.6
70°-80°	106.4	1.3
80°-90°	33.8	0.4
90°-100°	73.2	0.9
100°-110°	348.7	4.2
110°-120°	837.5	10.1
120°-130°	1066.5	12.9
130°-140°	1139.5	13.8
140°-150°	1065.6	12.9
150°-160°	859.5	10.4
160°-170°	554.7	6.7
170°-180°	191.2	2.3
0°-30°	690.8	8.3
0°-40°	1091.1	13.2
0°-60°	1787.6	21.6
0°-90°	2139.3	25.9
90°-120°	1259.4	15.2
90°-150°	4531.0	54.7
90°-180°	6136.0	74.1
0°-180°	8275.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	944	944	944	944	944	
5°	944	940	932	938	937	90
15°	901	892	871	867	862	254
25°	820	800	765	750	741	377
35°	709	681	634	602	588	444
45°	583	547	490	447	427	450
55°	443	404	340	297	280	397
65°	303	259	201	165	155	299
75°	160	123	81	74	72	171
85°	41	25	21	20	20	46
90°	2	17	36	42	45	6
95°	91	34	46	56	57	113
105°	446	454	327	78	66	472
115°	836	845	858	873	879	825
125°	1178	1190	1196	1199	1202	1052
135°	1467	1475	1482	1486	1482	1129
145°	1692	1702	1706	1709	1709	1059
155°	1864	1862	1863	1869	1861	859
165°	1966	1962	1960	1971	1961	555
175°	2012	2005	2006	2016	2005	191
180°	2012	2012	2012	2012	2012	



TEST NUMBER: P332428

CATALOG NUMBER: S123RDIW-S560D1535U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	944.5	944.5	944.5	944.5	944.5	944.5	944.5	944.5	944.5	944.5	944.5
2.5°	947.6	947.0	946.5	945.9	945.4	944.3	942.7	941.0	939.4	937.8	939.3
5°	944.5	943.7	942.8	942.0	941.1	939.7	937.6	935.6	933.5	931.5	933.0
7.5°	935.8	934.9	933.9	933.0	932.1	930.3	927.7	925.0	922.3	919.7	920.5
10°	928.4	927.2	926.0	924.8	923.7	921.5	918.5	915.4	912.3	909.3	909.4
12.5°	918.0	916.7	915.3	914.0	912.7	910.2	906.4	902.7	898.9	895.2	895.1
15°	900.8	899.0	897.1	895.2	893.4	890.0	885.3	880.5	875.7	871.0	870.1
17.5°	879.2	877.1	874.9	872.7	870.5	866.4	860.3	854.3	848.2	842.2	840.4
20°	863.3	860.6	857.9	855.1	852.4	847.8	841.3	834.9	828.4	821.9	819.7
22.5°	845.5	842.4	839.3	836.1	833.0	828.0	821.1	814.2	807.4	800.5	797.7
25°	819.6	815.4	811.1	806.9	802.6	796.6	788.7	780.9	773.1	765.3	761.7
27.5°	788.2	783.5	778.8	774.1	769.4	762.7	754.0	745.3	736.6	727.9	722.9
30°	766.8	761.7	756.6	751.5	746.4	739.0	729.5	720.0	710.4	700.9	695.1
32.5°	745.3	739.6	733.8	728.0	722.2	714.3	704.2	694.1	684.0	673.9	667.6
35°	709.3	703.2	697.1	691.0	684.8	676.5	665.9	655.4	644.8	634.3	626.9
37.5°	672.9	666.1	659.3	652.4	645.6	636.6	625.3	614.1	602.8	591.5	583.2
40°	649.6	642.1	634.6	627.1	619.6	609.8	597.8	585.7	573.6	561.5	552.6
42.5°	623.2	615.7	608.3	600.8	593.3	583.3	570.8	558.3	545.8	533.3	523.6
45°	582.9	575.3	567.6	560.0	552.3	541.9	528.8	515.7	502.6	489.5	479.8
47.5°	542.6	534.2	525.8	517.4	509.0	498.3	485.1	472.0	458.9	445.8	435.3
50°	513.2	505.2	497.2	489.2	481.2	470.3	456.5	442.8	429.0	415.2	404.6
52.5°	486.9	478.2	469.5	460.8	452.2	441.0	427.3	413.7	400.0	386.4	375.4
55°	442.8	434.4	426.1	417.7	409.4	398.0	383.5	369.1	354.6	340.1	330.2
57.5°	402.0	392.9	383.8	374.7	365.6	353.8	339.3	324.8	310.2	295.7	286.4
60°	373.8	364.5	355.1	345.7	336.4	324.6	310.5	296.4	282.2	268.1	258.9
62.5°	345.6	336.3	326.9	317.5	308.2	296.4	282.3	268.2	254.0	239.9	231.3
65°	302.6	293.2	283.9	274.5	265.1	253.8	240.5	227.3	214.0	200.7	192.4
67.5°	259.5	250.1	240.6	231.1	221.7	210.6	197.8	185.1	172.4	159.6	153.4
70°	231.3	222.1	213.0	203.8	194.6	184.0	172.1	160.2	148.3	136.4	130.4
72.5°	203.1	194.1	185.0	176.0	166.9	157.0	146.2	135.3	124.5	113.7	108.8
75°	160.1	151.9	143.8	135.6	127.4	118.6	109.3	99.9	90.6	81.2	79.5
77.5°	120.9	113.5	106.1	98.7	91.3	84.6	78.6	72.6	66.5	60.5	59.6
80°	95.8	88.8	81.8	74.8	67.8	62.6	59.0	55.4	51.8	48.3	47.7
82.5°	71.9	65.8	59.8	53.8	47.7	43.9	42.2	40.6	38.9	37.2	36.7
85°	40.6	36.9	33.1	29.4	25.6	23.5	23.0	22.5	22.0	21.4	21.1
87.5°	15.0	14.2	13.3	12.5	11.7	11.7	12.6	13.4	14.3	15.1	15.3
90°	1.5	4.8	8.1	11.5	14.8	18.6	22.9	27.2	31.6	35.9	37.2
92.5°	27.8	26.9	25.9	25.0	24.1	25.2	28.5	31.8	35.0	38.3	40.4
95°	91.2	77.6	64.0	50.3	36.7	31.7	35.4	39.0	42.7	46.3	48.7
97.5°	183.3	177.2	171.1	164.9	158.8	143.8	119.9	96.0	72.1	48.1	50.8
100°	252.7	259.3	265.9	272.6	279.2	256.6	204.8	153.0	101.2	49.3	52.0
102.5°	331.6	336.4	341.2	345.9	350.7	324.8	268.2	211.6	155.0	98.4	90.1
105°	445.5	449.2	452.8	456.5	460.1	447.0	417.1	387.2	357.3	327.4	268.6
107.5°	565.7	568.6	571.5	574.5	577.4	581.2	585.9	590.7	595.4	600.1	557.0
110°	645.8	648.5	651.1	653.8	656.5	659.6	663.3	666.9	670.6	674.2	663.3



TEST NUMBER: P332428

CATALOG NUMBER: S123RDIW-S560D1535U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	722.4	724.8	727.2	729.6	731.9	735.0	738.6	742.3	745.9	749.6	749.8
115°	835.7	837.7	839.7	841.7	843.7	846.2	849.2	852.1	855.1	858.1	861.4
117.5°	945.4	947.9	950.3	952.8	955.3	957.3	958.8	960.3	961.8	963.4	966.0
120°	1013.6	1016.6	1019.6	1022.6	1025.6	1027.6	1028.5	1029.5	1030.5	1031.5	1034.2
122.5°	1083.0	1085.4	1087.9	1090.3	1092.8	1094.7	1095.9	1097.2	1098.4	1099.7	1101.6
125°	1178.0	1180.7	1183.4	1186.0	1188.7	1190.7	1192.0	1193.3	1194.7	1196.0	1196.7
127.5°	1270.1	1272.8	1275.5	1278.1	1280.8	1282.9	1284.5	1286.1	1287.7	1289.3	1290.3
130°	1327.5	1330.2	1332.9	1335.5	1338.2	1340.2	1341.5	1342.8	1344.2	1345.5	1346.8
132.5°	1382.6	1385.2	1387.9	1390.5	1393.2	1395.1	1396.1	1397.2	1398.2	1399.3	1400.6
135°	1466.6	1468.6	1470.6	1472.6	1474.6	1476.2	1477.5	1478.9	1480.2	1481.5	1482.5
137.5°	1538.3	1540.9	1543.4	1545.9	1548.4	1550.1	1550.8	1551.5	1552.3	1553.0	1554.6
140°	1586.2	1588.2	1590.2	1592.2	1594.2	1595.6	1596.6	1597.6	1598.6	1599.6	1601.0
142.5°	1630.4	1632.4	1634.4	1636.4	1638.4	1639.9	1640.9	1641.9	1642.9	1643.9	1644.9
145°	1692.3	1694.6	1697.0	1699.3	1701.6	1703.1	1703.8	1704.4	1705.1	1705.8	1706.4
147.5°	1750.6	1752.2	1753.7	1755.2	1756.7	1757.8	1758.5	1759.2	1759.8	1760.5	1761.2
150°	1786.5	1787.5	1788.5	1789.5	1790.5	1791.3	1792.0	1792.7	1793.3	1794.0	1794.6
152.5°	1818.8	1819.3	1819.7	1820.2	1820.7	1821.1	1821.5	1821.9	1822.3	1822.7	1823.9
155°	1864.2	1863.6	1862.9	1862.3	1861.6	1861.4	1861.8	1862.1	1862.4	1862.7	1864.4
157.5°	1899.5	1899.5	1899.4	1899.3	1899.3	1899.1	1898.7	1898.4	1898.1	1897.7	1899.7
160°	1921.1	1920.7	1920.4	1920.1	1919.7	1919.4	1919.1	1918.7	1918.4	1918.1	1920.1
162.5°	1941.4	1940.5	1939.7	1938.8	1937.9	1937.3	1937.0	1936.7	1936.3	1936.0	1938.3
165°	1965.9	1964.9	1963.9	1962.9	1961.9	1961.3	1960.9	1960.6	1960.3	1959.9	1962.6
167.5°	1985.0	1983.7	1982.4	1981.1	1979.7	1979.1	1979.1	1979.1	1979.1	1979.1	1981.7
170°	1995.8	1994.5	1993.1	1991.8	1990.5	1989.8	1989.8	1989.8	1989.8	1989.8	1992.5
172.5°	2003.0	2001.4	1999.8	1998.2	1996.6	1995.9	1996.2	1996.5	1996.7	1997.0	1999.7
175°	2012.2	2010.6	2008.9	2007.3	2005.6	2004.9	2005.3	2005.6	2005.9	2006.3	2008.6
177.5°	2014.6	2013.3	2012.0	2010.7	2009.3	2008.8	2009.1	2009.3	2009.6	2009.9	2012.0
180°	2012.2	2012.2	2012.2	2012.2	2012.2	2012.2	2012.2	2012.2	2012.2	2012.2	2012.2



TEST NUMBER: P332428

CATALOG NUMBER: S123RDIW-S560D1535U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	944.5	944.5	944.5	944.5	944.5	944.5	944.5	944.5
2.5°	940.8	942.3	943.8	944.4	944.1	943.8	943.6	943.3
5°	934.5	936.1	937.6	938.2	937.9	937.5	937.2	936.8
7.5°	921.4	922.2	923.1	923.2	922.6	922.1	921.5	920.9
10°	909.6	909.8	909.9	909.6	908.8	907.9	907.1	906.2
12.5°	895.0	894.9	894.8	894.2	893.2	892.2	891.3	890.3
15°	869.3	868.4	867.6	866.5	865.3	864.2	863.0	861.8
17.5°	838.6	836.8	834.9	833.2	831.4	829.6	827.8	826.1
20°	817.5	815.3	813.1	811.0	808.9	806.9	804.8	802.8
22.5°	795.0	792.2	789.5	787.1	785.2	783.3	781.4	779.5
25°	758.1	754.5	751.0	748.2	746.4	744.5	742.6	740.7
27.5°	717.9	713.0	708.0	704.1	701.2	698.4	695.5	692.6
30°	689.3	683.5	677.8	673.5	670.8	668.1	665.3	662.6
32.5°	661.3	654.9	648.6	644.0	641.2	638.3	635.4	632.6
35°	619.6	612.3	605.0	599.8	596.7	593.7	590.6	587.5
37.5°	574.9	566.6	558.3	552.3	548.5	544.7	540.9	537.1
40°	543.8	534.9	526.1	519.7	515.8	511.9	508.0	504.0
42.5°	514.0	504.3	494.6	488.0	484.5	481.0	477.5	474.0
45°	470.1	460.4	450.7	443.8	439.7	435.6	431.5	427.4
47.5°	424.7	414.2	403.6	396.5	392.9	389.2	385.6	381.9
50°	394.1	383.5	373.0	365.7	361.8	357.9	354.0	350.1
52.5°	364.5	353.5	342.5	335.3	331.8	328.3	324.8	321.3
55°	320.4	310.5	300.6	294.0	290.6	287.2	283.8	280.4
57.5°	277.0	267.7	258.4	252.3	249.4	246.5	243.6	240.7
60°	249.7	240.5	231.3	225.3	222.4	219.5	216.6	213.7
62.5°	222.6	214.0	205.3	199.5	196.5	193.4	190.4	187.4
65°	184.0	175.7	167.3	162.2	160.4	158.5	156.6	154.7
67.5°	147.2	140.9	134.7	130.6	128.6	126.6	124.6	122.6
70°	124.4	118.5	112.5	108.6	106.7	104.9	103.0	101.1
72.5°	103.9	99.1	94.2	91.4	90.6	89.8	89.0	88.2
75°	77.8	76.1	74.4	73.4	73.0	72.7	72.3	72.0
77.5°	58.7	57.8	56.8	56.2	55.9	55.5	55.2	54.8
80°	47.2	46.7	46.2	45.8	45.5	45.1	44.8	44.4
82.5°	36.2	35.7	35.2	34.9	34.8	34.8	34.7	34.6
85°	20.8	20.4	20.1	19.9	19.9	19.9	19.9	19.9
87.5°	15.4	15.5	15.7	15.7	15.7	15.7	15.7	15.7
90°	38.5	39.9	41.2	42.2	42.9	43.5	44.2	44.8
92.5°	42.5	44.7	46.8	48.0	48.4	48.8	49.2	49.6
95°	51.0	53.3	55.6	56.8	56.8	56.8	56.8	56.8
97.5°	53.5	56.1	58.8	60.3	60.6	60.9	61.3	61.6
100°	54.6	57.3	60.0	61.5	61.8	62.1	62.5	62.8
102.5°	81.9	73.7	65.4	61.6	62.2	62.8	63.4	64.0
105°	209.8	151.0	92.2	63.1	63.8	64.5	65.1	65.8
107.5°	513.8	470.7	427.6	383.9	339.6	295.2	250.9	206.6
110°	652.3	641.3	630.4	601.1	553.6	506.1	458.6	411.1



TEST NUMBER: P332428

CATALOG NUMBER: S123RDIW-S560D1535U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	750.0	750.2	750.4	745.5	735.4	725.4	715.4	705.3
115°	864.8	868.1	871.4	873.7	875.1	876.4	877.7	879.1
117.5°	968.7	971.3	974.0	975.5	975.7	976.0	976.3	976.5
120°	1036.9	1039.5	1042.2	1043.5	1043.5	1043.5	1043.5	1043.5
122.5°	1103.4	1105.3	1107.2	1108.2	1108.5	1108.7	1109.0	1109.3
125°	1197.3	1198.0	1198.6	1199.3	1200.0	1200.6	1201.3	1202.0
127.5°	1291.4	1292.5	1293.5	1293.7	1293.1	1292.4	1291.7	1291.1
130°	1348.1	1349.5	1350.8	1351.1	1350.5	1349.8	1349.1	1348.5
132.5°	1402.0	1403.3	1404.6	1404.8	1403.9	1403.0	1402.0	1401.1
135°	1483.5	1484.5	1485.5	1485.5	1484.5	1483.5	1482.5	1481.5
137.5°	1556.2	1557.8	1559.4	1559.8	1559.2	1558.5	1557.8	1557.2
140°	1602.3	1603.6	1604.9	1605.3	1604.6	1604.0	1603.3	1602.6
142.5°	1646.0	1647.1	1648.1	1648.2	1647.3	1646.3	1645.4	1644.5
145°	1707.1	1707.8	1708.4	1708.8	1708.8	1708.8	1708.8	1708.8
147.5°	1761.8	1762.5	1763.2	1762.7	1761.2	1759.7	1758.1	1756.6
150°	1795.3	1796.0	1796.6	1796.5	1795.5	1794.5	1793.5	1792.5
152.5°	1825.1	1826.3	1827.5	1827.3	1825.8	1824.2	1822.7	1821.2
155°	1866.1	1867.7	1869.4	1869.2	1867.2	1865.2	1863.2	1861.3
157.5°	1901.7	1903.7	1905.7	1905.4	1902.8	1900.2	1897.6	1895.0
160°	1922.1	1924.0	1926.0	1925.9	1923.5	1921.2	1918.9	1916.6
162.5°	1940.5	1942.8	1945.0	1945.1	1943.1	1941.0	1939.0	1936.9
165°	1965.2	1967.9	1970.6	1970.7	1968.4	1966.1	1963.7	1961.4
167.5°	1984.4	1987.0	1989.7	1989.7	1987.0	1984.4	1981.7	1979.1
170°	1995.1	1997.8	2000.5	2000.5	1997.8	1995.1	1992.5	1989.8
172.5°	2002.3	2005.0	2007.6	2007.5	2004.6	2001.7	1998.7	1995.8
175°	2010.9	2013.2	2015.6	2015.4	2012.7	2010.1	2007.4	2004.8
177.5°	2014.1	2016.2	2018.4	2018.1	2015.4	2012.8	2010.1	2007.5
180°	2012.2	2012.2	2012.2	2012.2	2012.2	2012.2	2012.2	2012.2

(END OF REPORT)